

**NE5550979A-EV04-A****Evaluation Board**

- Circuit Description
- Typical Performance Data
- Circuit Schematic and Assembly Drawing

# Circuit Description

The NE5550979A-EV04-A is an evaluation circuit board for Renesas' LDMOS power FET, NE5550979A optimized for the performance at 460MHz. The circuit board is RoHS compliant.

## Matching and Bias Circuits

Both input and output matching networks consist of shunt capacitors and sections of transmission lines (refer to the schematic and assembly drawing in the two last pages for the component designation). The electrical lengths of the transmission lines labeled on the schematic are estimated and for reference only. Some bench tuning on the actual circuit board is usually required to achieve optimal performance. For applications where there is a constraint on the board space, a serial inductor, instead of transmission lines, can be used for the matching circuits. The efficiency, PAE, will be slightly lower in that case. The resistor, R1(=1ohm) at input is used to improve the stability margin. The gain is reduced by about 1dB when R1 used.

LDMOSFETs essentially draw no gate current under normal operation conditions. Therefore a large value resistor, in the order of  $k\Omega$ , can be used for the bias at gate so that the RF path is completely isolated from the DC line. At the drain an inductor is used as the RF choke. The current rating for this inductor should be high enough to provide the required current at the operation conditions.

## Bias Conditions

This evaluation board was optimized at a specific drain voltage, 7.5V. For different supply voltages, the matching circuits should be adjusted to fully utilize the device capability. The quiescent current is 200mA for the data shown below. The gain is higher at higher quiescent currents, particularly when the device is not completely saturated. For many communication systems, where the PA is never at idle state, a high quiescent current might be used.

## PCB Material:

The PCB is Getek 28mil two layer board. The dielectric constant of Getek is 4.2.


## Typical Performance Data

Test Conditions:


f=460MHz

Vd=7.5V, Idsq=200mA

Pout, Gain, PAE and Current vs Pin are shown in the following plot.

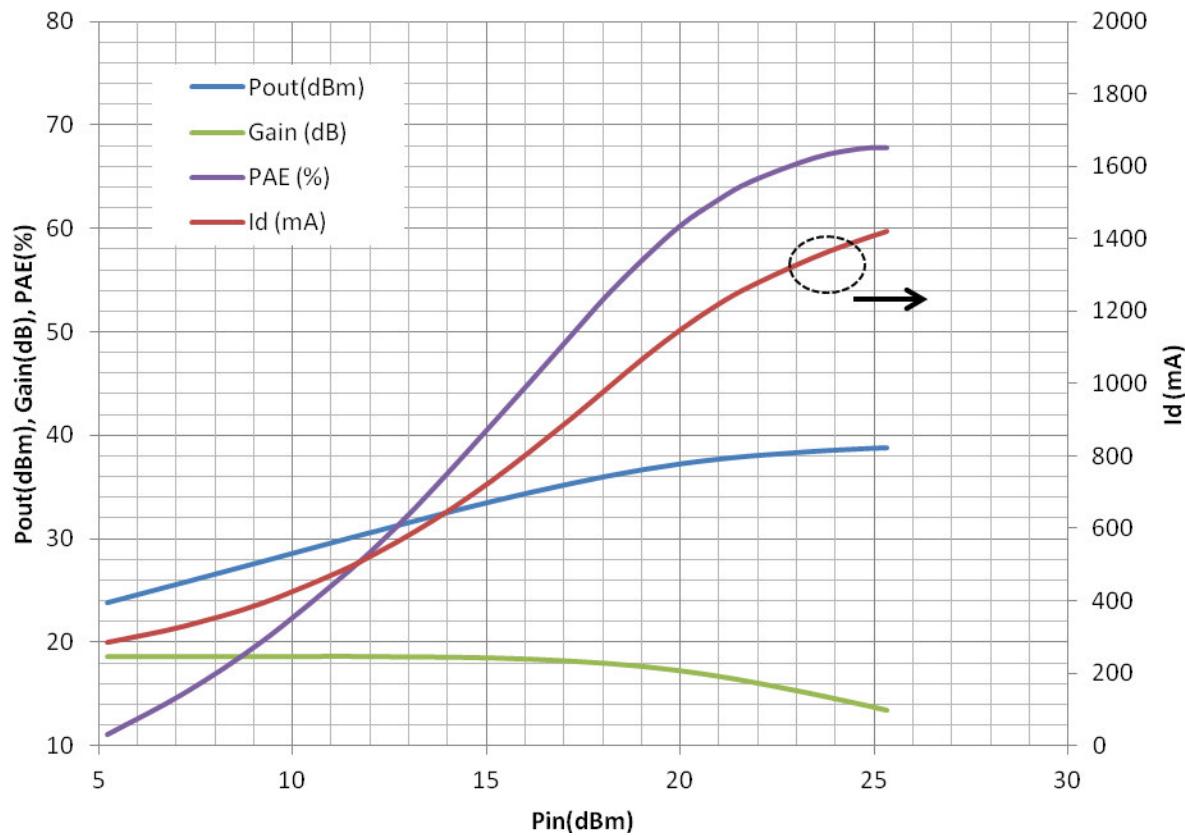


REVISIONS		ZONE	LTR	DESCRIPTION	DATE	APPROVED
-----------	--	------	-----	-------------	------	----------

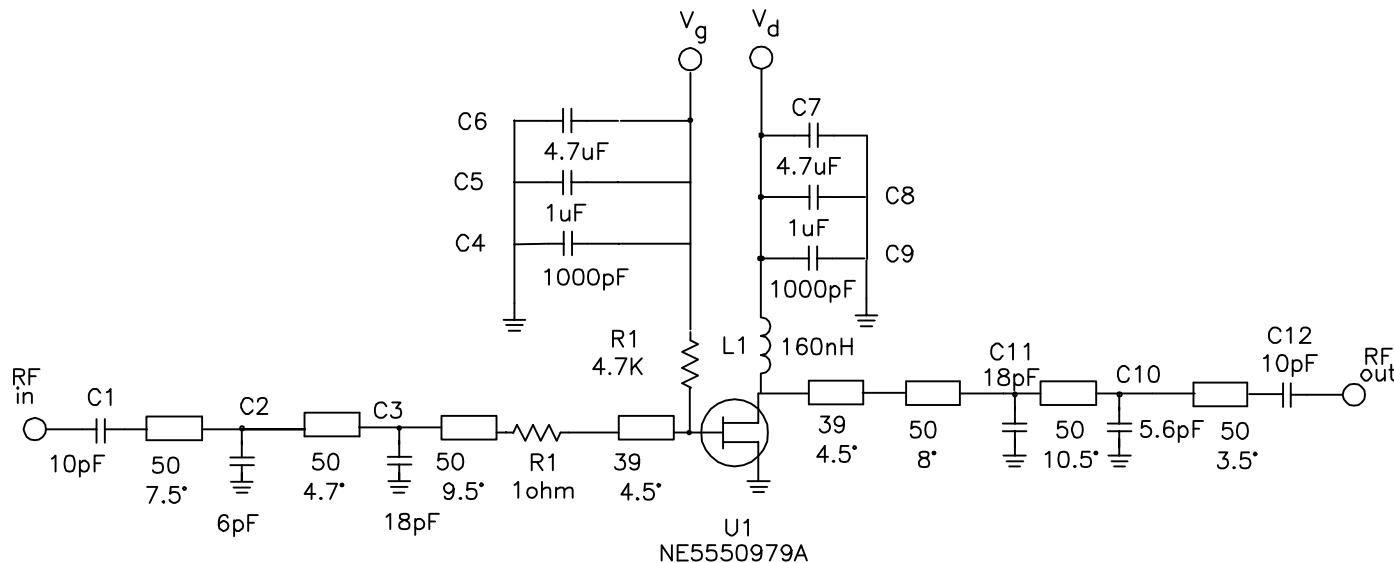

Note: All trace electrical lengths are at 460MHz

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS      ANGULAR .XX± .01 ± 1° .XXX± .005 ± .005 DO NOT SCALE DRAWING	APPROVALS		TITLE: <b>NE5550979A-EV04-A</b> <b>SCHEMATIC</b>
		MATERIAL	Drawing by: Mouqun Dong	3/1/2012	
		FINISH	Designed by: Mouqun Dong	3/1/2012	SIZE <b>C</b>
			Checked by:		
			Project Engineer:		
			Quality Control:		
NEXT ASSY	USED ON	SCALE NONE	RELEASE DATE	PROTOTYPE	SHEET 1 OF 1
APPLICATION					

REVISED		DESCRIPTION	DATE	APPROVED
ZONE	LTR			

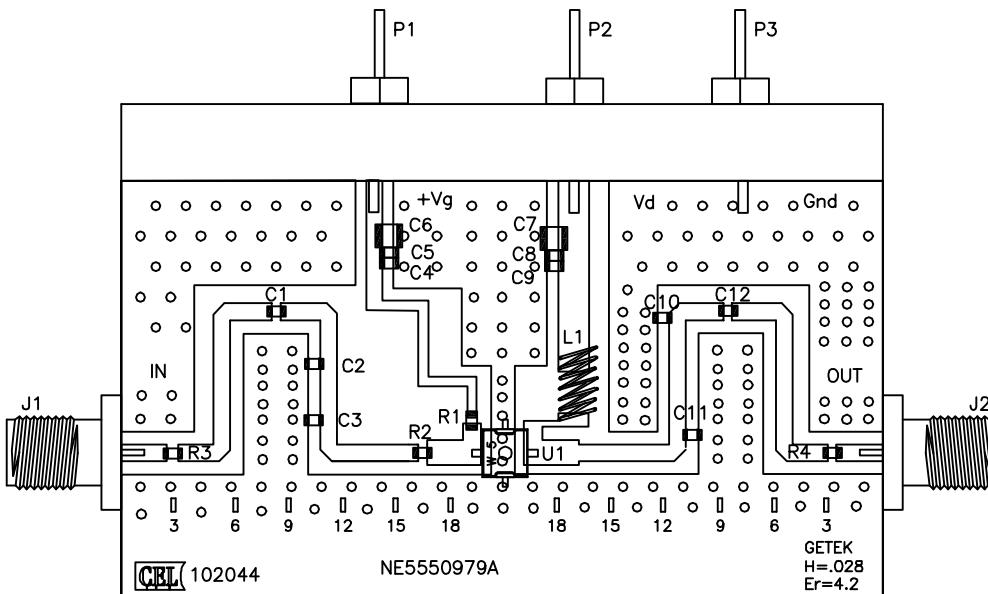

1	GRM1885C1H5R6CZ01B+C01	C10	0603 5.6pF CAP MURATA	15
2	GRM1885C1H105KE44D	C5,C8	0603 1uF CAP MURATA	14
2	GRM1885C1H102JA01B+A01	C4,C9	0603 1000pF CAP MURATA	13
2	GRM1885C1H180JA01B+A01	C3,C11	0603 18pF CAP MURATA	12
2	267M1002475K	C6,C7	4.7uF 10V TANT CHIP CAP B MATS	11
1	GRM1885C1H6R0DZ01B+C01	C2	0603 6.0pF CAP MURATA	10
2	GRM1885C1H100JA01B+A01	C1,C12	0603 10pF CAP MURATA	9
2	GENERIC	R3,R4	0603 0 OHM RESISTOR	8
1	GENERIC	R2	0603 1 OHM RESISTOR	7
1	GENERIC	R1	0603 4.7K OHM RESISTOR	6
1	2222SQ-161-JE	L1	160nH INDUCTOR COILCRAFT	5
3	2340-6111 TG	P1,P2,P3	PIN HEADER 3M	4
2	5308-2CC	J1,J2	SMA 4H FLANGE JACK TENSOLITE	3
1	NE5550979A-A	U1	RENESAS NE5550979A-A	2
1	CL-102044	DRAWING	COMPONENT LAYOUT DRAWING	1
QTY	PART NUMBER OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL/SPECIFICATION	ITEM NO.

PARTS LIST

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES $XX \pm .01$ ANGULAR $XXX \pm .005$	APPROVALS	<b>CEL</b> CALIFORNIA EASTERN LABS 4590 PATRICK HENRY DR. SANTA CLARA CA. 95054
		DO NOT SCALE DRAWING	Drawing by: M Dong      3/1/2012	
		MATERIAL	Designed by: M Dong      3/1/2012	
			Checked by:	
		FINISH	Project Engineer:	
			Quality Control:	
NEXT ASSY	USED ON		SIZE	FSCM NO.
APPLICATION			C	DWG NO.
				AD-102044
SCALE	RELEASE DATE	PROTOTYPE	SHEET 1	OF 1



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литер Н,  
помещение 100-Н Офис 331