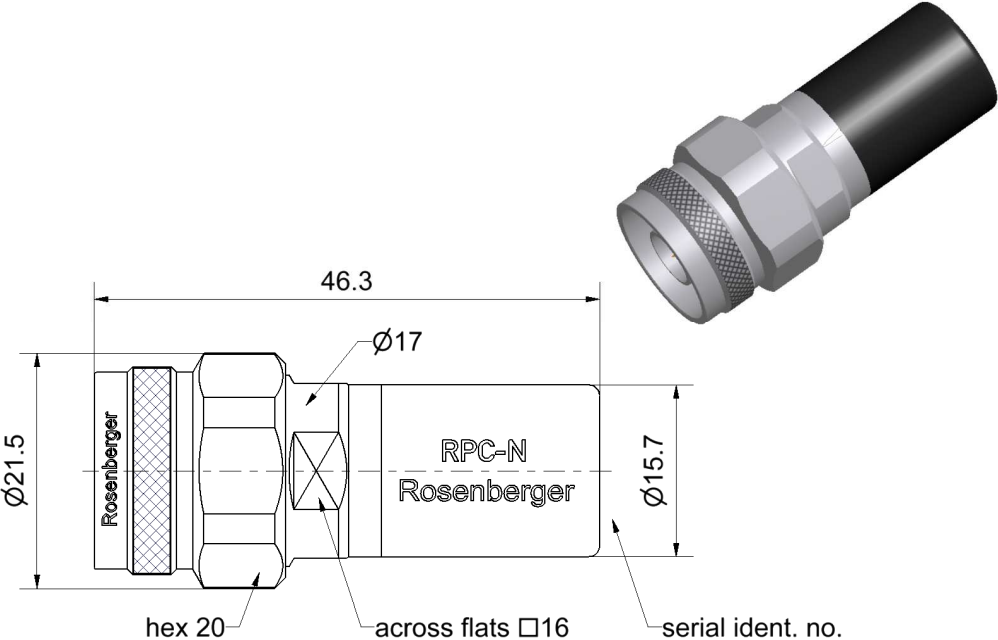


Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/09.14/6.2

Technical Data Sheet		Rosenberger
RPC-N 50 Ω	Open Circuit Plug	05S12L-000S3
		
All dimensions are in mm; tolerances according to ISO 2768 m-H		
Interface		
According to		IEC 61169-16
Documents		
Application note		AN001 "Calibration Services"
Material and plating		
Connector parts		
Center conductor	Material	Plating
Outer conductor	CuBe	Gold, min. 1.27 µm, over nickel
Coupling nut	Stainless steel	Passivated
Dielectric	Stainless steel	Passivated
	PS	
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de		Tel. : +49 8684 18-0 Email : info@rosenberger.de
		Page 1 / 3

Electrical data

Frequency range	DC to 18 GHz
Return loss	≤ 0.10 dB, DC to 4 GHz
	≤ 0.15 dB, 4 GHz to 8 GHz
	≤ 0.20 dB, 8 GHz to 18 GHz
Error from nominal phase ¹	$\leq 1.5^\circ$, DC to 4 GHz
	$\leq 2.0^\circ$, 4 GHz to 8 GHz
	$\leq 3.0^\circ$, 8 GHz to 18 GHz

¹ The nominal phase is defined by the Offset Delay, the Offset Loss and the Fringing Capacitances.

Mechanical data

Mating cycles	≥ 500
Maximum torque	1.70 Nm
Recommended torque	1.10 Nm
Gauge	5.28 mm to 5.32 mm

General standard definitions

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

Offset Z_o / Impedance / Z_o	50 Ω
Offset Delay	50.3682 ps
Length (electrical) / Offset Length	15.10 mm
Offset Loss	0.80 G Ω /s
Loss	0.0070 dB/ $\sqrt{\text{GHz}}$
Fringing Capacitances ²	

² Fringing Capacitances are determined individually for each open circuit and are documented in a Calibration Certificate.

Environmental data

Operating temperature range ³	+ 20 °C to +26 °C
Rated temperature range of use ⁴	0 °C to +50 °C
Storage temperature range	- 40 °C to +85 °C

RoHS	compliant
------	-----------

³ Temperature range over which these specification are valid.

⁴ This range is underneath and above the operating temperature range, within the open circuit is fully functional and could be used without damage.

Technical Data Sheet				Rosenberger																			
RPC-N 50 Ω		Open Circuit Plug		05S12L-000S3																			
Declaration of calibration options Factory Calibration Standard delivery for this calibration standard includes a Factory Calibration. The Calibration Certificate issued reports individual calibration results, traceable to national / international standards. Model based standard definitions are individually optimized and reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format. Accredited Calibration Optional this calibration standard can be delivered with an Accredited Calibration (DAkkS) having the highest confidence in the traceability. The DAkkS Calibration Certificate issued reports individual calibration results in a complex format, traceable to national / international standards. Model based standard definitions are individually optimized and reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format as well as in a dense data set needed for data based standard definitions. The uncertainties are smaller than in a Factory Calibration. For further, more detailed information see application note AN001 on the Rosenberger homepage. Calibration interval <table><tr><td>Recommendation</td><td>12 months</td></tr></table> Packing <table><tr><td>Standard</td><td>1 pce in box</td></tr><tr><td>Weight</td><td>44.0 g/pce</td></tr></table>								Recommendation	12 months	Standard	1 pce in box	Weight	44.0 g/pce										
Recommendation	12 months																						
Standard	1 pce in box																						
Weight	44.0 g/pce																						
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.																							
<table><tr><td>Draft</td><td>Date</td><td>Approved</td><td>Date</td></tr><tr><td>Herbert Babinger</td><td>28.07.04</td><td>Markus Müller</td><td>11.10.16</td></tr></table>				Draft	Date	Approved	Date	Herbert Babinger	28.07.04	Markus Müller	11.10.16	<table><tr><td>Rev.</td><td>Engineering change number</td><td>Name</td><td>Date</td></tr><tr><td>f00</td><td>16-1390</td><td>Marion Striegler</td><td>10.10.16</td></tr></table>				Rev.	Engineering change number	Name	Date	f00	16-1390	Marion Striegler	10.10.16
Draft	Date	Approved	Date																				
Herbert Babinger	28.07.04	Markus Müller	11.10.16																				
Rev.	Engineering change number	Name	Date																				
f00	16-1390	Marion Striegler	10.10.16																				
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de		Page 3 / 3																	



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331