


SST Series, Industrial Grade Discrete Plug-in, Time Delay Relay



Product Facts

- On-Delay, Off-Delay, Interval, One Shot & Repeat modes
- Time delays to 120 min.
- Fast setting with time calibrated knobs
- Superior transient protection
- Rugged construction with 8- or 11-pin plug
- Flame retardant housing
- File E15631, File LR33434

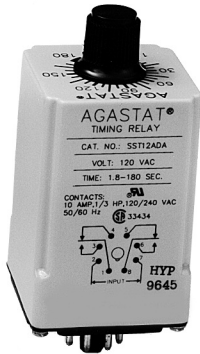

Timing Specifications

Timing Modes —

On-Delay, Off-Delay, Interval, One Shot (Latching Interval) or Repeat Cycle.

Timing Ranges — Nine ranges spanning 0.1 sec. to 120 min.

Timing Adjustment — Knob adjust.

Accuracy —

Repeat Accuracy — $\pm 1\%$
Overall Accuracy — $\pm 5\%$

Reset Time — 50 ms., max., (25 ms typ.) for on-delay and interval; 300 ms, max., for off-delay and one shot; 500 ms, max., for repeat type.

Relay Operate Time — 50 ms.

Relay Release Time — 30 ms.

Contact Data @ 25°C

Arrangements — 2 Form C (DPDT)

Rating — 10A @ 120/240VAC, resistive; 1/3 HP @ 120/240VAC, 50/60 Hz.

Expected Mechanical Life —

10 million operations

Expected Electrical Life — 500,000 operations, min., at rated resistive load.

Initial Dielectric Strength —

Between Contacts, Line Inputs and Control Circuits — 1,500V RMS, minimum, at 60 Hz.

Input Data @ 25°C

Voltage — See Ordering Information section for details.

Power Requirement — 3W max.

Transient Protection —

Non-repetitive transients of the following magnitudes will not cause spurious operation of affect function and accuracy.

Operating Voltage	<0.1 ms	<1 ms
12VDC	1,000V	240V*
12 & 24 VAC/VDC	860V	208V*
120 VAC	2,580V	2,150V*

*Minimum source impedance of 100 ohm.

Environmental Data


Temperature Range —

Storage — -23°C to $+71^{\circ}\text{C}$
Operating — -23°C to $+54^{\circ}\text{C}$


Mechanical Data

Mounting/Termination — On-Delay, Interval and Repeat types have 8- pin octal plug that fits either 27E122 or 27E891 socket. Off-Delay and One Shot types have 11-pin octal-type plug that fits 27E123 or 27E892. Sockets must be ordered separately.

Weight — 4 oz. (112g) approximately

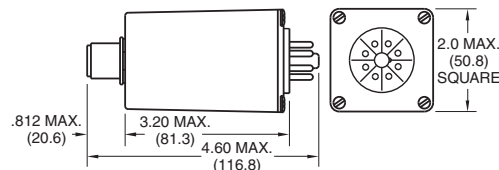

Outline Dimensions

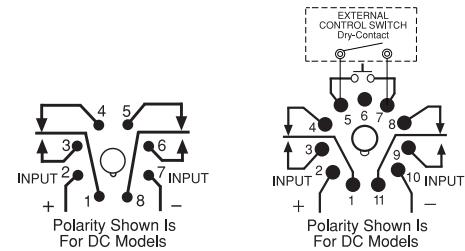

Wiring Diagrams (Bottom Views)

Ordering Information

SST1 – On Delay Types

Input	Time Range	Part No.
120 VAC	0.1 - 10 sec.	SST12AAA
	0.6 - 60 sec.	SST12ACA
	1.8 - 180 sec.	SST12ADA
	3 - 300 sec.	SST12AEA
	18 sec. - 30 min.	SST12AGA
24 VAC	36 sec. - 60 min.	SST12AHA
	0.1 - 10 sec.	SST12EAA
	1.8 - 180 sec.	SST12EDA
	3 - 300 sec.	SST12EEA
	18 sec. - 30 min.	SST12EGA
24 VDC	36 sec. - 60 min.	SST12EHA
	0.1 - 10 sec.	SST12QAA
	1.8 - 180 sec.	SST12QDA
	3 - 300 sec.	SST12QEA
	18 sec. - 30 min.	SST12QGA
12 VDC	36 sec. - 60 min.	SST12QHA
	0.1 - 10 sec.	SST12QAA
	1.8 - 180 sec.	SST12QDA
	3 - 300 sec.	SST12QEA
	18 sec. - 30 min.	SST12QGA

SST2 – Off Delay Types

Input	Time Range	Part No.
120 VAC	0.1 - 10 sec.	SST22AAA
	0.6 - 60 sec.	SST22ADA
	1.8 - 180 sec.	SST22AEA
	3 - 300 sec.	SST22AGA
	18 sec. - 30 min.	SST22AHA
24 VAC	36 sec. - 60 min.	SST22AHA
	0.1 - 10 sec.	SST22EAA
	1.8 - 180 sec.	SST22EDA
	3 - 300 sec.	SST22EEA
	18 sec. - 30 min.	SST22EGA
24 VDC	36 sec. - 60 min.	SST22EHA
	0.1 - 10 sec.	SST22QAA
	1.8 - 180 sec.	SST22QDA
	3 - 300 sec.	SST22QEA
	18 sec. - 30 min.	SST22QGA
12 VDC	36 sec. - 60 min.	SST22QHA
	0.1 - 10 sec.	SST22QAA
	1.8 - 180 sec.	SST22QDA
	3 - 300 sec.	SST22QEA
	18 sec. - 30 min.	SST22QGA

SST3 – Interval Types

Input	Time Range	Part No.
120 VAC	0.1 - 10 sec.	SST32AAA
	0.6 - 60 sec.	SST32ADA
	1.8 - 180 sec.	SST32AEA
	3 - 300 sec.	SST32AGA
	18 sec. - 30 min.	SST32AHA
24 VAC	36 sec. - 60 min.	SST32AHA
	0.1 - 10 sec.	SST32EAA
	1.8 - 180 sec.	SST32EDA
	3 - 300 sec.	SST32EEA
	18 sec. - 30 min.	SST32EGA
24 VDC	36 sec. - 60 min.	SST32EHA
	0.1 - 10 sec.	SST32QAA
	1.8 - 180 sec.	SST32QDA
	3 - 300 sec.	SST32QEA
	18 sec. - 30 min.	SST32QGA
12 VDC	36 sec. - 60 min.	SST32QHA
	0.1 - 10 sec.	SST32QAA
	1.8 - 180 sec.	SST32QDA
	3 - 300 sec.	SST32QEA
	18 sec. - 30 min.	SST32QGA

SST4 – One Shot* Types

Input	Time Range	Part No.
120 VAC	0.1 - 10 sec.	SST42AAA
	0.6 - 60 sec.	SST42ADA
	1.8 - 180 sec.	SST42AEA
	3 - 300 sec.	SST42AGA
	18 sec. - 30 min.	SST42AHA
24 VAC	36 sec. - 60 min.	SST42AHA
	0.1 - 10 sec.	SST42EAA
	1.8 - 180 sec.	SST42EDA
	3 - 300 sec.	SST42EEA
	18 sec. - 30 min.	SST42EGA
24 VDC	36 sec. - 60 min.	SST42EHA
	0.1 - 10 sec.	SST42QAA
	1.8 - 180 sec.	SST42QDA
	3 - 300 sec.	SST42QEA
	18 sec. - 30 min.	SST42QGA
12 VDC	36 sec. - 60 min.	SST42QHA
	0.1 - 10 sec.	SST42QAA
	1.8 - 180 sec.	SST42QDA
	3 - 300 sec.	SST42QEA
	18 sec. - 30 min.	SST42QGA

* Also known as Latching Interval

SST7 – Repeat Cycle Types

Input	Time Range	Part No.
120 VAC	0.1 - 10 sec.	SST72AAA
	0.6 - 60 sec.	SST72ADA
	1.8 - 180 sec.	SST72AEA
	3 - 300 sec.	SST72AGA
	18 sec. - 30 min.	SST72AHA
24 VAC	36 sec. - 60 min.	SST72AHA
	0.1 - 10 sec.	SST72EAA
	1.8 - 180 sec.	SST72EDA
	3 - 300 sec.	SST72EEA
	18 sec. - 30 min.	SST72EGA
24 VDC	36 sec. - 60 min.	SST72EHA
	0.1 - 10 sec.	SST72QAA
	1.8 - 180 sec.	SST72QDA
	3 - 300 sec.	SST72QEA
	18 sec. - 30 min.	SST72QGA
12 VDC	36 sec. - 60 min.	SST72QHA
	0.1 - 10 sec.	SST72QAA
	1.8 - 180 sec.	SST72QDA
	3 - 300 sec.	SST72QEA
	18 sec. - 30 min.	SST72QGA

Users should thoroughly review the technical data before selecting a product part number. It is recommended that user also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

Authorized distributors are likely to stock the following:

None at present.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331