

EMILY-RS

~8° spot beam. 14.74 mm high lens.

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 26.0 mm
Height	14.7 mm
Fastening	tape
ROHS compliant	yes 


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
EMILY-RS	Single lens	PMMA	clear	
SPUTNIK-TAPE	Tape	PU tape	black	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA13546_EMILY-RS	Single lens	1690	260	130	10.3
» Box size: 480 x 280 x 300 mm					




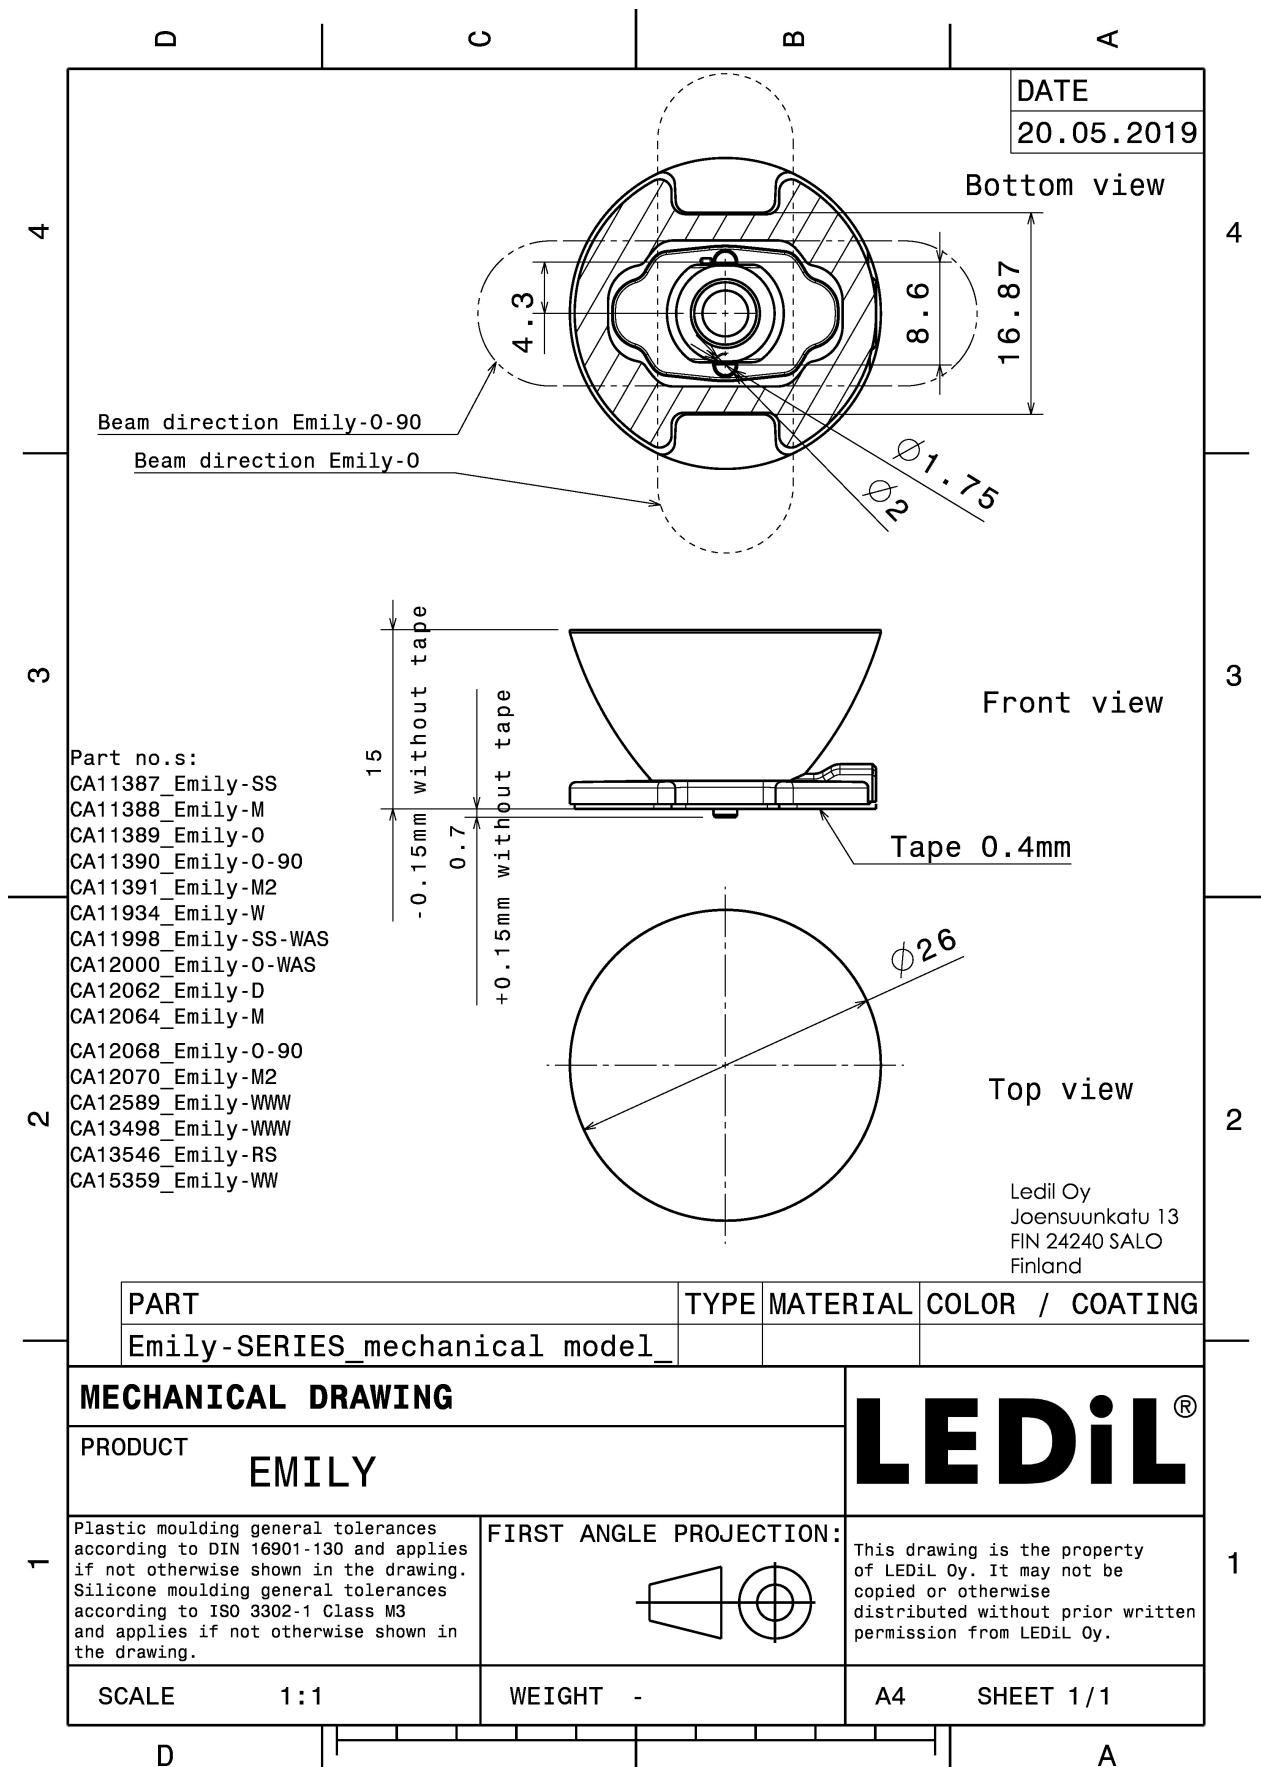

PHOTOMETRIC DATA (MEASURED):



CREE

LED XB-H
FWHM 9.0°
Efficiency 88 %
Peak intensity 24.7 cd/Im
LEDs/each optic 1
Light colour White
Required components:

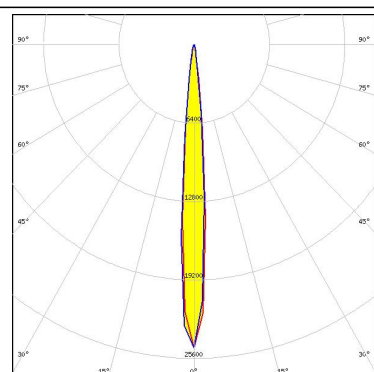


CREE

LED XP-G3
FWHM 10.0°
Efficiency 94 %
Peak intensity 18 cd/Im
LEDs/each optic 1
Light colour White
Required components:

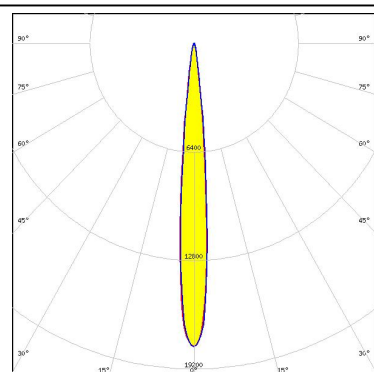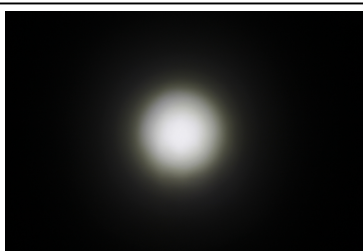


CREE

LED XP-L HD
FWHM 13.0°
Efficiency 89 %
Peak intensity 13.1 cd/Im
LEDs/each optic 1
Light colour White
Required components:

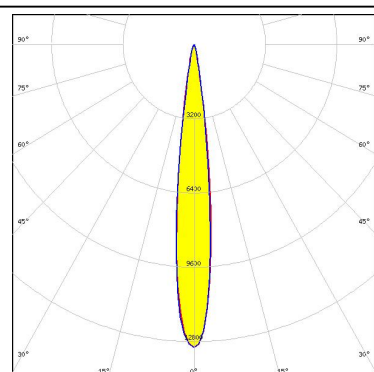

CREE



LED XP-L HI
FWHM 8.0°
Efficiency 88 %
Peak intensity 28 cd/Im
LEDs/each optic 1
Light colour White
Required components:

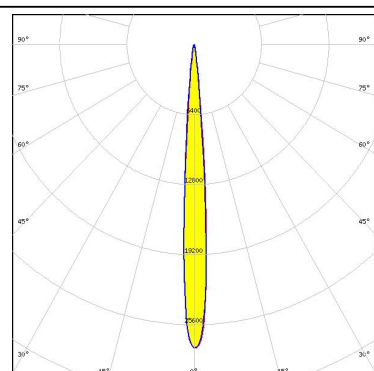



PHOTOMETRIC DATA (MEASURED):





LED XP-L2
FWHM 13.0°
Efficiency 93 %
Peak intensity 10 cd/Im
LEDs/each optic 1
Light colour White
Required components:

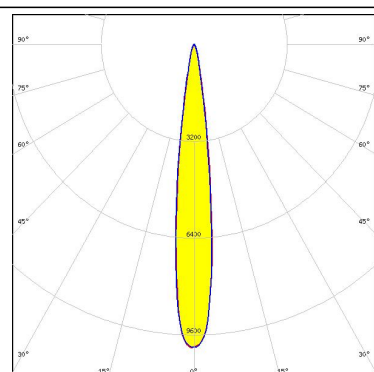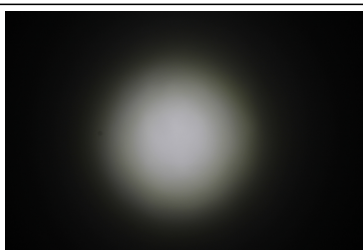


LED XQ-E HI
FWHM 4.0°
Efficiency 94 %
Peak intensity 71.1 cd/Im
LEDs/each optic 1
Light colour White
Required components:

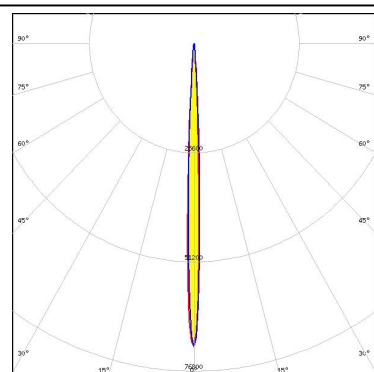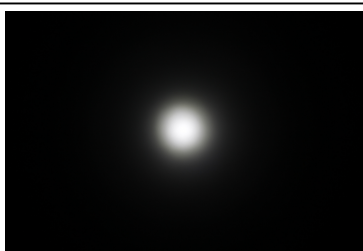

LED XT-E
FWHM 8.0°
Efficiency 91 %
Peak intensity 23.9 cd/Im
LEDs/each optic 1
Light colour White
Required components:

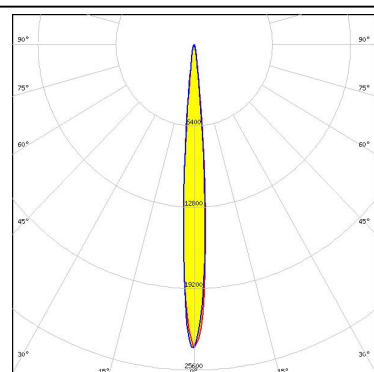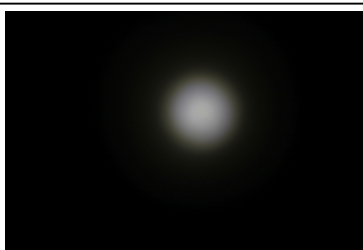



LED LUXEON Z ES
FWHM 5.0°
Efficiency 91 %
Peak intensity 52 cd/Im
LEDs/each optic 1
Light colour White
Required components:

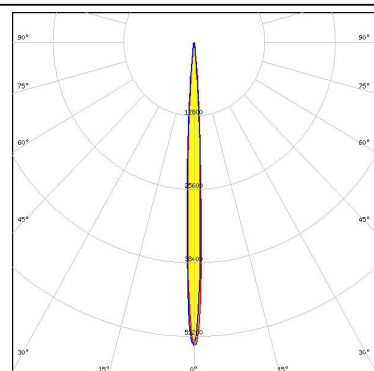

PHOTOMETRIC DATA (MEASURED):



LED NVSW219D
FWHM 10.0°
Efficiency 94 %
Peak intensity 20.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

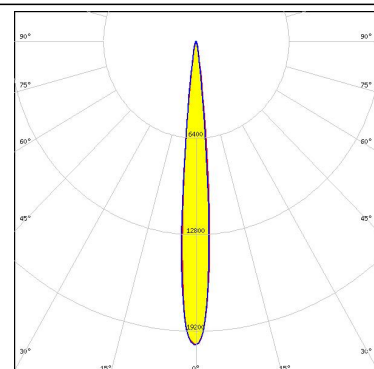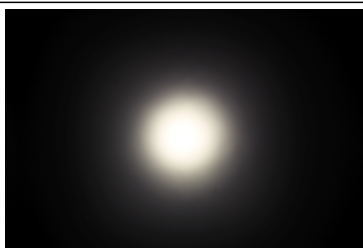

LED OSLO Square EC
FWHM 8.0°
Efficiency 90 %
Peak intensity 29.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:




LED PLPVEC2 850A
FWHM 4.0°
Efficiency %
LEDs/each optic 1
Light colour IR
Required components:



SEOUL SEMICONDUCTOR

LED nPola
FWHM 5.0°
Efficiency 94 %
Peak intensity 81.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

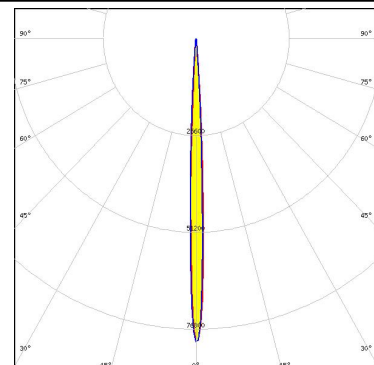


PHOTOMETRIC DATA (MEASURED):




PHOTOMETRIC DATA (SIMULATED):




LED XP-E2
FWHM 6.0°
Efficiency 94 %
Peak intensity 51.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

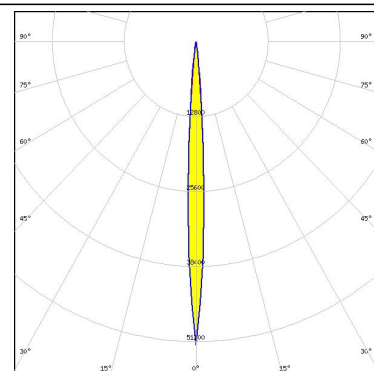


LED XP-G2
FWHM 8.0°
Efficiency 94 %
Peak intensity 30.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

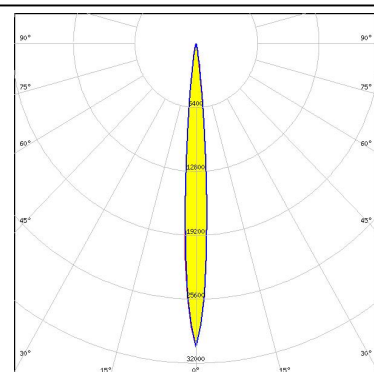

LED XP-G2 HE
FWHM 10.0°
Efficiency 95 %
Peak intensity 19.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

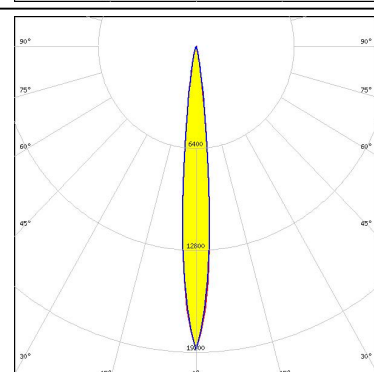


LED LUXEON Rebel
FWHM 6.0°
Efficiency 94 %
Peak intensity 41.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

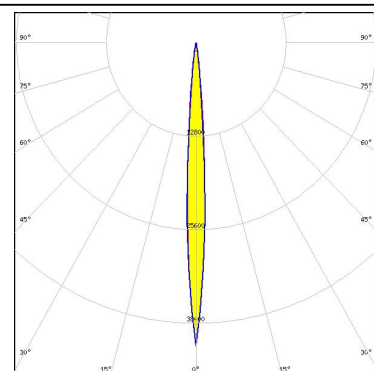


PHOTOMETRIC DATA (SIMULATED):




LED LUXEON Rebel Plus
FWHM 6.0°
Efficiency 94 %
Peak intensity 42.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

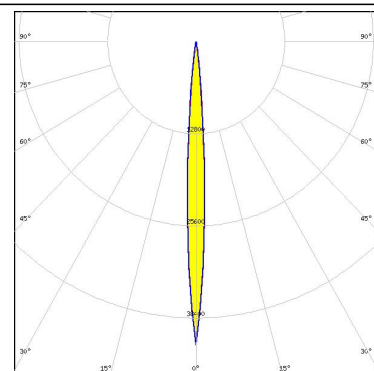


LED LUXEON Z
FWHM 5.9°
Efficiency 94 %
Peak intensity 65.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

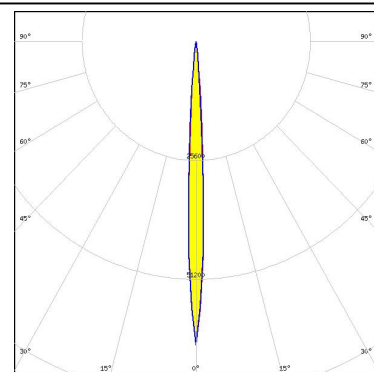

LED NCSxE17A
FWHM 8.0°
Efficiency 92 %
Peak intensity 32.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

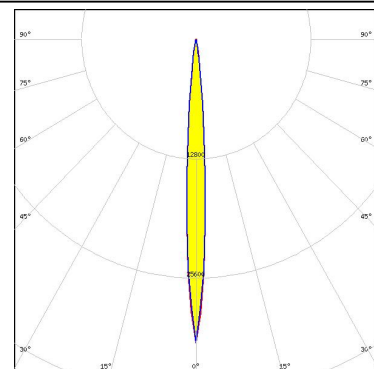


LED NVSxE21A
FWHM 8.0°
Efficiency 93 %
Peak intensity 26.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

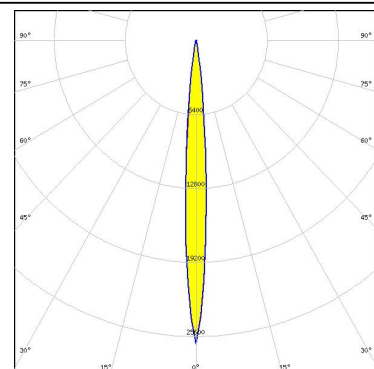

PHOTOMETRIC DATA (SIMULATED):


OSRAM Opto Semiconductors

LED OSCONIQ P 3030
FWHM 10.0°
Efficiency 96 %
Peak intensity 20.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

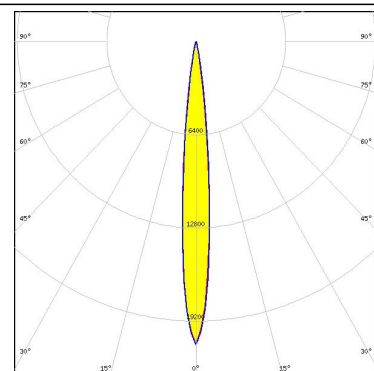


OSRAM Opto Semiconductors

LED OSLON Black
FWHM 11.0°
Efficiency 94 %
Peak intensity 19.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

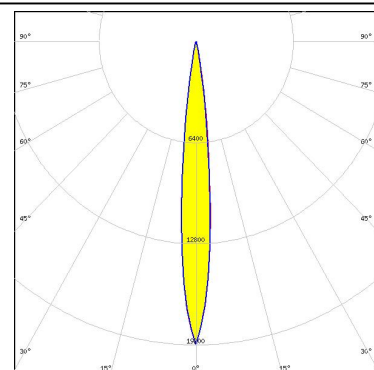


OSRAM Opto Semiconductors

LED OSLON Black Flat
FWHM 6.3°
Efficiency 94 %
Peak intensity 50.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

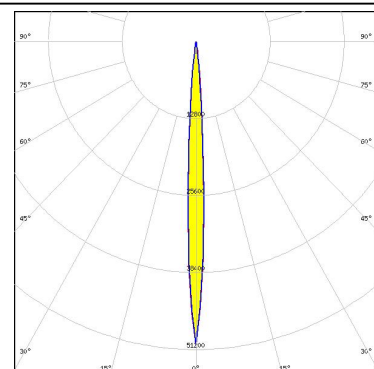

OSRAM Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3
FWHM 11.0°
Efficiency 94 %
Peak intensity 19.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

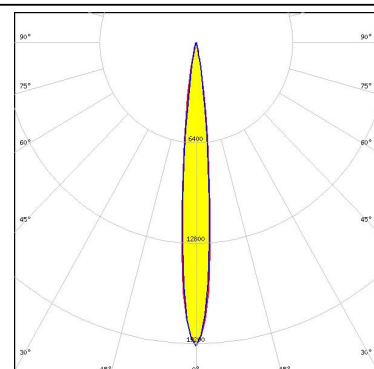

PHOTOMETRIC DATA (SIMULATED):


OSRAM Opto Semiconductors

LED OSLON SSL 150
FWHM 6.0°
Efficiency 96 %
Peak intensity 47.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

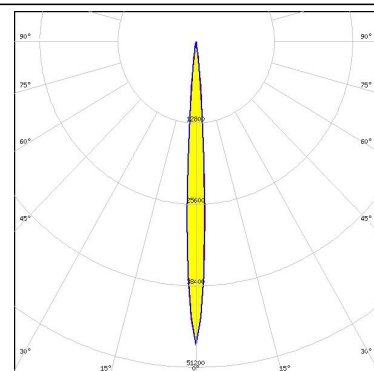


OSRAM Opto Semiconductors

LED OSLON SSL 80
FWHM 7.0°
Efficiency 94 %
Peak intensity 38 cd/lm
LEDs/each optic 1
Light colour White
Required components:

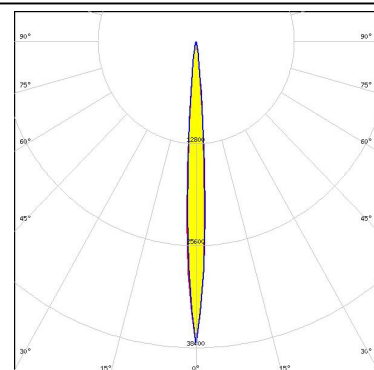

OSRAM Opto Semiconductors

LED SFH 4170S
FWHM 6.0°
Efficiency 87 %
LEDs/each optic 1
Light colour IR
Required components:

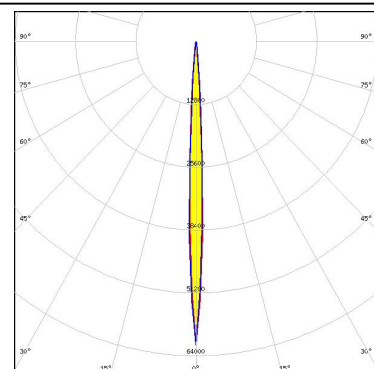


OSRAM Opto Semiconductors

LED SFH 4716AS
FWHM 8.0°
Efficiency 96 %
LEDs/each optic 1
Light colour IR
Required components:

PHOTOMETRIC DATA (SIMULATED):

SAMSUNG

LED LM301B
FWHM 9.0°
Efficiency 94 %
Peak intensity 28.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

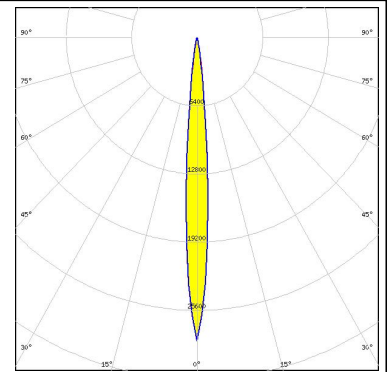

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331