

● PCB MOUNTING LEDs - Ø 5mm

## FEATURES



## 106 SERIES

PACK QUANTITY = 250 PIECES

- Material conforms to UL94 V-O flammability ratings
- Low current versions available
- Reverse polarity options available
- Customised lead lengths available
- Product Illustrated 106-505-04
- Typically available ex stock

## SPECIFICATIONS

Ordering Information &amp; Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure up to = 100,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

| PART NUMBER        | COLOUR                                                                                        | LENS            | VOLTAGE<br>DC<br>Vopr | CURRENT<br>DC<br>Iopr | LUMINOUS<br>INTENSITY<br>lv@20mA | WAVE<br>LENGTH<br>λp | OPERATING<br>TEMP<br>Topr | STORAGE<br>TEMP<br>Tstg |  |
|--------------------|-----------------------------------------------------------------------------------------------|-----------------|-----------------------|-----------------------|----------------------------------|----------------------|---------------------------|-------------------------|--------------------------------------------------------------------------------------|
| STANDARD INTENSITY |                                                                                               |                 |                       |                       |                                  |                      |                           |                         |                                                                                      |
| 106-505-04         | Red        | Colour Diffused | 2.0*                  | 20                    | 60                               | 627                  | -40 ~ +85^                | -40 ~ +85               | Yes                                                                                  |
| 106-511-04         | Yellow     | Colour Diffused | 2.1*                  | 20                    | 40                               | 590                  | -40 ~ +85^                | -40 ~ +85               | Yes                                                                                  |
| 106-514-04         | Green      | Colour Diffused | 2.2*                  | 20                    | 40                               | 565                  | -40 ~ +85^                | -40 ~ +85               | Yes                                                                                  |
| 106-530-04         | Red/Green  | White Diffused  | 2.0/2.2*              | 20                    | 30/25                            | 627/565              | -40 ~ +85^                | -40 ~ +85               | Yes                                                                                  |
| 106-581-20         | Red        | Colour Diffused | 5                     | 13                    | 50@13mA                          | 627                  | -40 ~ +70                 | -40 ~ +85               | Yes                                                                                  |
| 106-582-20         | Yellow     | Colour Diffused | 5                     | 13                    | 20@13mA                          | 590                  | -40 ~ +70                 | -40 ~ +85               | Yes                                                                                  |
| 106-583-20         | Green      | Colour Diffused | 5                     | 11.5                  | 20@11.5mA                        | 565                  | -40 ~ +70                 | -40 ~ +85               | Yes                                                                                  |
| UNITS              |                                                                                               |                 | Vdc                   | mA                    | mcd                              | nm                   | °C                        | °C                      |                                                                                      |

\* = Voltage DC for 20mA product is Vf@20mA, not Vopr

^ = Products must be derated according to the derating information. Each derating graph refers to specific LEDs. Refer to page 3.

## How to Order:


website: [www.marl.co.uk](http://www.marl.co.uk) • email: [sales@marl.co.uk](mailto:sales@marl.co.uk) •

• Telephone +44 (0)1229 582430 • Fax: +44 (0)1229 585155

The information contained in this datasheet does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. Marl International reserve the right to alter without notice the specification or any conditions of supply for products or service.

BS EN ISO 9001:2000  
Approved Manufacturer

## 106 Series

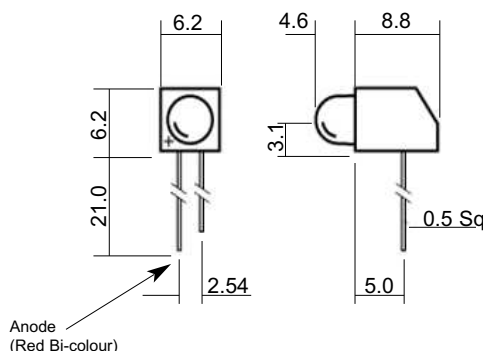

Dimensions in mm (Typical)  
Not to scale

## Housing Material

Polycarbonate

This material offers UL94 V-0 flame retardancy\* and a high impact strength. This material has a melt point of 290-340°C and is suitable for use in the majority of automatic soldering processes.

\*Material test thickness 1.6mm

## LEDs

### LED Polarity

Anode identification is shown in the dimensional diagram. The long lead of a non-cropped unit can also be used to help identify the anode. For the 2 pin Bi-colour units the standard colour configuration is red anode to the '+' sign.

### Reverse Polarity

This is offered on all PCB units, with the exception of the 125 series, if requested to help overcome the problem of systems with reverse polarity connections. Multiple units can also be supplied in reverse polarity but not with mixed polarities. The 2 pin and 3 pin Bi-colours can be supplied in reverse colour configuration.

### Lead Cropping

Should lead cropping be required Marl offer two standard lengths, either by request or by adding one of the following codes to the end of the part number:-

-24 = 3mm                      -26 = 5mm (E.g 106-505-04-26)  
Other non-standard lead lengths are available on request.

### Bi-colour

#### 2 Pin Operation

To achieve the second colour for a 2 pin Bi-colour unit the supply must be reversed, standard colour configuration for these units is red anode to the '+' sign.

### Electro-static Discharge (ESD)

Build up of electrostatic discharge occurs in many situations involving people moving and handling products. The range of possible situations is very diverse but voltage levels as high as several thousand volts can and do arise in many individual situations. When an operator charged up to these levels handles a 'static sensitive device', there is a very probable likelihood that the device will be irreversibly damaged. It is essential that precautions are taken at all stages during manufacture and assembly of these products. Although LEDs were never considered to be static sensitive devices, changes in manufacturing technology and materials used to produce higher intensity products over a large range of the wavelength spectrum have changed this. Marl has an approved system of ESD control from goods in, through production and into final packing and despatch. We recommend all users of LED based products follow the guidelines of BS 100015.

Note: All luminous intensity figures refer to the unmodified discrete LED.

### How to Order:

website: [www.marl.co.uk](http://www.marl.co.uk) • email: [sales@marl.co.uk](mailto:sales@marl.co.uk) •




• Telephone +44 (0)1229 582430 • Fax: +44 (0)1229 585155

The information contained in this datasheet does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. Marl International reserve the right to alter without notice the specification or any conditions of supply for products or service.



BS EN ISO 9001:2000  
Approved Manufacturer

## DERATING INFORMATION

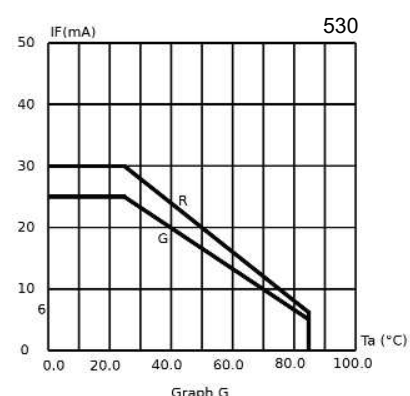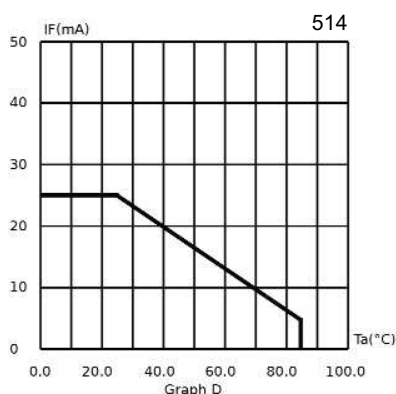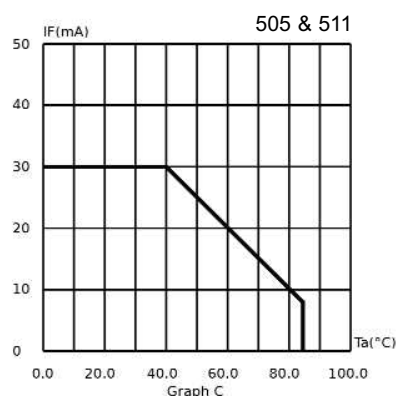

## ALSO AVAILABLE

Part numbers also available in the 106 Series:

| PART NO.      | COLOUR<br>(Vdc) Vopr | VOLTAGE DC |
|---------------|----------------------|------------|
| 106-000-04-57 | Green                | 20mA       |
| 106-384-21    | Red                  | 12Vdc      |
| 106-505-01    | Red                  | 2mA        |
| 106-505-02    | Red                  | 10mA       |
| 106-505-04    | Red                  | 20mA       |
| 106-505-04-1  | Red                  | 20mA       |
| 106-505-04-25 | Red                  | 20mA       |
| 106-505-04-26 | Red                  | 20mA       |
| 106-505-04-50 | Red                  | 20mA       |
| 106-508-01    | Orange               | 2mA        |
| 106-508-04    | Orange               | 20mA       |
| 106-511-01    | Yellow               | 2mA        |
| 106-511-04    | Yellow               | 20mA       |
| 106-511-04-24 | Yellow               | 20mA       |
| 106-511-04-25 | Yellow               | 20mA       |
| 106-511-04-26 | Yellow               | 20mA       |
| 106-511-04-50 | Yellow               | 20mA       |
| 106-514-01    | Green                | 2mA        |
| 106-514-02    | Green                | 10mA       |
| 106-514-04    | Green                | 20mA       |
| UNITS         |                      |            |

| PART NO.      | COLOUR<br>(Vdc) Vopr | VOLTAGE DC |
|---------------|----------------------|------------|
| 106-514-04-24 | Green                | 20mA       |
| 106-514-04-25 | Green                | 20mA       |
| 106-514-04-50 | Green                | 20mA       |
| 106-515-04    | Red                  | 20mA       |
| 106-530-04    | Red/Green            | 20mA       |
| 106-530-04-1  | Red/Green            | 20mA       |
| 106-530-04-26 | Red/Green            | 20mA       |
| 106-530-13    | Red/Green            | 5/6Vdc RP  |
| 106-530-13-26 | Red/Green            | 5/6Vdc RP  |
| 106-555-04    | Red                  | 20mA       |
| 106-555-04-4  | Red                  | 20mA       |
| 106-561-04    | Yellow               | 20mA       |
| 106-561-04-4  | Yellow               | 20mA       |
| 106-564-04    | Green                | 20mA       |
| 106-564-04-4  | Green                | 20mA       |
| 106-579-04    | Blue                 | 20mA       |
| 106-584-21    | Red                  | 12Vdc      |
| 106-585-21    | Yellow               | 12Vdc      |
| 106-802-13    | Red                  | 5/6Vdc RP  |
| UNITS         |                      |            |

The products listed above illustrate all of the options available to order. These products may have custom modifications that alter their operation beyond the generic information contained within this datasheet. Please contact sales for further information.

### How to Order:

website: [www.marl.co.uk](http://www.marl.co.uk) • email: [sales@marl.co.uk](mailto:sales@marl.co.uk) •

• Telephone +44 (0)1229 582430 • Fax: +44 (0)1229 585155

The information contained in this datasheet does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. Marl International reserve the right to alter without notice the specification or any conditions of supply for products or service.



BS EN ISO 9001:2000  
Approved Manufacturer



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331