

Alchip™-MZS Series

- Downsizing and Lower ESR, 2,000 hours at 105°C
- Rated voltage range : 25 & 35V, Nominal capacitance range : 330 to 1,000μF
- Solvent resistant type
- Vibration resistant structure
- RoHS2 Compliant
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information







◆ SPECIFICATIONS

Items	Characteristics			
Category	-55 to +105°C			
Temperature Range				
Rated Voltage Range	25 & 35V _{dc}			
Capacitance Tolerance	±20% (M) (at 20°C , 120Hz)			
Leakage Current	I=0.01CV or 3μA, which is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)			
Dissipation Factor (tan δ)	Rated voltage (V _{dc})	25V	35V	(at 20°C , 120Hz)
	tan δ (Max.)	0.14	0.12	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	25V	35V	(at 120Hz)
	Z(-25°C)/Z(+20°C)	2	2	
	Z(-40°C)/Z(+20°C)	3	3	
	Z(-55°C)/Z(+20°C)	3	3	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 105°C.			
	Capacitance change	≤ ±30% of the initial value		
	D.F. (tan δ)	≤ 200% of the initial specified value		
	Leakage current	≤ The initial specified value		
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.			
	Capacitance change	≤ ±30% of the initial value		
	D.F. (tan δ)	≤ 200% of the initial specified value		
	Leakage current	≤ The initial specified value		
Surge Voltage Test	The capacitors shall be subjected to 1,000 cycles each consisting of charging with the specified surge voltage for 30±5 seconds through a protective resistor (as required for RC=0.1±0.05sec) and open-circuiting for 5.5 minutes at a room temperature of 15 to 35°C.			
	Rated voltage (V _{dc})	25V	35V	
	Surge voltage (V _{dc})	29V	40V	
	Appearance	No significant damage		
	Capacitance change	≤ ±20% of the initial value		
	D.F. (tan δ)	≤ 200% of the initial specified value		
	Leakage current	≤ The initial specified value		
	(Caution)			
	Surge Voltage Test intends to evaluate capacitors in durability of an exceptional excessive voltage under specific conditions.It does not imply long-term use at all.			

◆ DIMENSIONS [mm]

- Terminal Code : A
- Size code : HA0 to JA0

- Terminal Code : G (Vibration resistant structure)
- Size code : HA0 to JA0




Size Code	φD	L	A	B	C	W	P
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

: Dummy terminals

◆ MARKING

EX) 35V680μF




- Rated voltage symbol

Rated voltage (V _{dc})	25	35
Symbol	E	V

Applying voltage over the rated voltages causes the capacitors to have short lifetime.
Besides, applying voltage over the specified surge voltages may cause to have short circuit failure.
A protection circuit should be used if applied voltage will exceed the rated voltages.

Alchip™-M^ZS Series

◆ PART NUMBERING SYSTEM

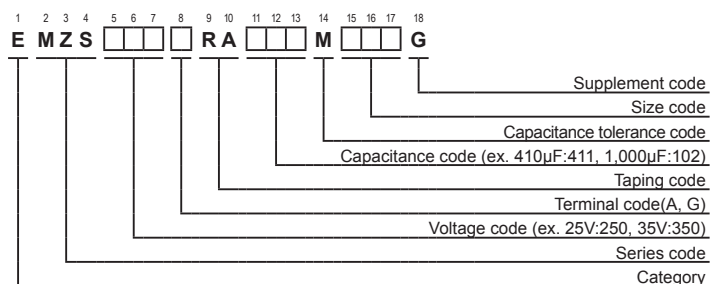

◆ STANDARD RATINGS

WV (Vdc)	Cap (μF)	Size code	tan δ	ESR (Ω max. /20°C, 100kHz)	Rated ripple current (mA rms/105°C, 100kHz)	Part No.
25	470	HA0	0.14	0.08	850	EMZS250□RA471MHA0G
	560	HA0	0.14	0.08	850	EMZS250□RA561MHA0G
	820	JA0	0.14	0.06	1,190	EMZS250□RA821MJA0G
	1,000	JA0	0.14	0.06	1,190	EMZS250□RA102MJA0G
35	330	HA0	0.12	0.08	850	EMZS350□RA331MHA0G
	410	HA0	0.12	0.08	850	EMZS350□RA411MHA0G
	470	HA0	0.12	0.08	850	EMZS350□RA471MHA0G
	560	JA0	0.12	0.06	1,190	EMZS350□RA561MJA0G
	680	JA0	0.12	0.06	1,190	EMZS350□RA681MJA0G

□ :Enter the appropriate terminal code.

◆ RATED RIPPLE CURRENT MULTIPLIERS

● Frequency Multipliers

Capacitance (μF) \ Frequency (Hz)	120	1k	10k	100k
330 to 560	0.50	0.85	0.94	1.00
680 to 1,000	0.60	0.87	0.95	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[United Chemi-Con \(UCC\):](#)

[EMZS250ARA821MJA0G](#) [EMZS350ARA411MHA0G](#) [EMZS350ARA561MJA0G](#) [EMZS250ARA471MHA0G](#)
[EMZS350ARA471MHA0G](#) [EMZS250ARA102MJA0G](#) [EMZS250ARA561MHA0G](#) [EMZS350ARA681MJA0G](#)
[EMZS350ARA331MHA0G](#)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331