

VARIOCON

Modular Contact Inserts


1. Short Description

The modular contact inserts are based on the tried-and-tested COMBICON technology. They are available with the screw connection system and on the equipment side also as a solder in version.


The sleeve or mounting contact inserts are snapped into the correct frames and are then simple to assemble and mount. The modules are easy to unsnap with a screwdriver.

All contact inserts can be equipped with coding profiles. This rules out the possibility of mixing up several plug connectors.


The modules can be individually labeled using the corresponding marker cards SK...

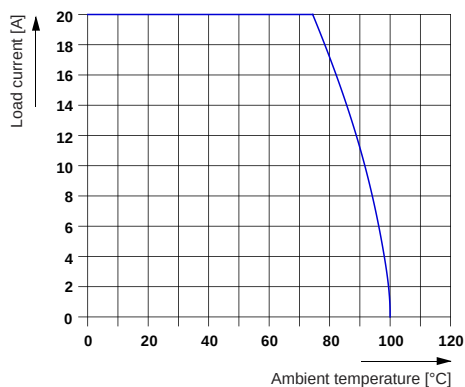

Derating curve VC-TFS 2 / VC-AML 2 / VC-AMS 2

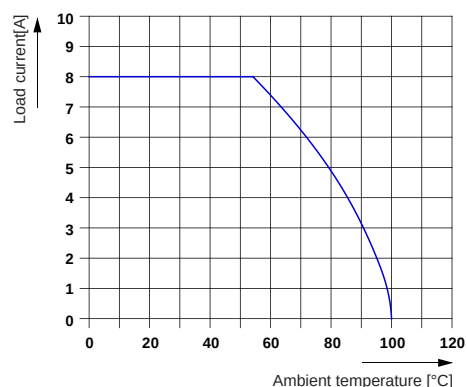

Derating curve VC-TFS HC 8 / VC-AML 8 / VC-AMS 8

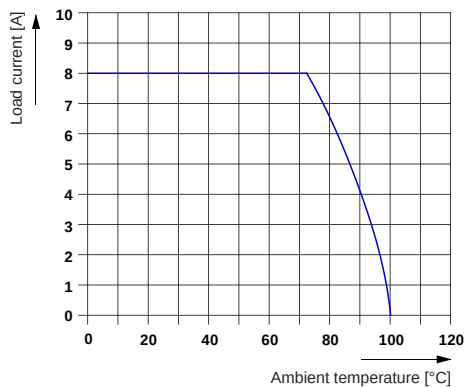


Derating curve VC-TFS HC 6 / VC-AML 6 / VC-AMS 6

VARIOCON


Sleeve Contact Insert with Screw Terminal Blocks




Description	Number of positions	Type	Order No.	Pcs./Pkt.
Contact insert , for sleeve frames	2 6 8	VC-TFS 2 VC-TFS 6 VC-TFS 8	18 52 84 6 18 53 47 6 18 52 82 0	10
Accessories				
Coding section , for VC-...2, is inserted into the groove on the connector and header, red insulating material		CP-HCC 4	16 00 02 7	100
Coding section , for VC-...6/8, is inserted into the groove on the header, red insulating material		CP-MSTB	17 34 63 4	100
Technical data				
Design		VC-TFS 2	VC-TFS 6	VC-TFS 8
Technical data in accordance with IEC/ DIN VDE				
Rated current	[A]	20	8	8
Rated voltage	[V]	400	250	160
Surge voltage category / contamination class		III / 3	III / 3	III / 3
Rated surge voltage / insulation material group	[kV] / –	6 / I	4 / I	2.5 / I
Connection capacity				
Solid / Stranded	[mm ²] / [mm ²]	0.2 - 4.0 / 0.2 - 1.5	0.14 - 1.5 / 0.14 - 1.5	0.14 - 1.5 / 0.14 - 1.5
	AWG / AWG	24 - 12 / 24 - 16	28 - 16 / 28 - 16	28 - 16 / 28 - 16
Multiple connection (2 conductors with same cross section)				
Solid / Stranded	[mm ²] / [mm ²]	0.2 - 2.5 / 0.2 - 1.5	0.14 - 0.5 / 0.14 - 0.75	0.14 - 0.5 / 0.14 - 0.75
	AWG / AWG	24 - 14 / 24 - 16	28 - 20 / 28 - 18	28 - 20 / 28 - 18
Stranded with ferrule without plastic sleeve	[mm ²] / [mm ²]	0.25 - 1.5	0.25 - 0.34	0.25 - 0.34
	AWG / AWG	24 - 16	24 - 20	24 - 20
Stranded with TWIN ferrule with plastic sleeve	[mm ²] / [mm ²]	0.5 - 2.5	0.5	0.5
	AWG / AWG	20 - 14	20	20
Insulating material		PA	PA	PA
Inflammability class in acc. with UL 94		V0	V0	V0
Approval data (UL and CUL)				
Nom. voltage / nom. current / conduc. cross sec.	UL: [V] / [A] / AWG	600 / 20 / 30-10	300 / 8 / 30-14	300 / 8 / 30-14
	CUL: [V] / [A] / AWG	600 / 20 / 30-10	300 / 8 / 30-14	300 / 8 / 30-14
Torque	[Nm]	0.5 - 0.6	0.22 - 0.25	0.22 - 0.25
Approvals				



VC-TFS 2



VC-TFS 6



VC-TFS 8

VARIOCON

Mounting Contact Insert with Screw Terminal Blocks



Description	Number of positions	Type	Order No.	Pcs./Pkt.
Contact insert , for panel mounting frames	2	VC-AMS 2	18 53 52 8	10
	6	VC-AMS 6	18 54 01 9	
	8	VC-AMS 8	18 54 02 2	
Accessories				
Coding section , for VC-...2, is inserted into the groove on the connector and header, red insulating material		CP-HCC 4	16 00 02 7	100
Coding section , for VC-...6/8, is inserted into the groove on the header, red insulating material		CP-MSTB	17 34 63 4	100

Technical data

Design

Technical data in accordance with IEC/ DIN VDE

		VC-AMS 2	VC-AMS 6	VC-AMS 8
Rated current	[A]	20	8	8
Rated voltage	[V]	400	250	160
Surge voltage category / contamination class		III / 3	III / 3	III / 3
Rated surge voltage / insulation material group	[kV] / -	6 / I	4 / I	2.5 / I

Connection capacity

Solid / Stranded	[mm ²] / [mm ²]	0.2 - 4.0 / 0.2 - 1.5	0.14 - 1.5 / 0.14 - 1.5	0.14 - 1.5 / 0.14 - 1.5
	AWG / AWG	24 - 12 / 24 - 16	28 - 16 / 28 - 16	28 - 16 / 28 - 16

Multiple connection (2 conductors with same cross section)

Solid / Stranded	[mm ²] / [mm ²]	0.2 - 2.5 / 0.2 - 1.5	0.14 - 0.5 / 0.14 - 0.75	0.14 - 0.5 / 0.14 - 0.75
	AWG / AWG	24 - 14 / 24 - 16	28 - 20 / 28 - 18	28 - 20 / 28 - 18
Stranded with ferrule without plastic sleeve	[mm ²] / [mm ²]	0.25 - 1.5	0.25 - 0.34	0.25 - 0.34
	AWG / AWG	24 - 16	24 - 20	24 - 20
Stranded with TWIN ferrule with plastic sleeve	[mm ²] / [mm ²]	0.5 - 2.5	0.5	0.5
	AWG / AWG	20 - 14	20	20

Insulating material

Inflammability class in acc. with UL 94


Approval data (UL and CUL)

Nom. voltage / nom. current / conduc. cross sec.	UL: [V] / [A] / AWG	600 / 20 / 30-10	300 / 8 / 30-14	300 / 8 / 30-14
	CUL: [V] / [A] / AWG	600 / 20 / 30-10	300 / 8 / 30-14	300 / 8 / 30-14


Torque

	[Nm]	0.5 - 0.6	0.22 - 0.25	0.22 - 0.25
--	------	-----------	-------------	-------------


Approvals



VC-AMS 2



VC-AMS 6



VC-AMS 8

VARIOCON


Mounting Contact Insert with 90° Angled Solder-In Pins




Description	Number of positions	Type	Order No.	Pcs./Pkt.
Contact insert , for mounting panel frames	2	VC-AML 2	18 52 85 9	10
	6	VC-AML 6	18 53 53 1	
	8	VC-AML 8	18 52 83 3	
Accessories				
Coding section , for VC-...2, is inserted into the groove on the connector and header, red insulating material		CP-HCC 4	16 00 02 7	100
Coding section , for VC-...6/8, is inserted into the groove on the header, red insulating material		CP-MSTB	17 34 63 4	100

Technical data


Design		VC-AML 2	VC-AML 6	VC-AML 8
Dimensions solder-in pins	[mm] x [mm]	2 x 0.8	0.8 x 0.8	0.8 x 0.8
Hole diameter	[mm]	1.4	1.4	1.2
Technical data in accordance with IEC/ DIN VDE				
Rated current	[A]	20	8	8
Rated voltage	[V]	400	250	160
Surge voltage category / contamination class		III / 3	III / 3	III / 3
Rated surge voltage / insulation material group	[kV] / -	6 / I	4 / I	2.5 / I
Insulating material		PA	PA	PA
Inflammability class in acc. with UL 94		V0	V0	V0
Approval data (UL and CUL)				
Nom. voltage / nom. current / conduc. cross sec.	UL: [V] / [A] / AWG	600 / 20 / -	300 / 8 / -	300 / 8 / -
	CUL: [V] / [A] / AWG	600 / 20 / -	300 / 8 / -	300 / 8 / -
Approvals				




VC-AML 2




VC-AML 6




VC-AML 8



Drilling diagram VC-AML 2



Drilling diagram VC-AML 6



Drilling diagram VC-AML 8

VARIOCON

Mounting Contact Insert with Straight Solder-In Pins




Description	Number of positions	Type	Order No.	Pcs./Pkt.
Contact insert , for panel mounting frames	2	VC-AMLV 2	18 84 97 9	10
	6	VC-AMLV 6	18 84 87 2	
	8	VC-AMLV 8	18 84 88 5	
Accessories				
Coding section , for VC-...2, is inserted into the groove on the connector and header, red insulating material		CP-HCC 4	16 00 02 7	100
Coding section , for VC-...6/8, is inserted into the groove on the header, red insulating material		CP-MSTB	17 34 63 4	100

Technical data


Design		VC-AMLV 2	VC-AMLV 6	VC-AMLV 8
Dimensions solder-in pins	[mm] x [mm]	2 x 0.8	0.8 x 0.8	0.8 x 0.8
Hole diameter	[mm]	1.4	1.4	1.2
Technical data in accordance with IEC/ DIN VDE				
Rated current	[A]	20	8	8
Rated voltage	[V]	400	250	160
Surge voltage category / contamination class ¹⁾		III / 3	III / 3	III / 3
Rated surge voltage / insulation material group	[kV] / –	6 / I	4 / I	2.5 / I
Insulating material		PA	PA	PA
Inflammability class in acc. with UL 94		V0	V0	V0
Approval data (UL and CUL)				
Nom. voltage / nom. current / conduc. cross sec.	UL: [V] / [A] / AWG	600 / 20 / –	300 / 8 / –	300 / 8 / –
	CUL: [V] / [A] / AWG	600 / 20 / –	300 / 8 / –	300 / 8 / –

Approvals


¹⁾ In the 2 and 6-pos. constellation, as well as in the 2 and 8-pos. versions, there is a reduction in the air and creepage distances. The contamination class is thus reduced to 2 and the surge voltage category to II.




VC-AMLV 2




VC-AMLV 6




VC-AMLV 8



Drilling diagram VC-AMLV 2



Drilling diagram VC-AMLV 6



Drilling diagram VC-AMLV 8



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331