



# TJA1044

## High-speed CAN transceiver with Standby mode

Rev. 6 — 24 August 2017

Product data sheet

## 1. General description

---

The TJA1044 is part of the Mantis family of high-speed CAN transceivers. It provides an interface between a Controller Area Network (CAN) protocol controller and the physical two-wire CAN bus. The transceiver is designed for high-speed CAN applications in the automotive industry, providing the differential transmit and receive capability to (a microcontroller with) a CAN protocol controller.

The TJA1044 offers a feature set optimized for 12 V automotive applications, with significant improvements over NXP's first- and second-generation CAN transceivers, such as the TJA1040 and TJA1042, and excellent ElectroMagnetic Compatibility (EMC) performance. Additionally, the TJA1044 features:

- Ideal passive behavior to the CAN bus when the supply voltage is off
- A very low-current Standby mode with bus wake-up capability
- Excellent EMC performance at speeds up to 500 kbit/s, even without a common mode choke
- TJA1044GT/3 and TJA1044GTK/3 can be interfaced directly to microcontrollers with supply voltages from 3 V to 5 V

These features make the TJA1044 an excellent choice for all types of HS-CAN networks, in nodes that require a low-power mode with wake-up capability via the CAN bus.

The TJA1044 implements the CAN physical layer as defined in ISO 11898-2:2016 and SAE J2284-1 to SAE J2284-5. The TJA1044T is specified for data rates up to 1 Mbit/s. Additional timing parameters defining loop delay symmetry are specified for the other variants. This implementation enables reliable communication in the CAN FD fast phase at data rates up to 5 Mbit/s.

## 2. Features and benefits

---

### 2.1 General

- Fully ISO 11898-2:2016 and SAE J2284-1 to SAE J2284-5 compliant
- Very low-current Standby mode with host and bus wake-up capability
- Optimized for use in 12 V automotive systems
- EMC performance satisfies 'Hardware Requirements for LIN, CAN and FlexRay Interfaces in Automotive Applications', Version 1.3, May 2012.
- AEC-Q100 qualified
- Dark green product (halogen free and Restriction of Hazardous Substances (RoHS) compliant)



- $V_{IO}$  input on TJA1044x/3 variants allows for direct interfacing with 3 V to 5 V microcontrollers. Variants without a  $V_{IO}$  pin can interface with 3.3 V and 5 V-supplied microcontrollers, provided the microcontroller I/Os are 5 V tolerant.
- Both  $V_{IO}$  and non- $V_{IO}$  variants are available in SO8 and leadless HVSON8 (3.0 mm × 3.0 mm) packages; HVSON8 with improved Automated Optical Inspection (AOI) capability.

## 2.2 Predictable and fail-safe behavior

- Functional behavior predictable under all supply conditions
- Transceiver disengages from bus when not powered (zero load)
- Transmit Data (TXD) and bus dominant time-out functions
- Internal biasing of TXD and STB input pins

## 2.3 Protection

- High ESD handling capability on the bus pins (8 kV IEC and HBM)
- Bus pins protected against transients in automotive environments
- Undervoltage detection on pins  $V_{CC}$  and  $V_{IO}$
- Thermally protected

## 2.4 TJA1044 CAN FD (applicable to all product variants except TJA1044T)

- Timing guaranteed for CAN FD data rates up to 5 Mbit/s
- Improved TXD to RXD propagation delay of 210 ns

### 3. Quick reference data

Table 1. Quick reference data

| Symbol                   | Parameter                                                 | Conditions                                    | Min  | Typ | Max  | Unit         |
|--------------------------|-----------------------------------------------------------|-----------------------------------------------|------|-----|------|--------------|
| $V_{CC}$                 | supply voltage                                            |                                               | 4.75 | -   | 5.25 | V            |
| $I_{CC}$                 | supply current                                            | Standby mode; variants without a $V_{IO}$ pin | -    | 10  | 15   | $\mu$ A      |
|                          |                                                           | Standby mode; variants with a $V_{IO}$ pin    | -    | -   | 5    | $\mu$ A      |
|                          |                                                           | Normal mode; bus recessive                    | 2    | 5   | 10   | mA           |
|                          |                                                           | Normal mode; bus dominant                     | 20   | 45  | 70   | mA           |
| $V_{uvd(stb)}(V_{CC})$   | standby undervoltage detection voltage on pin $V_{CC}$    |                                               | 3.5  | 4   | 4.3  | V            |
| $V_{uvd(swoff)}(V_{CC})$ | switch-off undervoltage detection voltage on pin $V_{CC}$ | valid for variants without a $V_{IO}$ pin     | 1.3  | 2.4 | 3.4  | V            |
| $V_{IO}$                 | supply voltage on pin $V_{IO}$                            |                                               | 2.95 | -   | 5.25 | V            |
| $I_{IO}$                 | supply current on pin $V_{IO}$                            | Standby mode                                  | -    | 10  | 16.5 | $\mu$ A      |
|                          |                                                           | Normal mode; bus recessive                    | 10   | 80  | 200  | $\mu$ A      |
|                          |                                                           | Normal mode; bus dominant                     | -    | 350 | 1000 | $\mu$ A      |
| $V_{uvd(swoff)}(V_{IO})$ | switch-off undervoltage detection voltage on pin $V_{IO}$ |                                               | 2.4  | 2.6 | 2.8  | V            |
| $V_{ESD}$                | electrostatic discharge voltage                           | IEC 61000-4-2 at pins CANH and CANL           | -8   | -   | +8   | kV           |
| $V_{CANH}$               | voltage on pin CANH                                       | limiting value according to IEC60134          | -42  | -   | +42  | V            |
| $V_{CANL}$               | voltage on pin CANL                                       | limiting value according to IEC60134          | -42  | -   | +42  | V            |
| $T_{vj}$                 | virtual junction temperature                              |                                               | -40  | -   | +150 | $^{\circ}$ C |


### 4. Ordering information

Table 2. Ordering information

| Type number <sup>[1]</sup>           | Package |                                                                                                                   |          |
|--------------------------------------|---------|-------------------------------------------------------------------------------------------------------------------|----------|
|                                      | Name    | Description                                                                                                       | Version  |
| TJA1044T<br>TJA1044GT<br>TJA1044GT/3 | SO8     | plastic small outline package; 8 leads; body width 3.9 mm                                                         | SOT96-1  |
| TJA1044GTK<br>TJA1044GTK/3           | HVSON8  | plastic thermal enhanced very thin small outline package; no leads; 8 terminals; body $3 \times 3 \times 0.85$ mm | SOT782-1 |

[1] TJA1044GT/3 and TJA1044GTK/3 with  $V_{IO}$  pin; all variants other than TJA1044T support CAN FD.

5. Block diagram

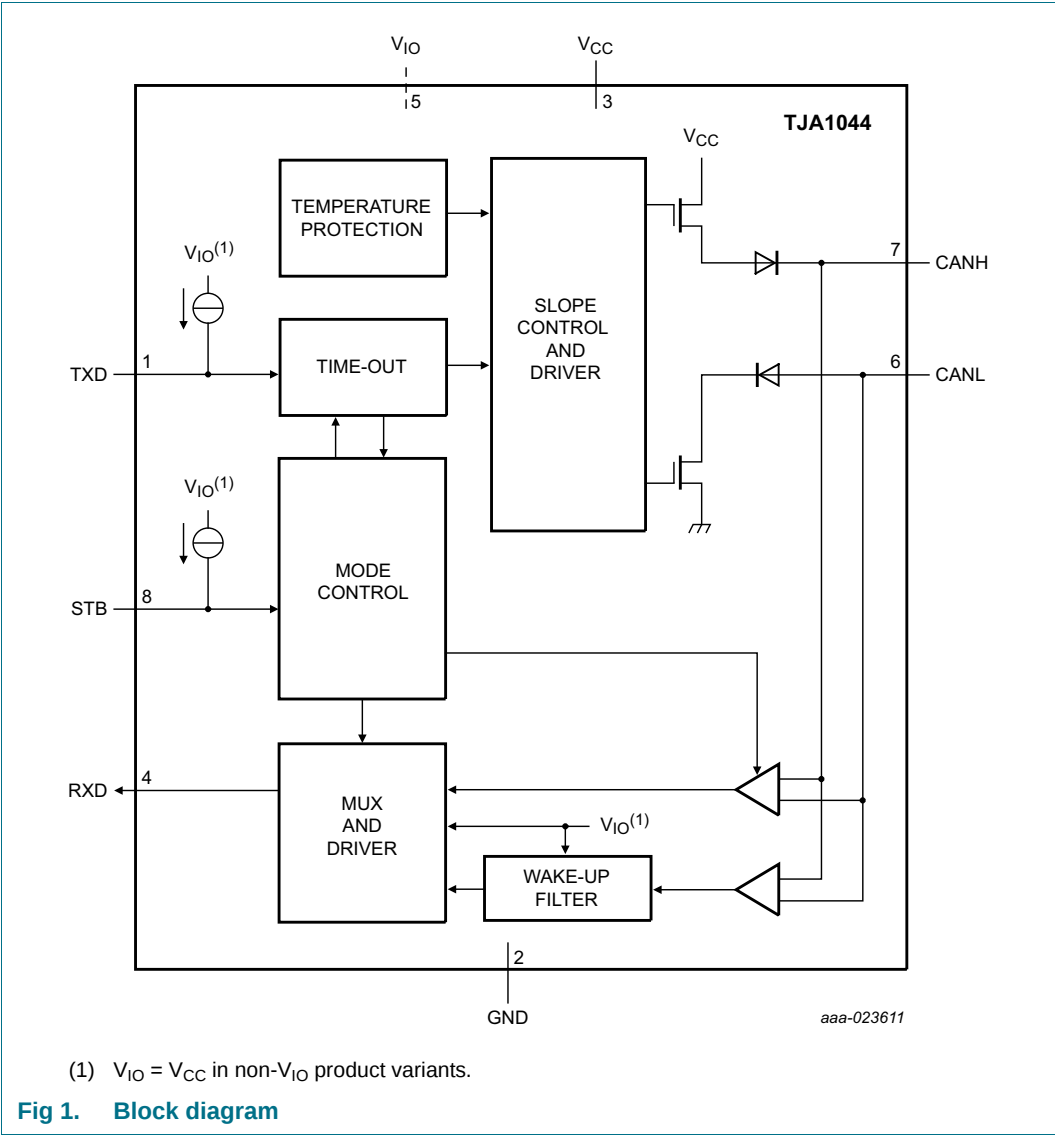

6. Pinning information

6.1 Pinning

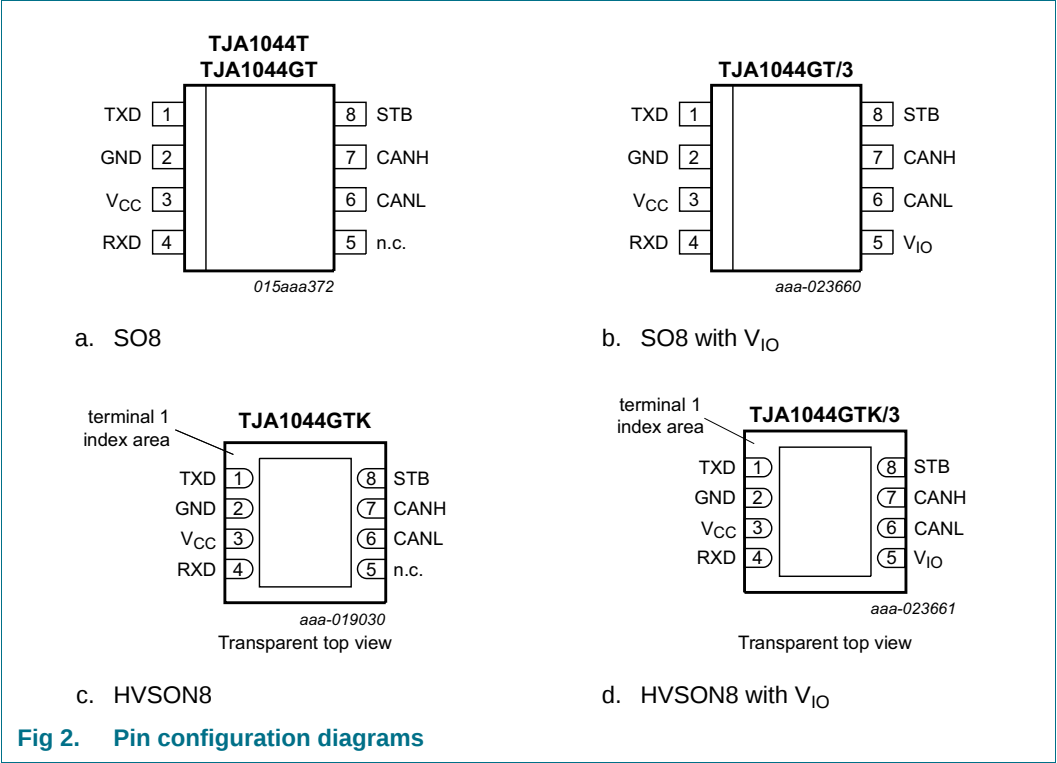


Fig 2. Pin configuration diagrams

6.2 Pin description

Table 3. Pin description

| Symbol             | Pin | Description                                                    |
|--------------------|-----|----------------------------------------------------------------|
| TXD                | 1   | transmit data input                                            |
| GND <sup>[1]</sup> | 2   | ground supply                                                  |
| V <sub>CC</sub>    | 3   | supply voltage                                                 |
| RXD                | 4   | receive data output; reads out data from the bus lines         |
| n.c.               | 5   | not connected; TJA1044T, TJA1044GT and TJA1044GTK only         |
| V <sub>IO</sub>    | 5   | supply voltage for I/O level adapter; TJA1044x/3 variants only |
| CANL               | 6   | LOW-level CAN bus line                                         |
| CANH               | 7   | HIGH-level CAN bus line                                        |
| STB                | 8   | Standby mode control input                                     |

[1] HVSON8 package die supply ground is connected to both the GND pin and the exposed center pad. The GND pin must be soldered to board ground. For enhanced thermal and electrical performance, it is recommended that the exposed center pad also be soldered to board ground.

## 7. Functional description

### 7.1 Operating modes

The TJA1044 supports two operating modes, Normal and Standby. The operating mode is selected via pin STB. See [Table 4](#) for a description of the operating modes under normal supply conditions.

**Table 4. Operating modes**

| Mode    | Inputs  |                  | Outputs          |                                   |
|---------|---------|------------------|------------------|-----------------------------------|
|         | Pin STB | Pin TXD          | CAN driver       | Pin RXD                           |
| Normal  | LOW     | LOW              | dominant         | LOW                               |
|         |         | HIGH             | recessive        | LOW when bus dominant             |
|         |         |                  |                  | HIGH when bus recessive           |
| Standby | HIGH    | x <sup>[1]</sup> | biased to ground | follows BUS when wake-up detected |
|         |         |                  |                  | HIGH when no wake-up detected     |

[1] 'x' = don't care.

#### 7.1.1 Normal mode

A LOW level on pin STB selects Normal mode. In this mode, the transceiver can transmit and receive data via the bus lines CANH and CANL (see [Figure 1](#) for the block diagram). The differential receiver converts the analog data on the bus lines into digital data which is output on pin RXD. The slopes of the output signals on the bus lines are controlled internally and are optimized in a way that guarantees the lowest possible EME.

#### 7.1.2 Standby mode

A HIGH level on pin STB selects Standby mode. In Standby mode, the transceiver is not able to transmit or correctly receive data via the bus lines. The transmitter and Normal-mode receiver blocks are switched off to reduce supply current, and only a low-power differential receiver monitors the bus lines for activity.

In Standby mode, the bus lines are biased to ground to minimize system supply current. The low-power receiver is supplied from  $V_{IO}$  ( $V_{CC}$  in non- $V_{IO}$  variants) and can detect CAN bus activity even if  $V_{IO}$  is the only available supply voltage. Pin RXD follows the bus after a wake-up request has been detected. A transition to Normal mode is triggered when STB is forced LOW.

### 7.2 Remote wake-up (via the CAN bus)

The TJA1044 wakes up from Standby mode when a dedicated wake-up pattern (specified in ISO 11898-2:2016) is detected on the bus. This filtering helps avoid spurious wake-up events. A spurious wake-up sequence could be triggered by, for example, a dominant clamped bus or by dominant phases due to noise or spikes on the bus.

The wake-up pattern consists of:

- a dominant phase of at least  $t_{wake(busdom)}$  followed by
- a recessive phase of at least  $t_{wake(busrec)}$  followed by
- a dominant phase of at least  $t_{wake(busdom)}$

Dominant or recessive bits between the above mentioned phases that are shorter than  $t_{\text{wake(busdom)}}$  and  $t_{\text{wake(busrec)}}$  respectively are ignored.

The complete dominant-recessive-dominant pattern must be received within  $t_{\text{to(wake)bus}}$  to be recognized as a valid wake-up pattern (see Figure 3). Otherwise, the internal wake-up logic is reset. The complete wake-up pattern will then need to be retransmitted to trigger a wake-up event. Pin RXD remains HIGH until the wake-up event has been triggered.

After a wake-up sequence has been detected, the TJA1044 will remain in Standby mode with the bus signals reflected on RXD. Note that dominant or recessive phases lasting less than  $t_{\text{fltr(wake)bus}}$  will not be detected by the low-power differential receiver and will not be reflected on RXD in Standby mode.

A wake-up event is not flagged on RXD if any of the following events occurs while a valid wake-up pattern is being received:

- The TJA1044 switches to Normal mode
- The complete wake-up pattern was not received within  $t_{\text{to(wake)bus}}$
- A  $V_{\text{CC}}$  or  $V_{\text{IO}}$  undervoltage is detected ( $V_{\text{CC}} < V_{\text{uvd(swoff)}}(V_{\text{CC}})$  or  $V_{\text{IO}} < V_{\text{uvd(swoff)}}(V_{\text{IO}})$ ; see Section 7.3.3)

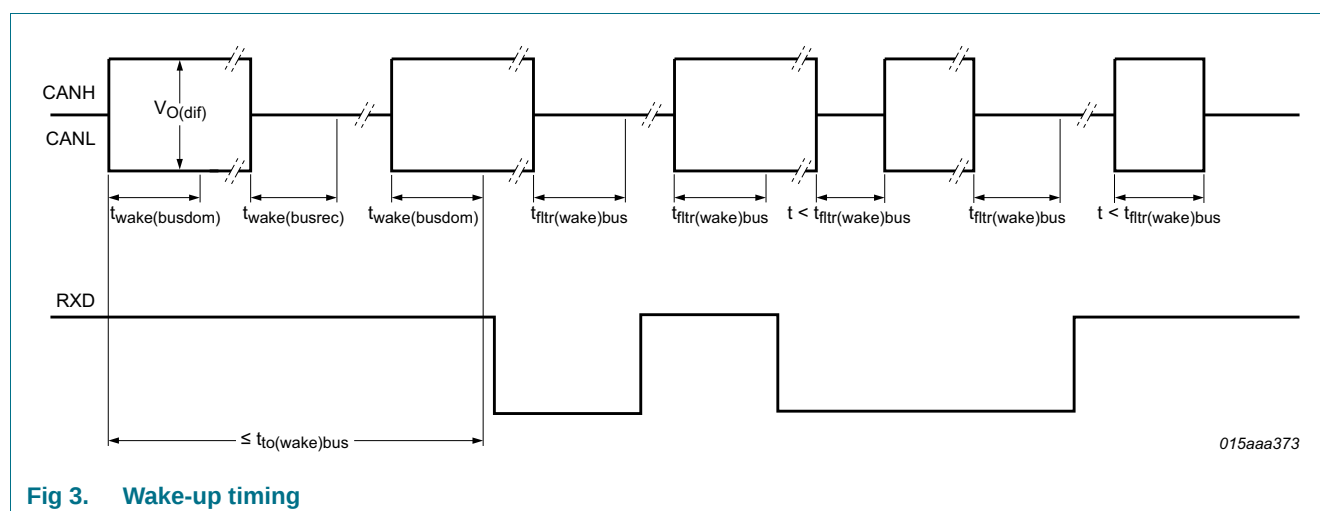


Fig 3. Wake-up timing

## 7.3 Fail-safe features

### 7.3.1 TXD dominant time-out function

A 'TXD dominant time-out' timer is started when pin TXD is set LOW. If the LOW state on this pin persists for longer than  $t_{\text{to(dom)TXD}}$ , the transmitter is disabled, releasing the bus lines to recessive state. This function prevents a hardware and/or software application failure from driving the bus lines to a permanent dominant state (blocking all network communications). The TXD dominant time-out timer is reset when pin TXD is set HIGH. The TXD dominant time-out time also defines the minimum possible bit rate of approximately 25 kbit/s.

### 7.3.2 Internal biasing of TXD and STB input pins

Pins TXD and STB have internal pull-ups to  $V_{CC}$  ( $V_{IO}$  for variants with a  $V_{IO}$  pin) to ensure a safe, defined state in case one or both of these pins are left floating. Pull-up currents flow in these pins in all states; both pins should be held HIGH in Standby mode to minimize supply current.

### 7.3.3 Undervoltage detection on pins $V_{CC}$ and $V_{IO}$

If  $V_{CC}$  drops below the standby undervoltage detection level,  $V_{uvd(stb)}(V_{CC})$ , the transceiver switches to Standby mode. The logic state of pin STB is ignored until  $V_{CC}$  has recovered.

In versions with a  $V_{IO}$  pin, if  $V_{IO}$  drops below the switch-off undervoltage detection level ( $V_{uvd(swoff)}(V_{IO})$ ), the transceiver switches off and disengages from the bus (zero load) until  $V_{IO}$  has recovered.

In versions without a  $V_{IO}$  pin, if  $V_{CC}$  drops below the switch-off undervoltage detection level ( $V_{uvd(swoff)}(V_{CC})$ ), the transceiver switches off and disengages from the bus (zero load) until  $V_{CC}$  has recovered.

### 7.3.4 Overtemperature protection

The output drivers are protected against overtemperature conditions. If the virtual junction temperature exceeds the shutdown junction temperature,  $T_{j(sd)}$ , both output drivers are disabled. When the virtual junction temperature drops below  $T_{j(sd)}$  again, the output drivers recover once TXD has been reset to HIGH. Including the TXD condition prevents output driver oscillation due to small variations in temperature.

## 7.4 $V_{IO}$ supply pin (TJA1044x/3 variants)

Pin  $V_{IO}$  should be connected to the microcontroller supply voltage (see [Figure 7](#)). This will adjust the signal levels of pins TXD, RXD and STB to the I/O levels of the microcontroller. Pin  $V_{IO}$  also provides the internal supply voltage for the low-power differential receiver in the transceiver. For applications running in low-power mode, this allows the bus lines to be monitored for activity even if there is no supply voltage on pin  $V_{CC}$ .

For variants of the TJA1044 without a  $V_{IO}$  pin, all circuitry is connected to  $V_{CC}$  (pin 5 is not bonded). The signal levels of pins TXD, RXD and STB are then compatible with 5 V microcontrollers. This allows the device to interface with both 3.3 V and 5 V-supplied microcontrollers, provided the microcontroller I/Os are 5 V tolerant.

## 8. Limiting values

**Table 5. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134). All voltages are referenced to GND.

| Symbol            | Parameter                             | Conditions                                                            | Min  | Max                           | Unit |
|-------------------|---------------------------------------|-----------------------------------------------------------------------|------|-------------------------------|------|
| $V_x$             | voltage on pin x <sup>[1]</sup>       | on pins CANH, CANL                                                    | -42  | +42                           | V    |
|                   |                                       | on pin $V_{CC}$ , $V_{IO}$                                            | -0.3 | +7                            | V    |
|                   |                                       | on any other pin <sup>[2]</sup>                                       | -0.3 | $V_{IO} + 0.3$ <sup>[3]</sup> | V    |
| $V_{(CANH-CANL)}$ | voltage between pin CANH and pin CANL |                                                                       | -27  | +27                           | V    |
| $V_{trt}$         | transient voltage                     | on pins CANH and CANL <sup>[4]</sup>                                  |      |                               |      |
|                   |                                       | pulse 1                                                               | -100 | -                             | V    |
|                   |                                       | pulse 2a                                                              | -    | 75                            | V    |
|                   |                                       | pulse 3a                                                              | -150 | -                             | V    |
|                   |                                       | pulse 3b                                                              | -    | 100                           | V    |
| $V_{ESD}$         | electrostatic discharge voltage       | IEC 61000-4-2 (150 pF, 330 $\Omega$ ) <sup>[5]</sup>                  |      |                               |      |
|                   |                                       | on pins CANH and CANL                                                 | -8   | +8                            | kV   |
|                   |                                       | Human Body Model (HBM); 100 pF, 1.5 k $\Omega$ <sup>[6]</sup>         |      |                               |      |
|                   |                                       | on pins CANH and CANL                                                 | -8   | +8                            | kV   |
|                   |                                       | on any other pin                                                      | -4   | +4                            | kV   |
|                   |                                       | Machine Model (MM); 200 pF, 0.75 $\mu$ H, 10 $\Omega$ <sup>[7]</sup>  |      |                               |      |
|                   |                                       | on any pin                                                            | -200 | +200                          | V    |
|                   |                                       | Charged Device Model (CDM); field Induced charge; 4 pF <sup>[8]</sup> |      |                               |      |
|                   |                                       | on corner pins                                                        | -750 | +750                          | V    |
|                   |                                       | on any other pin                                                      | -500 | +500                          | V    |
| $T_{vj}$          | virtual junction temperature          | <sup>[9]</sup>                                                        | -40  | +150                          | °C   |
| $T_{stg}$         | storage temperature                   |                                                                       | -55  | +150                          | °C   |

- [1] The device can sustain voltages up to the specified values over the product lifetime, provided applied voltages (including transients) never exceed these values.
- [2] Maximum voltage should never exceed 7 V.
- [3]  $V_{CC} + 0.3$  in the non- $V_{IO}$  product variants TJA1044T/TJA1044GT/TJA1044GTK.
- [4] According to IEC TS 62228 (2007), Section 4.2.4; parameters for standard pulses defined in ISO7637 part 2: 2004-06.
- [5] According to IEC TS 62228 (2007), Section 4.3; DIN EN 61000-4-2.
- [6] According to AEC-Q100-002.
- [7] According to AEC-Q100-003.
- [8] According to AEC-Q100-011 Rev-C1. The classification level is C4B.
- [9] In accordance with IEC 60747-1. An alternative definition of virtual junction temperature is:  $T_{vj} = T_{amb} + P \times R_{th(vj-a)}$ , where  $R_{th(vj-a)}$  is a fixed value to be used for the calculation of  $T_{vj}$ . The rating for  $T_{vj}$  limits the allowable combinations of power dissipation (P) and ambient temperature ( $T_{amb}$ ).

## 9. Thermal characteristics

**Table 6. Thermal characteristics**

According to IEC 60747-1.

| Symbol         | Parameter                                           | Conditions                           | Value | Unit |
|----------------|-----------------------------------------------------|--------------------------------------|-------|------|
| $R_{th(vj-a)}$ | thermal resistance from virtual junction to ambient | SO8 package; in free air             | 97    | K/W  |
|                |                                                     | HVSON8 package; in free air          |       |      |
|                |                                                     | dual-layer board <a href="#">[1]</a> | 91    | K/W  |
|                |                                                     | four-layer board <a href="#">[2]</a> | 52    | K/W  |

- [1] According to JEDEC JESD51-2, JESD51-3 and JESD51-5 at natural convection on 1s board with thermal via array under the exposed pad connected to the second copper layer.
- [2] According to JEDEC JESD51-2, JESD51-5 and JESD51-7 at natural convection on 2s2p board. Board with two inner copper layers (thickness: 35  $\mu\text{m}$ ) and thermal via array under the exposed pad connected to the first inner copper layer.

## 10. Static characteristics

**Table 7. Static characteristics**

$T_{vj} = -40\text{ }^{\circ}\text{C}$  to  $+150\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 4.75\text{ V}$  to  $5.25\text{ V}$ ;  $V_{IO} = 2.95\text{ V}$  to  $5.25\text{ V}$  [\[1\]](#);  $R_L = 60\text{ }\Omega$ ;  $C_L = 100\text{ pF}$  unless specified otherwise; All voltages are defined with respect to ground. Positive currents flow into the IC. [\[2\]](#)

| Symbol                                                            | Parameter                                                        | Conditions                                                                                                                  | Min  | Typ | Max  | Unit |
|-------------------------------------------------------------------|------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|------|-----|------|------|
| Supply; pin V <sub>CC</sub>                                       |                                                                  |                                                                                                                             |      |     |      |      |
| V <sub>CC</sub>                                                   | supply voltage                                                   |                                                                                                                             | 4.75 | -   | 5.25 | V    |
| V <sub>uvd(stb)</sub> (V <sub>CC</sub> )                          | standby undervoltage detection voltage on pin V <sub>CC</sub>    |                                                                                                                             | 3.5  | 4   | 4.3  | V    |
| V <sub>uvd(swoff)</sub> (V <sub>CC</sub> )                        | switch-off undervoltage detection voltage on pin V <sub>CC</sub> | for variants without a V <sub>IO</sub> pin                                                                                  | 1.3  | 2.4 | 3.4  | V    |
| I <sub>CC</sub>                                                   | supply current                                                   | Standby mode                                                                                                                |      |     |      |      |
|                                                                   |                                                                  | variants without a V <sub>IO</sub> pin;<br>V <sub>TXD</sub> = V <sub>CC</sub>                                               | -    | 10  | 15   | μA   |
|                                                                   |                                                                  | variants with a V <sub>IO</sub> pin;<br>V <sub>TXD</sub> = V <sub>IO</sub>                                                  | -    | -   | 5    | μA   |
|                                                                   |                                                                  | Normal mode                                                                                                                 |      |     |      |      |
|                                                                   |                                                                  | recessive; V <sub>TXD</sub> = V <sub>IO</sub> <a href="#">[3]</a>                                                           | 2    | 5   | 10   | mA   |
|                                                                   |                                                                  | dominant; V <sub>TXD</sub> = 0 V                                                                                            | 20   | 45  | 70   | mA   |
|                                                                   |                                                                  | dominant; V <sub>TXD</sub> = 0 V;<br>short circuit on bus lines;<br>−3 V < (V <sub>CANH</sub> = V <sub>CANL</sub> ) < +18 V | 2    | 80  | 110  | mA   |
| I/O level adapter supply; pin V <sub>IO</sub> <a href="#">[1]</a> |                                                                  |                                                                                                                             |      |     |      |      |
| V <sub>IO</sub>                                                   | supply voltage on pin V <sub>IO</sub>                            |                                                                                                                             | 2.95 | -   | 5.25 | V    |
| I <sub>IO</sub>                                                   | supply current on pin V <sub>IO</sub>                            | Standby mode; V <sub>TXD</sub> = V <sub>IO</sub> <a href="#">[3]</a>                                                        | -    | 10  | 16.5 | μA   |
|                                                                   |                                                                  | Normal mode                                                                                                                 |      |     |      |      |
|                                                                   |                                                                  | recessive; V <sub>TXD</sub> = V <sub>IO</sub> <a href="#">[3]</a>                                                           | 10   | 80  | 200  | μA   |
|                                                                   |                                                                  | dominant; V <sub>TXD</sub> = 0 V                                                                                            | -    | 350 | 1000 | μA   |
| V <sub>uvd(swoff)</sub> (V <sub>IO</sub> )                        | switch-off undervoltage detection voltage on pin V <sub>IO</sub> | for variants with a V <sub>IO</sub> pin                                                                                     | 2.4  | 2.6 | 2.8  | V    |

**Table 7. Static characteristics ...continued**

$T_{vj} = -40\text{ }^{\circ}\text{C}$  to  $+150\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 4.75\text{ V}$  to  $5.25\text{ V}$ ;  $V_{IO} = 2.95\text{ V}$  to  $5.25\text{ V}$  [1];  $R_L = 60\text{ }\Omega$ ;  $C_L = 100\text{ pF}$  unless specified otherwise; All voltages are defined with respect to ground. Positive currents flow into the IC. [2]

| Symbol                                     | Parameter                             | Conditions                                                                                                                                                       | Min          | Typ         | Max            | Unit          |
|--------------------------------------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------|----------------|---------------|
| <b>Standby mode control input; pin STB</b> |                                       |                                                                                                                                                                  |              |             |                |               |
| $V_{IH}$                                   | HIGH-level input voltage              | variants with a $V_{IO}$ pin                                                                                                                                     | $0.7V_{IO}$  | -           | $V_{IO} + 0.3$ | V             |
|                                            |                                       | variants without a $V_{IO}$ pin                                                                                                                                  | 2            | -           | $V_{CC} + 0.3$ | V             |
| $V_{IL}$                                   | LOW-level input voltage               | variants with a $V_{IO}$ pin                                                                                                                                     | $-0.3V_{IO}$ | -           | $+0.3V_{IO}$   | V             |
|                                            |                                       | variants without a $V_{IO}$ pin                                                                                                                                  | -0.3         | -           | +0.8           | V             |
| $I_{IH}$                                   | HIGH-level input current              | $V_{STB} = V_{IO}$ [3]                                                                                                                                           | -1           | -           | +1             | $\mu\text{A}$ |
| $I_{IL}$                                   | LOW-level input current               | $V_{STB} = 0\text{ V}$                                                                                                                                           | -15          | -           | -1             | $\mu\text{A}$ |
| <b>CAN transmit data input; pin TXD</b>    |                                       |                                                                                                                                                                  |              |             |                |               |
| $V_{IH}$                                   | HIGH-level input voltage              | variants with a $V_{IO}$ pin                                                                                                                                     | $0.7V_{IO}$  | -           | $V_{IO} + 0.3$ | V             |
|                                            |                                       | variants without a $V_{IO}$ pin                                                                                                                                  | 2            | -           | $V_{CC} + 0.3$ | V             |
| $V_{IL}$                                   | LOW-level input voltage               | variants with a $V_{IO}$ pin                                                                                                                                     | $-0.3V_{IO}$ | -           | $+0.3V_{IO}$   | V             |
|                                            |                                       | variants without a $V_{IO}$ pin                                                                                                                                  | -0.3         | -           | +0.8           | V             |
| $I_{IH}$                                   | HIGH-level input current              | $V_{TXD} = V_{IO}$ [3]                                                                                                                                           | -5           | -           | +5             | $\mu\text{A}$ |
| $I_{IL}$                                   | LOW-level input current               | $V_{TXD} = 0\text{ V}$ ; variants with a $V_{IO}$ pin                                                                                                            | -260         | -150        | -60            | $\mu\text{A}$ |
|                                            |                                       | $V_{TXD} = 0\text{ V}$ ; variants without a $V_{IO}$ pin                                                                                                         | -260         | -150        | -70            | $\mu\text{A}$ |
| $C_i$                                      | input capacitance                     | [4]                                                                                                                                                              | -            | 5           | 10             | pF            |
| <b>CAN receive data output; pin RXD</b>    |                                       |                                                                                                                                                                  |              |             |                |               |
| $I_{OH}$                                   | HIGH-level output current             | $V_{RXD} = V_{IO}$ [3] - 0.4 V                                                                                                                                   | -8           | -3          | -1             | mA            |
| $I_{OL}$                                   | LOW-level output current              | $V_{RXD} = 0.4\text{ V}$ ; bus dominant                                                                                                                          | 1            | -           | 12             | mA            |
| <b>Bus lines; pins CANH and CANL</b>       |                                       |                                                                                                                                                                  |              |             |                |               |
| $V_{O(\text{dom})}$                        | dominant output voltage               | $V_{TXD} = 0\text{ V}$ ; $t < t_{\text{to}(\text{dom})\text{TXD}}$                                                                                               |              |             |                |               |
|                                            |                                       | pin CANH; $R_L = 50\text{ }\Omega$ to $65\text{ }\Omega$                                                                                                         | 2.75         | 3.5         | 4.5            | V             |
|                                            |                                       | pin CANL; $R_L = 50\text{ }\Omega$ to $65\text{ }\Omega$                                                                                                         | 0.5          | 1.5         | 2.25           | V             |
| $V_{\text{dom}(\text{TX})\text{sym}}$      | transmitter dominant voltage symmetry | $V_{\text{dom}(\text{TX})\text{sym}} = V_{CC} - V_{\text{CANH}} - V_{\text{CANL}}$                                                                               | -400         | -           | +400           | mV            |
| $V_{\text{TXsym}}$                         | transmitter voltage symmetry          | $V_{\text{TXsym}} = V_{\text{CANH}} + V_{\text{CANL}}$ ; [4]<br>$f_{\text{TXD}} = 250\text{ kHz}$ , 1 MHz and 2.5 MHz; [5]<br>$C_{\text{SPLIT}} = 4.7\text{ nF}$ | $0.9V_{CC}$  | -           | $1.1V_{CC}$    | V             |
| $V_{O(\text{dif})}$                        | differential output voltage           | dominant; Normal mode;<br>$V_{TXD} = 0\text{ V}$ ; $t < t_{\text{to}(\text{dom})\text{TXD}}$ ;                                                                   |              |             |                |               |
|                                            |                                       | $R_L = 50\text{ }\Omega$ to $65\text{ }\Omega$                                                                                                                   | 1.5          | -           | 3              | V             |
|                                            |                                       | $R_L = 45\text{ }\Omega$ to $70\text{ }\Omega$                                                                                                                   | 1.4          | -           | 3.3            | V             |
|                                            |                                       | $R_L = 2240\text{ }\Omega$                                                                                                                                       | 1.5          | -           | 5              | V             |
|                                            |                                       | recessive                                                                                                                                                        |              |             |                |               |
|                                            |                                       | Normal mode: $V_{TXD} = V_{IO}$ [3];<br>no load                                                                                                                  | -50          | -           | +50            | mV            |
|                                            |                                       | Standby mode; no load                                                                                                                                            | -0.2         | -           | +0.2           | V             |
| $V_{O(\text{rec})}$                        | recessive output voltage              | Normal mode; $V_{TXD} = V_{IO}$ [3]; no load                                                                                                                     | 2            | $0.5V_{CC}$ | 3              | V             |
|                                            |                                       | Standby mode; no load                                                                                                                                            | -0.1         | -           | +0.1           | V             |

**Table 7.** Static characteristics ...continued

$T_{vj} = -40\text{ }^{\circ}\text{C}$  to  $+150\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 4.75\text{ V}$  to  $5.25\text{ V}$ ;  $V_{IO} = 2.95\text{ V}$  to  $5.25\text{ V}$ <sup>[1]</sup>;  $R_L = 60\text{ }\Omega$ ;  $C_L = 100\text{ pF}$  unless specified otherwise; All voltages are defined with respect to ground. Positive currents flow into the IC.<sup>[2]</sup>

| Symbol                       | Parameter                                | Conditions                                                                                                                                 | Min  | Typ | Max  | Unit               |
|------------------------------|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|------|-----|------|--------------------|
| $V_{th(RX)dif}$              | differential receiver threshold voltage  | $-12\text{ V} \leq V_{CANL} \leq +12\text{ V}$ ;<br>$-12\text{ V} \leq V_{CANH} \leq +12\text{ V}$                                         |      |     |      |                    |
|                              |                                          | Normal mode                                                                                                                                | 0.5  | -   | 0.9  | V                  |
|                              |                                          | Standby mode                                                                                                                               | 0.4  | -   | 1.15 | V                  |
| $V_{rec(RX)}$                | receiver recessive voltage               | $-12\text{ V} \leq V_{CANL} \leq +12\text{ V}$ ;<br>$-12\text{ V} \leq V_{CANH} \leq +12\text{ V}$                                         |      |     |      |                    |
|                              |                                          | Normal mode                                                                                                                                | -4   | -   | 0.5  | V                  |
|                              |                                          | Standby mode                                                                                                                               | -4   | -   | 0.4  | V                  |
| $V_{dom(RX)}$                | receiver dominant voltage                | $-12\text{ V} \leq V_{CANL} \leq +12\text{ V}$ ;<br>$-12\text{ V} \leq V_{CANH} \leq +12\text{ V}$                                         |      |     |      |                    |
|                              |                                          | Normal mode                                                                                                                                | 0.9  | -   | 9.0  | V                  |
|                              |                                          | Standby mode                                                                                                                               | 1.15 | -   | 9.0  | V                  |
| $V_{hys(RX)dif}$             | differential receiver hysteresis voltage | $-12\text{ V} \leq V_{CANL} \leq +12\text{ V}$ ;<br>$-12\text{ V} \leq V_{CANH} \leq +12\text{ V}$ ; Normal mode                           | 50   | -   | 300  | mV                 |
| $I_{O(sc)dom}$               | dominant short-circuit output current    | $V_{TXD} = 0\text{ V}$ ; $t < t_{to(dom)TXD}$ ; $V_{CC} = 5\text{ V}$                                                                      |      |     |      |                    |
|                              |                                          | pin CANH; $V_{CANH} = -15\text{ V}$ to $+40\text{ V}$                                                                                      | -100 | -70 | -40  | mA                 |
|                              |                                          | pin CANL; $V_{CANL} = -15\text{ V}$ to $+40\text{ V}$                                                                                      | 40   | 70  | 100  | mA                 |
| $I_{O(sc)rec}$               | recessive short-circuit output current   | Normal mode; $V_{TXD} = V_{IO}$ <sup>[3]</sup> ;<br>$V_{CANH} = V_{CANL} = -27\text{ V}$ to $+32\text{ V}$                                 | -5   | -   | +5   | mA                 |
| $I_L$                        | leakage current                          | $V_{CC} = V_{IO} = 0\text{ V}$ or<br>$V_{CC} = V_{IO} = \text{shorted to GND via } 47\text{ k}\Omega$ ; $V_{CANH} = V_{CANL} = 5\text{ V}$ | -5   | -   | +5   | $\mu\text{A}$      |
| $R_i$                        | input resistance                         | $-2\text{ V} \leq V_{CANL} \leq +7\text{ V}$ ;<br>$-2\text{ V} \leq V_{CANH} \leq +7\text{ V}$ <sup>[4]</sup>                              | 9    | 15  | 28   | k $\Omega$         |
| $\Delta R_i$                 | input resistance deviation               | $0\text{ V} \leq V_{CANL} \leq +5\text{ V}$ ;<br>$0\text{ V} \leq V_{CANH} \leq +5\text{ V}$ <sup>[4]</sup>                                | -3   | -   | +3   | %                  |
| $R_{i(dif)}$                 | differential input resistance            | $-2\text{ V} \leq V_{CANL} \leq +7\text{ V}$ ;<br>$-2\text{ V} \leq V_{CANH} \leq +7\text{ V}$ <sup>[4]</sup>                              | 19   | 30  | 52   | k $\Omega$         |
| $C_{i(cm)}$                  | common-mode input capacitance            | <sup>[4]</sup>                                                                                                                             | -    | -   | 20   | pF                 |
| $C_{i(dif)}$                 | differential input capacitance           | <sup>[4]</sup>                                                                                                                             | -    | -   | 10   | pF                 |
| <b>Temperature detection</b> |                                          |                                                                                                                                            |      |     |      |                    |
| $T_{j(sd)}$                  | shutdown junction temperature            | <sup>[4]</sup>                                                                                                                             | -    | 185 | -    | $^{\circ}\text{C}$ |

[1] Only TJA1044x/3 variants have a  $V_{IO}$  pin; all circuitry is connected to  $V_{CC}$  in the other variants.

[2] Factory testing uses correlated test conditions to cover the specified temperature and power supply voltage range.

[3]  $V_{IO} = V_{CC}$  in non- $V_{IO}$  product variants..

[4] Not tested in production; guaranteed by design.

[5] The test circuit used to measure the bus output voltage symmetry (which includes  $C_{SPLIT}$ ) is shown in [Figure 9](#).

## 11. Dynamic characteristics

**Table 8. Dynamic characteristics**



$T_{vj} = -40\text{ }^{\circ}\text{C}$  to  $+150\text{ }^{\circ}\text{C}$ ;  $V_{CC} = 4.75\text{ V}$  to  $5.25\text{ V}$ ;  $V_{IO} = 2.95\text{ V}$  to  $5.25\text{ V}$  [1];  $R_L = 60\text{ }\Omega$ ;  $C_L = 100\text{ pF}$  unless specified otherwise. All voltages are defined with respect to ground. [2]

| Symbol                                                                      | Parameter                            | Conditions                                       | Min | Typ | Max | Unit          |
|-----------------------------------------------------------------------------|--------------------------------------|--------------------------------------------------|-----|-----|-----|---------------|
| Transceiver timing; pins CANH, CANL, TXD and RXD; see Figure 8 and Figure 4 |                                      |                                                  |     |     |     |               |
| $t_{d(TXD-busdom)}$                                                         | delay time from TXD to bus dominant  | Normal mode                                      | -   | 65  | -   | ns            |
| $t_{d(TXD-busrec)}$                                                         | delay time from TXD to bus recessive | Normal mode                                      | -   | 90  | -   | ns            |
| $t_{d(busdom-RXD)}$                                                         | delay time from bus dominant to RXD  | Normal mode                                      | -   | 60  | -   | ns            |
| $t_{d(busrec-RXD)}$                                                         | delay time from bus recessive to RXD | Normal mode                                      | -   | 65  | -   | ns            |
| $t_{d(TXDL-RXDL)}$                                                          | delay time from TXD LOW to RXD LOW   | TJA1044T; Normal mode                            | 50  | -   | 230 | ns            |
|                                                                             |                                      | all other variants; Normal mode                  | 50  | -   | 210 | ns            |
| $t_{d(TXDH-RXDH)}$                                                          | delay time from TXD HIGH to RXD HIGH | TJA1044T; Normal mode                            | 50  | -   | 230 | ns            |
|                                                                             |                                      | all other variants; Normal mode                  | 50  | -   | 210 | ns            |
| $t_{bit(bus)}$                                                              | transmitted recessive bit width      | TJA1044Gx                                        |     |     |     |               |
|                                                                             |                                      | $t_{bit(TXD)} = 500\text{ ns}$ [3]               | 435 | -   | 530 | ns            |
|                                                                             |                                      | $t_{bit(TXD)} = 200\text{ ns}$ [3]               | 155 | -   | 210 | ns            |
| $t_{bit(RXD)}$                                                              | bit time on pin RXD                  | TJA1044Gx                                        |     |     |     |               |
|                                                                             |                                      | $t_{bit(TXD)} = 500\text{ ns}$ [3]               | 400 | -   | 550 | ns            |
|                                                                             |                                      | $t_{bit(TXD)} = 200\text{ ns}$ [3]               | 120 | -   | 220 | ns            |
| $\Delta t_{rec}$                                                            | receiver timing symmetry             | TJA1044Gx                                        |     |     |     |               |
|                                                                             |                                      | $t_{bit(TXD)} = 500\text{ ns}$                   | -65 | -   | +40 | ns            |
|                                                                             |                                      | $t_{bit(TXD)} = 200\text{ ns}$                   | -45 | -   | +15 | ns            |
| $t_{to(dom)TXD}$                                                            | TXD dominant time-out time           | $V_{TXD} = 0\text{ V}$ ; Normal mode             | 0.8 | 3   | 6.5 | ms            |
| $t_{d(stb-norm)}$                                                           | standby to normal mode delay time    |                                                  | 7   | 25  | 47  | $\mu\text{s}$ |
| $t_{wake(busdom)}$                                                          | bus dominant wake-up time            | Standby mode;<br>variants with a $V_{IO}$ pin    | 0.5 | -   | 1.8 | $\mu\text{s}$ |
|                                                                             |                                      | Standby mode;<br>variants without a $V_{IO}$ pin | 0.5 | -   | 3.0 | $\mu\text{s}$ |
| $t_{wake(busrec)}$                                                          | bus recessive wake-up time           | Standby mode;<br>variants with a $V_{IO}$ pin    | 0.5 | -   | 1.8 | $\mu\text{s}$ |
|                                                                             |                                      | Standby mode;<br>variants without a $V_{IO}$ pin | 0.5 | -   | 3.0 | $\mu\text{s}$ |
| $t_{to(wake)bus}$                                                           | bus wake-up time-out time            | Standby mode                                     | 0.8 | 3   | 6.5 | ms            |
| $t_{fltr(wake)bus}$                                                         | bus wake-up filter time              | Standby mode                                     |     |     |     |               |
|                                                                             |                                      | variants without a $V_{IO}$ pin                  | 0.5 | 1   | 3   | $\mu\text{s}$ |
|                                                                             |                                      | variants with a $V_{IO}$ pin                     | 0.5 | -   | 1.8 | $\mu\text{s}$ |

[1] Only TJA1044x/3 variants have a  $V_{IO}$  pin; all circuitry is connected to  $V_{CC}$  in the other variants.



[2] Factory testing uses correlated test conditions to cover the specified temperature and power supply voltage range.

[3] See Figure 5.

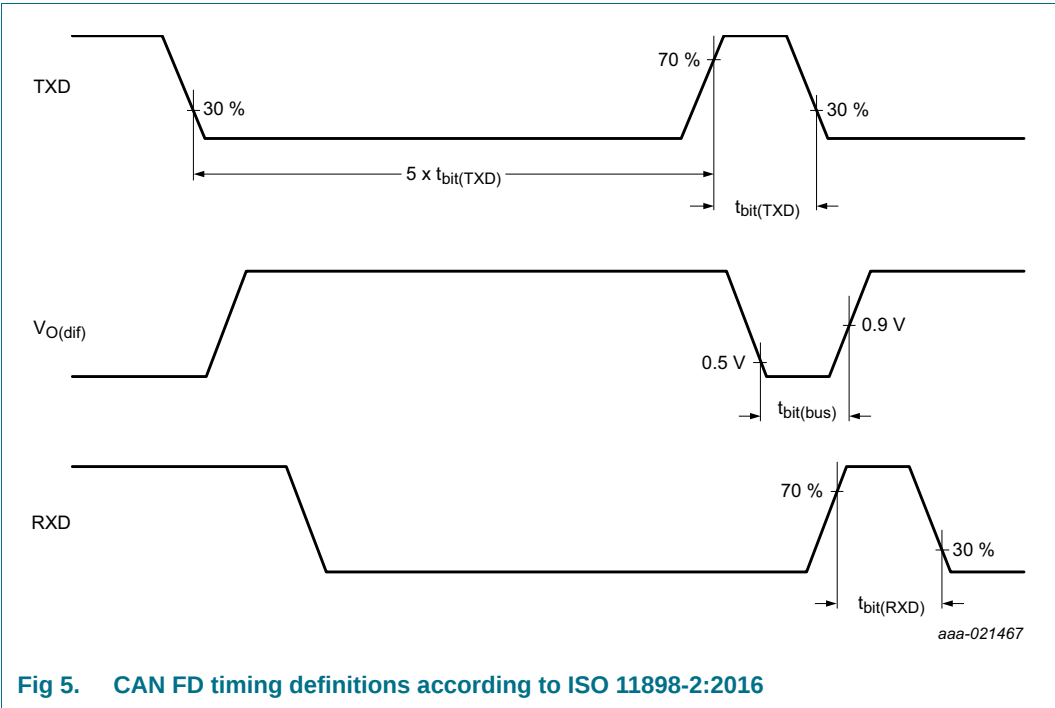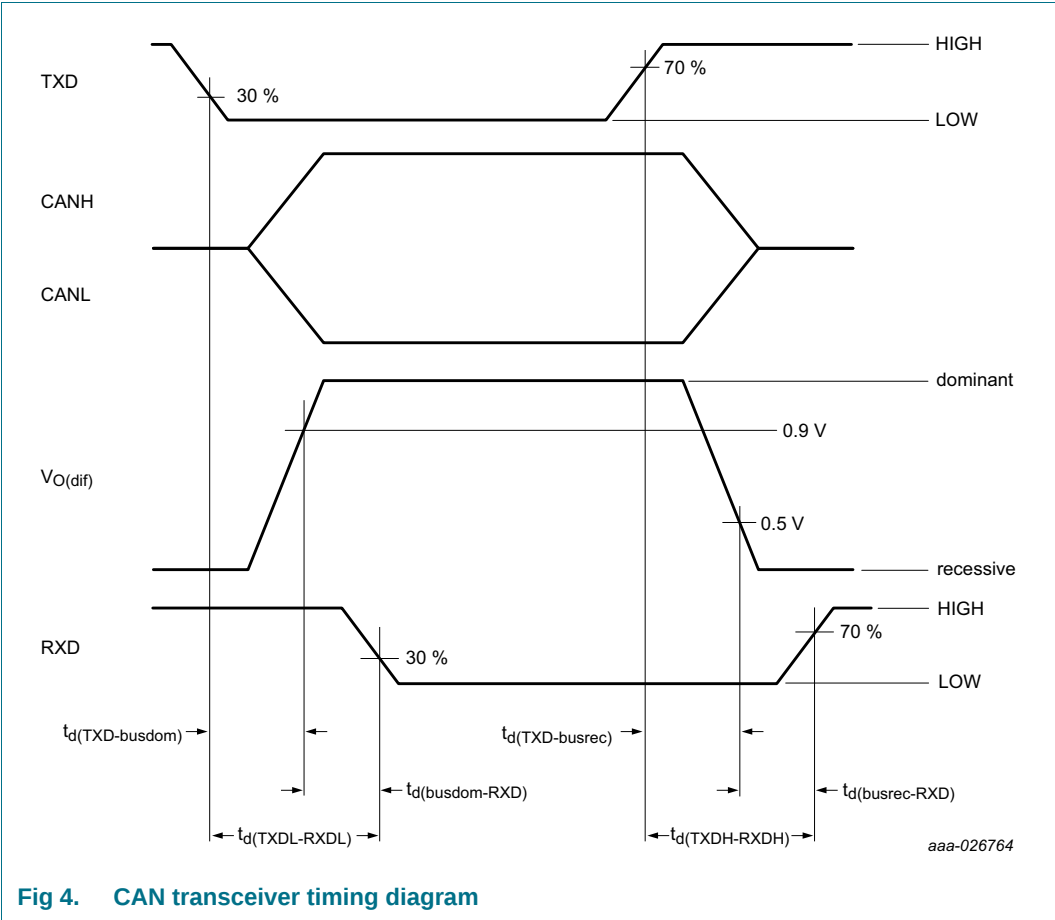

## 12. Application information



### 12.1 Application diagram

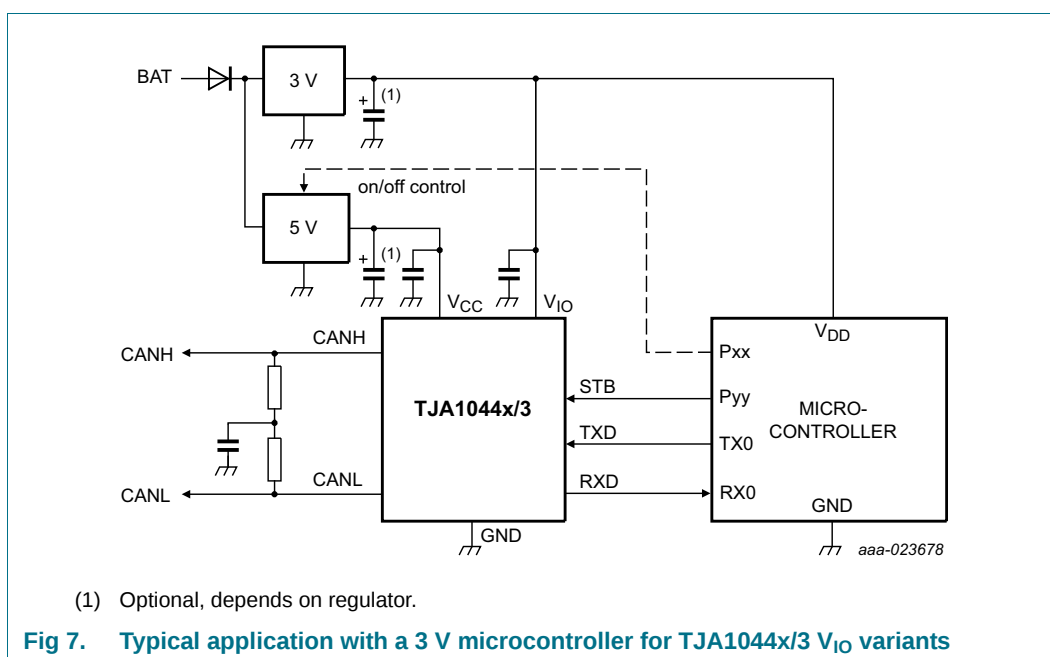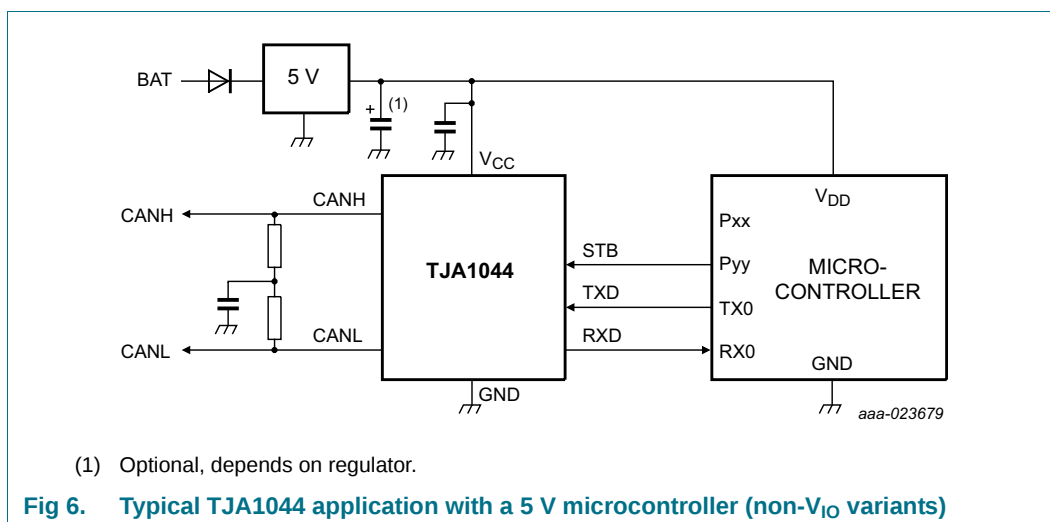

### 12.2 Application hints

Further information on the application of the TJA1044 can be found in NXP application hints *AH1308 Application Hints - Standalone high-speed CAN transceivers Mantis TJA1044/TJA1057 and Dual-Mantis TJA1046*.

## 13. Test information

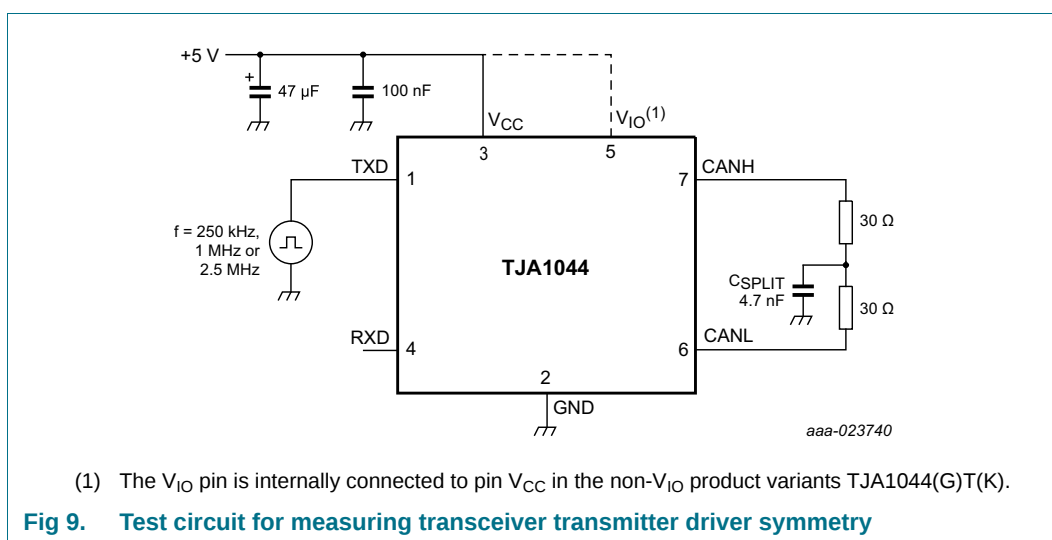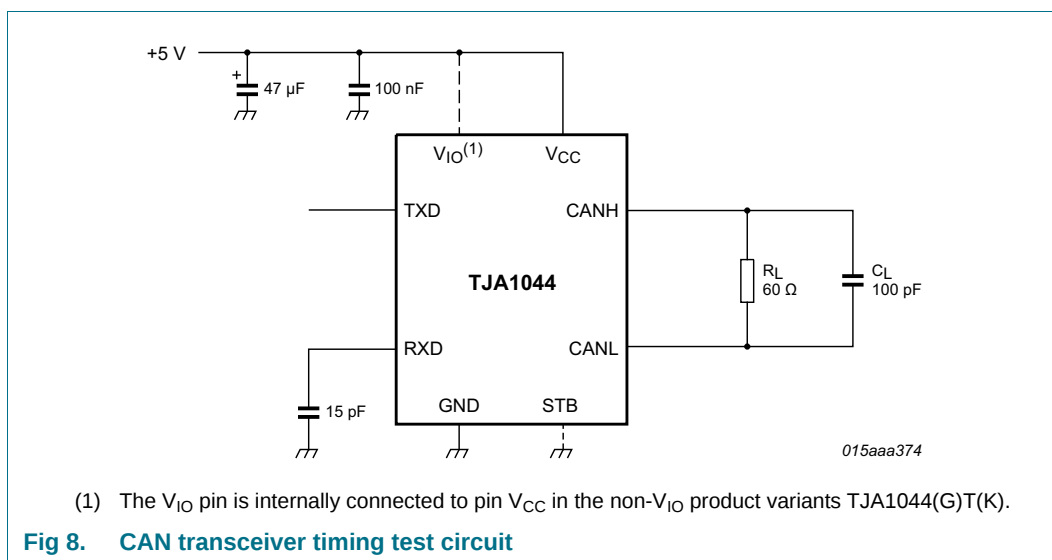

### 13.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard Q100 Rev-G - *Failure mechanism based stress test qualification for integrated circuits*, and is suitable for use in automotive applications.

14. Package outline

SO8: plastic small outline package; 8 leads; body width 3.9 mm SOT96-1

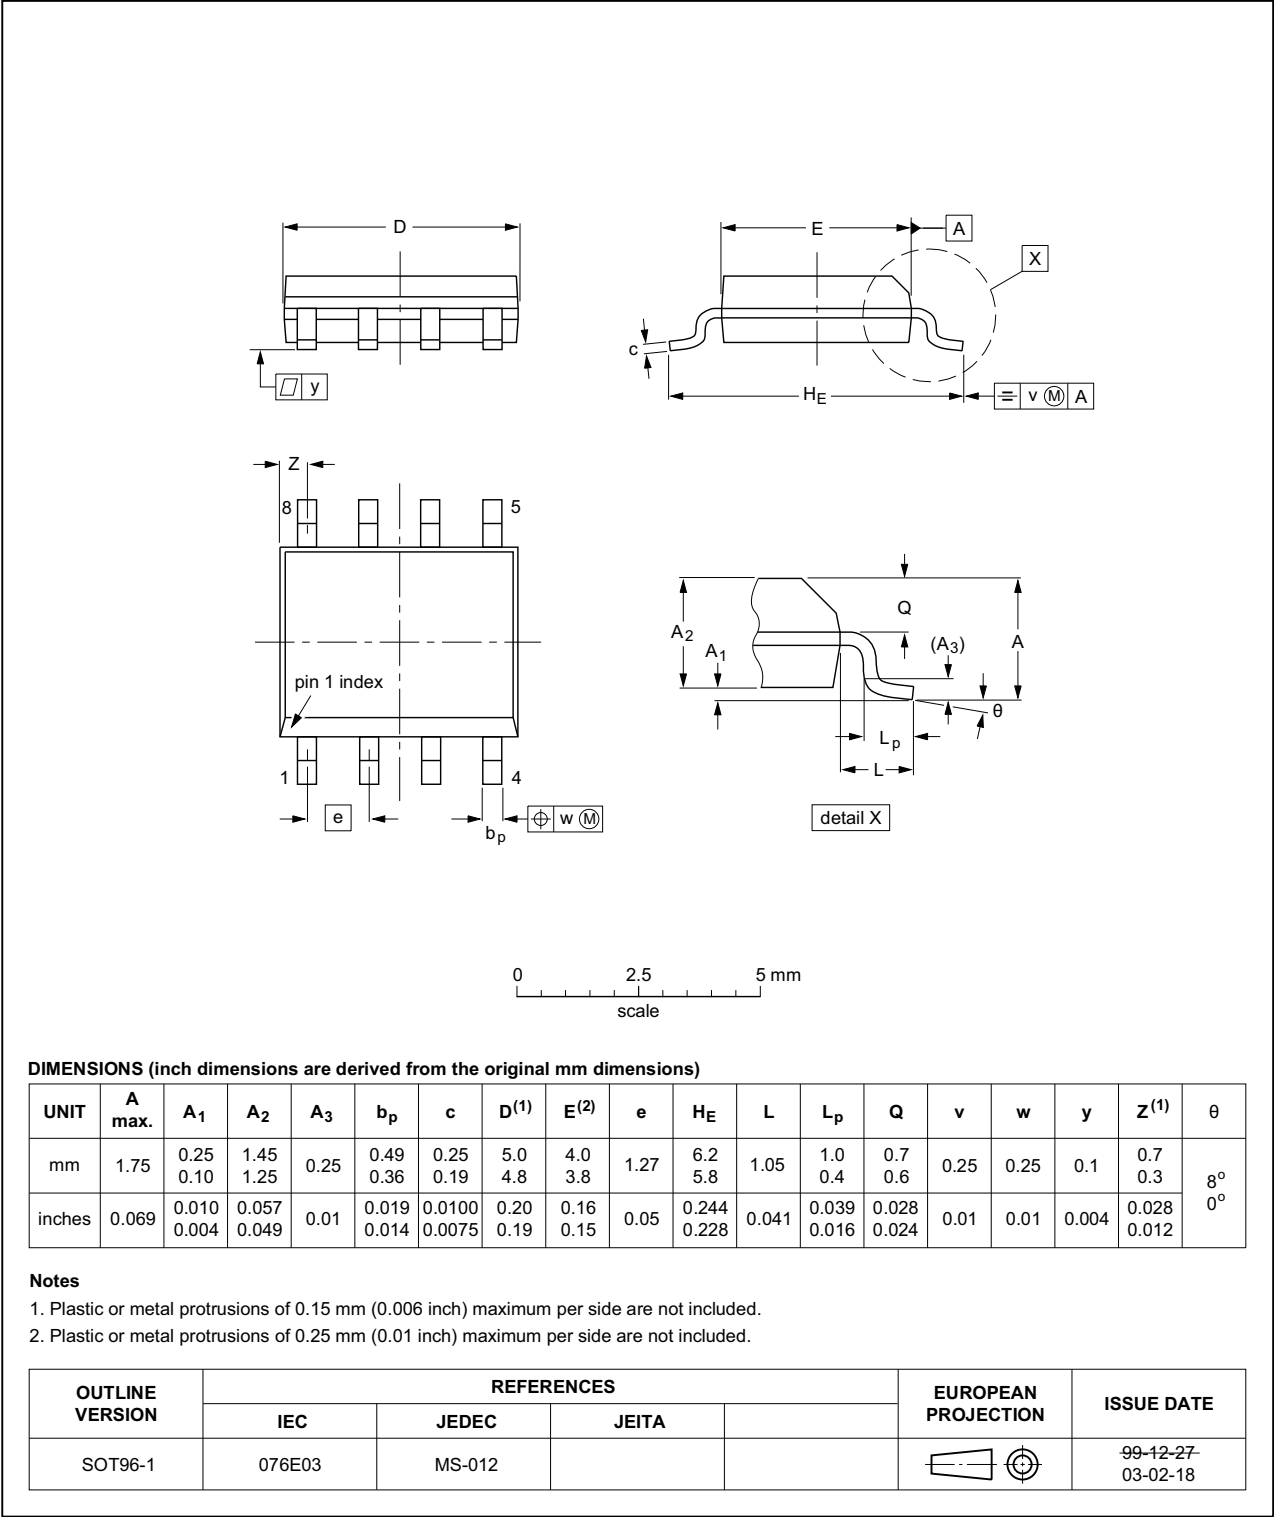


Fig 10. Package outline SOT96-1 (SO8)

**HVSON8: plastic thermal enhanced very thin small outline package; no leads;**  
**8 terminals; body 3 x 3 x 0.85 mm**

SOT782-1

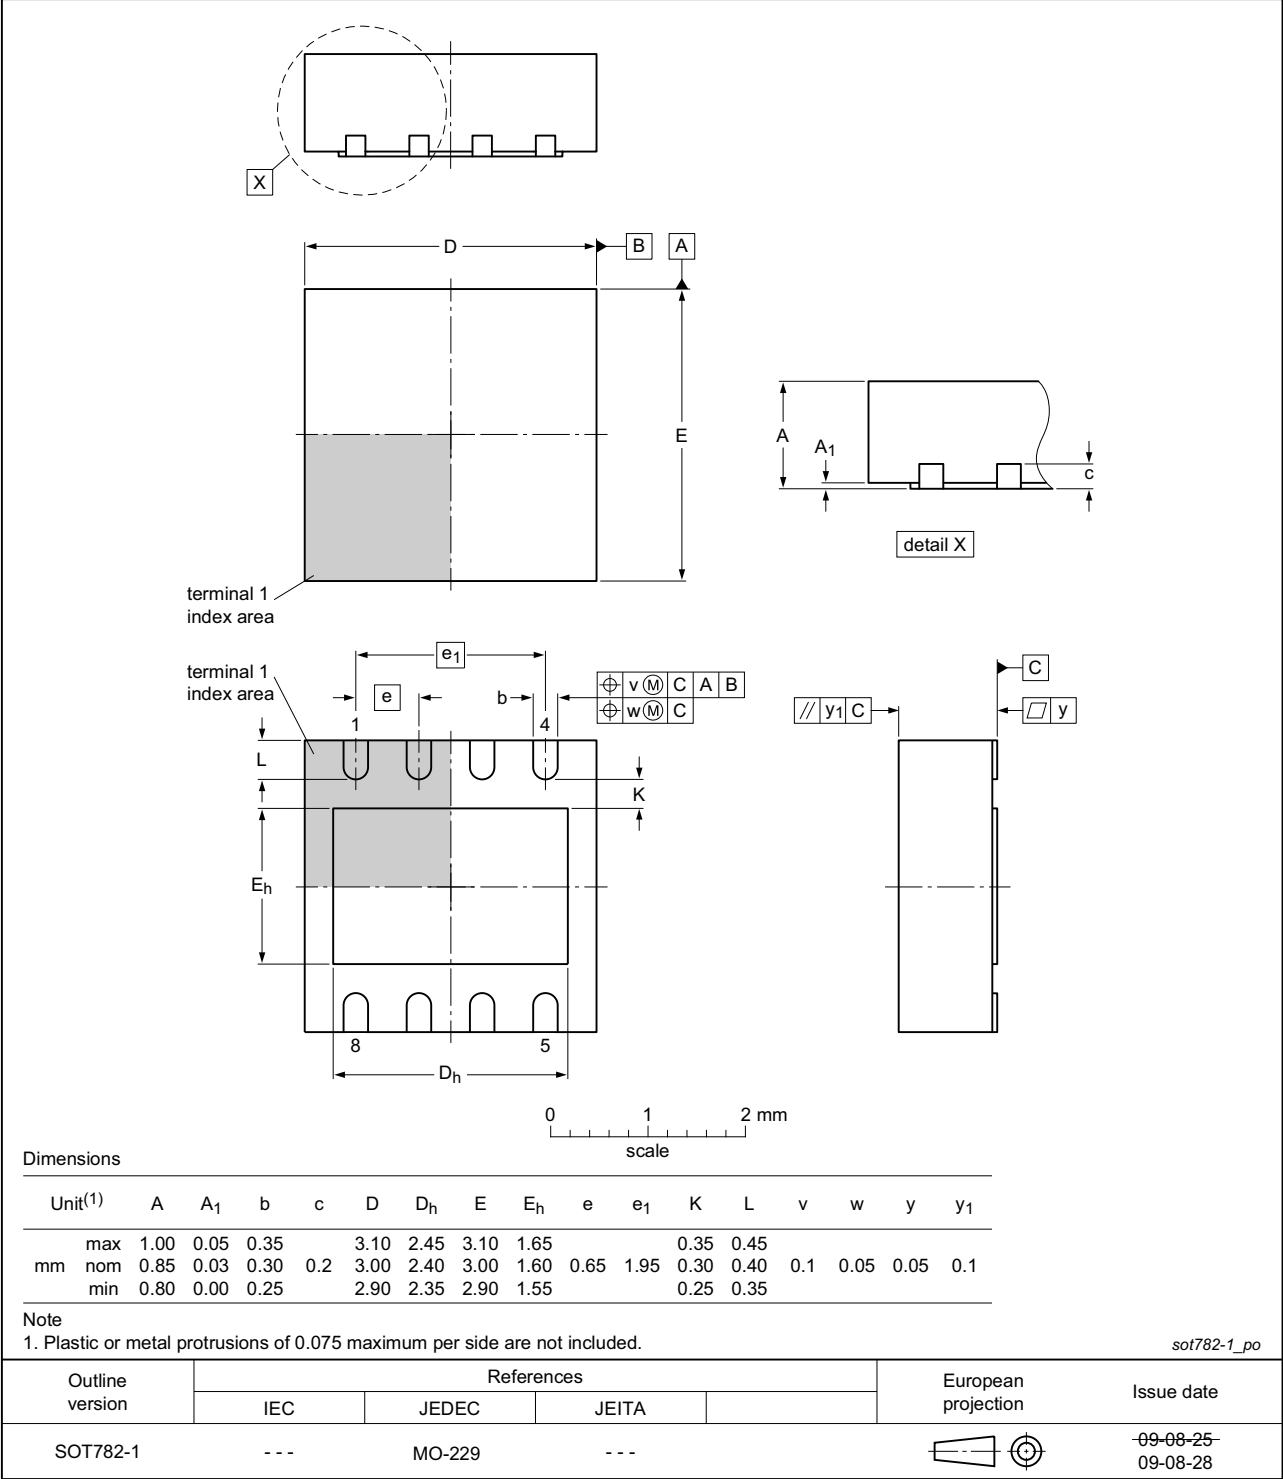


Fig 11. Package outline SOT782-1 (HVSON8)

## 15. Handling information

All input and output pins are protected against ElectroStatic Discharge (ESD) under normal handling. When handling ensure that the appropriate precautions are taken as described in JESD625-A or equivalent standards.

## 16. Soldering of SMD packages

This text provides a very brief insight into a complex technology. A more in-depth account of soldering ICs can be found in Application Note AN10365 “*Surface mount reflow soldering description*”.

### 16.1 Introduction to soldering

Soldering is one of the most common methods through which packages are attached to Printed Circuit Boards (PCBs), to form electrical circuits. The soldered joint provides both the mechanical and the electrical connection. There is no single soldering method that is ideal for all IC packages. Wave soldering is often preferred when through-hole and Surface Mount Devices (SMDs) are mixed on one printed wiring board; however, it is not suitable for fine pitch SMDs. Reflow soldering is ideal for the small pitches and high densities that come with increased miniaturization.

### 16.2 Wave and reflow soldering

Wave soldering is a joining technology in which the joints are made by solder coming from a standing wave of liquid solder. The wave soldering process is suitable for the following:

- Through-hole components
- Leaded or leadless SMDs, which are glued to the surface of the printed circuit board

Not all SMDs can be wave soldered. Packages with solder balls, and some leadless packages which have solder lands underneath the body, cannot be wave soldered. Also, leaded SMDs with leads having a pitch smaller than ~0.6 mm cannot be wave soldered, due to an increased probability of bridging.

The reflow soldering process involves applying solder paste to a board, followed by component placement and exposure to a temperature profile. Leaded packages, packages with solder balls, and leadless packages are all reflow solderable.

Key characteristics in both wave and reflow soldering are:

- Board specifications, including the board finish, solder masks and vias
- Package footprints, including solder thieves and orientation
- The moisture sensitivity level of the packages
- Package placement
- Inspection and repair
- Lead-free soldering versus SnPb soldering

### 16.3 Wave soldering

Key characteristics in wave soldering are:

- Process issues, such as application of adhesive and flux, clinching of leads, board transport, the solder wave parameters, and the time during which components are exposed to the wave
- Solder bath specifications, including temperature and impurities

## 16.4 Reflow soldering

Key characteristics in reflow soldering are:

- Lead-free versus SnPb soldering; note that a lead-free reflow process usually leads to higher minimum peak temperatures (see [Figure 12](#)) than a SnPb process, thus reducing the process window
- Solder paste printing issues including smearing, release, and adjusting the process window for a mix of large and small components on one board
- Reflow temperature profile; this profile includes preheat, reflow (in which the board is heated to the peak temperature) and cooling down. It is imperative that the peak temperature is high enough for the solder to make reliable solder joints (a solder paste characteristic). In addition, the peak temperature must be low enough that the packages and/or boards are not damaged. The peak temperature of the package depends on package thickness and volume and is classified in accordance with [Table 9](#) and [10](#)

**Table 9. SnPb eutectic process (from J-STD-020D)**


| Package thickness (mm) | Package reflow temperature (°C) |       |
|------------------------|---------------------------------|-------|
|                        | Volume (mm <sup>3</sup> )       |       |
|                        | < 350                           | ≥ 350 |
| < 2.5                  | 235                             | 220   |
| ≥ 2.5                  | 220                             | 220   |

**Table 10. Lead-free process (from J-STD-020D)**

| Package thickness (mm) | Package reflow temperature (°C) |             |        |
|------------------------|---------------------------------|-------------|--------|
|                        | Volume (mm <sup>3</sup> )       |             |        |
|                        | < 350                           | 350 to 2000 | > 2000 |
| < 1.6                  | 260                             | 260         | 260    |
| 1.6 to 2.5             | 260                             | 250         | 245    |
| > 2.5                  | 250                             | 245         | 245    |

Moisture sensitivity precautions, as indicated on the packing, must be respected at all times.

Studies have shown that small packages reach higher temperatures during reflow soldering, see [Figure 12](#).

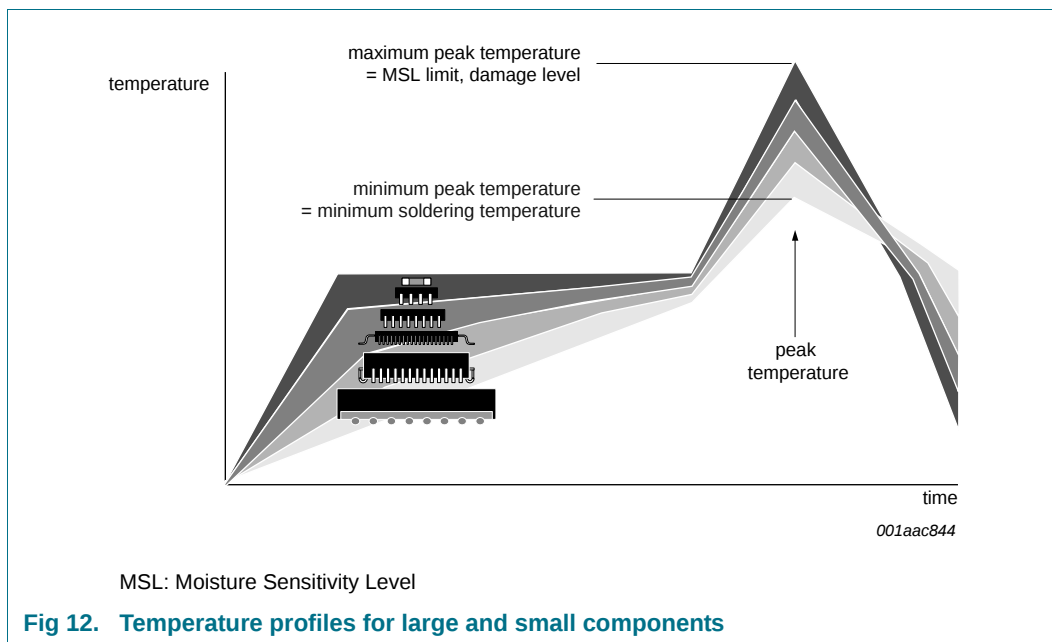

For further information on temperature profiles, refer to Application Note AN10365 “Surface mount reflow soldering description”.

## 17. Appendix: ISO 11898-2:2016 parameter cross-reference list

Table 11. ISO 11898-2:2016 to NXP data sheet parameter conversion

| ISO 11898-2:2016                                                                                                                                      |                                          | NXP data sheet            |                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------------|-----------------------------------------|
| Parameter                                                                                                                                             | Notation                                 | Symbol                    | Parameter                               |
| HS-PMA dominant output characteristics                                                                                                                |                                          |                           |                                         |
| Single ended voltage on CAN_H                                                                                                                         | V <sub>CAN_H</sub>                       | V <sub>O(dom)</sub>       | dominant output voltage                 |
| Single ended voltage on CAN_L                                                                                                                         | V <sub>CAN_L</sub>                       |                           |                                         |
| Differential voltage on normal bus load                                                                                                               | V <sub>Diff</sub>                        | V <sub>O(dif)</sub>       | differential output voltage             |
| Differential voltage on effective resistance during arbitration                                                                                       |                                          |                           |                                         |
| Optional: Differential voltage on extended bus load range                                                                                             |                                          |                           |                                         |
| HS-PMA driver symmetry                                                                                                                                |                                          |                           |                                         |
| Driver symmetry                                                                                                                                       | V <sub>SYM</sub>                         | V <sub>TXsym</sub>        | transmitter voltage symmetry            |
| Maximum HS-PMA driver output current                                                                                                                  |                                          |                           |                                         |
| Absolute current on CAN_H                                                                                                                             | I <sub>CAN_H</sub>                       | I <sub>O(sc)dom</sub>     | dominant short-circuit output current   |
| Absolute current on CAN_L                                                                                                                             | I <sub>CAN_L</sub>                       |                           |                                         |
| HS-PMA recessive output characteristics, bus biasing active/inactive                                                                                  |                                          |                           |                                         |
| Single ended output voltage on CAN_H                                                                                                                  | V <sub>CAN_H</sub>                       | V <sub>O(rec)</sub>       | recessive output voltage                |
| Single ended output voltage on CAN_L                                                                                                                  | V <sub>CAN_L</sub>                       |                           |                                         |
| Differential output voltage                                                                                                                           | V <sub>Diff</sub>                        | V <sub>O(dif)</sub>       | differential output voltage             |
| Optional HS-PMA transmit dominant timeout                                                                                                             |                                          |                           |                                         |
| Transmit dominant timeout, long                                                                                                                       | t <sub>dom</sub>                         | t <sub>to(dom)TXD</sub>   | TXD dominant time-out time              |
| Transmit dominant timeout, short                                                                                                                      |                                          |                           |                                         |
| HS-PMA static receiver input characteristics, bus biasing active/inactive                                                                             |                                          |                           |                                         |
| Recessive state differential input voltage range                                                                                                      | V <sub>Diff</sub>                        | V <sub>th(RX)dif</sub>    | differential receiver threshold voltage |
| Dominant state differential input voltage range                                                                                                       |                                          | V <sub>rec(RX)</sub>      | receiver recessive voltage              |
|                                                                                                                                                       |                                          | V <sub>dom(RX)</sub>      | receiver dominant voltage               |
| HS-PMA receiver input resistance (matching)                                                                                                           |                                          |                           |                                         |
| Differential internal resistance                                                                                                                      | R <sub>Diff</sub>                        | R <sub>i(dif)</sub>       | differential input resistance           |
| Single ended internal resistance                                                                                                                      | R <sub>CAN_H</sub><br>R <sub>CAN_L</sub> | R <sub>i</sub>            | input resistance                        |
| Matching of internal resistance                                                                                                                       | MR                                       | ΔR <sub>i</sub>           | input resistance deviation              |
| HS-PMA implementation loop delay requirement                                                                                                          |                                          |                           |                                         |
| Loop delay                                                                                                                                            | t <sub>Loop</sub>                        | t <sub>d(TXDH-RXDH)</sub> | delay time from TXD HIGH to RXD HIGH    |
|                                                                                                                                                       |                                          | t <sub>d(TXDL-RXDL)</sub> | delay time from TXD LOW to RXD LOW      |
| Optional HS-PMA implementation data signal timing requirements for use with bit rates above 1 Mbit/s up to 2 Mbit/s and above 2 Mbit/s up to 5 Mbit/s |                                          |                           |                                         |
| Transmitted recessive bit width @ 2 Mbit/s / @ 5 Mbit/s, intended                                                                                     | t <sub>Bit(Bus)</sub>                    | t <sub>bit(bus)</sub>     | transmitted recessive bit width         |
| Received recessive bit width @ 2 Mbit/s / @ 5 Mbit/s                                                                                                  | t <sub>Bit(RXD)</sub>                    | t <sub>bit(RXD)</sub>     | bit time on pin RXD                     |
| Receiver timing symmetry @ 2 Mbit/s / @ 5 Mbit/s                                                                                                      | Δt <sub>Rec</sub>                        | Δt <sub>rec</sub>         | receiver timing symmetry                |

Table 11. ISO 11898-2:2016 to NXP data sheet parameter conversion

| ISO 11898-2:2016                                                                        |                                          | NXP data sheet                           |                                       |
|-----------------------------------------------------------------------------------------|------------------------------------------|------------------------------------------|---------------------------------------|
| Parameter                                                                               | Notation                                 | Symbol                                   | Parameter                             |
| HS-PMA maximum ratings of V <sub>CAN_H</sub> , V <sub>CAN_L</sub> and V <sub>Diff</sub> |                                          |                                          |                                       |
| Maximum rating V <sub>Diff</sub>                                                        | V <sub>Diff</sub>                        | V <sub>(CANH-CANL)</sub>                 | voltage between pin CANH and pin CANL |
| General maximum rating V <sub>CAN_H</sub> and V <sub>CAN_L</sub>                        | V <sub>CAN_H</sub>                       | V <sub>x</sub>                           | voltage on pin x                      |
| Optional: Extended maximum rating VCAN_H and VCAN_L                                     | V <sub>CAN_L</sub>                       |                                          |                                       |
| HS-PMA maximum leakage currents on CAN_H and CAN_L, unpowered                           |                                          |                                          |                                       |
| Leakage current on CAN_H, CAN_L                                                         | I <sub>CAN_H</sub><br>I <sub>CAN_L</sub> | I <sub>L</sub>                           | leakage current                       |
| HS-PMA bus biasing control timings                                                      |                                          |                                          |                                       |
| CAN activity filter time, long                                                          | t <sub>Filter</sub>                      | t <sub>wake(busdom)</sub> <sup>[1]</sup> | bus dominant wake-up time             |
| CAN activity filter time, short                                                         |                                          | t <sub>wake(busrec)</sub> <sup>[1]</sup> | bus recessive wake-up time            |
| Wake-up timeout, short                                                                  | t <sub>Wake</sub>                        | t <sub>to(wake)bus</sub>                 | bus wake-up time-out time             |
| Wake-up timeout, long                                                                   |                                          |                                          |                                       |
| Timeout for bus inactivity                                                              | t <sub>Silence</sub>                     | t <sub>to(silence)</sub>                 | bus silence time-out time             |
| Bus Bias reaction time                                                                  | t <sub>Bias</sub>                        | t <sub>d(busact-bias)</sub>              | delay time from bus active to bias    |

[1]  $t_{fltr(wake)bus}$  - bus wake-up filter time, in devices with basic wake-up functionality

## 18. Revision history

Table 12. Revision history

| Document ID    | Release date                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Data sheet status      | Change notice | Supersedes    |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------------|---------------|
| TJA1044 v.6.1  | 20170824                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Product data sheet     | -             | TJA1044 v.5.1 |
| Modifications: | <ul style="list-style-type: none"> <li>Added variants TJA1044GT/3 and TJA1044GTK/3 with <math>V_{IO}</math> pin that interface directly with 3 V and 5 V microcontrollers.               <ul style="list-style-type: none"> <li><a href="#">Table 2</a>: added parameters <math>V_{uvd(swoff)}(VCC)</math>, <math>V_{IO}</math>, <math>I_{IO}</math>, <math>V_{uvd(swoff)}(VIO)</math>; amended <math>I_{CC}</math></li> <li>Amended <a href="#">Figure 8</a> and <a href="#">Figure 9</a>; added <a href="#">Figure 7</a></li> </ul> </li> <li>No changes to product specifications of existing non-<math>V_{IO}</math> variants</li> <li>Updated to comply with ISO 11898-2:2016 and SAE J2284-1 through SAE J2284-5 specifications:               <ul style="list-style-type: none"> <li><a href="#">Table 7</a>: conditions added to parameters <math>R_i</math>, <math>\Delta R_i</math> and <math>R_{i(dif)}</math>; values/conditions changed for parameters <math>I_{CC}</math>, <math>V_{rec}(RX)</math>, <math>V_{dom}(RX)</math>, <math>I_{O(sc)dom}</math></li> <li>Additional measurement taken at <math>f_{TXD} = 1</math> MHz and 2.5 MHz for parameter <math>V_{TXsym}</math>; see <a href="#">Table 7</a> and <a href="#">Figure 9</a></li> <li><a href="#">Table 8</a>: values/conditions changed for parameter <math>t_{fltr(wake)bus}</math></li> <li><a href="#">Figure 4</a>: thresholds clarified</li> <li><a href="#">Figure 5</a>: title changed</li> </ul> </li> <li><a href="#">Section 2.1</a>: text of last entry amended</li> <li><a href="#">Table 5</a>, <a href="#">Table note 2</a> added</li> <li>Amended <a href="#">Figure 4</a> and <a href="#">Figure 6</a></li> <li><a href="#">Section 12.2</a>: reference updated</li> </ul> |                        |               |               |
| TJA1044 v.5.1  | 20160523                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Product data sheet     | -             | TJA1044 v.4   |
| TJA1044 v.4    | 20150710                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Product data sheet     | -             | TJA1044 v.3   |
| TJA1044 v.3    | 20141119                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Product data sheet     | -             | TJA1044 v.2   |
| TJA1044 v.2    | 20131030                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Product data sheet     | -             | TJA1044 v.1   |
| TJA1044 v.1    | 20130530                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Preliminary data sheet | -             | -             |

## 19. Legal information

### 19.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition                                                                            |
|-----------------------------------|-------------------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 19.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 19.3 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use in automotive applications** — This NXP Semiconductors product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

## 19.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

**Mantis** — is a trademark of NXP B.V.

## 20. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

## 21. Contents

|           |                                                                               |           |           |                                      |           |
|-----------|-------------------------------------------------------------------------------|-----------|-----------|--------------------------------------|-----------|
| <b>1</b>  | <b>General description</b> . . . . .                                          | <b>1</b>  | 19.1      | Data sheet status . . . . .          | 25        |
| <b>2</b>  | <b>Features and benefits</b> . . . . .                                        | <b>1</b>  | 19.2      | Definitions . . . . .                | 25        |
| 2.1       | General . . . . .                                                             | 1         | 19.3      | Disclaimers . . . . .                | 25        |
| 2.2       | Predictable and fail-safe behavior . . . . .                                  | 2         | 19.4      | Trademarks . . . . .                 | 26        |
| 2.3       | Protection . . . . .                                                          | 2         | <b>20</b> | <b>Contact information</b> . . . . . | <b>26</b> |
| 2.4       | TJA1044 CAN FD (applicable to all product variants except TJA1044T) . . . . . | 2         | <b>21</b> | <b>Contents</b> . . . . .            | <b>27</b> |
| <b>3</b>  | <b>Quick reference data</b> . . . . .                                         | <b>3</b>  |           |                                      |           |
| <b>4</b>  | <b>Ordering information</b> . . . . .                                         | <b>3</b>  |           |                                      |           |
| <b>5</b>  | <b>Block diagram</b> . . . . .                                                | <b>4</b>  |           |                                      |           |
| <b>6</b>  | <b>Pinning information</b> . . . . .                                          | <b>5</b>  |           |                                      |           |
| 6.1       | Pinning . . . . .                                                             | 5         |           |                                      |           |
| 6.2       | Pin description . . . . .                                                     | 5         |           |                                      |           |
| <b>7</b>  | <b>Functional description</b> . . . . .                                       | <b>6</b>  |           |                                      |           |
| 7.1       | Operating modes . . . . .                                                     | 6         |           |                                      |           |
| 7.1.1     | Normal mode . . . . .                                                         | 6         |           |                                      |           |
| 7.1.2     | Standby mode . . . . .                                                        | 6         |           |                                      |           |
| 7.2       | Remote wake-up (via the CAN bus) . . . . .                                    | 6         |           |                                      |           |
| 7.3       | Fail-safe features . . . . .                                                  | 7         |           |                                      |           |
| 7.3.1     | TXD dominant time-out function . . . . .                                      | 7         |           |                                      |           |
| 7.3.2     | Internal biasing of TXD and STB input pins . . . . .                          | 8         |           |                                      |           |
| 7.3.3     | Undervoltage detection on pins V <sub>CC</sub> and V <sub>IO</sub> . . . . .  | 8         |           |                                      |           |
| 7.3.4     | Overtemperature protection . . . . .                                          | 8         |           |                                      |           |
| 7.4       | V <sub>IO</sub> supply pin (TJA1044x/3 variants) . . . . .                    | 8         |           |                                      |           |
| <b>8</b>  | <b>Limiting values</b> . . . . .                                              | <b>9</b>  |           |                                      |           |
| <b>9</b>  | <b>Thermal characteristics</b> . . . . .                                      | <b>10</b> |           |                                      |           |
| <b>10</b> | <b>Static characteristics</b> . . . . .                                       | <b>10</b> |           |                                      |           |
| <b>11</b> | <b>Dynamic characteristics</b> . . . . .                                      | <b>13</b> |           |                                      |           |
| <b>12</b> | <b>Application information</b> . . . . .                                      | <b>15</b> |           |                                      |           |
| 12.1      | Application diagram . . . . .                                                 | 15        |           |                                      |           |
| 12.2      | Application hints . . . . .                                                   | 15        |           |                                      |           |
| <b>13</b> | <b>Test information</b> . . . . .                                             | <b>16</b> |           |                                      |           |
| 13.1      | Quality information . . . . .                                                 | 16        |           |                                      |           |
| <b>14</b> | <b>Package outline</b> . . . . .                                              | <b>17</b> |           |                                      |           |
| <b>15</b> | <b>Handling information</b> . . . . .                                         | <b>19</b> |           |                                      |           |
| <b>16</b> | <b>Soldering of SMD packages</b> . . . . .                                    | <b>19</b> |           |                                      |           |
| 16.1      | Introduction to soldering . . . . .                                           | 19        |           |                                      |           |
| 16.2      | Wave and reflow soldering . . . . .                                           | 19        |           |                                      |           |
| 16.3      | Wave soldering . . . . .                                                      | 19        |           |                                      |           |
| 16.4      | Reflow soldering . . . . .                                                    | 20        |           |                                      |           |
| <b>17</b> | <b>Appendix: ISO 11898-2:2016 parameter cross-reference list</b> . . . . .    | <b>22</b> |           |                                      |           |
| <b>18</b> | <b>Revision history</b> . . . . .                                             | <b>24</b> |           |                                      |           |
| <b>19</b> | <b>Legal information</b> . . . . .                                            | <b>25</b> |           |                                      |           |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP Semiconductors N.V. 2017.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 24 August 2017

Document identifier: TJA1044



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331