



Features


- Epitaxial Planar Die Construction
- Ideal for Low Power Amplification and Switching
- Ultra-Small Surface Mount Package
- **Lead Free By Design/RoHS Compliant (Note 1)**
- **Qualified to AEC-Q101 Standards for High Reliability**
- **"Green" Device (Note 4 and 5)**

Mechanical Data

- Case: SOT-563
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminal Connections: See Diagram
- Terminals: Finish - Matte Tin annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 20
- Terminals: Lead bearing terminal plating available. See Ordering information Page 3
- Marking & Type Code Information: See Page 3
- Ordering Information: See Page 3
- Weight: 0.003 grams (approximate)



See Note 1



| SOT-563 | | | |
|----------------------|------|------|------|
| Dim | Min | Max | Typ |
| A | 0.15 | 0.30 | 0.25 |
| B | 1.10 | 1.25 | 1.20 |
| C | 1.55 | 1.70 | 1.60 |
| D | 0.50 | | |
| G | 0.90 | 1.10 | 1.00 |
| H | 1.50 | 1.70 | 1.60 |
| K | 0.56 | 0.60 | 0.60 |
| L | 0.10 | 0.30 | 0.20 |
| M | 0.10 | 0.18 | 0.11 |
| All Dimensions in mm | | | |

Maximum Ratings @_{TA} = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--------------------------------|------------------|-------|------|
| Collector-Base Voltage | V _{CB0} | -40 | V |
| Collector-Emitter Voltage | V _{CE0} | -40 | V |
| Emitter-Base Voltage | V _{EBO} | -5.0 | V |
| Collector Current - Continuous | I _C | -200 | mA |

Thermal Characteristics

| Characteristic | Symbol | Value | Unit |
|--|-----------------------------------|-------------|------|
| Power Dissipation (Note 3) @ T _A = 25°C | P _d | 150 | mW |
| Thermal Resistance, Junction to Ambient (Note 3) @ T _A = 25°C | R _{θJA} | 833 | °C/W |
| Operating and Storage Temperature Range | T _J , T _{STG} | -55 to +150 | °C |

- Notes:
1. No purposefully added lead.
 2. Package is non-polarized. Parts may be on reel in orientation illustrated, 180° rotated, or mixed (both ways).
 3. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
 4. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
 5. Product manufactured with Date Code UO (week 40, 2007) and newer are built with Green Molding Compound. Product manufactured prior to Date Code UO are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

Electrical Characteristics @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Min | Max | Unit | Test Condition |
|--------------------------------------|----------------------|-----------------------------|-------------------------|--------------------|--|
| OFF CHARACTERISTICS (Note 6) | | | | | |
| Collector-Base Breakdown Voltage | V _{(BR)CBO} | -40 | — | V | I _C = -10μA, I _E = 0 |
| Collector-Emitter Breakdown Voltage | V _{(BR)CEO} | -40 | — | V | I _C = -1.0mA, I _B = 0 |
| Emitter-Base Breakdown Voltage | V _{(BR)EBO} | -5.0 | — | V | I _E = -10μA, I _C = 0 |
| Collector Cutoff Current | I _{CEX} | — | -50 | nA | V _{CE} = -30V, V _{EB(OFF)} = -3.0V |
| Base Cutoff Current | I _{BL} | — | -50 | nA | V _{CE} = -30V, V _{EB(OFF)} = -3.0V |
| ON CHARACTERISTICS (Note 6) | | | | | |
| DC Current Gain | h _{FE} | 60 80 100 60 30 | — — 300 — — | — | I _C = -100μA, V _{CE} = -1.0V I _C = -1.0mA, V _{CE} = -1.0V I _C = -10mA, V _{CE} = -1.0V I _C = -50mA, V _{CE} = -1.0V I _C = -100mA, V _{CE} = -1.0V |
| Collector-Emitter Saturation Voltage | V _{CE(SAT)} | — | -0.25 -0.40 | V | I _C = -10mA, I _B = -1.0mA I _C = -50mA, I _B = -5.0mA |
| Base-Emitter Saturation Voltage | V _{BE(SAT)} | -0.65 | -0.85 -0.95 | V | I _C = -10mA, I _B = -1.0mA I _C = -50mA, I _B = -5.0mA |
| SMALL SIGNAL CHARACTERISTICS | | | | | |
| Output Capacitance | C _{obo} | — | 4.5 | pF | V _{CB} = -5.0V, f = 1.0MHz, I _E = 0 |
| Input Capacitance | C _{ibo} | — | 10 | pF | V _{EB} = -0.5V, f = 1.0MHz, I _C = 0 |
| Input Impedance | h _{ie} | 2.0 | 12 | kΩ | V _{CE} = 10V, I _C = 1.0mA, f = 1.0kHz |
| Voltage Feedback Ratio | h _{re} | 0.1 | 10 | x 10 ⁻⁴ | |
| Small Signal Current Gain | h _{fe} | 100 | 400 | — | |
| Output Admittance | h _{oe} | 3.0 | 60 | μS | |
| Current Gain-Bandwidth Product | f _T | 250 | — | MHz | V _{CE} = -20V, I _C = -10mA, f = 100MHz |
| Noise Figure | NF | — | 4.0 | dB | V _{CE} = -5.0V, I _C = -100μA, R _S = 1.0kΩ, f = 1.0kHz |
| SWITCHING CHARACTERISTICS | | | | | |
| Delay Time | t _d | — | 35 | ns | V _{CC} = -3.0V, I _C = -10mA, V _{BE(off)} = 0.5V, I _{B1} = -1.0mA |
| Rise Time | t _r | — | 35 | ns | |
| Storage Time | t _s | — | 225 | ns | V _{CC} = -3.0V, I _C = -10mA, I _{B1} = I _{B2} = -1.0mA |
| Fall Time | t _f | — | 75 | ns | |

Notes: 6. Short duration pulse test used to minimize self-heating effect.

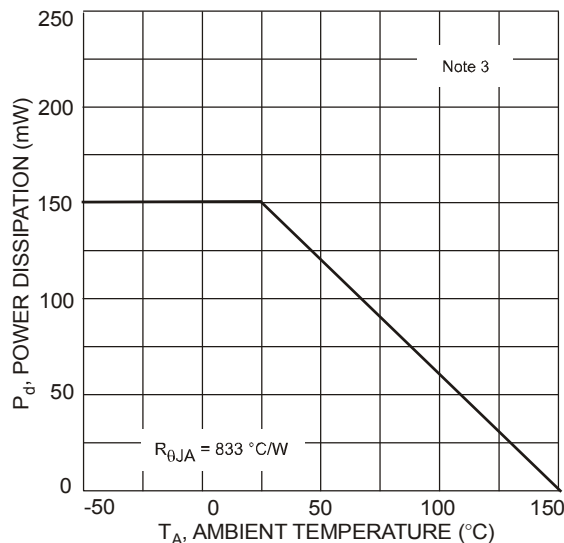


Fig. 1, Derating Curve - Total Device

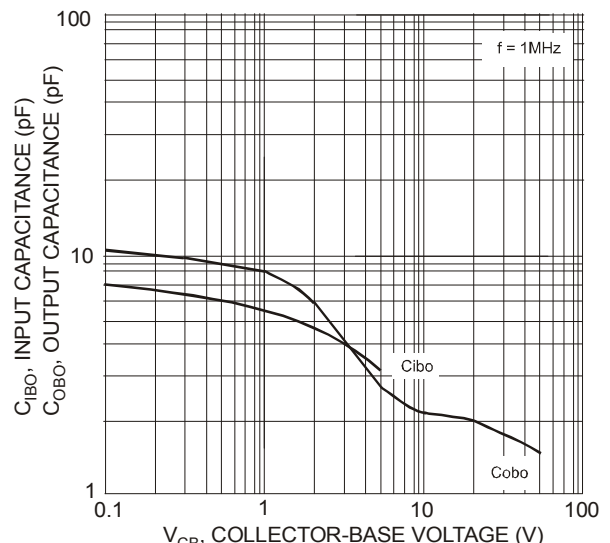


Fig. 2, Input and Output Capacitance vs. Collector-Base Voltage

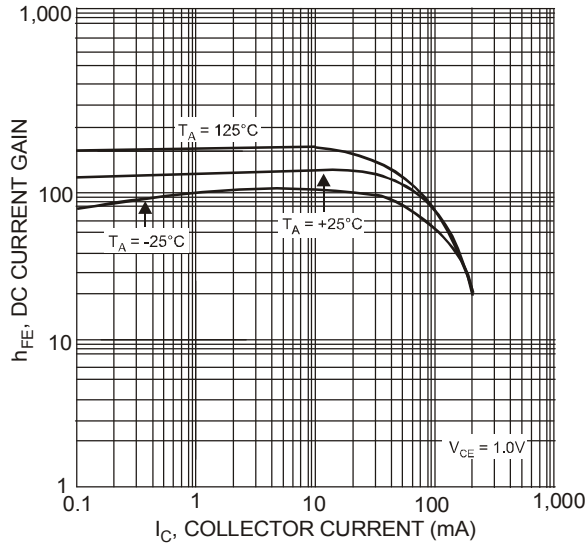


Fig. 3, Typical DC Current Gain vs. Collector Current

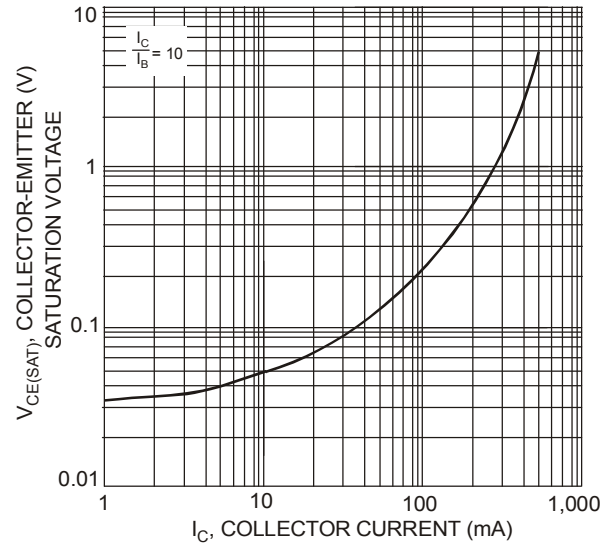


Fig. 4, Typical Collector-Emitter Saturation Voltage vs. Collector Current

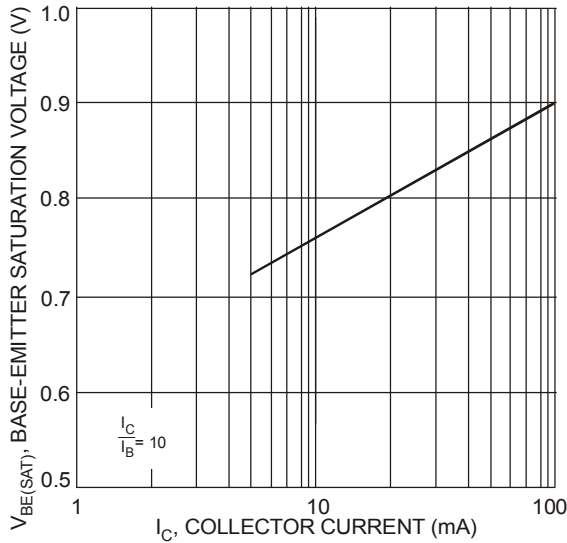



Fig. 5, Typical Base-Emitter Saturation Voltage vs. Collector Current

Ordering Information (Note 7)

| Device | Packaging | Shipping |
|-------------|-----------|------------------|
| MMDT3906V-7 | SOT-563 | 3000/Tape & Reel |

Notes: 7. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



KAR = Product Type Marking Code
 YM = Date Code Marking
 Y = Year (ex: T = 2006)
 M = Month (ex: 9 = September)

Date Code Key

| Year | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|------|------|------|------|------|------|------|------|------|
| Code | S | T | U | V | W | X | Y | Z |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331