

15 WATT POWER AMPLIFIER MODULE, 1.8 - 2.2 GHz

Features

P1dB Output Power: 15 Watts from 1.8 to 2.2 GHz
Gain: 40 dB min
Noise Figure: 6 dB
Thermally Compensated and Protected
Reverse Polarity Protected
TTL DC Power Enable
Unconditionally Stable
Heat Sink/Fan Accessories Available


Typical Applications

Test applications for:


- Cellular/PCS/3G Infrastructure
- Automated Test Equipment (ATE)
- Laboratory Use

General Description

The HMC-C008 is a 15 Watt Power Amplifier Module suitable for Cellular/3G repeaters, laboratory use and ATE applications. The unit includes DC power sequencing, enable and conditioning, as well as an output circulator for load mismatch protection. Thermal protection/fault circuitry automatically turns off DC power at base temperatures exceeding +75 °C and restores power at < +55 °C.

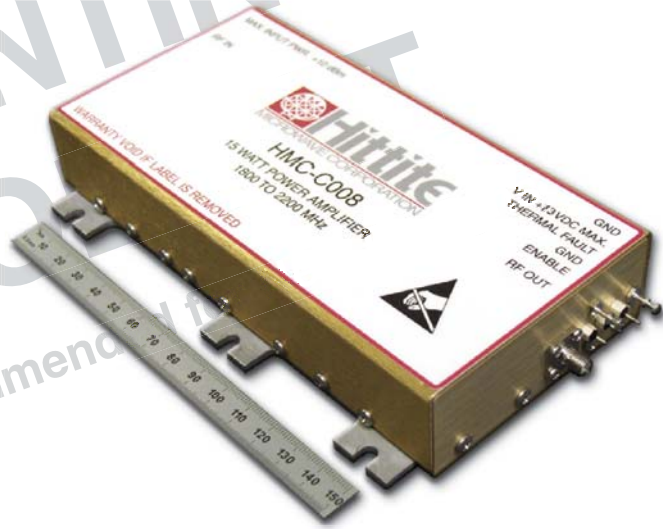

Functional Diagram

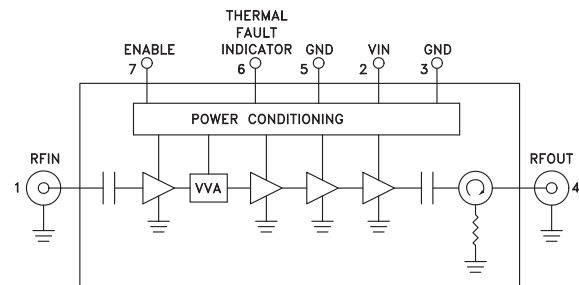

Electrical Specifications, $T_A = +25^\circ \text{C}$, $V_{IN} = +12\text{V}$

Parameter	Min.	Typ.	Max.	Units
Frequency Range	1.8 - 2.2			GHz
Gain	40	42		dB
Noise Figure		6	8	dB
Input Return Loss		12		dB
Output Return Loss		12		dB
Output Power for 1 dB Compression (P1dB)	15			W
Saturated Output Power (Psat)		43		dBm
Output Third Order Intercept (IP3) (Two-tone Input Power = -28 dBm each tone)		52		dBm
Channel Output Power for -50 dBc ACPR (CDMA 2000, 1960 MHz)		36		dBm
Channel Output Power for -50 dBc ACPR (W-CDMA, 2110 MHz)		33		dBm
Second Harmonic at Output P1dB		-55		dBc
Third Harmonic at Output P1dB		-55		dBc
Spurious at Output P1dB		-65		dBc
Supply Current		6.5	7.0	A


For price, delivery, and to place orders, please contact Hittite Microwave Corporation:
20 Alpha Road Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373
Order Online at www.hittite.com

**15 WATT POWER AMPLIFIER
MODULE, 1.8 - 2.2 GHz**


1

AMPLIFIERS


Gain vs. Temperature

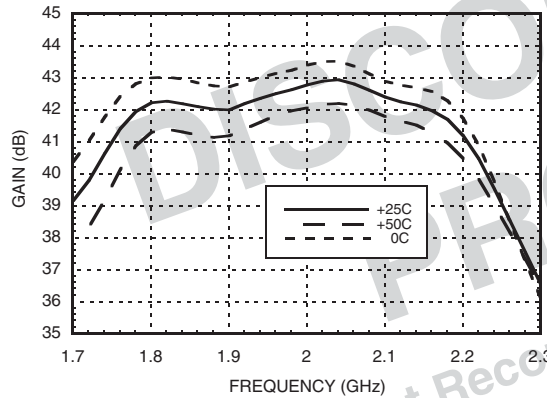


Input & Output Return Loss

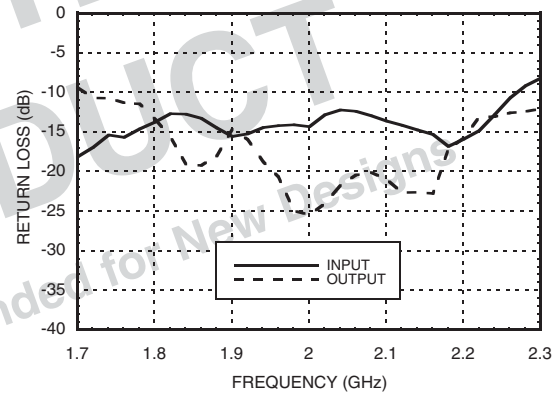


P1dB vs. Temperature

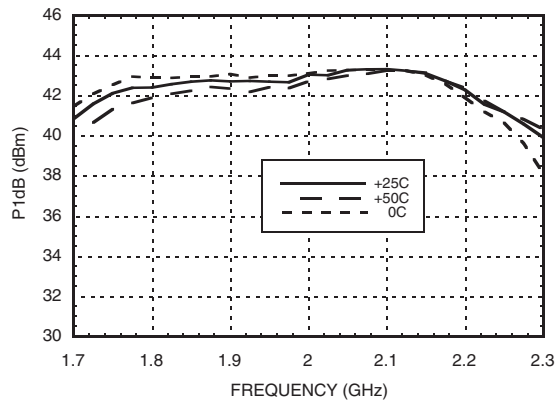


Psat vs. Temperature

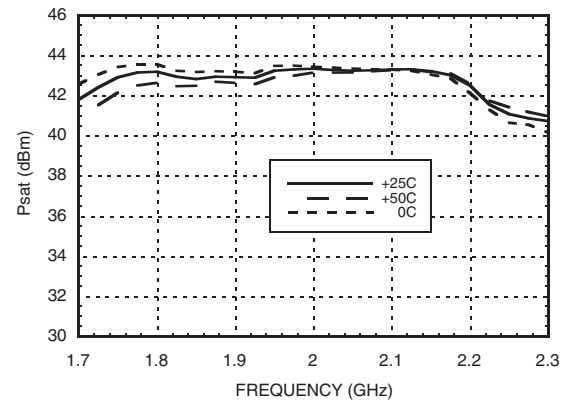

ACPR @ 2110 MHz, W-CDMA

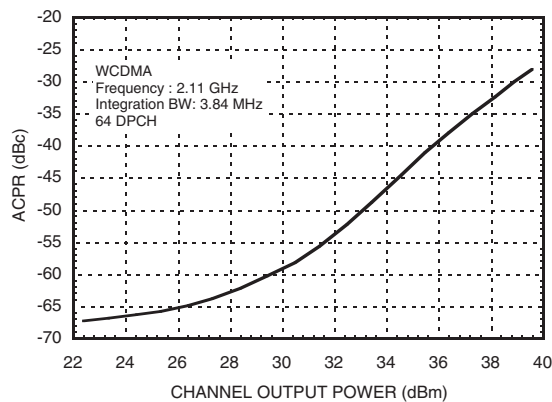


ACPR @ 1960 MHz, CDMA-2000

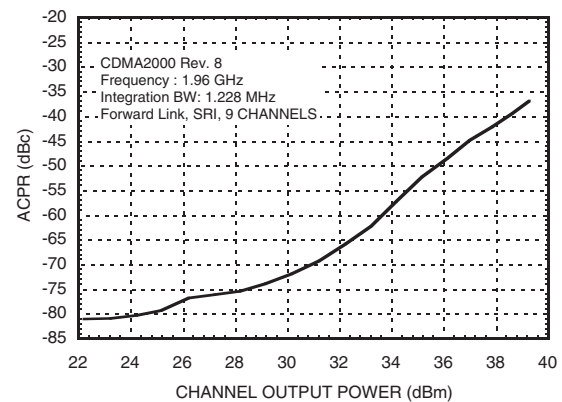


**15 WATT POWER AMPLIFIER
MODULE, 1.8 - 2.2 GHz**


Output IP3 vs. Temperature

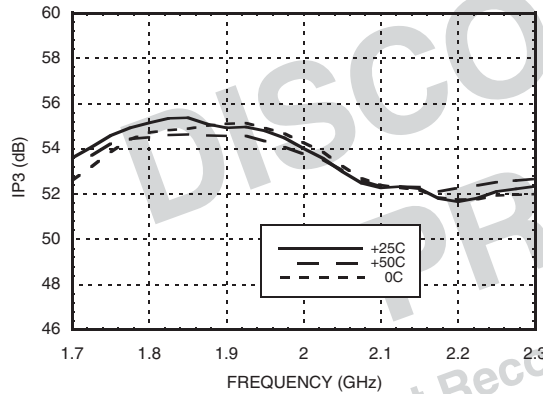

Reverse Isolation vs. Temperature

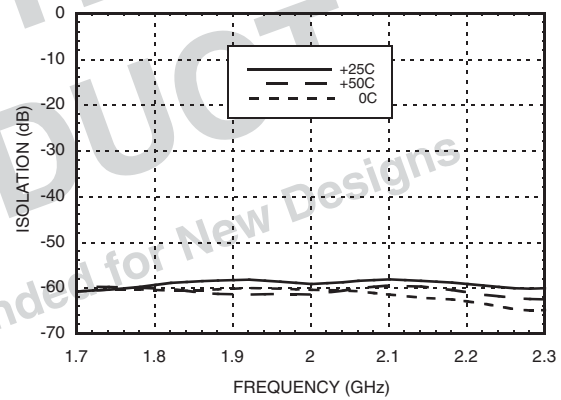

Noise Figure vs. Temperature

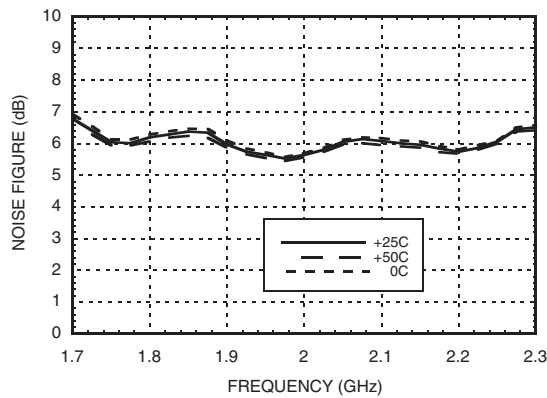

Absolute Maximum Ratings

Supply Voltage (VIN)	+13 Vdc
RF Input Power (RFIN)	+10 dBm
Storage Temperature	-40 to +70 °C
Operating Temperature	0 to +50 °C
RF Output Isolator Max Dissipation	20 W
Thermal Fault Indicator Max Pdis (derate 1.8 mW/°C above 50 °C)	180 mW
Enable Vmax	6 V



**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**

**Thermal Fault Indicator
Characteristics**

Parameter	Min.	Typ.	Max.	Units
I _{OUT} (V _{OUT} > 2V)		350		mA
R _{ON} (I _{OUT} = 50 mA)			7.5	Ohms
R _{OFF} (V _{OUT} = 30 V)		1		MOhm

Enable Input Characteristics

Parameter	Min.	Typ.	Max.	Units
V _{IH}	3.5			V
V _{IL}			1.6	V
I _{IL} @ VIN = 0V		-0.5		mA
I _{IH} @ 5V		< ± 50		μA

Recommended Biasing Procedure

TURN-ON






1. Connect RF input and output
2. Apply Supply Voltage VIN (+12 Vdc)
3. Set Enable low
4. Apply RF input signal

TURN-OFF

1. Remove RF input signal
2. Remove Supply Voltage VIN


**15 WATT POWER AMPLIFIER
MODULE, 1.8 - 2.2 GHz**

Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1	RFIN & RF Ground	RF input connector, SMA female. This pin is AC coupled and matched to 50 Ohms.	
2	VIN	Power supply voltage for the amplifier.	
3	GND	Power supply ground.	
4	RFOUT & RF Ground	RF output connector, SMA female. This pin is isolator protected and matched to 50 Ohms.	
5	GND	Ground for thermal fault indicator and enable circuit.	
6	Thermal Fault Indicator	Open drain output. High impedance for base plate temperatures less than 55 °C. Low impedance for base plate temperatures exceeding 75 °C.	
7	Enable	TTL compatible supply voltage (VIN) shutdown. If enable feature is not required, short this pin to DC ground. TTL "High" Disable TTL "Low" Enable	

15 WATT POWER AMPLIFIER MODULE, 1.8 - 2.2 GHz

Outline Drawing

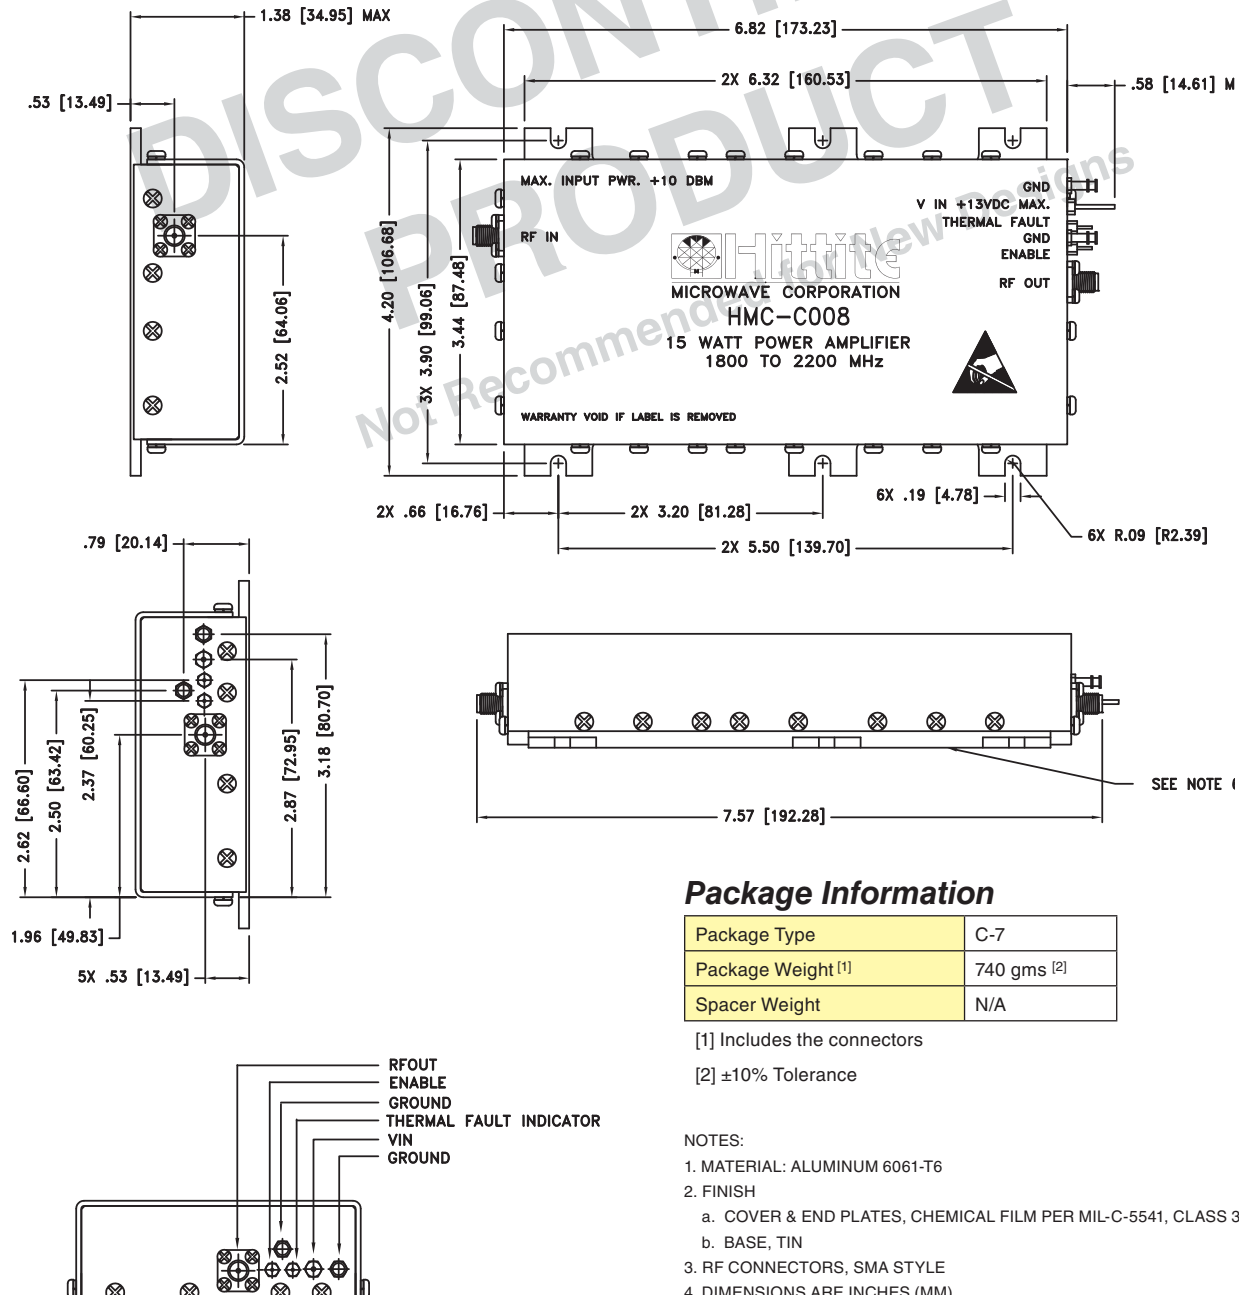

Package Information

Package Type	C-7
Package Weight ^[1]	740 gms ^[2]
Spacer Weight	N/A

[1] Includes the connectors

[2] ±10% Tolerance

NOTES:


1. MATERIAL: ALUMINUM 6061-T6
2. FINISH
 - a. COVER & END PLATES, CHEMICAL FILM PER MIL-C-5541, CLASS 3
 - b. BASE, TIN
3. RF CONNECTORS, SMA STYLE
4. DIMENSIONS ARE INCHES (MM)
5. TOLERANCES .X±.1 (2.54mm)

.XX±.02 (0.50mm)
6. BASE MUST BE GROUNDED AND MOUNTED TO HEAT SINK

CAPABLE OF DISSIPATING 100W (50 °C)


**15 WATT POWER AMPLIFIER
MODULE, 1.8 - 2.2 GHz**

HMC-C008 Heatsink/Fan Outline Drawing

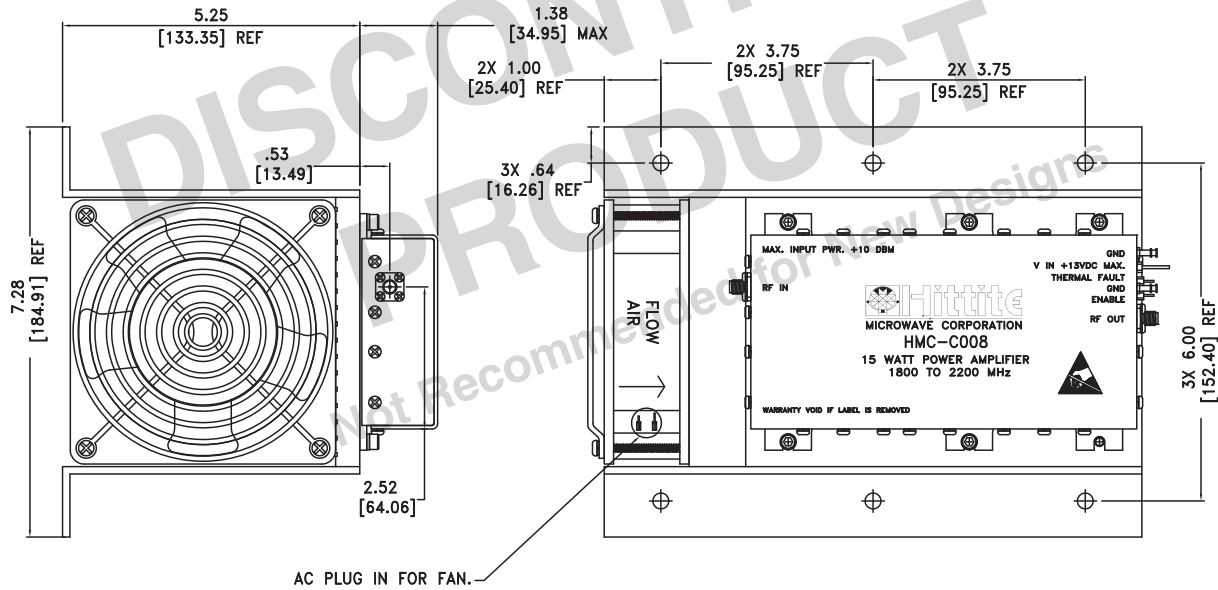


NOTES:

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: COVER & END PLATES, CHEMICAL FILM PER MIL-C-5541, CLASS 3
3. RF CONNECTORS, SMA STYLE
4. DIMENSIONS ARE INCHES (MM)
5. TOLERANCES .X±.1 (2.54mm)
.XX±.02 (0.50mm)

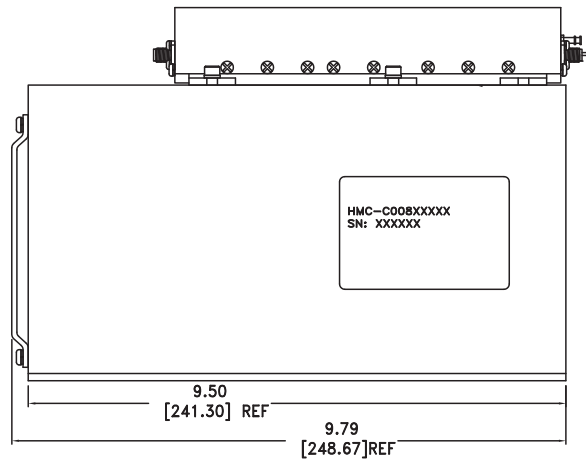

HMC-C008 Ordering Information

Part Number	Description
HMC-C008	15 Watt Power Amplifier Module, 1.8 - 2.2 GHz
HMC-C008HV115	15 Watt Power Amplifier Module with heat sink, 115 Vac fan and power cord.
HMC-C008HV230	15 Watt Power Amplifier Module with heat sink, 230 Vac fan and power cord.

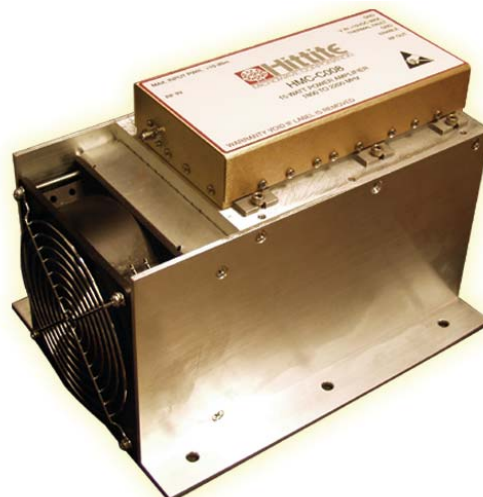



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331