


RoHS HF **SL Lo Rho Battery Strap Series**

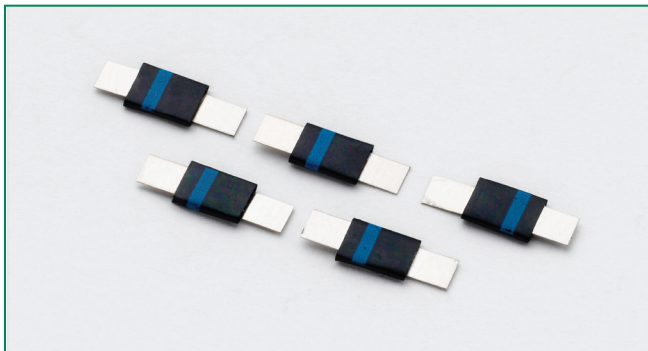

Description

The new Littelfuse SL LoRho Battery Strap Series PPTC (polymer positive temperature coefficient) is designed with a proprietary conductive polymer material, to provide both over-current and over-temperature protection for rechargeable battery cells. This series features a slim, low profile and low resistance design to install directly on the latest generations of battery cells for a longer battery run time.

Features

- Low Profile
- Lo Rho (low resistance at normal operating hold current)
- Installs Directly on battery cell
- RoHS Compliant, lead-free and halogen-free

Applications

- Rechargeable battery cell protection

Agency Approvals

AGENCY	AGENCY FILE NUMBER
	E183209
	R50119583

Electrical Characteristics

Part Number	I_{hold} (A)	I_{trip} (A)	V_{max} (Vdc)	I_{max} (A)	P_d max. (W)	Maximum Time To Trip		Resistance			Agency Approvals	
						Current (A)	Time (Sec.)	R_{min} (Ω)	R_{max} (Ω)	R_{1max} (Ω)		
06SL190G	1.9	4.9	6	50	1.0	9.5	3.00	0.006	0.013	0.024	X	X
06SL370G	3.7	9.0	6	50	1.2	18.5	5.00	0.005	0.013	0.020		

I_{hold} = Hold current: maximum current device will pass without tripping in 25°C still air.

I_{trip} = Trip current: minimum current at which the device will trip in 25°C still air.

V_{max} = Maximum voltage device can withstand without damage at rated current (I_{max})

I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max})

P_d = Power dissipated from device when in the tripped state at 25°C still air.

R_{min} = Minimum resistance of device in initial (un-soldered) state.

R_{max} = Maximum resistance of device in initial (un-soldered) state.


R_{1max} = Maximum resistance of device at 25°C measured one hour after tripping

Caution: Operation beyond the specified rating may result in damage and possible arcing and flame.


Temperature Derating

Part Number	Ambient Operation Temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
Part Number	Hold Current (A)								
	06SL190G	06SL370G	06SL190G	06SL370G	06SL190G	06SL370G	06SL190G	06SL370G	06SL190G
06SL190G	3.40	3.00	2.60	1.90	1.70	1.40	1.20	1.00	0.70
06SL370G	5.90	5.20	4.80	3.70	3.10	2.80	2.20	1.70	1.20

Average Time Current Curves

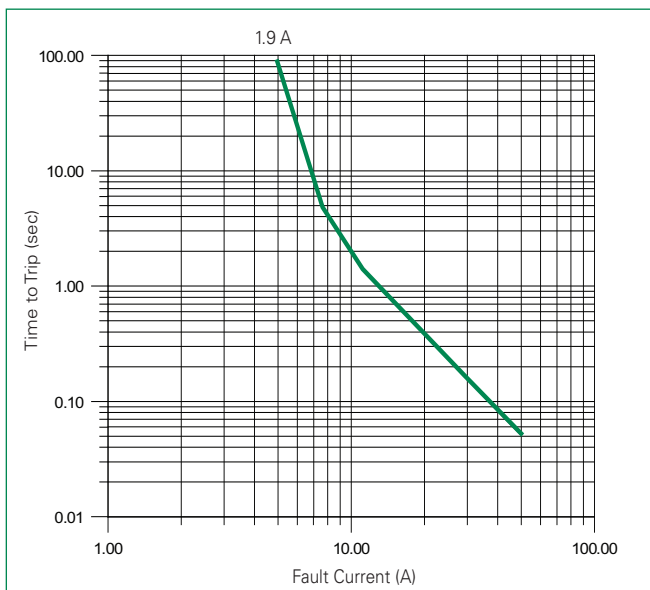

Temperature Derating Curve

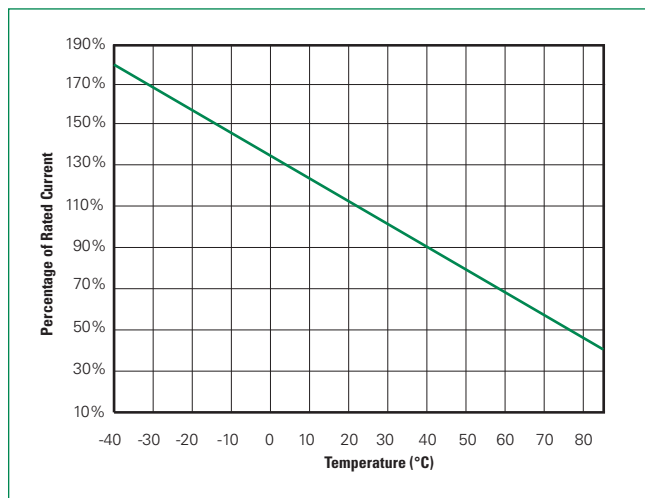


Order Numbering System

06 SL 190G M

- 06**: VOLTAGE RATING (VDC)
- SL**: SERIES
- 190**: HOLD CURRENT (VALUE DIVIDED BY 100 = HOLD CURRENT IN AMPS)
- G**: HOLD CURRENT (VALUE DIVIDED BY 100 = HOLD CURRENT IN AMPS)
- M**: QUANTITY CODE M: 1000

Dimensions (mm)

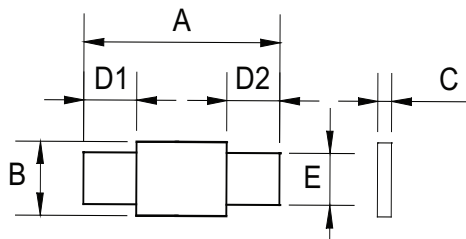

A				B				C				D1				D2				E			
Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
0.36	0.43	9.2	10.8	0.12	0.14	3.15	3.45	0.02	0.04	0.55	0.95	0.09	0.13	2.15	3.25	0.09	0.13	2.15	3.25	0.087	0.094	2.2	2.4

Packaging

Part Number	Ordering Number	I _{hold} (A)	I _{hold} Code	Packaging Option Bulk	Quantity	Quantity & Packaging Code
06SL190G	06SL190GM	1.9	190	Bulk	1000	M
06SL370G	06SL370GM	3.7	370	Bulk	1000	M



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331