Glenair®

# 380-018
# EMI/RFI Non-Environmental Backshell
## with Strain Relief
## Type E - Rotatable Coupling - Low Profile

## CONNECTOR DESIGNATORS
## A-F-H-L-S
## ROTATABLE COUPLING

## TYPE E INDIVIDUAL AND/OR OVERALL SHIELD TERMINATION

**380 F S 018 M 24 12 D A 6**

- 380 — Product Series
- F — Connector Designator
- S — Angle and Profile: A = 90°, B = 45°, S = Straight
- 018 — Basic Part No.
- M — Finish (Table II)
- 24 — Shell Size (Table I)
- 12 — Cable Entry (Table X, XI)
- D — Termination (Note 5): D = 2 Rings, T = 3 Rings
- A — Strain Relief Style (H, A, M, D)
- 6 — Length: S only (1/2 inch increments: e.g. 6 = 3 inches)

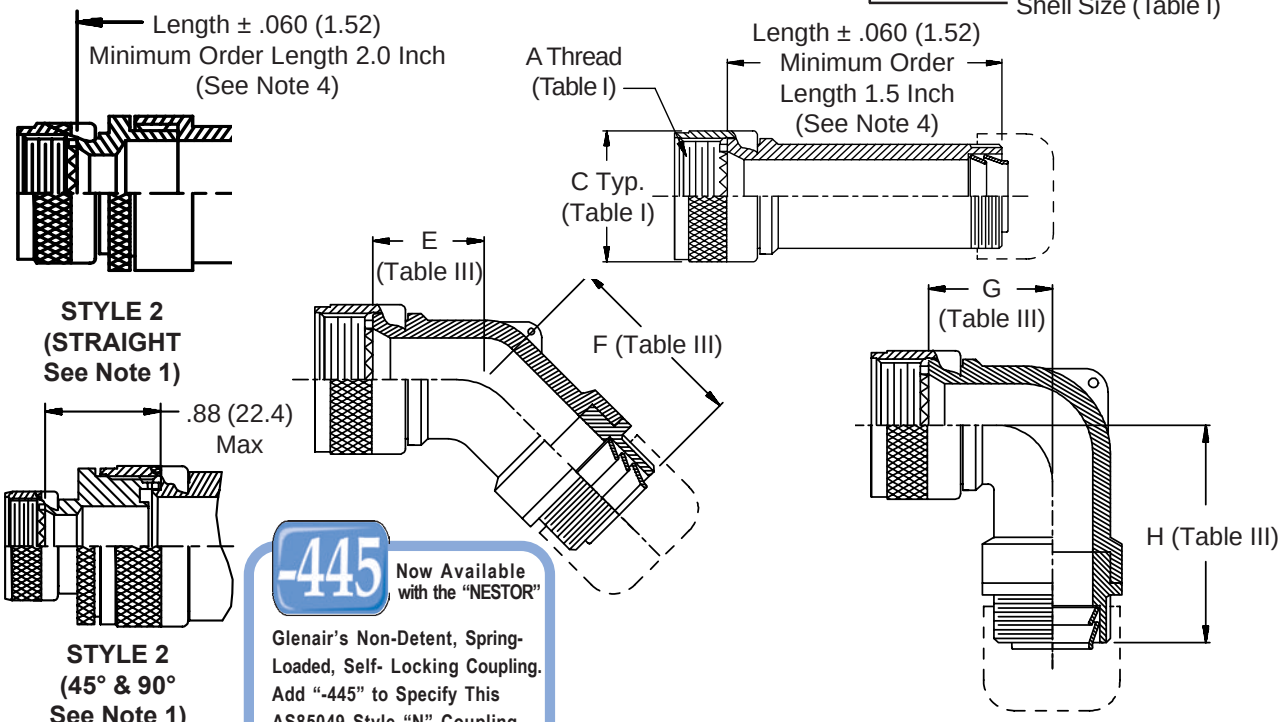


**-445** Now Available with the "NESTOR"

Glenair's Non-Detent, Spring-Loaded, Self- Locking Coupling. Add "-445" to Specify This AS85049 Style "N" Coupling Interface.

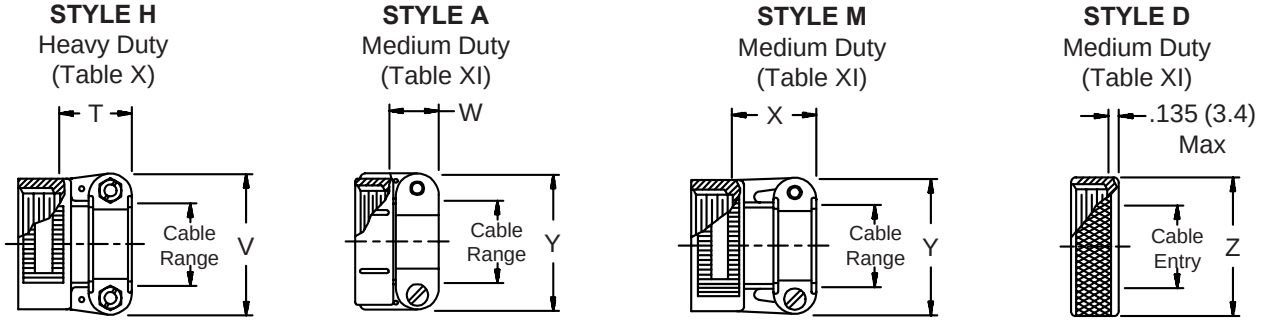


© 2005 Glenair, Inc.

# 380-018
# EMI/RFI Non-Environmental Backshell
## with Strain Relief
## Type E - Rotatable Coupling - Low Profile

See inside back cover fold-out or pages 13 and 14 for unabridged Tables I and II.

**TABLE III: ELBOW DIMENSIONS**

| Shell Size Conn. Desig. A-F-L-S | H | E Max | F Max | G Max | H Max |
|---|---|---|---|---|---|
| 08 | 09 | .520 (13.2) | 1.680 (47.2) | .477 (12.7) | 1.730 (43.9) |
| 10 | 11 | .615 (15.6) | 1.800 (45.7) | .540 (13.7) | 1.730 (43.9) |
| 12 | 13 | .630 (16.0) | 1.820 (46.2) | .602 (15.3) | 1.790 (45.5) |
| 14 | 15 | .720 (18.3) | 1.890 (48.0) | .665 (19.6) | 1.880 (47.8) |
| 16 | 17 | .905 (23.0) | 1.980 (50.3) | .758 (19.2) | 1.990 (50.5) |
| 18 | 19 | .995 (25.3) | 2.150 (54.6) | .946 (24.0) | 2.180 (55.4) |
| 20 | 21 | .995 (25.3) | 2.150 (54.6) | .946 (24.0) | 2.180 (55.4) |
| 22 | 23 | 1.145 (29.1) | 2.260 (57.4) | 1.040 (26.4) | 2.330 (59.2) |
| 24 | 25 | 1.145 (29.1) | 2.260 (57.4) | 1.040 (26.4) | 2.330 (59.2) |

**TABLE II: STANDARD FINISHES**

| GLENAIR SYMBOL | FINISH |
|---|---|
| B | Cadmium Plate, Olive Drab |
| M | Electroless Nickel |
| NF | Cadmium Plate, Olive Drab Over Electroless Nickel |

See Inside Back Cover for Additional Finish Options

**TABLE X: CABLE ENTRY**

| Dash No. | T Max | V Max | Cable Range Min | Cable Range Max |
|---|---|---|---|---|
| 04 | .780 (19.8) | .957 (24.3) | .125 (3.2) | .312 (7.9) |
| 06 | .780 (19.8) | 1.145 (29.1) | .250 (6.4) | .437 (11.1) |
| 08 | .780 (19.8) | 1.332 (33.8) | .312 (7.9) | .562 (14.3) |
| 10 | .780 (19.8) | 1.332 (33.8) | .350 (8.9) | .625 (15.9) |
| 12 | .811 (20.6) | 1.551 (39.4) | .500 (12.7) | .750 (19.1) |
| 16 | .905 (23.0) | 1.770 (45.0) | .625 (15.9) | .937 (23.8) |
| 20 | 1.092 (27.7) | 2.113 (53.7) | .875 (22.2) | 1.250 (31.8) |
| 24 | 1.124 (28.5) | 2.363 (60.0) | 1.000 (25.4) | 1.375 (34.9) |
| 28 | 1.399 (35.5) | 2.770 (70.4) | 1.250 (31.8) | 1.625 (41.3) |
| 32 | 1.399 (35.5) | 3.020 (76.7) | 1.437 (36.5) | 1.875 (47.6) |

1. When maximum cable entry (page 21) is exceeded, Style 2 will be supplied. Dimensions E, F, G and H will not apply. Please consult factory.
2. Metric dimensions (mm) are indicated in parentheses.
3. Cable range is defined as the accommodations range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
4. Consult factory for shorter lengths on straight backshells.
5. Designate Symbol T for 3 ring termination of individual and overall braid. Designate D for standard 2 ring termination of individual or overall braid.

**TABLE XI: CABLE ENTRY**

| Dash No. | W Max | X Max | Y Max | Z Max | Cable Range Min ** | Cable Range Max |
|---|---|---|---|---|---|---|
| 03* | .437 (11.1) | .760 (19.3) | .843 (21.4) | .630 (16.0) | .156 (4.0) | .250 (6.4) |
| 04* | .437 (11.1) | .760 (19.3) | .906 (23.0) | .755 (19.2) | .188 (4.8) | .312 (7.9) |
| 06* | .500 (12.7) | .760 (19.3) | 1.093 (27.8) | .942 (23.9) | .281 (7.1) | .438 (11.1) |
| 08 | .563 (14.3) | .760 (19.3) | 1.187 (30.1) | 1.067 (27.1) | .344 (8.7) | .562 (14.3) |
| 10 | .563 (14.3) | .760 (19.3) | 1.281 (32.5) | 1.192 (30.3) | .375 (9.5) | .625 (15.9) |
| 12 | .563 (14.3) | .760 (19.3) | 1.500 (38.1) | 1.380 (35.1) | .438 (11.1) | .750 (19.1) |
| 16 | .656 (16.7) | 1.073 (27.3) | 1.719 (43.7) | 1.535 (39.0) | .562 (14.3) | .938 (23.8) |
| 20 | .656 (16.7) | 1.323 (33.6) | 2.062 (52.4) | 1.848 (46.9) | .750 (19.1) | 1.250 (31.8) |
| 24 | .656 (16.7) | 1.323 (33.6) | 2.312 (58.7) | 2.255 (57.3) | .781 (19.8) | 1.375 (34.9) |
| 28 | 1.188 (30.2) | 1.572 (39.9) | 2.719 (69.1) | 2.505 (63.6) | .969 (24.6) | 1.625 (41.3) |
| 32* | 1.187 (30.1) | 1.572 (39.9) | 2.969 (75.4) | 2.755 (70.0) | 1.125 (28.6) | 1.875 (47.6) |
| 40* | 1.125 (28.6) | 1.572 (39.9) | 3.531 (89.7) | 3.255 (82.7) | 1.469 (37.3) | 2.375 (60.3) |

* Not available in Style M clamp.

** Not Applicable Style D

© 2005 Glenair, Inc.

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** sales@st-electron.ru

**Адрес:** 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331