



### Main

|                               |                                             |
|-------------------------------|---------------------------------------------|
| Range of product              | Harmony XB6                                 |
| Product or component type     | Complete body for pilot lights              |
| Device short name             | ZB6                                         |
| Sale per indivisible quantity | 5                                           |
| Connections - terminals       | Pins for printed circuit board (1 x 0.5 mm) |
| Light source                  | LED                                         |
| Bulb base                     | Integral LED                                |
| Light block supply            | Direct                                      |
| Light source colour           | Yellow                                      |
| [Us] rated supply voltage     | 12...24 V AC/DC                             |

### Complementary

|                                        |                                                                                             |
|----------------------------------------|---------------------------------------------------------------------------------------------|
| CAD overall height                     | 0.63 in (16 mm)                                                                             |
| CAD overall depth                      | 2.28 in (58 mm)                                                                             |
| Terminals description ISO n°1          | (X1-X2)PL                                                                                   |
| Product weight                         | 0.01 lb(US) (0.003 kg)                                                                      |
| Operating position                     | Any position                                                                                |
| [Ui] rated insulation voltage          | 250 V (degree of pollution: 3) conforming to EN/IEC 60947-1                                 |
| [Uimp] rated impulse withstand voltage | 4 kV conforming to EN 60947-1                                                               |
| Signalling type                        | Steady                                                                                      |
| Supply voltage limits                  | 6...30 V AC/DC                                                                              |
| Current consumption                    | 15 mA                                                                                       |
| Surge withstand                        | 1 kV in contact conforming to IEC 61000-4-5<br>2 kV in free air conforming to IEC 61000-4-5 |


### Environment

|                                       |                                                                                                                                                                        |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| protective treatment                  | TC                                                                                                                                                                     |
| ambient air temperature for storage   | -40...158 °F (-40...70 °C)                                                                                                                                             |
| ambient air temperature for operation | -13...158 °F (-25...70 °C)                                                                                                                                             |
| electrical shock protection class     | Class II conforming to IEC 61140                                                                                                                                       |
| standards                             | EN/IEC 60947-1<br>EN/IEC 60947-5-1<br>EN/IEC 60947-5-5<br>JIS C 4520<br>JIS C 852<br>UL 508<br>CSA C22.2 No 14                                                         |
| product certifications                | CCC<br>CSA<br>GOST<br>UL                                                                                                                                               |
| vibration resistance                  | +/- 3 mm (f = 2...500 Hz) conforming to IEC 60068-2-6<br>5 gn (f = 2...500 Hz) conforming to IEC 60068-2-6                                                             |
| shock resistance                      | 30 gn (duration = 18 ms) half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) half sine wave acceleration conforming to IEC 60068-2-27 |
| resistance to fast transients         | 2 kV conforming to IEC 61000-4-4                                                                                                                                       |
| resistance to electromagnetic fields  | 9.14 V/yd (10 V/m) conforming to IEC 61000-4-3                                                                                                                         |
| resistance to electrostatic discharge | 6 kV on contact (on metal parts) conforming to IEC 61000-2-6<br>8 kV in free air (in insulating parts) conforming to IEC 61000-2-6                                     |
| electromagnetic emission              | Class B conforming to IEC 55011                                                                                                                                        |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the Schneider Electric group. It is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Body for Pilot Light


### Dimensions




b 15.5 mm/0.61 in.

## Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

### Front Panel Cut-out (Viewed from Installer's Side)

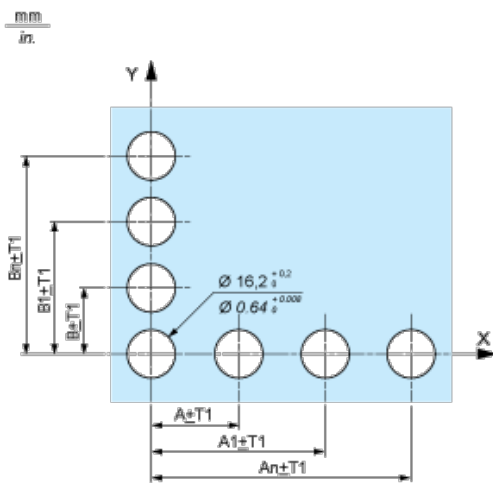

### Printed Circuit Board Drillings (Viewed from Electrical Block Side)

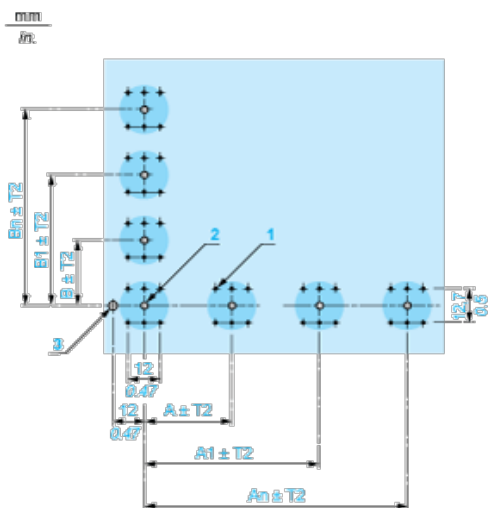

A 24 mm/0.94 in. minimum for rectangular heads, 18 mm/0.71 in. minimum for square or circular heads

B 18 mm/0.71 in. minimum

(1) 6 x Ø 1.1 mm / 6 x Ø 0.04 in. holes.

(2) 1 x Ø 2.6<sup>0</sup><sub>-0.2</sub> mm / 1 x Ø 0.10<sup>0</sup><sub>-0.008</sub> in. hole for locating pin, only when using socket adaptor ZB6Y010.

(3) 1 x Ø 3.2<sup>0</sup><sub>-0.2</sub> mm / 1 x Ø 0.13<sup>0</sup><sub>-0.008</sub> in. hole for fixing of printed circuit board onto the front panel using body bracket ZB6Y011. This hole must be drilled on the left-hand side, when heads are positioned at the normal angle. Fit a body bracket ZB6Y011 every 72 mm/2.83 in. maximum for cut-outs on 24 mm/0.94 in. centres (rectangular heads) and 54 mm/2.13 in. maximum for cut-outs on 18 mm/0.71 in. centres (square or circular heads).


General tolerances of the panel and printed circuit board: T1, T2: T1 + T2 = 0.3 mm/0.01 in. maximum.

Installation precautions:

Thickness of printed circuit board: 1.6 mm/0.06 in. minimum.


### Mounting with Body Bracket

With socket adaptor ZB6Y010

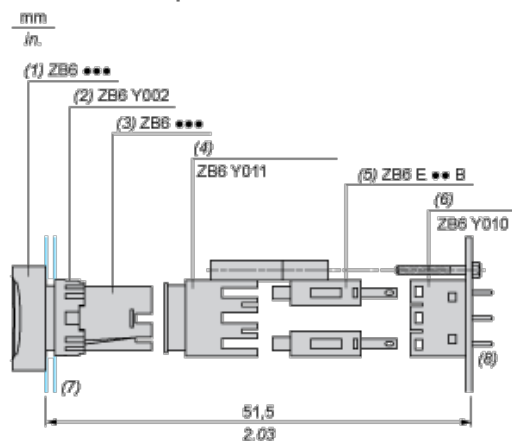

- (1) Head
- (2) Nut
- (3) Body
- (4) Body bracket
- (5) Contact block
- (6) Socket adaptor
- (7) Panel
- (8) Printed circuit

Direct mounting without socket adaptor ZB6Y010

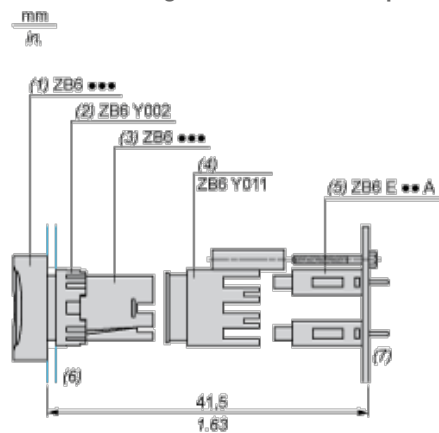

- (1) Head
- (2) Nut
- (3) Body
- (4) Body bracket
- (5) Contact block
- (6) Panel
- (7) Printed circuit



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331