


Description: High Efficiency Ultra Wideband
Dipole Antenna 698-6000MHz

PART NUMBER: W3554XXXXX

Features:

- 698-6000MHz
- Size W x L x H (30mm x 120mm x 0.2mm)
- Low Weight (1.5g)
- RoHS Compliant
- Coaxial Cable feed
- Connector options:
 - U-FL
 - SMA
 - MMCX
 - Per request

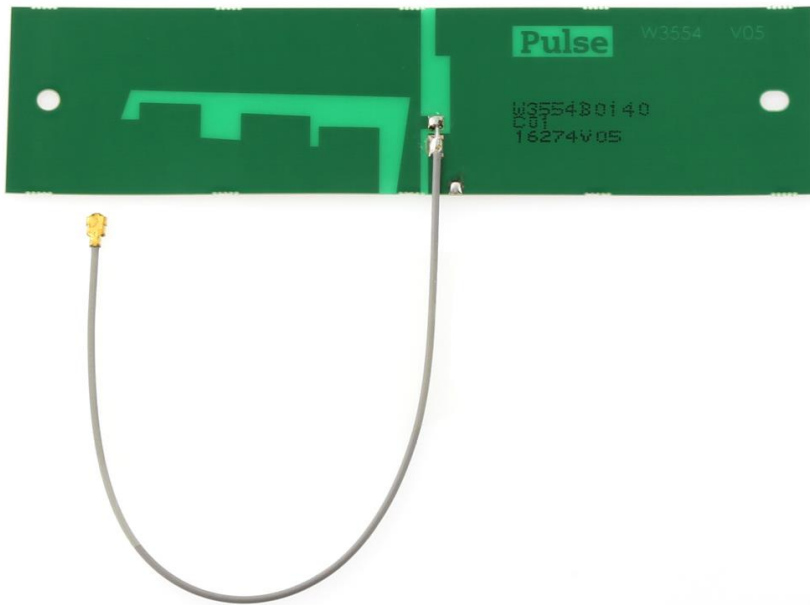

Applications:

- 2G/3G/4G/5G
- GNSS
- WiFi
- Bluetooth, BLE, Zigbee
- ISM 868, 915, 2400, 5000MHz

Issue: 1835

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel: 1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Co, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg, 4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998



Series: Internal PCB Antenna
Description: High Efficiency Ultra Wideband
Dipole Antenna 698-6000MHz

PART NUMBER: W3554XXXXX
This document covers all product variants of the following product family:

W3554B0140	143mm 1.13mm OD cable	U.FL compatible connector
W3554B0140T	143mm 1.13mm OD cable	U.FL compatible connector with ADH
W3554B0170	170mm 1.13mm OD cable	U.FL compatible connector
W3554B0293	293mm 1.13mm OD cable	U.FL compatible connector
W3554E0193	193mm 1.13mm OD cable	Right angle MMCX male connector
W3554G0100	100mm 1.13mm OD cable	SMA male connector
W3554G0254	254mm 1.13mm OD cable	SMA male connector
W3554G0384	384mm 1.37mm OD cable	SMA male connector
W3554G0457	457mm 1.13mm OD cable	SMA male connector
W3554K0153	153mm 1.37mm OD cable	Right angle SMA male connector

Issue: 1835

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel:1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Do, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg,4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998


ELECTRICAL SPECIFICATIONS

Frequency	698-960MHz, 1400-1600MHz, 1710-2690MHz, 3300-3800MHz, 4900-6000MHz
Nominal Impedance	50 Ω
Return Loss(698-960MHz)	-4dB
Return Loss(1400-1600MHz)	-3dB
Return Loss(1710-2690MHz)	-6dB
Return Loss(3300-3800MHz)	-5dB
Return Loss(4900-6000MHz)	-4dB
Radiation Pattern	Omni
Peak Gain(698-960MHz)	1.9dBi
Peak Gain(1400-1600MHz)	2.5dBi
Peak Gain(1710-2690MHz)	3.2dBi
Peak Gain(3300-3800MHz)	3.3dBi
Peak Gain(4900-6000MHz)	3.5dBi
Average Efficiency(698-960MHz)	45%
Average Efficiency(1400-1600MHz)	53%
Average Efficiency(1710-2690MHz)	66%
Average Efficiency(3300-3800MHz)	57%
Average Efficiency(4900-6000MHz)	37%
Polarization	Vertical
Power Withstanding	5W

Description: High Efficiency Ultra Wideband
Dipole Antenna 698-6000MHz

PART NUMBER: W3554XXXXX


MECHANICAL SPECIFICATIONS

PCB size W x L x H	30 x 120 x 0.2	mm
Weight	1.5	g
Connector type	Optional	
Cable type	Optional	
Cable length	Optional	

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-40/+85	° C
Storage Temperature	-40/+85	° C
RoHS Compliant	Yes	

MECHANICAL DRAWING

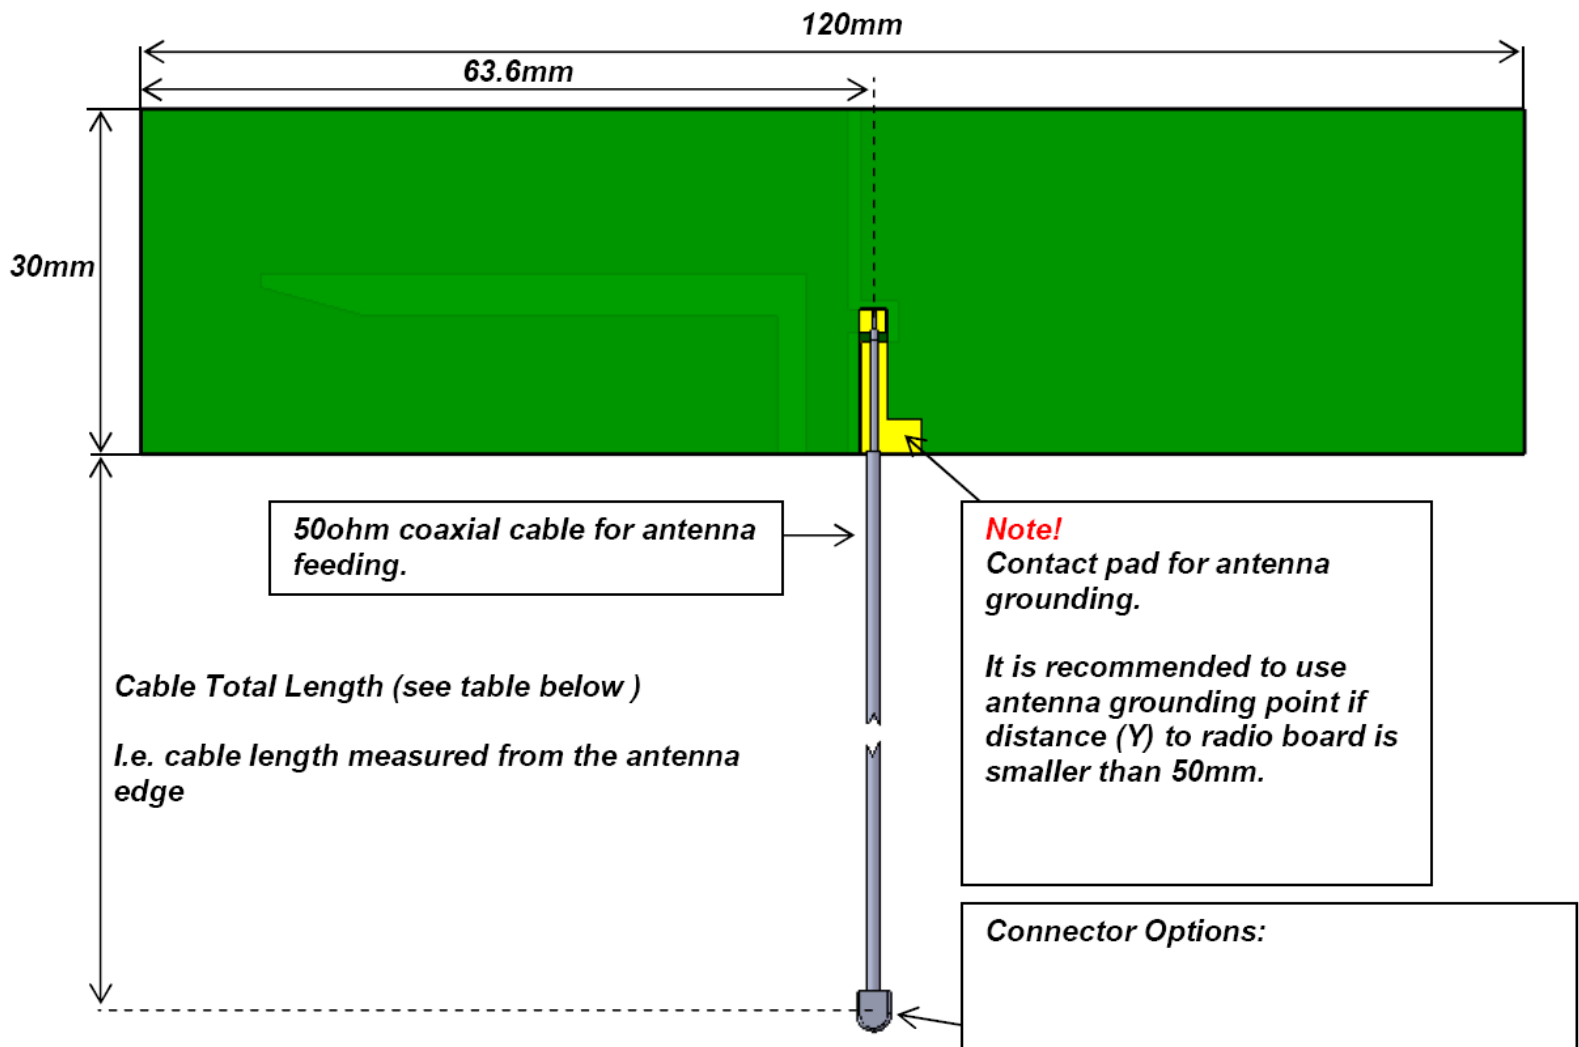


Description: High Efficiency Ultra Wideband
Dipole Antenna 698-6000MHz

PART NUMBER: W3554XXXXX

TEST SETUP

Antenna was measured in Free Space Environment (FS) without test board presence.

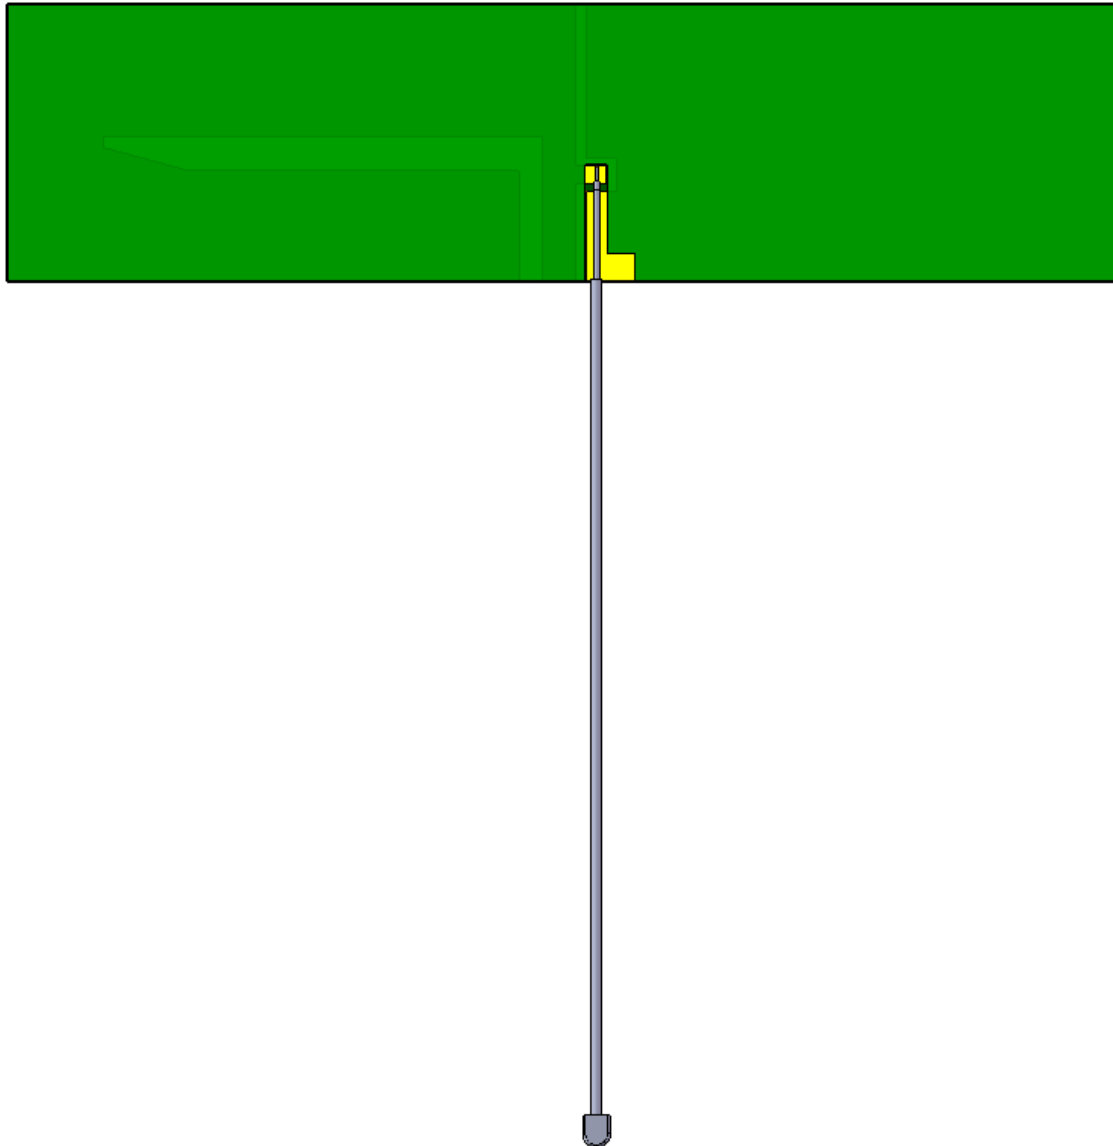


CHARTS

Return Loss




CHARTS

Efficiency

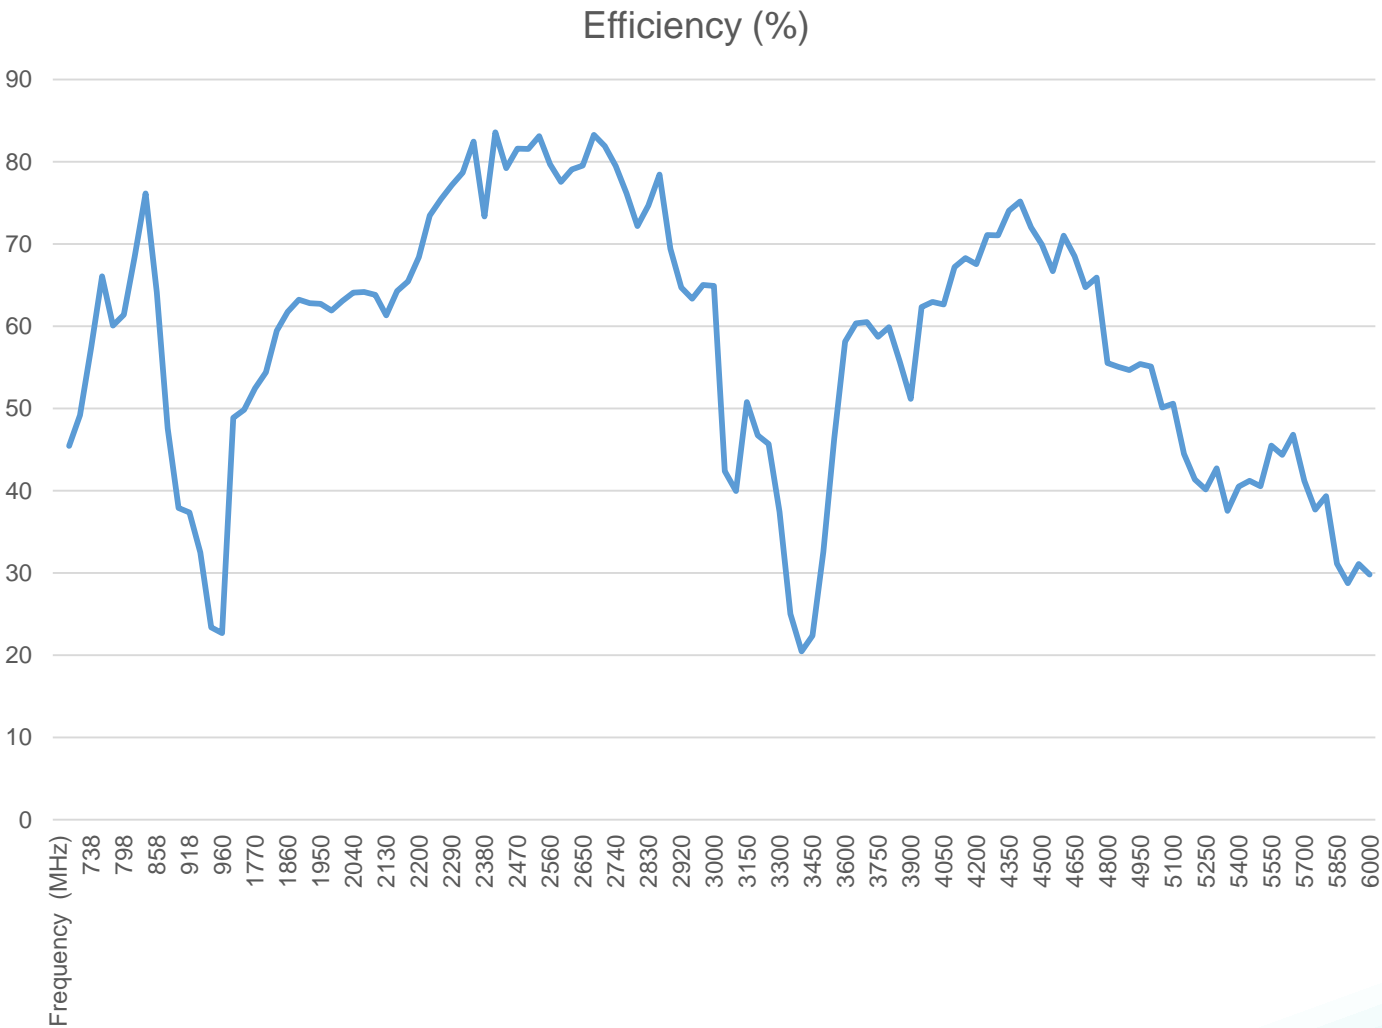

CHARTS


Peak Gain

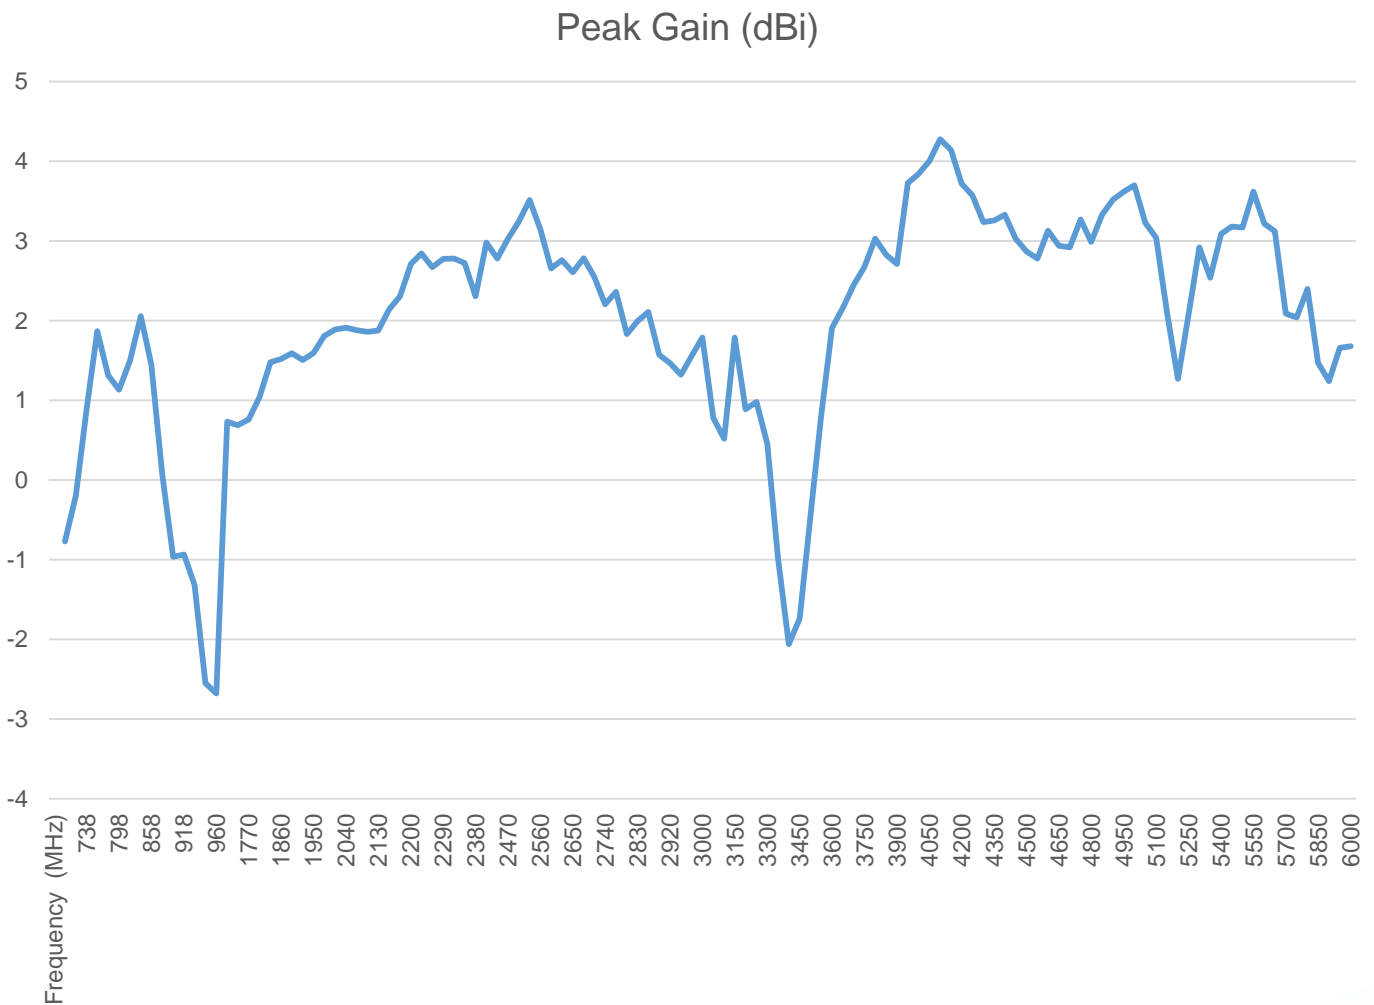

CHARTS

Free Space Radiation Pattern


Horizontal Plane

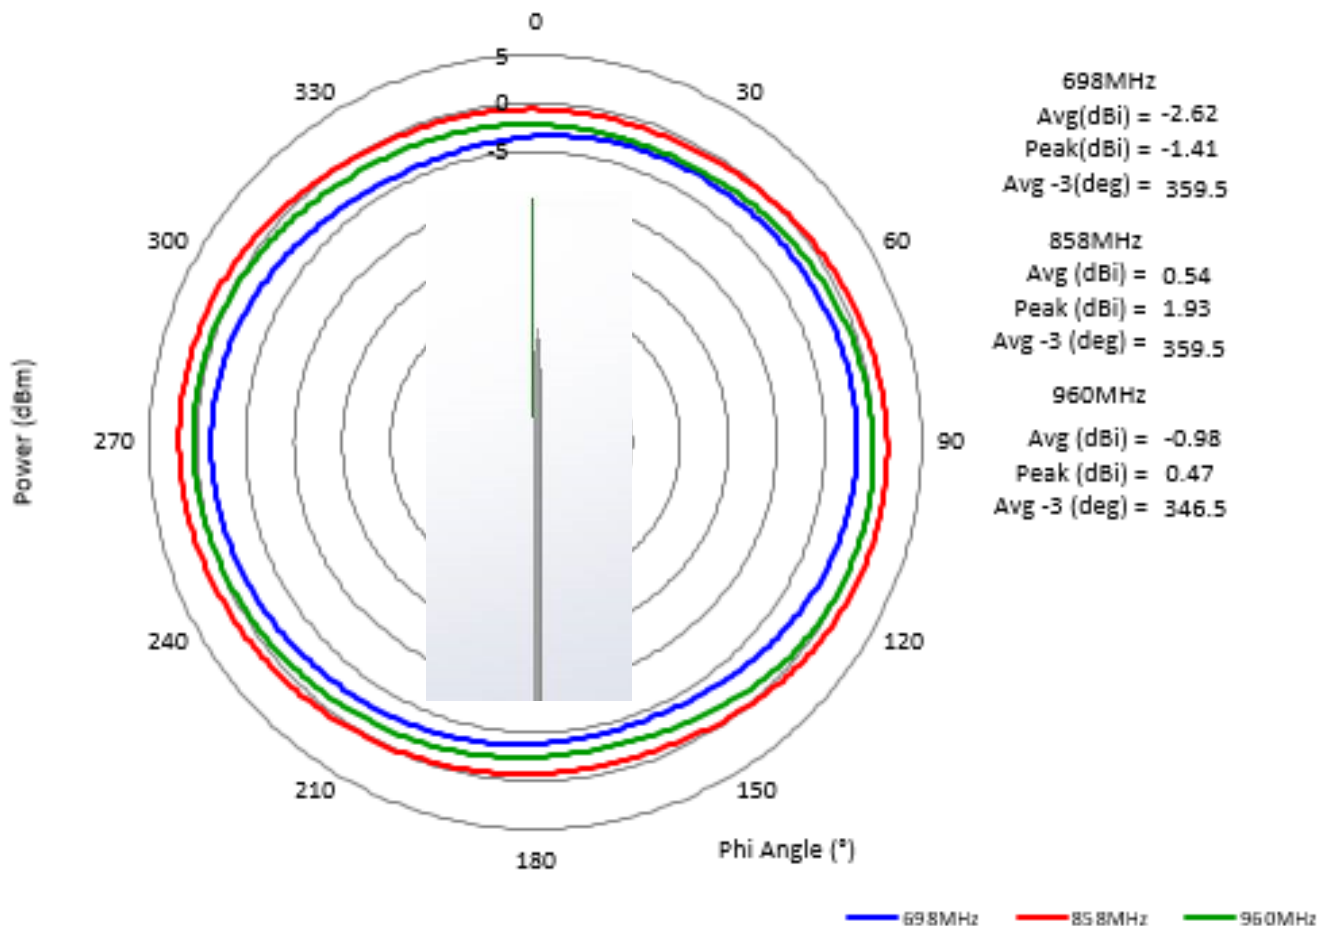

CHARTS

Free Space Radiation Pattern

Elevation Plane

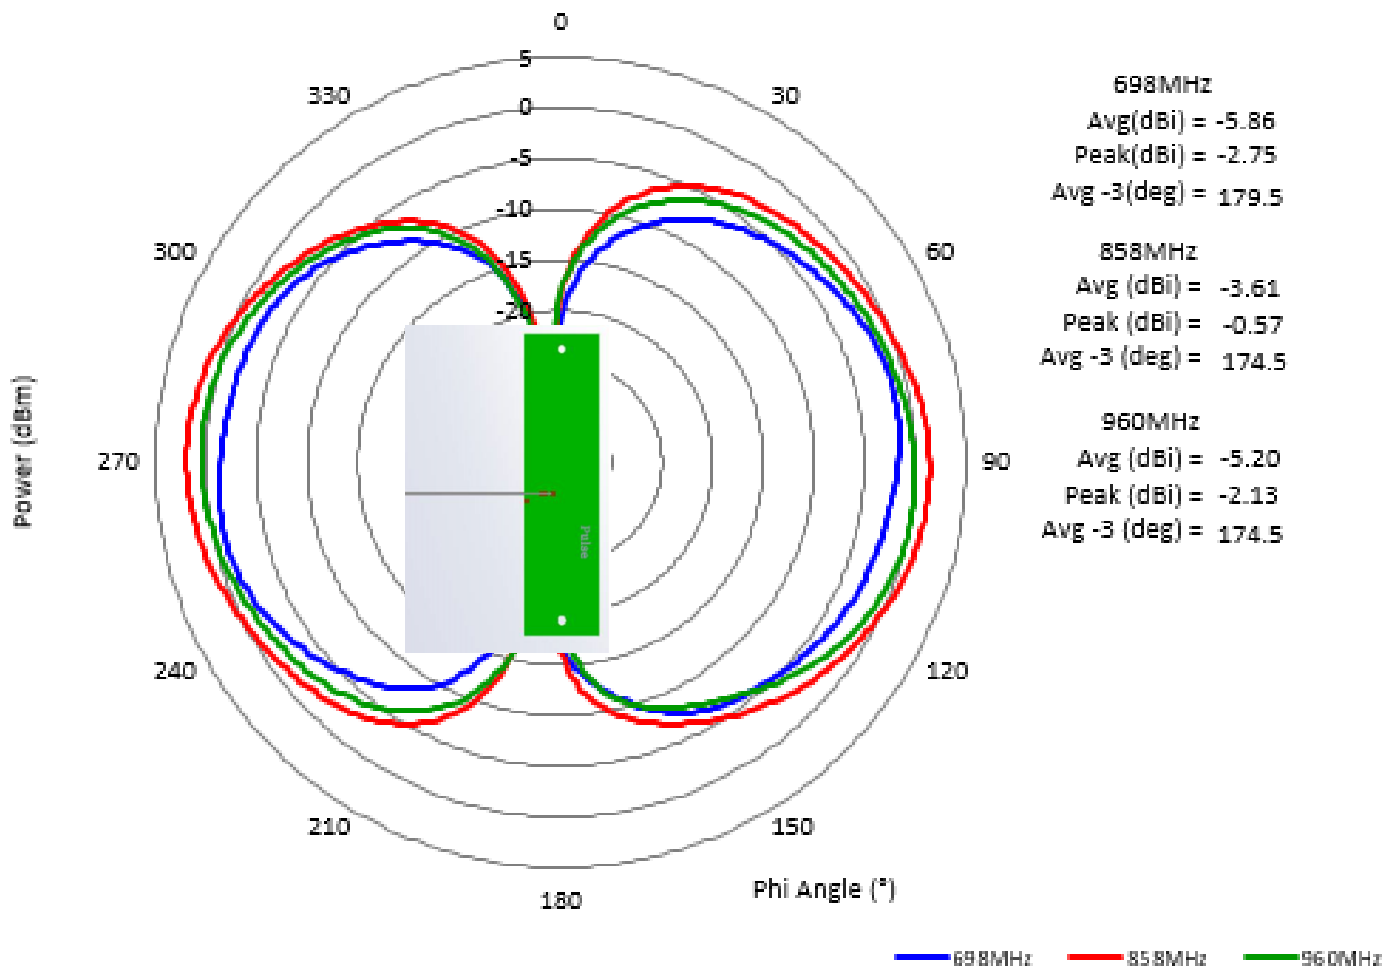

Issue: 1835

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

CHARTS

Free Space Radiation Pattern


Horizontal Plane

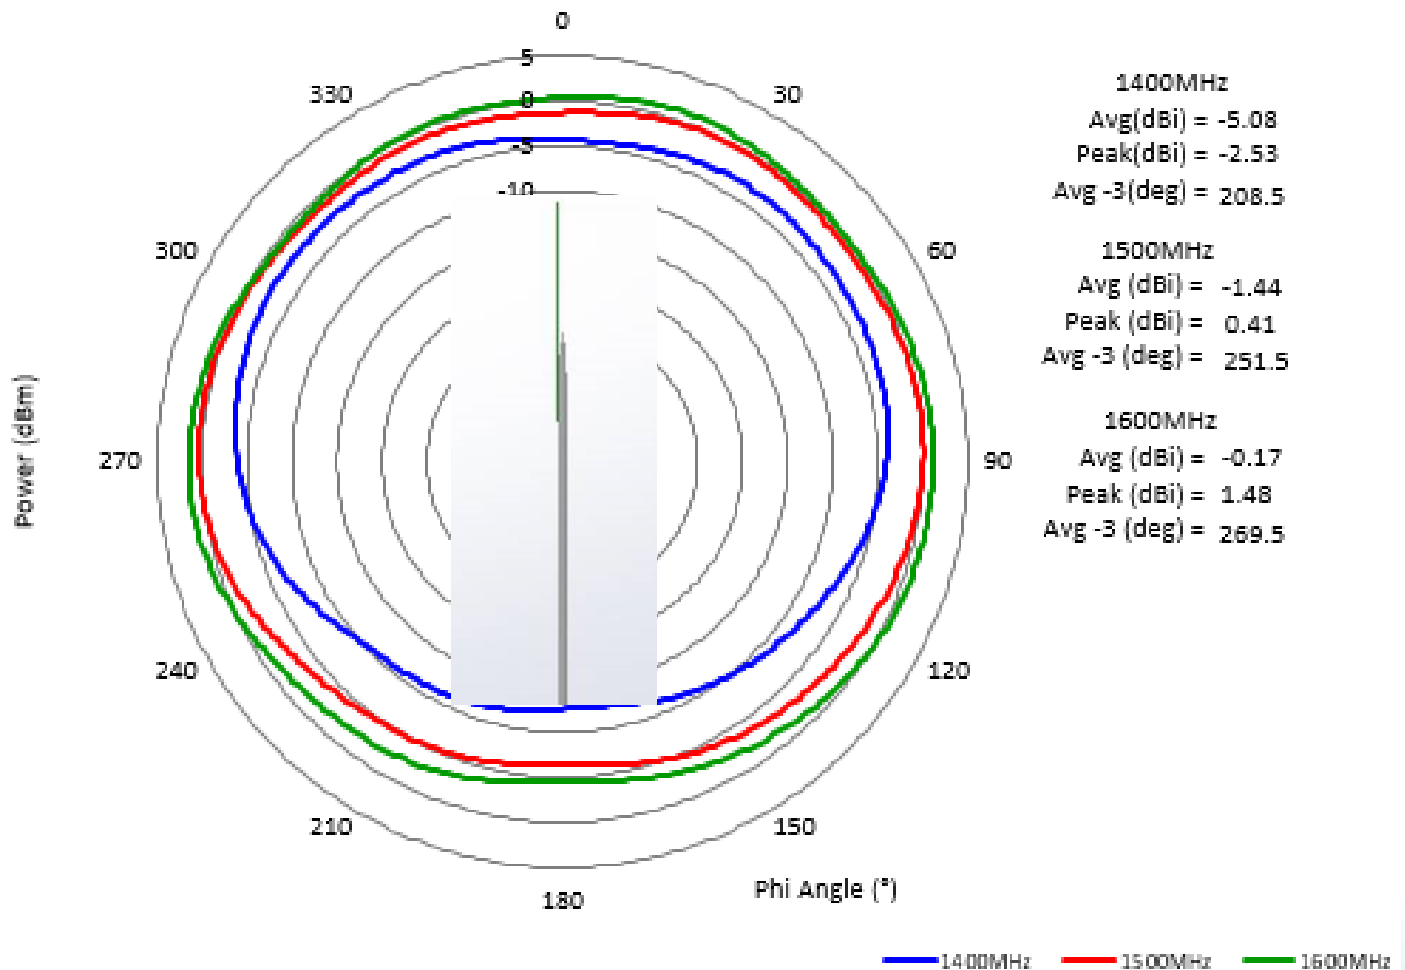

CHARTS

Free Space Radiation Pattern


Elevation Plane

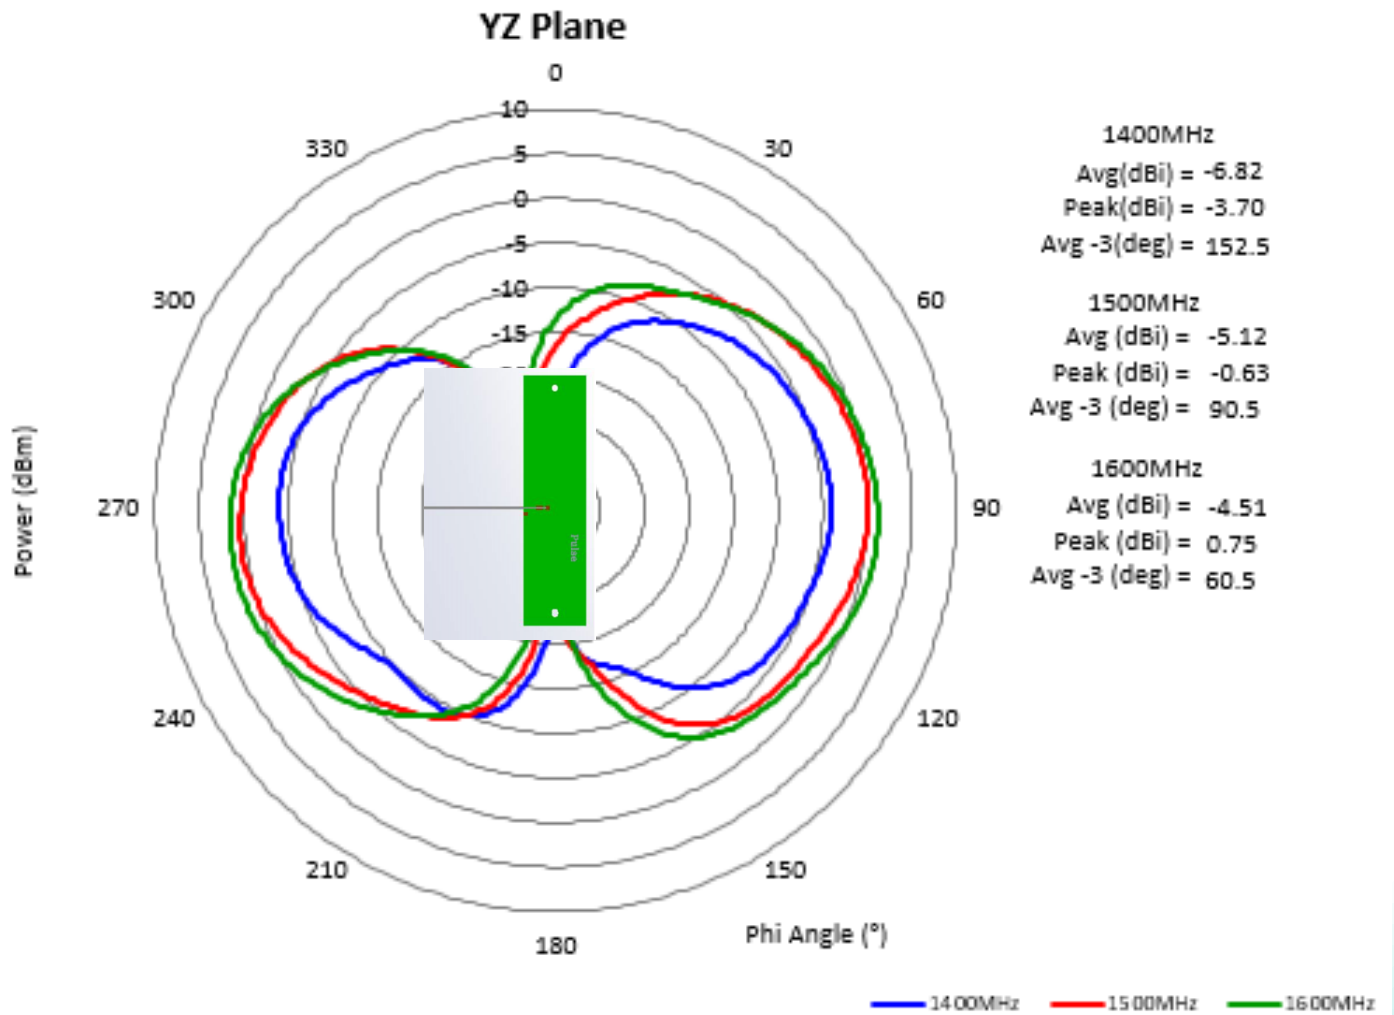

CHARTS

Free Space Radiation Pattern


Horizontal Plane

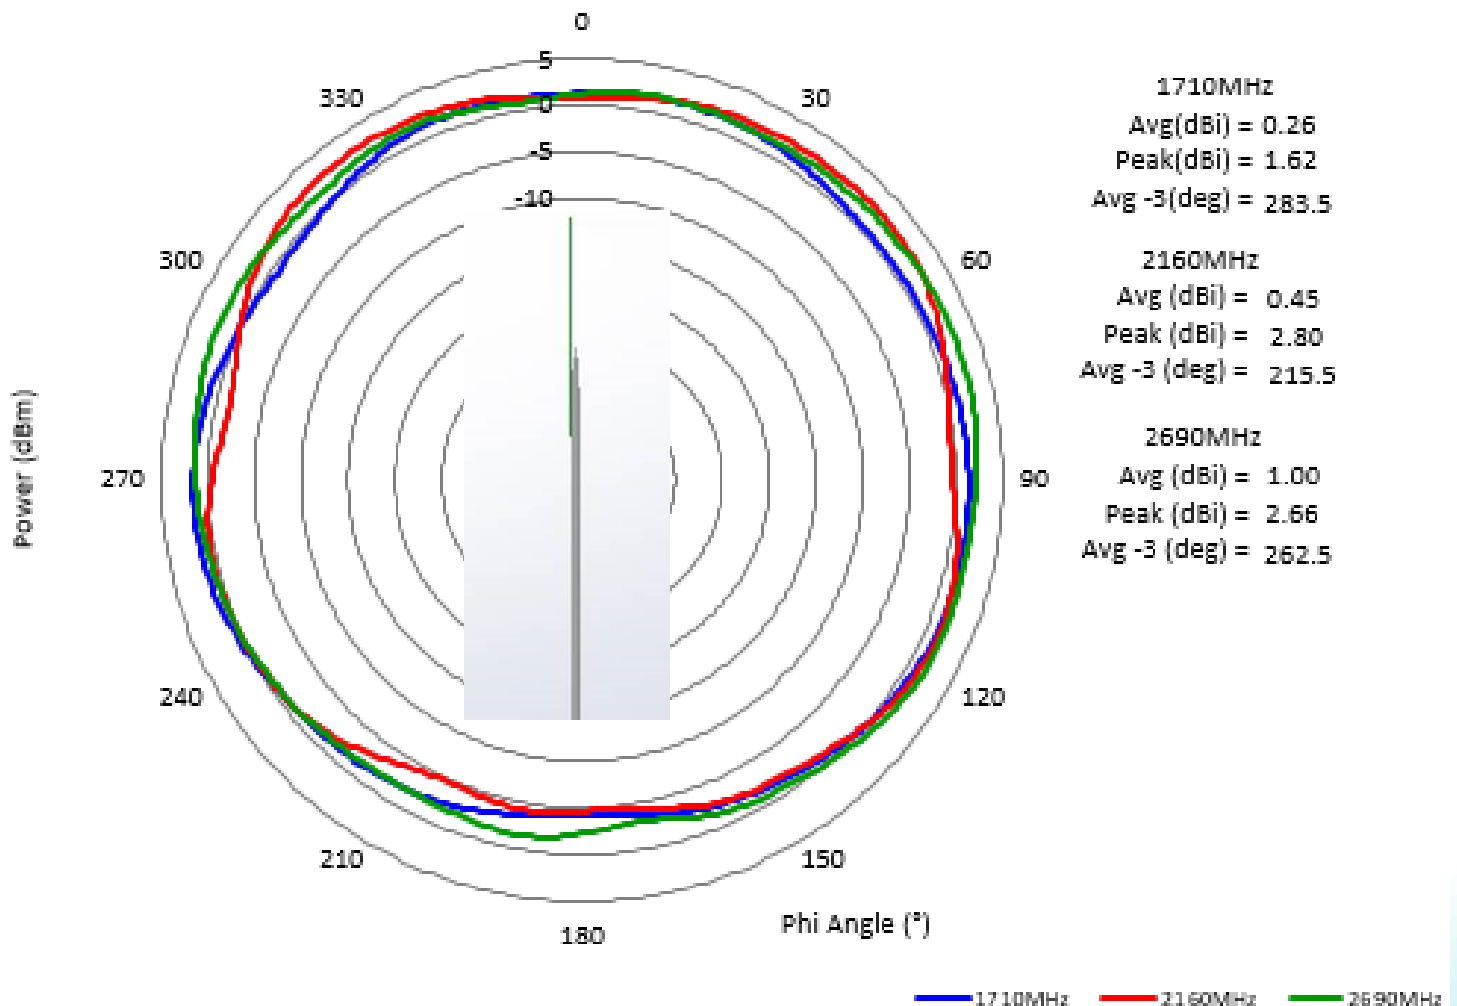

CHARTS

Free Space Radiation Pattern


Elevation Plane

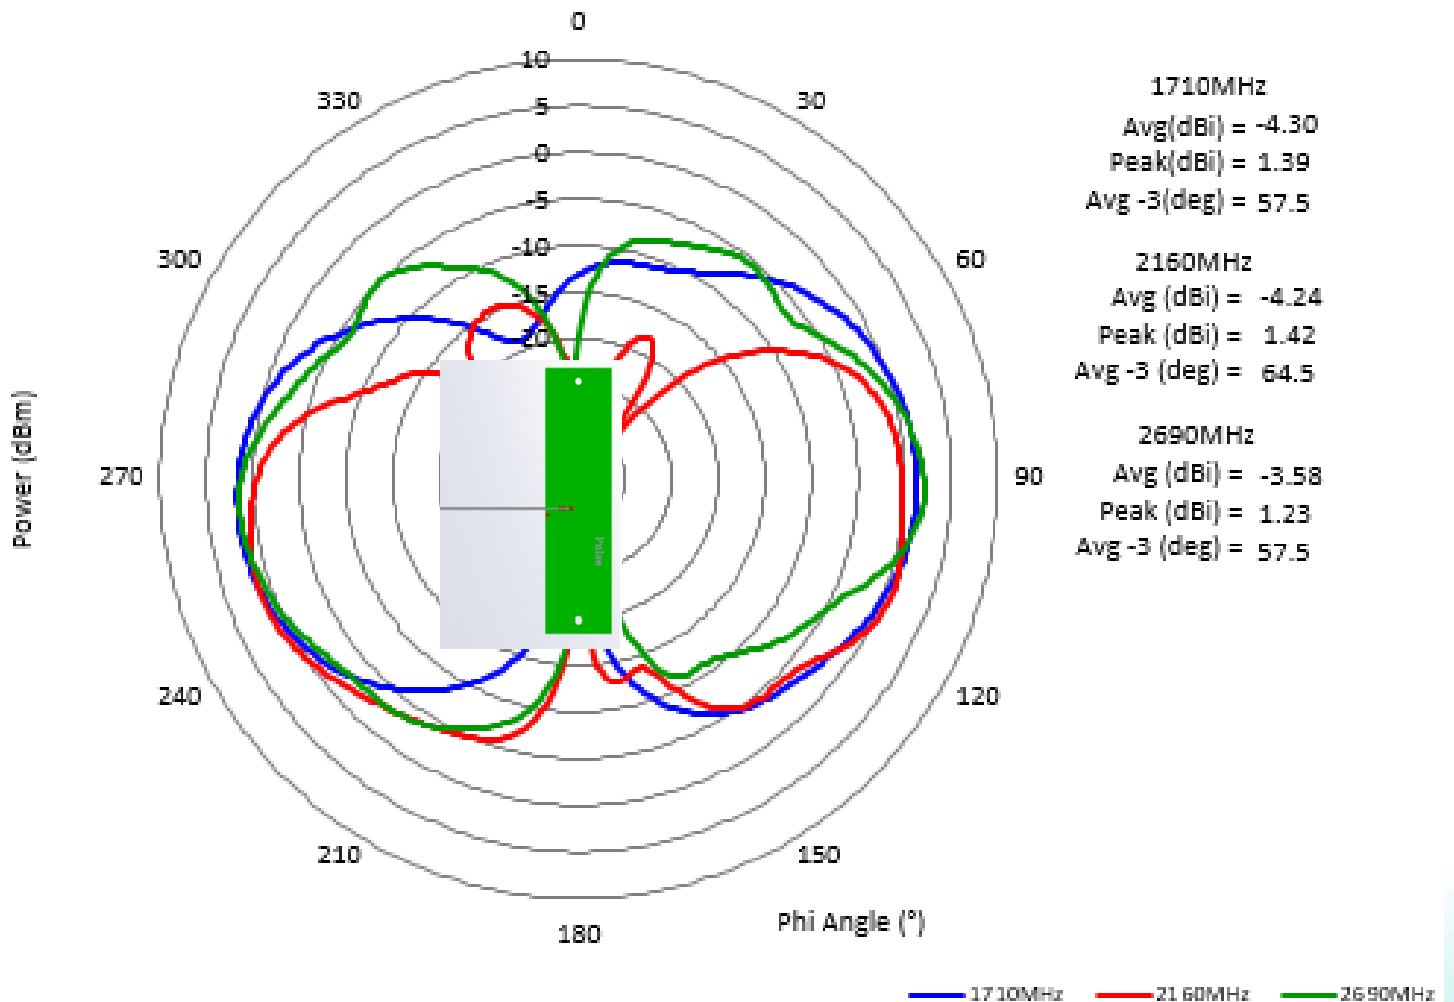

CHARTS

Free Space Radiation Pattern


Horizontal Plane

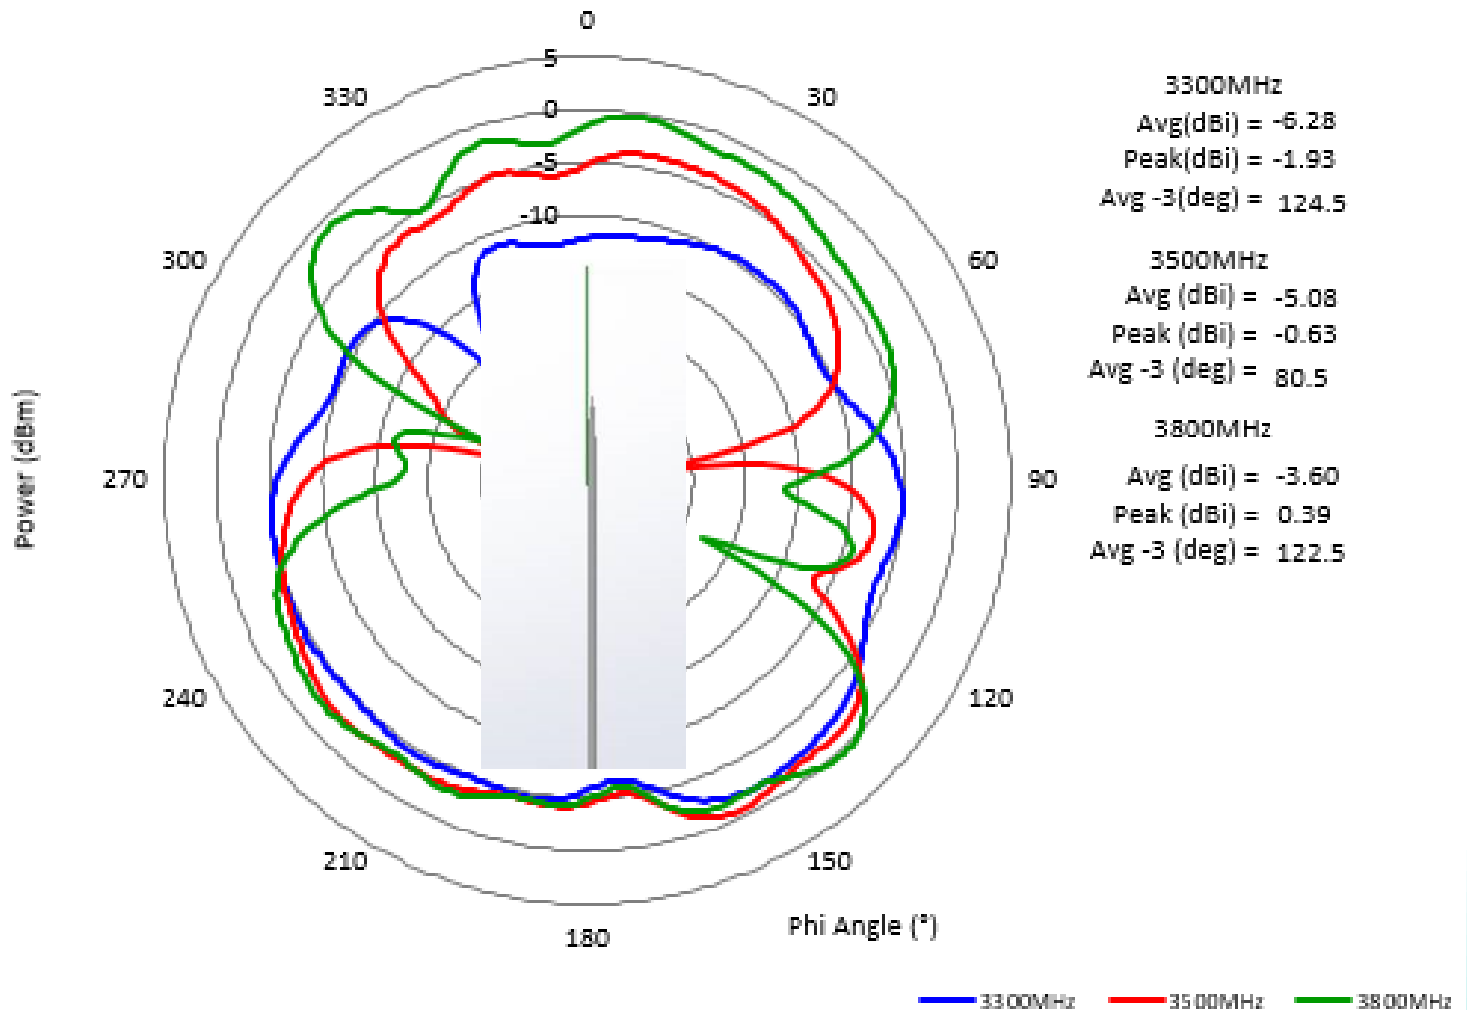

CHARTS

Free Space Radiation Pattern


Elevation Plane

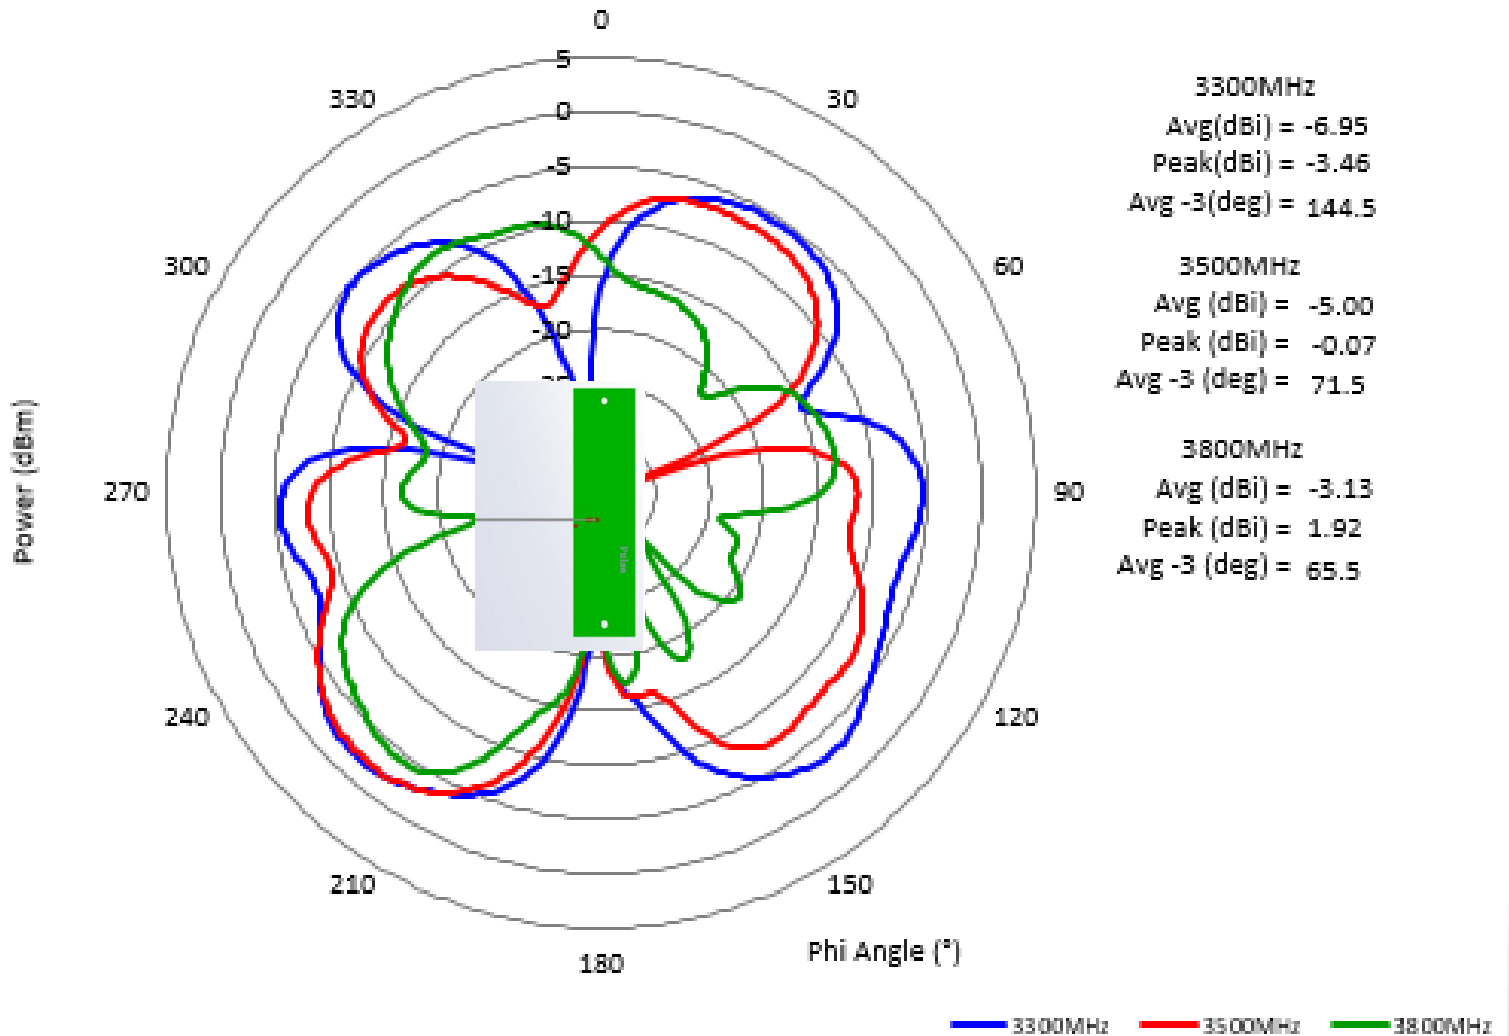

CHARTS

Free Space Radiation Pattern


Horizontal Plane

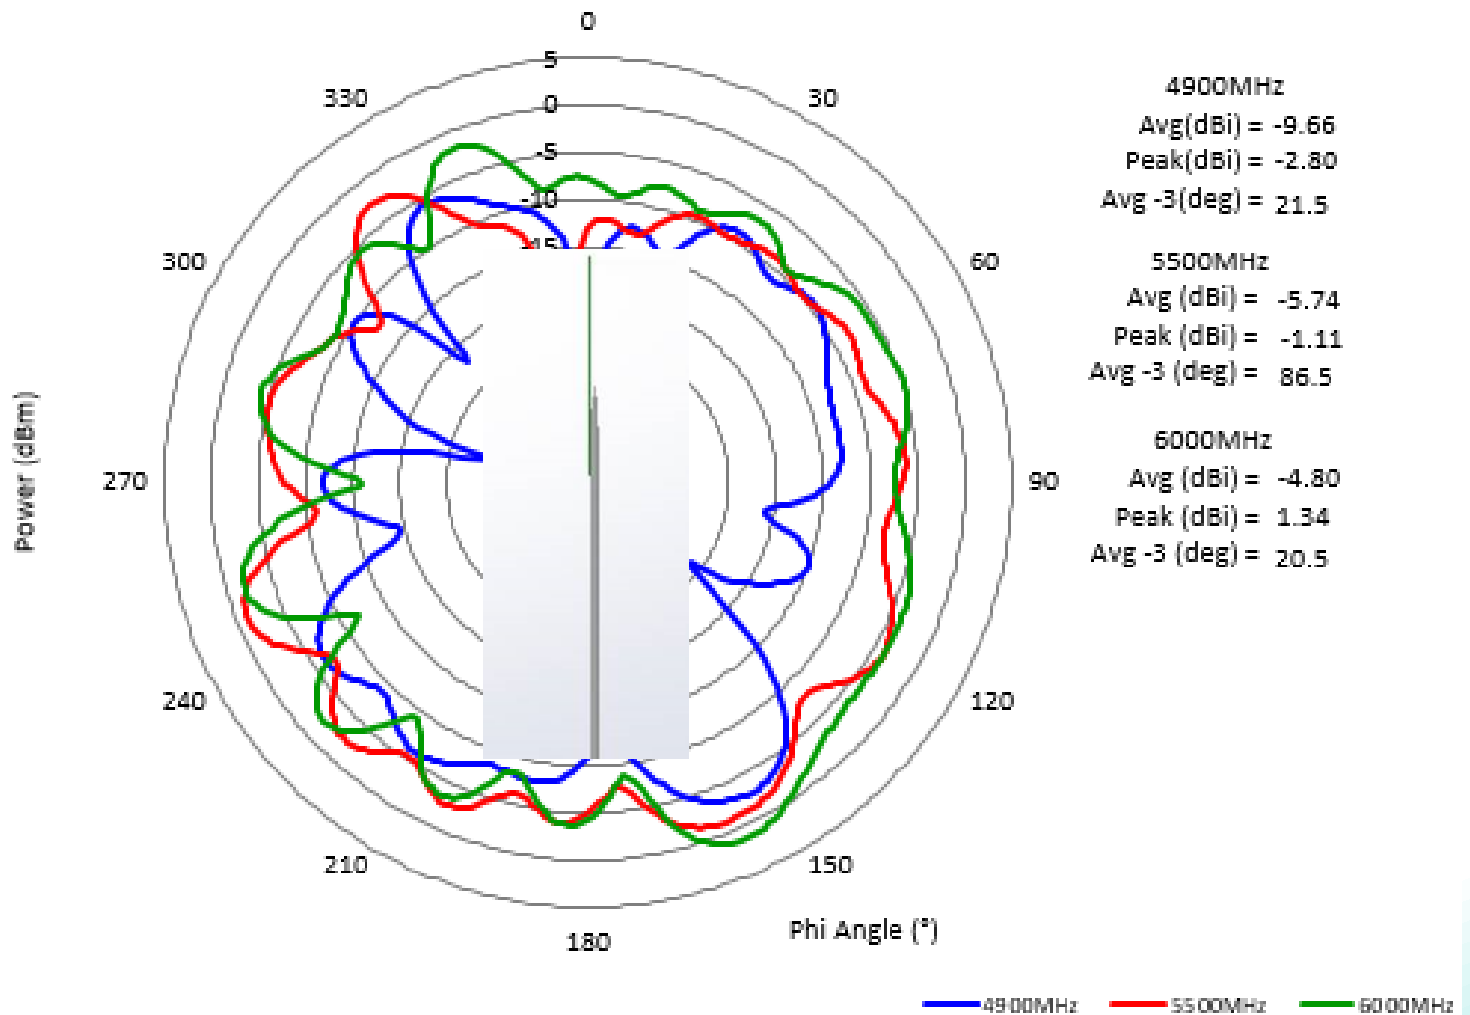

CHARTS

Free Space Radiation Pattern

Elevation Plane

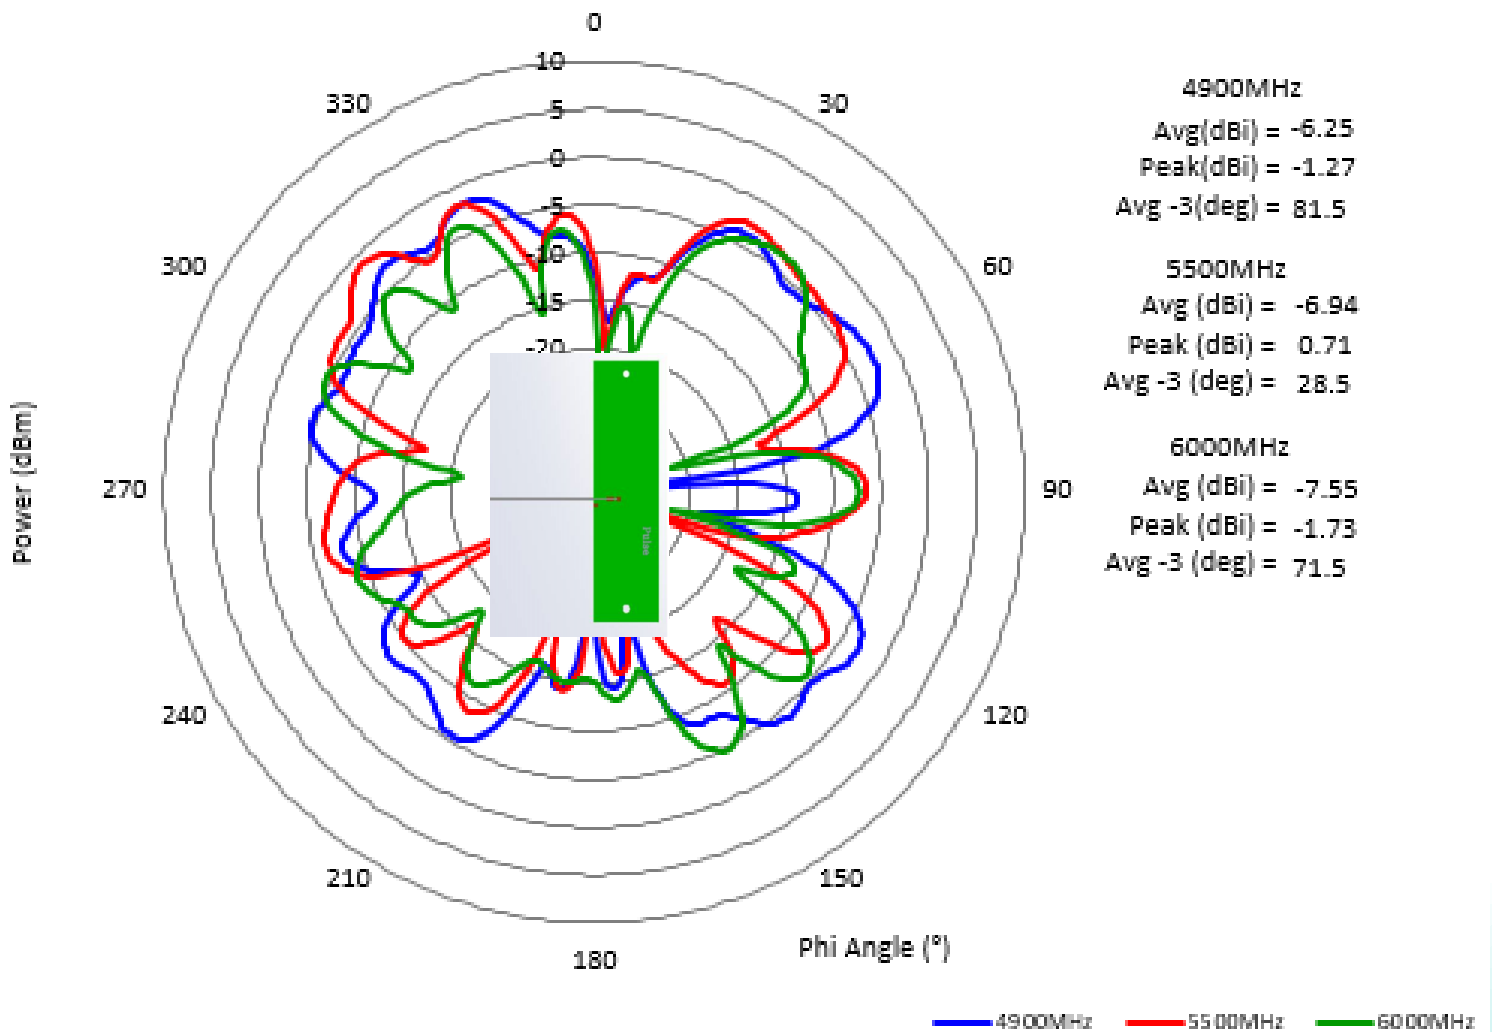

Description: High Efficiency Ultra Wideband
Dipole Antenna 698-6000MHz

PART NUMBER: W3554XXXXX

PACKAGING

5PCS/PE bag

20PCS PE bag/Foam bag

10PCS foam bag/Carton box

Total: 1000PCS/Carton box





**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331