


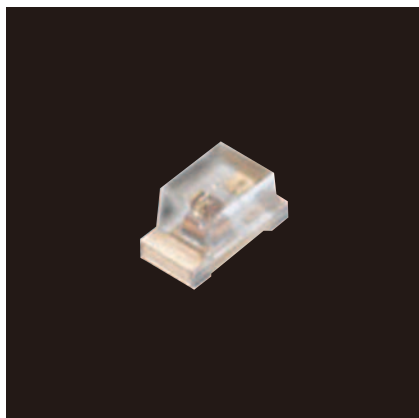

SML-31 series

1608(0603)
 1.6×0.8mm(t=0.8mm)

Features

- 1608 standard size(1.6×0.8mm, t=0.8mm)
- Abundant color variations with diverse luminous intensity types


Color Type	V	U	D	Y	W
	M	P	E	B	WB

Product Specifications


Part No.	LED chip	Emitting color	Absolute maximum ratings (Ta=25℃)						Electrical and optical characteristics (Ta=25℃)										
			Power dissipation Pd(mW)	Forward current If(mA)	Peak forward current IFP(mA)	Reverse voltage VR(V)	Operating temperature Topr(℃)	Storage temperature Tstg(℃)	Forward voltage Vf		Reverse current Ir		Dominant wavelength λD			Luminous intensity Iv			
									Typ. (V)	If(mA)	Max. (μA)	VR(V)	Min. (nm)	Typ. (nm)	Max. (nm)	If(mA)	Min. (mcd)	Typ. (mcd)	If(mA)
 SML-310VT	GaAsP on GaP	Red	55						2	20			625	630	635	20	1.4	4	20
 SML-311UT	AlGaInP on GaAs		44							1.8	2			615	620	625	2	0.9	2.5
 SML-311DT		Orange											602	605	608		1.6	3.15	
 SML-310DT	GaAsP on GaP		55							2	20						20	2.2	6.3
 SML-311WT	AlGaInP on GaAs	Yellow	44		60±1	4		-40 to +85	1.8	2		4	587	590	593	2	0.9	2.5	2
 SML-311YT														584	587	590		2.2	6.3
 SML-310YT	GaAsP on GaP			20				-30 to +85	2.1		100								
 SML-310MT	GaP	Yellowish Green	55						2.2				567	570	573		3.6	16	
 SML-310PT		Green											557	560	563		1.4	4	
 SML312ECT		Bluish Green							3.3	20			520	527	535	20	90	200	20
 SML312EC4T											3.2			525			36	90	
 SML312BCT	InGaN	Blue	84		100±2	5		-40 to +100	3.3			5	464	470	476		22	63	
 SML312BC4T											3.2							46	
 SML312WBCW(A)		White	108	30	100±2		-40 to +100		3.0	5			(x, y) (0.30, 0.29)			5	45	71	5

※1:Duty 1/5, 200Hz / ※2:Duty 1/10, 1kHz


Dimensions

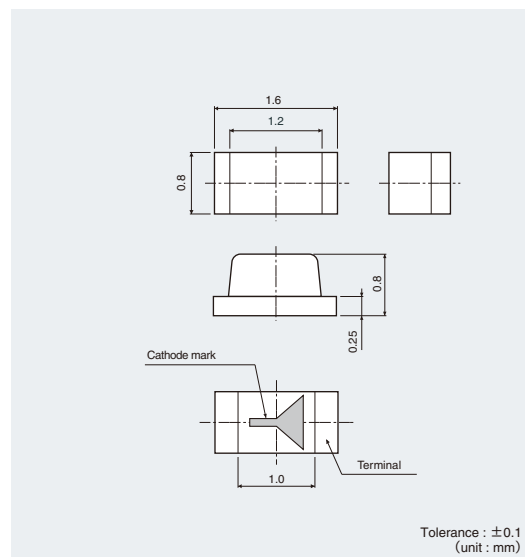

Recommended Solder Pattern

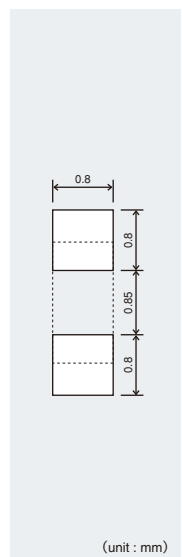


Viewing Angle

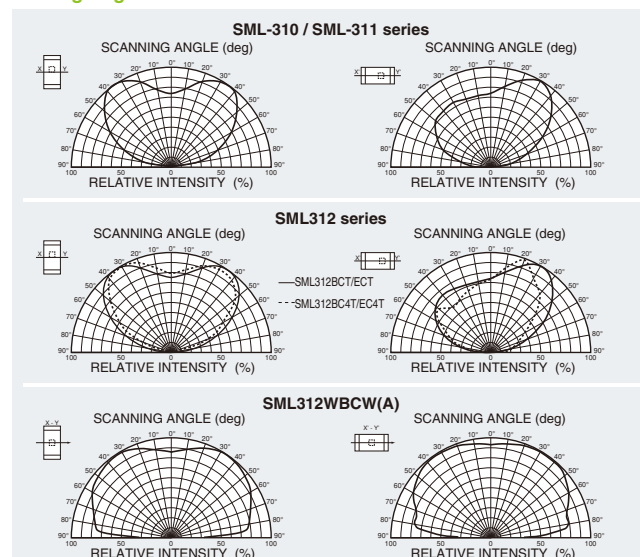


Electrical Characteristics Curves


Forward Current-Forward Voltage

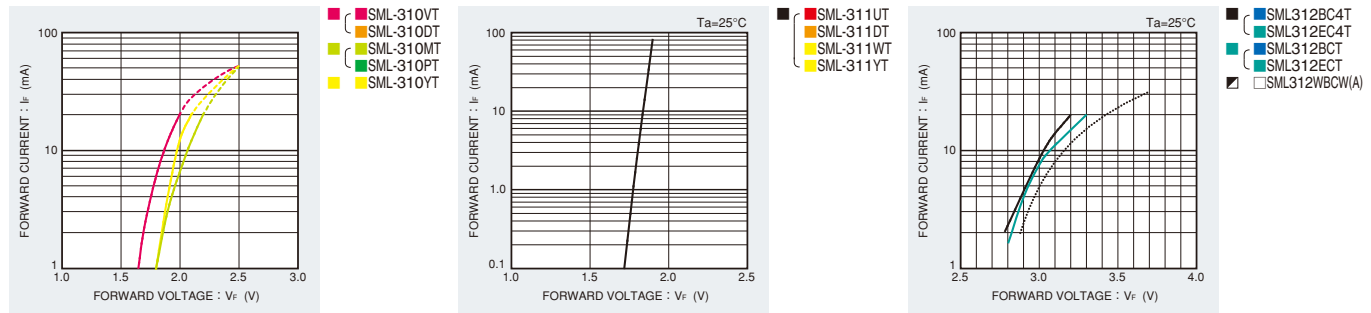


Luminous Intensity-Atmosphere Temperature

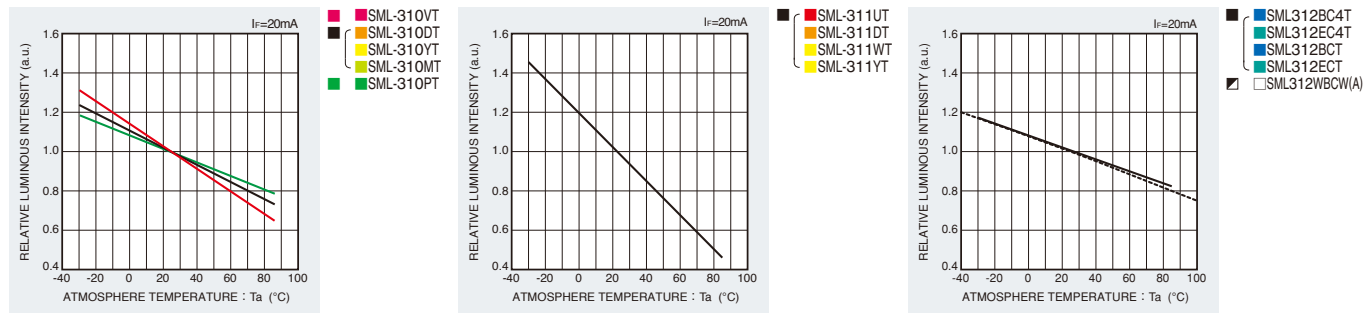

Luminous Intensity-Forward Current

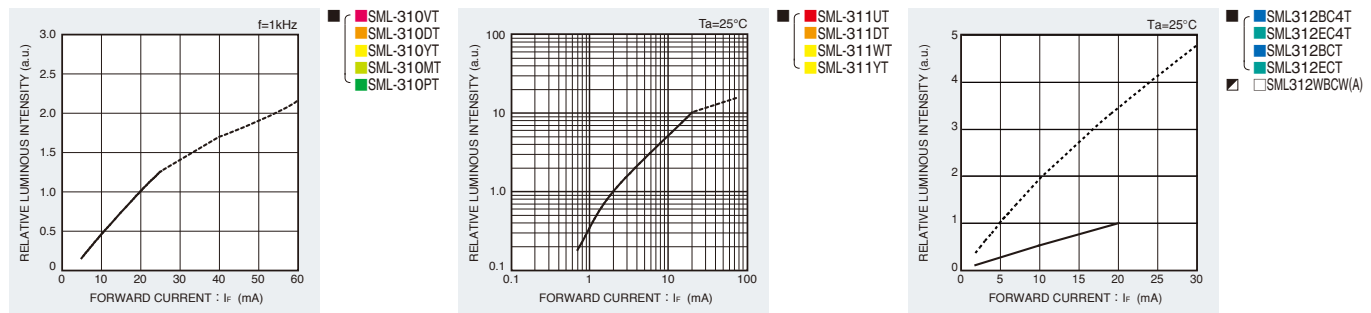

Deratings

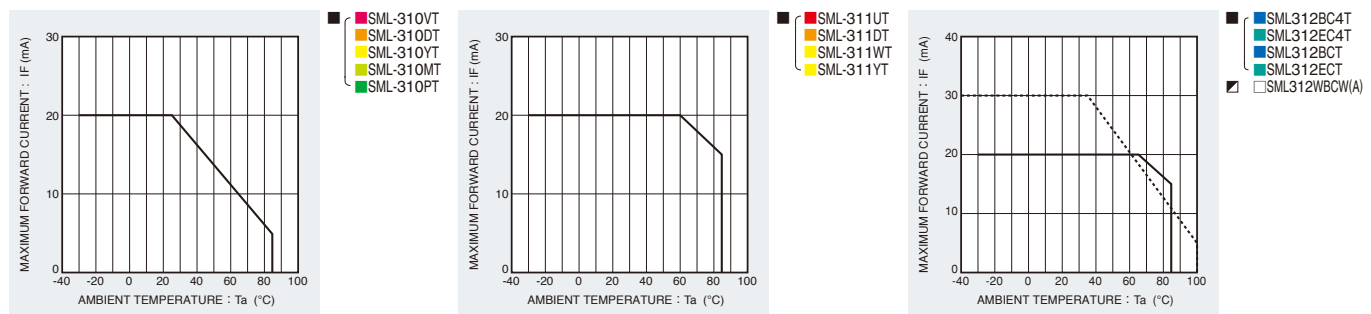

SML-31 series

Rank Reference of Brightness

■ Red (V, U)

(Ta=25°C, If=20mA)

	Package size(mm)	Height(mm)	Luminous Intensity (mcd)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X
Mini-mold Chip LEDs	1608	0.8		1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600
				SML-311UT ^{※/※1}															
				SML-310VT [※]															

■ Orange (D)

(Ta=25°C, If=2mA)

	Package size(mm)	Height(mm)	Luminous Intensity (mcd)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X
Mini-mold Chip LEDs	1608	0.8		1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600
				SML-311DT															

■ Yellow (Y, W)

(Ta=25°C, If=20mA)

	Package size(mm)	Height(mm)	Luminous Intensity (mcd)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X
Mini-mold Chip LEDs	1608	0.8		1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600
				SML-311YT ^{※/※1}															
				SML-311WT ^{※/※1}															
				SML-310YT [※]															

■ Green (M, P, E)

(Ta=25°C, If=20mA)

		Luminous Intensity (mcd)	(Ta=25℃, If=20mA)																			
	Package size(mm)		Height(mm)	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X		
Mini-mold Chip LEDs	1608	0.8	0.63 to 1.0	1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600			
			SML-310MT [※]										SML312ECT [※]									
			SML-310PT [※]										SML312EC4T [※]									

■ Blue (B)

(Ta=25°C, If=20mA)

	Package size(mm)	Height(mm)	Luminous Intensity (mcd)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W
Mini-mold Chip LEDs	1608	0.8		0.9 to 1.4	1.4 to 2.2	2.2 to 3.6	3.6 to 5.6	5.6 to 9.0	9 to 14	14 to 22	22 to 36	36 to 56	56 to 90	90 to 140	140 to 220	220 to 360	360 to 560	560 to 900
				SML312BC4T														
				SML312BCT														

■ White (WB)

(Ta=25°C, If=5mA)

	Package size(mm)	Height(mm)	Luminous Intensity (mcd)	P	Q	R	S	T	U	V	W	X1	X2	Y1	Y2	Z1
Mini-mold Chip LEDs	1608	0.8		25 to 36	36 to 56	56 to 90	90 to 140	140 to 220	220 to 360	360 to 560	560 to 900	900 to 1100	1100 to 1400	1400 to 1800	1800 to 2200	2200 to 2800
				SML312WBCW(A)												

※Brightness on specification sheet include tolerance of within ±10%. ※1:If=2mA

Part No. Construction

* "-" will be taken out for emitting color W/B/E series.

Special Code will be applied for Emitting color W/B/E series.

Chromaticity rank (for white LED)

S	M	L	-	3	1	0	D		T	T	8	6		K
Series name				Package type		Chip Type	Emitting Color	Resin Color	Taping Specifications			Rank sign (Brightness Rank)*		

0	Standard Type
1	Low Current Type
2	High Brightness Type

V	Red:630nm
U	Red:620nm
D	Orange:605nm
W	Yellow:590nm
Y	Yellow:587(590)nm
M	Yellowish-Green:572nm
P	Green:560nm
E	Bluish-Green:527nm
B	Blue:470(466)nm
WB	White

T	Transparent Colorless
W	MilkyWhite

T86	Cathode at sprocket hole side
T87	Reverse of T86
1	For white LED, cathode at sprocket hole side

- ※ Concerning the Brightness rank
 - Please refer to the rank chart above for luminous intensity classification.
 - Part name is individual for each rank.
 - When shipped as sample, the part name will be a representative part name.
- General products are free of ranks. Please contact sales if rank appointment is needed.

Packing Specification

ROHM LED products are being shipped with desiccant (silica gel) concluded in moisture-proof bags. Pasting the moisture sensitive label on the outer surface of the moisture-proof bags or enclosing the humidity indication card inside the bag is available upon request. Please contact the nearest sales office or distributor if necessary.

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ROHM Semiconductor:](#)

[SML312WBCW1](#)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331