

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0753415533

Status:

Active

Overview:

gbx_backplane_connector_system

Description:

1.85mm by 1.85mm (.073 by .073") Pitch 4-Pair GbX® Backplane Connector System, Power Module, 12 Circuits, 1.27µm (50µ") Gold (Au), Lead Free

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E29179

General

Product Family

Backplane Connectors

Series

75341

Application

Backplane

Application Tooling Documents

Tooling Manual

Comments

Blade Length A 7.50mm, B 7.50mm, C 6.00mm, D 6.00mm

Component Type

Power Header

Overview

gbx_backplane_connector_system

Product Name

GbX®

Style

N/A

Physical

Circuits (Loaded)

8

Circuits (maximum)

8

Circuits Detail

Rows A, B, C, & D

Color - Resin

Gray

Durability (mating cycles max)

200

First Mate / Last Break

Yes

Flammability

94V-0

Guide to Mating Part

No

Keying to Mating Part

None

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Number of Columns

N/A

Number of Pairs

4

Number of Rows

4

Orientation

Vertical

PC Tail Length (in)

0.089 In

PC Tail Length (mm)

2.28 mm

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness Recommended (in)

0.063 In

PCB Thickness Recommended (mm)

1.60 mm

Packaging Type

Tube

Pitch - Mating Interface (in)

0.073 In

Pitch - Mating Interface (mm)

1.85 mm

Pitch - Term. Interface (in)

0.102 In

Pitch - Term. Interface (mm)

2.60 mm

Plating min: Mating (µin)

50

Plating min: Mating (µm)

1.25

Plating min: Termination (µin)

30




image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

75341Series

Mates With

75292 GbX® Daughtercard

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Insertion Module,

0622022005

GbX® 4 pair 1- Up

Power Module

Plating min: Termination (μm)	0.75
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	6A
Data Rate	8.0 Gbps
Real Signals (per 25mm)	0
Shielded	No
Voltage - Maximum	120V AC (RMS)/DC

Material Info


Reference - Drawing Numbers

Sales Drawing	SD-75341-001
---------------	--------------

GbX is a registered trademark of Amphenol Corporation.


This document was generated on 05/13/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

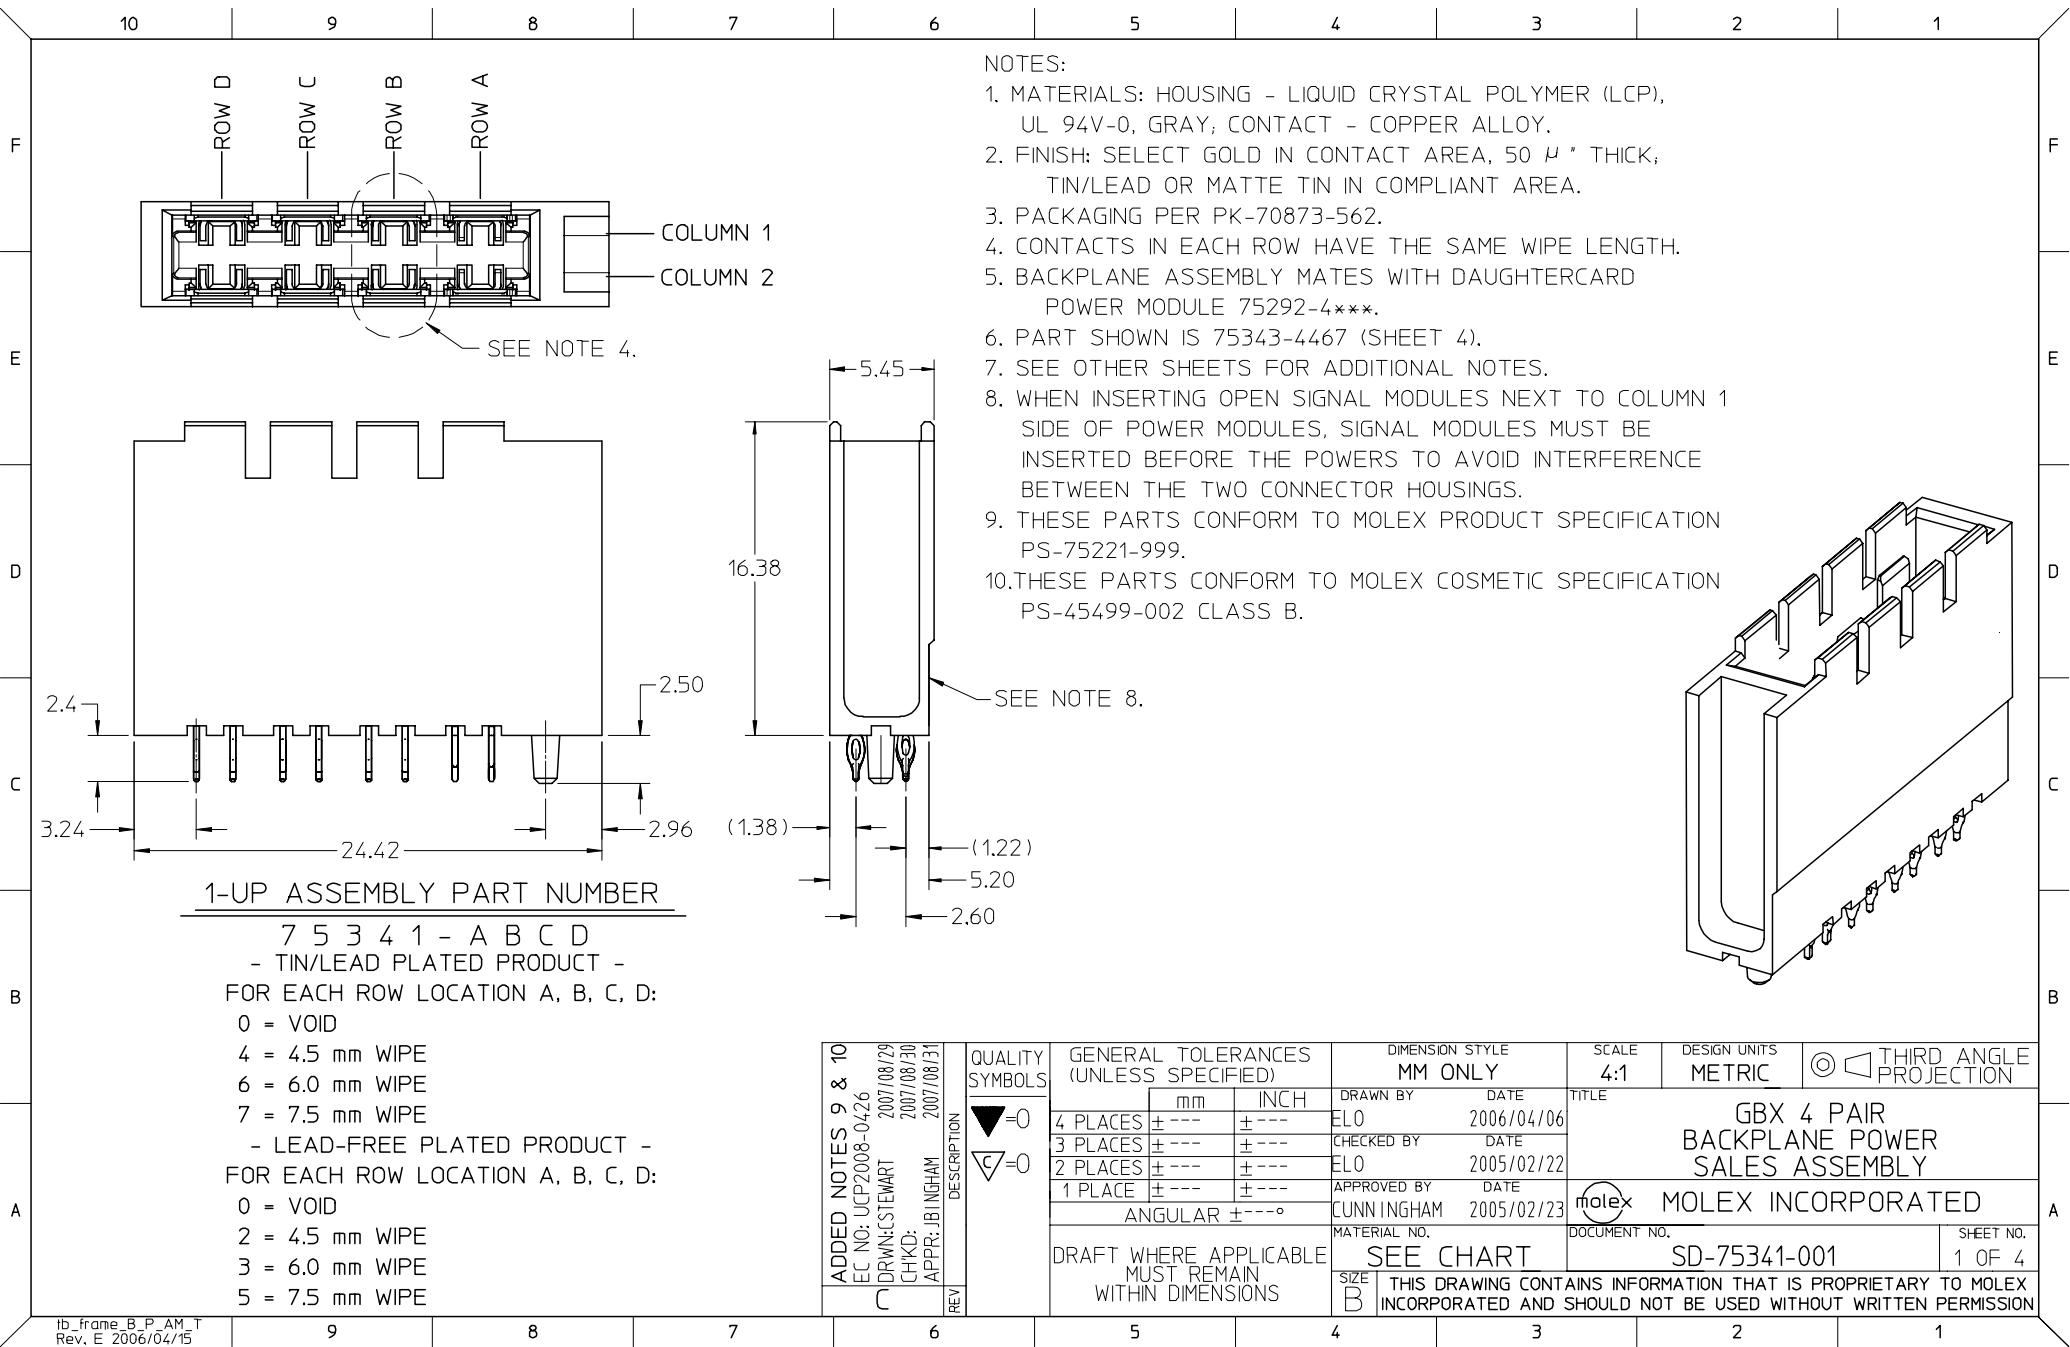

ADDED NOTES 9 & 10 EC NO: UCP2008-0426 DRAWN: STEWART 2007/08/29 CHKD: 2007/08/30 APPR: J. B. INGHAM 2007/08/31				QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
								DRAWN BY ELO		DATE 2006/04/06	TITLE GBX 4 PAIR BACKPLANE POWER SALES ASSEMBLY MOLEX INCORPORATED SD-75341-001			
						4 PLACES ± --- ± ---		CHECKED BY ELO		DATE 2005/02/22				
						3 PLACES ± --- ± ---		APPROVED BY CUNNINGHAM		DATE 2005/02/23				
						2 PLACES ± --- ± ---		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-75341-001			SHEET NO. 1 OF 4	
						1 PLACE ± --- ± ---		SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
ANGULAR ± --- °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS												

10 9 8 7 6 5 4 3 2 1

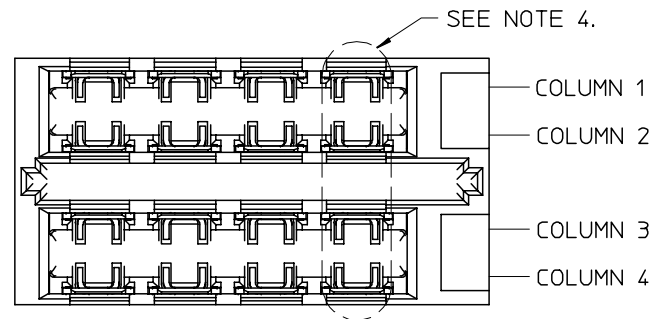

2-UP ASSEMBLY PART NUMBER




7 5 3 4 2 - A B C D

- TIN/LEAD PLATED PRODUCT -
FOR EACH ROW LOCATION A, B, C, D:

0 = VOID
4 = 4.5 mm WIPE
6 = 6.0 mm WIPE
7 = 7.5 mm WIPE

- LEAD-FREE PLATED PRODUCT -
FOR EACH ROW LOCATION A, B, C, D:


0 = VOID
2 = 4.5 mm WIPE
3 = 6.0 mm WIPE
5 = 7.5 mm WIPE

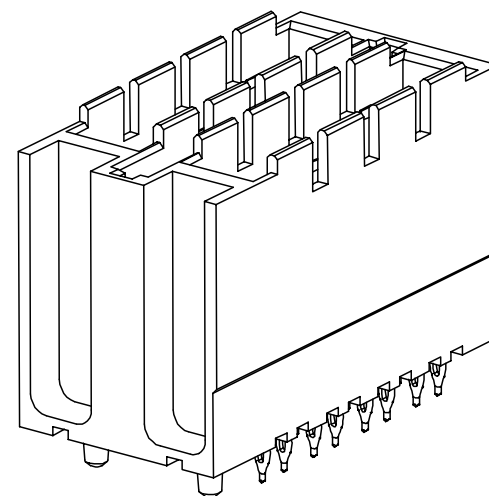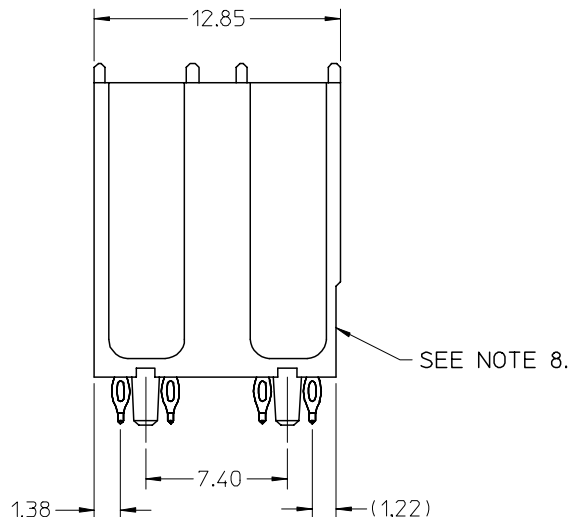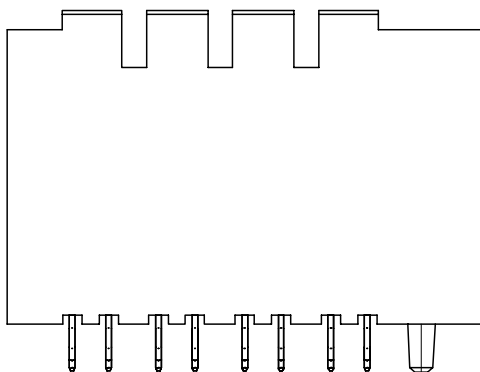

SEE SHEET 1 FOR ADDITIONAL INFORMATION
CHECK WITH PRODUCT MANAGER FOR AVAILABILITY



SEE SHEET ONE EC NO: UCP2008-0426 DRAWN: STEWART 2007/08/29 CHKD: 2007/08/30 APPR: J. B. INGHAM 2007/08/31	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
					mm	INCH	DRAWN BY ELO	DATE 2006/04/06	GBX 4 PAIR BACKPLANE POWER SALES ASSEMBLY				
			4 PLACES	± ---	± ---	CHECKED BY ELO	DATE 2005/02/22						
			3 PLACES	± ---	± ---	APPROVED BY CUNNINGHAM 2005/02/23							
			2 PLACES	± ---	± ---								
			1 PLACE	± ---	± ---	MOLEX INCORPORATED							
			ANGULAR ± ---°		MATERIAL NO.			DOCUMENT NO.	SHEET NO. 2 OF 4				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE CHART		SD-75341-001				
							SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9 8 7 6 5 4 3 2 1

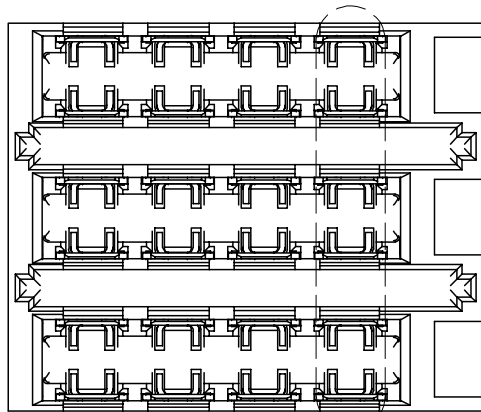

COLUMN 1
COLUMN 2
COLUMN 3
COLUMN 4
COLUMN 5
COLUMN 6

SEE NOTE 4.

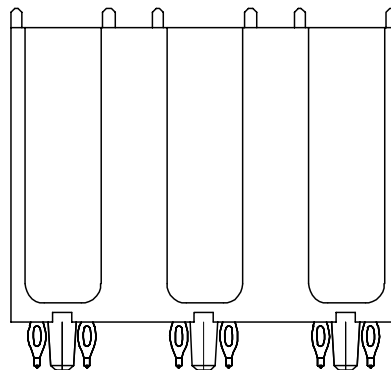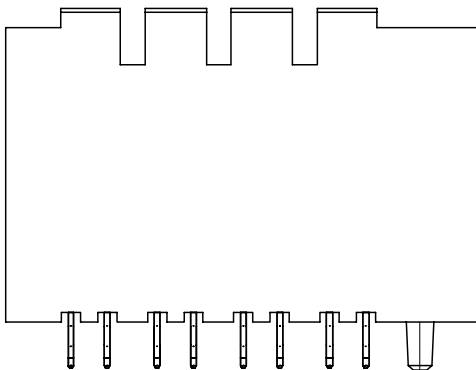

SEE NOTE 8.

3-UP ASSEMBLY PART NUMBER

7 5 3 4 3 - A B C D

- TIN/LEAD PLATED PRODUCT -

FOR EACH ROW LOCATION A, B, C, D:

0 = VOID

4 = 4.5 mm WIPE

6 = 6.0 mm WIPE

7 = 7.5 mm WIPE

- LEAD-FREE PLATED PRODUCT -


FOR EACH ROW LOCATION A, B, C, D:

0 = VOID

2 = 4.5 mm WIPE

3 = 6.0 mm WIPE

5 = 7.5 mm WIPE

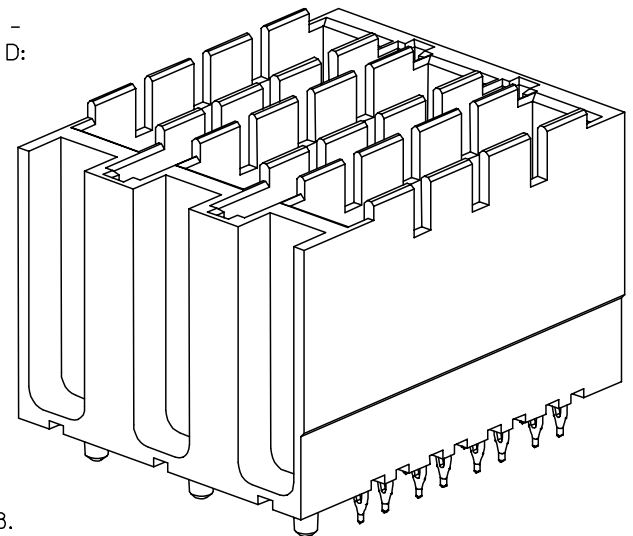

SEE SHEET 1 FOR ADDITIONAL INFORMATION
CHECK WITH PRODUCT MANAGER FOR AVAILABILITY

SEE SHEET ONE EC NO: UCP2008-0426 DRAWN: STEWART 2007/08/29 CHKD: 2007/08/30 APPR: BINGHAM 2007/08/31	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY ELO	DATE 2006/04/06		
		4 PLACES	± ---	± ---		CHECKED BY	DATE		
		3 PLACES	± ---	± ---		ELO	2005/02/22		
REV	DESCRIPTION	2 PLACES	± ---	± ---		APPROVED BY	DATE	MOLEX INCORPORATED	
		1 PLACE	± ---	± ---		CUNNINGHAM	2005/02/23		
		ANGULAR ± ---°		MATERIAL NO.		DOCUMENT NO.			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-75341-001			
SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
								SHEET NO. 3 OF 4	

10 9 8 7 6 5 4 3 2 1


F
E
D
C
B
A

SEE NOTE 5.

6.0 mm WIPE
7.5 mm WIPE


4.5 mm WIPE

0.76
DC BOARD EDGE TO
CENTERLINE OF BP TAIL

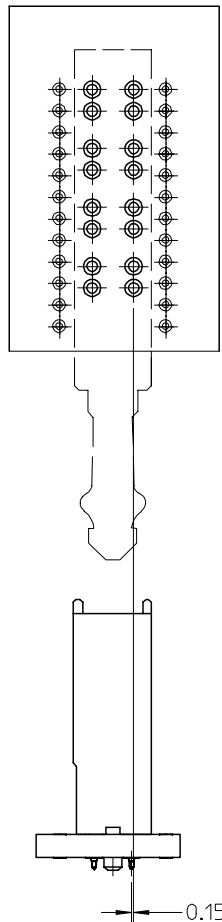

HOLE PATTERN FOR 1-UP ASSEMBLY

- 1.) ADD 7.40 FROM CENTERLINES OF PEGS FOR MULTIPLE UP ASSEMBLIES.
- 2.) ADD 5.55 FROM CENTERLINE TO CENTERLINE OF PEG FOR INDIVIDUAL POWER MODULES STACKED NEXT TO EACH OTHER.

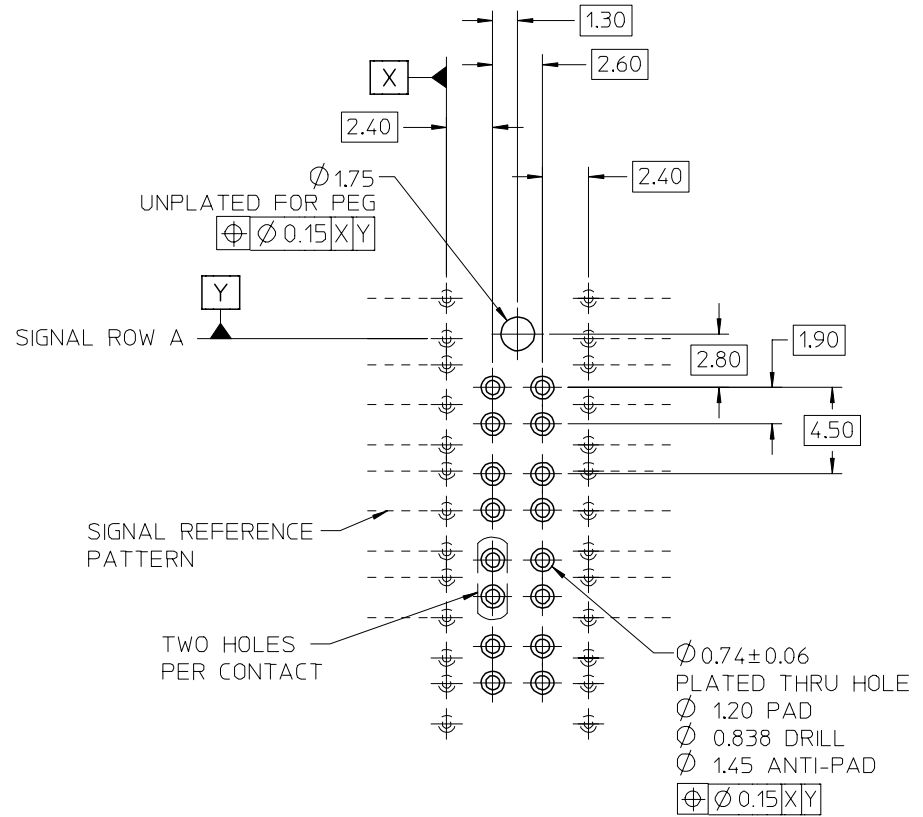

ADDED $\phi 0.74 \pm 0.06$ EC NO: UCP2008-0426 DRAWN: STEWART CHKD: J.B. INGHAM APPR: J.B. INGHAM	2007/08/29 2007/08/30 2007/08/31	DESCRIPTION REV	QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
								TITLE GBX 4 PAIR BACKPLANE POWER SALES ASSEMBLY			MOLEX INCORPORATED	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE PREVIOUS			DOCUMENT NO. SD-75341-001	
				SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

9 8 7 6 5 4 3 2 1



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331