

A02 series

Pushbutton switches & indicators

Distinctive features and specifications

A02_AX1607USR2



- ☐ Panel Sealed to IP65
- ☐ Single pole to four pole changeover
- ☐ Engraving & film legends
- ☐ Captive screw & push on tab terminals
- ☐ 12A 250VAC

ELECTRICAL SPECIFICATIONS

- **Current/Voltage Rating** : 25mA 5VAC Min, 12A 250VAC max, 12A 12VDC max
- **Initial Contact Resistance** : 10mΩ max at 1A 4VDC
- **Insulation Resistance** : 50MΩ min
- **Dielectric Strength** : 2KV between open contacts, 4KV live to accessible
- **Electrical Life** : 50,000 cycles min
- **Contact Gap** : Double break 2 x 1,5mm (0.059)
- **Insulation** : Class 2
- **Lamp Life** : LED, 60,000 hours to 75% relative luminosity filament, approx. 5000 hours, neon, approx. 10,000 hours

MECHANICAL SPECIFICATIONS

- **Mechanical Life (operator)** : momentary, 1 million cycles, maintained 100,000 cycles
- **Lamp** : Midget grove T1 ¾ filament, neon or LED
- **Terminals** : M3 captive screw and push on tab terminal

GENERAL SPECIFICATIONS

- **Operating Temperature** : -20°C to +85°C
- **Sealing** : Panel sealed to IP65, rear of panel IP40


AGENCY APPROVALS




MATERIALS

- **Screens** : PC
- **Reflector Assembly** : PC
- **Optional Metal Bezel** : Nickel plated brass
- **Operator** : PBT
- **Nut** : ABS
- **Camtrack Momentary** : PPE
- **Camtrack Maintained** : PPSU
- **Switch Block 1 & 2 Pole** : PBT
- **Switch Block 3 & 4 Pole** : PEI
- **Contacts** : Gold plated silver

PANEL CUT OUT

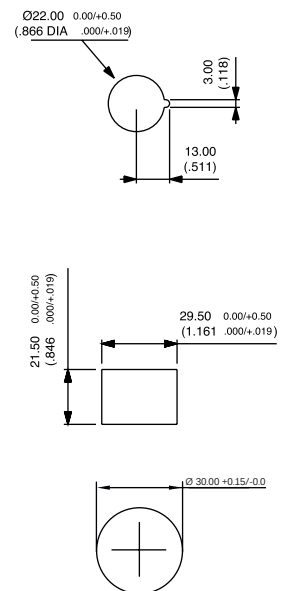

CIRCUIT



Dimensions : first dimensions are in mm while inches are shown in brackets.
Refer to the following pages for further information.




Mounting accessories : standard hardware 1 nut and 1 sealing washer.

A02 series


Pushbutton switches & indicators

Panel cut-out Ø22mm (0.866) or 29.5 (1.161) x 21.5(0.846)mm

Ø22mm or 29.5 x 21.5mm Surface mount pushbutton

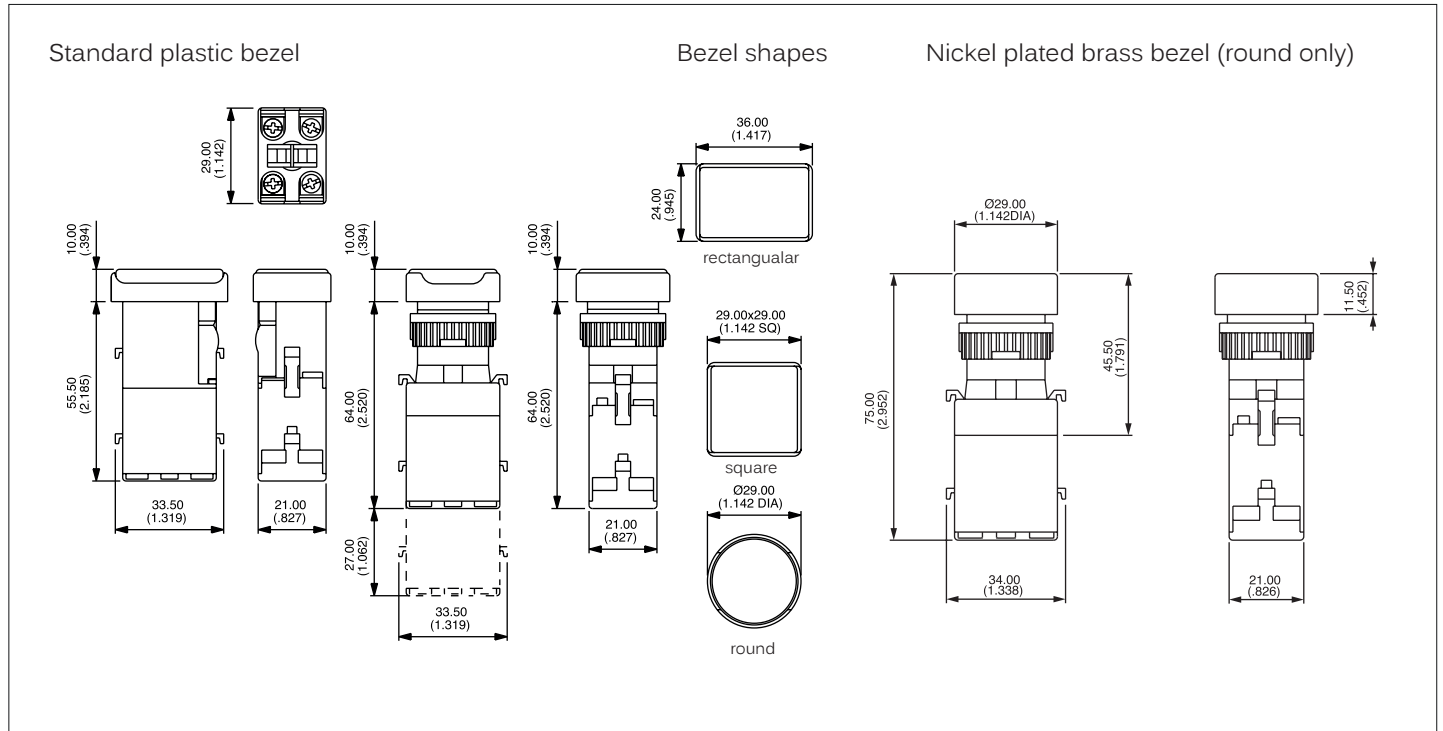

Ø22mm or 29.5 x 21.5mm Surface mount indicator

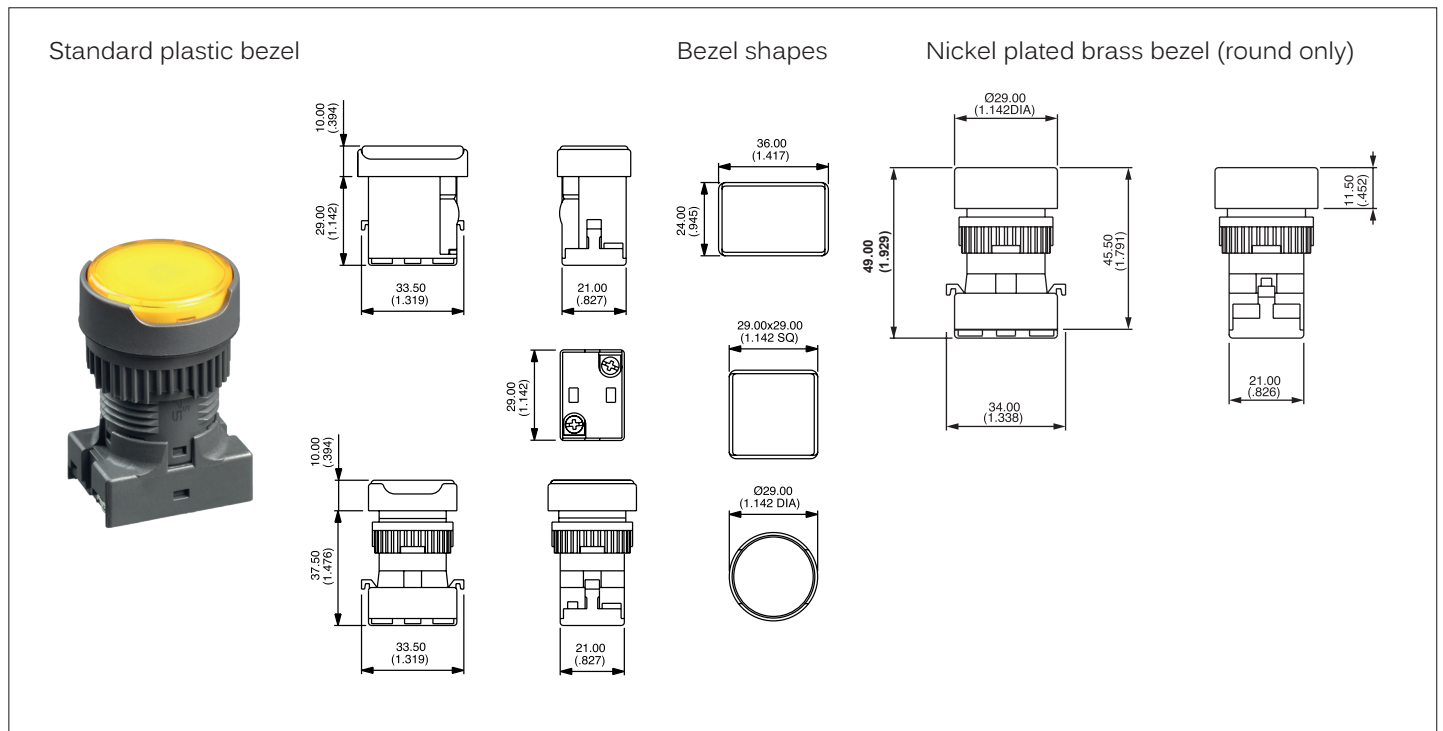

A02 series

Pushbutton switches & indicators

Overview

Pushbutton

Screen			+	Lamp (if required)		+	Operator (with standard bezel)			+	Switch block	
Bezel	Colour	Part No	Lamp	Voltage	Part No	Bezel	Description	Lamp type	Part No	Contacts	Part No	
	black	A0261A	Filament	6.3V	A0141A		Illum, momentary	Lamp/LED bulb	A0201Y	1 N.O.	A02501	
	red	A0261B	Filament	14V	A0141B		Illum, maintained	Lamp/LED bulb	A0201X	1 N.C.	A02502	
	amber	A0261C	Filament	28V	A0141C		Non-illum, momentary		A0203Y	2 N.O.	A02503	
	yellow	A0261D	Filament	36V	A0141D		Non-illum, maintained		A0203X	2 N.C.	A02504	
	green	A0261E	Filament	48V	A0141E		Illum, momentary	Lamp/LED bulb	A0204Y	1 N.O./1 N.C.	A02505	
	blue	A0261F	Filament	60V	A0141F		Illum, maintained	Lamp/LED bulb	A0204X			
	clear	A0261G	Neon	110V	A0143G		Non-illum, momentary		A0206Y	Second switch block		
	white	A0261J	Neon	220V	A0143H		Non-illum, maintained		A0206X			
	black	A0262A	LED	6V red	A0142L1		Illum, momentary	Lamp/LED bulb	A0207Y	Contacts	Part No	
	red	A0262B	LED	6V green	A0142L2		Illum, maintained	Lamp/LED bulb	A0207X			
	amber	A0262C	LED	6V amber	A0142L3		Non-illum, momentary		A0209Y	1 N.O.	A02506	
	yellow	A0262D	LED	12V red	A0142M1		Non-illum, maintained		A0209X	1 N.C.	A02507	
	green	A0262E	LED	12V green	A0142M2	Operator (with nickel bezel)				2 N.O.	A02508	
	blue	A0262F	LED	12V amber	A0142M3					2 N.C.	A02509	
	clear	A0262G	LED	12V blue	A0142M4	Bezel	Description	Lamp type	Part No	1 N.O./1 N.C.	A02510	
	white	A0262J	LED	12V white	A0142M5					To achieve 3 or 4 pole switching, add second switch block from above table.		
	black	A0263A	LED	24V red	A0142N1		Illum, momentary	Lamp/LED bulb	A0210Y			
	red	A0263B	LED	24V green	A0142N2		Illum, maintained	Lamp/LED bulb	A0210X			
	amber	A0263C	LED	24V amber	A0142N3		Non-illum, momentary		A0212Y			
	yellow	A0263D	LED	24V blue	A0142N4		Non-illum, maintained		A0212X			
	green	A0263E	LED	24V white	A0142N5	Std bezel material : nickel plated brass For optional black finish, add 'G' to the end of operator model number.						
	blue	A0263F	LED	48V red	A0142P1							
	clear	A0263G	LED	48V green	A0142P2							
	white	A0263J	LED	48V amber	A0142P3							
Bezel:  rectangular  square  round. 'Illum' - illuminated, 'Non-illum' - non illuminated												

Indicator

Screen			+	Lamp		+	Operator (with standard bezel)		
Bezel	Colour	Part No	Lamp	Voltage	Part No	Bezel	Description	Lamp type	Part No
	black	A0261A	Filament	6.3V	A0141A		Indicator	Lamp/LED bulb	A0271
	red	A0261B	Filament	14V	A0141B		Indicator	Lamp/LED bulb	A0273
	amber	A0261C	Filament	28V	A0141C		Indicator	Lamp/LED bulb	A0275
	yellow	A0261D	Filament	36V	A0141D	Operator (with nickel bezel)			
	green	A0261E	Filament	48V	A0141E				
	blue	A0261F	Filament	60V	A0141F		Illum, indicator	Lamp/LED bulb	A0277
	clear	A0261G	Neon	110V	A0143G				
	white	A0261J	Neon	220V	A0143H	Std bezel material : nickel plated brass For optional black finish, add 'G' to the end of operator model number.			
	black	A0262A	LED	6V red	A0142L1				
	red	A0262B	LED	6V green	A0142L2	operator model number.			
	amber	A0262C	LED	6V amber	A0142L3				
	yellow	A0262D	LED	12V red	A0142M1				
	green	A0262E	LED	12V green	A0142M2				
	blue	A0262F	LED	12V amber	A0142M3				
	clear	A0262G	LED	12V blue	A0142M4				
	white	A0262J	LED	12V white	A0142M5				
	black	A0263A	LED	24V red	A0142N1				
	red	A0263B	LED	24V green	A0142N2				
	amber	A0263C	LED	24V amber	A0142N3				
	yellow	A0263D	LED	24V blue	A0142N4				
	green	A0263E	LED	24V white	A0142N5				
	blue	A0263F	LED	48V red	A0142P1				
	clear	A0263G	LED	48V green	A0142P2				
	white	A0263J	LED	48V amber	A0142P3				
Bezel:  rectangular  square  round. 'Illum' - illuminated, 'Non-illum' - non illuminated									




Unsealed switches & indicators (IP40) suffix 01 to the end of the part number.
Screen engraving insertable legends, & bi-color LED's please contact APEM
For 6.35mm push on tab terminals suffix the switch block part number with SP

A02 series


Flush mount pushbutton switches & indicators

Panel cut-out Ø30mm

Ø30mm Flush mount pushbutton

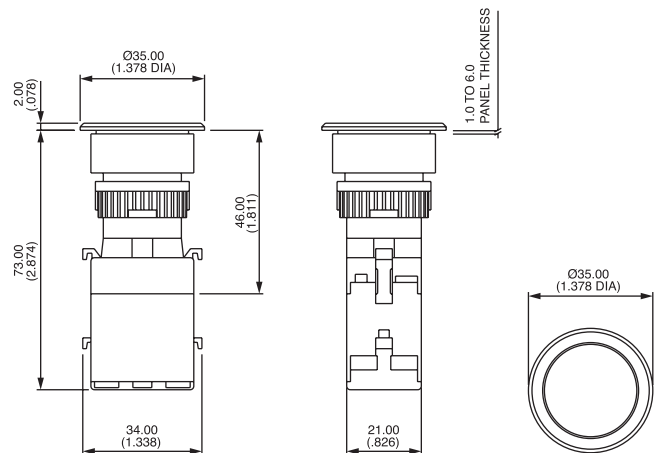

Ø30mm Flush mount indicator

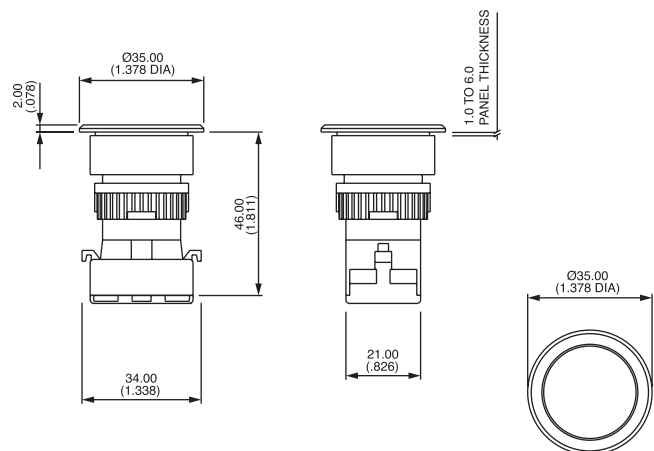

A02 series

Flush mount pushbutton switches & indicators

Overview

Pushbutton

Screen			+	Lamp (if required)			+	Operator			+	Switch block		
Bezel	Colour	Part No	Lamp	Voltage	Part No	Bezel	Description	Lamp type	Part No	Contacts	Part No			
○	black	A0263A	Filament	6.3V	A0141A	○	Illum, momentary	Lamp/LED bulb	A0214Y	1 N.O.	A02501			
○	red	A0263B	Filament	14V	A0141B	○	Illum, maintained	Lamp/LED bulb	A0214X	1 N.C.	A02502			
○	amber	A0263C	Filament	28V	A0141C	○	Non-illum, momentary		A0215Y	2 N.O.	A02503			
○	yellow	A0263D	Filament	36V	A0141D	○	Non-illum, maintained		A0215X	2 N.C.	A02504			
○	green	A0263E	Filament	48V	A0141E	○	Non-illum, maintained		A0215X	2 N.C.	A02504			
○	blue	A0263F	Filament	60V	A0141F	○	Illum, indicator	Lamp/LED bulb	A02791	1 N.O./1 N.C.	A02505			
○	clear	A0263G	Neon	110V	A0143G	⌋	Illum, indicator	Lamp/LED bulb	A02791	1 N.O./1 N.C.	A02505			
○	white	A0263J	Neon	220V	A0143H									
			LED	6V red	A0142L1									
			LED	6V green	A0142L2									
			LED	6V amber	A0142L3									
			LED	12V red	A0142M1									
			LED	12V green	A0142M2									
			LED	12V amber	A0142M3									
			LED	12V blue	A0142M4									
			LED	12V white	A0142M5									
			LED	24V red	A0142N1									
			LED	24V green	A0142N2									
			LED	24V amber	A0142N3									
			LED	24V blue	A0142N4									
			LED	24V white	A0142N5									
			LED	48V red	A0142P1									
			LED	48V green	A0142P2									
			LED	48V amber	A0142P3									

Bezel:

rectangular

square

round.

'Illum' - illuminated,

'Non-illum' - non illuminated

Std bezel material : silver anodised aluminium.

For optional black anodised aluminium, add 'G' to the end of operator model number.

Second switch block

Contacts

Part No

1 N.O.

1 N.C.

2 N.O.

2 N.C.

1 N.O./1 N.C.

A02506

A02507

A02508

A02509

A02510


To achieve 3 or 4 pole switching, add second switch block from above table.

A02 series

Pushbutton switches & indicators

Installation & tools

Installation guide

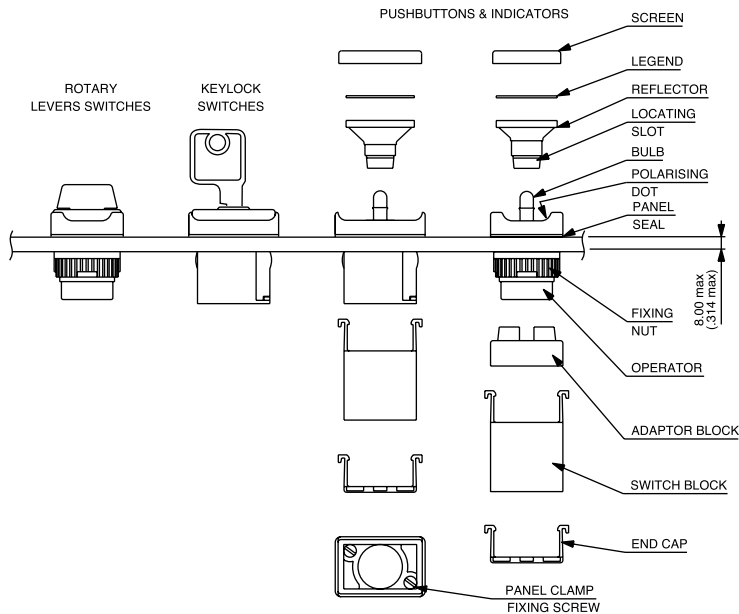

PANEL MOUNTING ASSEMBLY

- Drill/punch hole shaped as shown on page one.
- Assemble front operator through hole and
 - a) Round & square types, tighten nut to a maximum torque of 0.8Nm using tool no. 30-0001. Snap on the adaptor block fit fixing nut and tighten to a maximum
 - b) Rectangular types, tighten the two panel fixing screws in the front to a maximum torque of 6cNm
- Wire chosen switch block as required and snap onto back of operator with optional end cap
- Fit bulb if required using tool No. 30-0002.
- Snap screen onto reflector assembly with legend in between if required and snap onto front operator, take care to line up the locating slot with the polarising dot and not to damage the internal seal
- To place/remove the bulb use the bulb extractor 30-0002.

SWITCH BLOCK ASSEMBLY

The switch block snaps onto the adaptor block, to remove, lever out the latches using a small screwdriver taking care not to overbend, pull off the block from the adaptor block.

Tools

Nut fixing key



30-0001

Bulb remover



30-0002

Accessories

Switch block end cap, terminal guard



14-0005



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331