
TE CONNECTIVITY (TE) RESERVES THE RIGHT TO CHANGE THIS DRAWING AT ANYTIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.

| REVISION | | | | | | |
|----------|---------------------------|------------|----------|--|--|--|
| LTR | DESCRIPTION | DATE | APPROVED | | | |
| L | REVISED PER ECO-15-003575 | 03/06/2015 | I. MYONG | | | |
| | | | | | | |

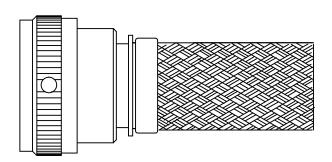

CODE 21, SHIELDED STRAIGHT ADAPTER

NOTES:

- 1. THIS PRODUCT IS DESIGNED TO TERMINATE A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR.
- 2. FOR ADDITIONAL DIMENSIONS, ORDERING INFORMATION AND MODIFICATIONS, SEE CH00-0250-004.
- 3. ADAPTER TO BE PERMANENTLY MARKED WITH CODE IDENT. NO. AND PART NO. (E.G.: 06090-206M012-19B08 YYWW).
- 4 FOR LARGER ENTRY SIZES, A 2 PIECE ADAPTER (TYPE II) IS SUPPLIED.
- 5 BRAID TERMINATION RING MAY BE SUPPLIED AS TINEL-LOCK SHAPE MEMORY RING AT MANUFACTURER'S OPTION.
- 6 ADAPTER MATES TO MIL-DTL-26482 SERIES I, MS3110, MS3111, MS3116 CLASS E & F CONNECTORS.
- (7) ANTI-ROTATIONAL SET SCREW, 3 THREADED HOLES 120° ± 5° APART, SINGLE MATING SET SCREW SUPPLIED: AN565DC4H2. NOT REQUIRED FOR TYPE II ADAPTERS.


If this document is printed it becomes uncontrolled. Check for the latest revision


©2015 TE CONNECTIVITY LTD. FAMILY OF COMPANIES. ALL RIGHTS RESERVED TE CONNECTIVITY AND TE CONNECTIVITY (LOGO) ARE TRADEMARKS.


OTHER LOGOS PRODUCT AND/OR COMPANY NAMES MAY BE TRADEMARKS OF THEIR RESPECTIVE OWNERS.

Raychem Adapters CUSTOMER DRAWING

| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. REFERENCE METRIC DIMENSIONS ARE IN BRACKETS [metric]. | DRAWN: R. RAMIREZ | DATE: 05/24/1993 | | TE Connactivity |
|--|-----------------------|-------------------------|--|-----------------|
| DECIMALS TOLERANCES: XXX ± .005 [0.13mm] | CHECKED: | DATE: | S TE | TE Connectivity |
| | APPROVED: W. C. GAY | DATE: 05/24/1993 | | COLID CODE 04 |
| | MATERIAL: SEE NOTES | FINISH: SEE NOTES | ADAPTER, | SOLID, CODE 21 |
| SCALE: DO NOT SCALE THIS DRAWING | CAD FILE: 206M0XX.dwg | THIRD ANGLE PROJECTION: | SIZE: SHEET: CAGE CODE: DRAWING NO: A 1 OF 3 06090 | 206MOXX Rev. |

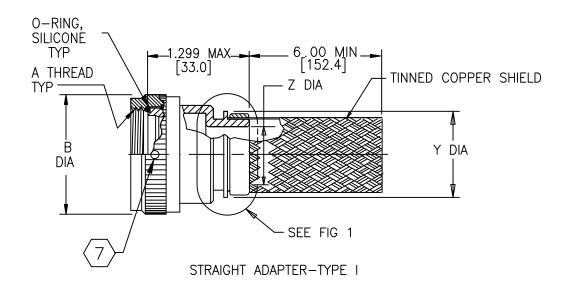


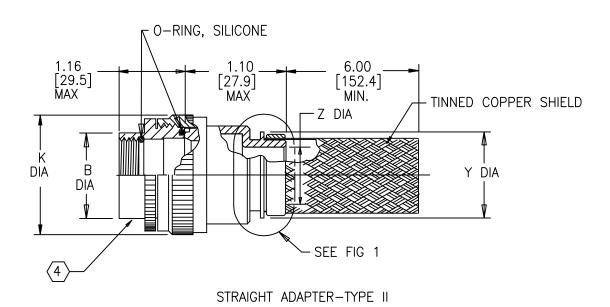

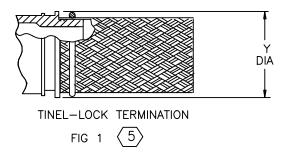

If this document is printed it becomes uncontrolled. Check for the latest revision

Raychem Adapters CUSTOMER DRAWING



| TABLE I | | | | | |
|---------------------|--------------------|----------------------------------|-------------------------|-----------------|--|
| BASE PART NO. | SHELL SIZE 6 | MAX ENTRY SIZE 4 TYPE I | A THREAD CLASS 2B | B DIA MAX | |
| 206M008 | 8 | 04 | .438-28 UNEF | .72 [18.3] | |
| 206M010 | 10 | 06 | .562-24 UNEF | .85 [21.6] | |
| 206M012 | 12 | 80 | .688-24 UNEF | .98 [24.9] | |
| 206M014 | 14 | 10 | .812-20 UNEF | 1.11 [28.2] | |
| 206M016 | 16 | 12 | .938-20 UNEF | 1.23 [31.2] | |
| 206M018 | 18 | 13 | 1.062-18 UNEF | 1.35 [34.35] | |
| 206M020 | 20 | 15 | 1.188-18 UNEF | 1.48 [37.6] | |
| 206M022 | 22 | 16 | 1.312-18 UNEF | 1.60 [40.6] | |
| 206M024 | 24 | 18 | 1.438-18 UNEF | 1.72 [43.55] | |

| TABLE II | | | | |
|---------------|----------------|------------------|-----------------|--|
| ENTRY SIZE | K MAX | Z DIA REF | Y DIA REF | |
| 03 | NA | .188 [4.77] | .516 [13.1] | |
| 04 | NA | .250 [6.35] | .516 [13.1] | |
| 05 | .83 | .312 | .516 | |
| | [21.0] | [7.92] | [13.1] | |
| 06 | .83 | .375 | .705 | |
| | [21.0] | [9.53] | [17.9] | |
| 07 | .92 | .438 | .705 | |
| | [23.4] | [11.12] | [17.9] | |
| 08 | .97 | .500 | .705 | |
| | [24.5] | [12.70] | [17.9] | |
| 09 | 1.18 | .562 | .705 | |
| | [30.0] | [14.27] | [17.9] | |
| 10 | 1.18 | .625 | .953 | |
| | [30.0] | [15.87] | [24.2] | |
| 11 | 1.28 | .688 | .953 | |
| | [32.5] | [17.47] | [24.2] | |
| 12 | 1.35 | .750 | .953 | |
| | [34.3] | [19.05] | [24.2] | |
| 13 | 1.41 | .812 | .953 | |
| | [35.8] | [20.62] | [24.2] | |
| 14 | 1.41 | .875 | 1.205 | |
| | [35.8] | [22.23] | [30.6] | |
| 15 | 1.60 | .938 | 1.205 | |
| | [40.6] | [23.82] | [30.6] | |
| 16 | 1.60 | 1.000 | 1.205 | |
| | [40.6] | [25.40] | [30.6] | |
| 17 | 1.60 | 1.062 | 1.307 | |
| | [40.6] | [26.98] | [33.2] | |
| 18 | 1.66 | 1.126 | 1.307 | |
| | [51.8] | [28.60] | [33.2] | |
| 20 | 2.04 [51.8] | 1.252 [31.80] | 1.654 | |
| 21 | 2.04 | 1.023 | 1.654 | |
| | [51.8] | [33.34] | [42.0] | |
| 22 | 2.23 | 1.378 | 1.654 | |
| | [56.6] | [35.00] | [42.0] | |
| 24 | 2.23 | 1.500 | 1.654 | |
| | [56.6] | [38.10] | [42.0] | |
| 28 | 2.48 | 1.750 | 1.929 | |
| | [63.0] | [44.45] | [49.0] | |

If this document is printed it becomes uncontrolled. Check for the latest revision

Raychem Adapters CUSTOMER DRAWING



DO NOT SCALE THIS DRAWING

SIZE

06090

DWG. NO.

SHEET

3 OF 3

206MOXX

REV



Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию.

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России, а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научноисследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,

Промышленная ул, дом № 19, литера Н,

помещение 100-Н Офис 331