


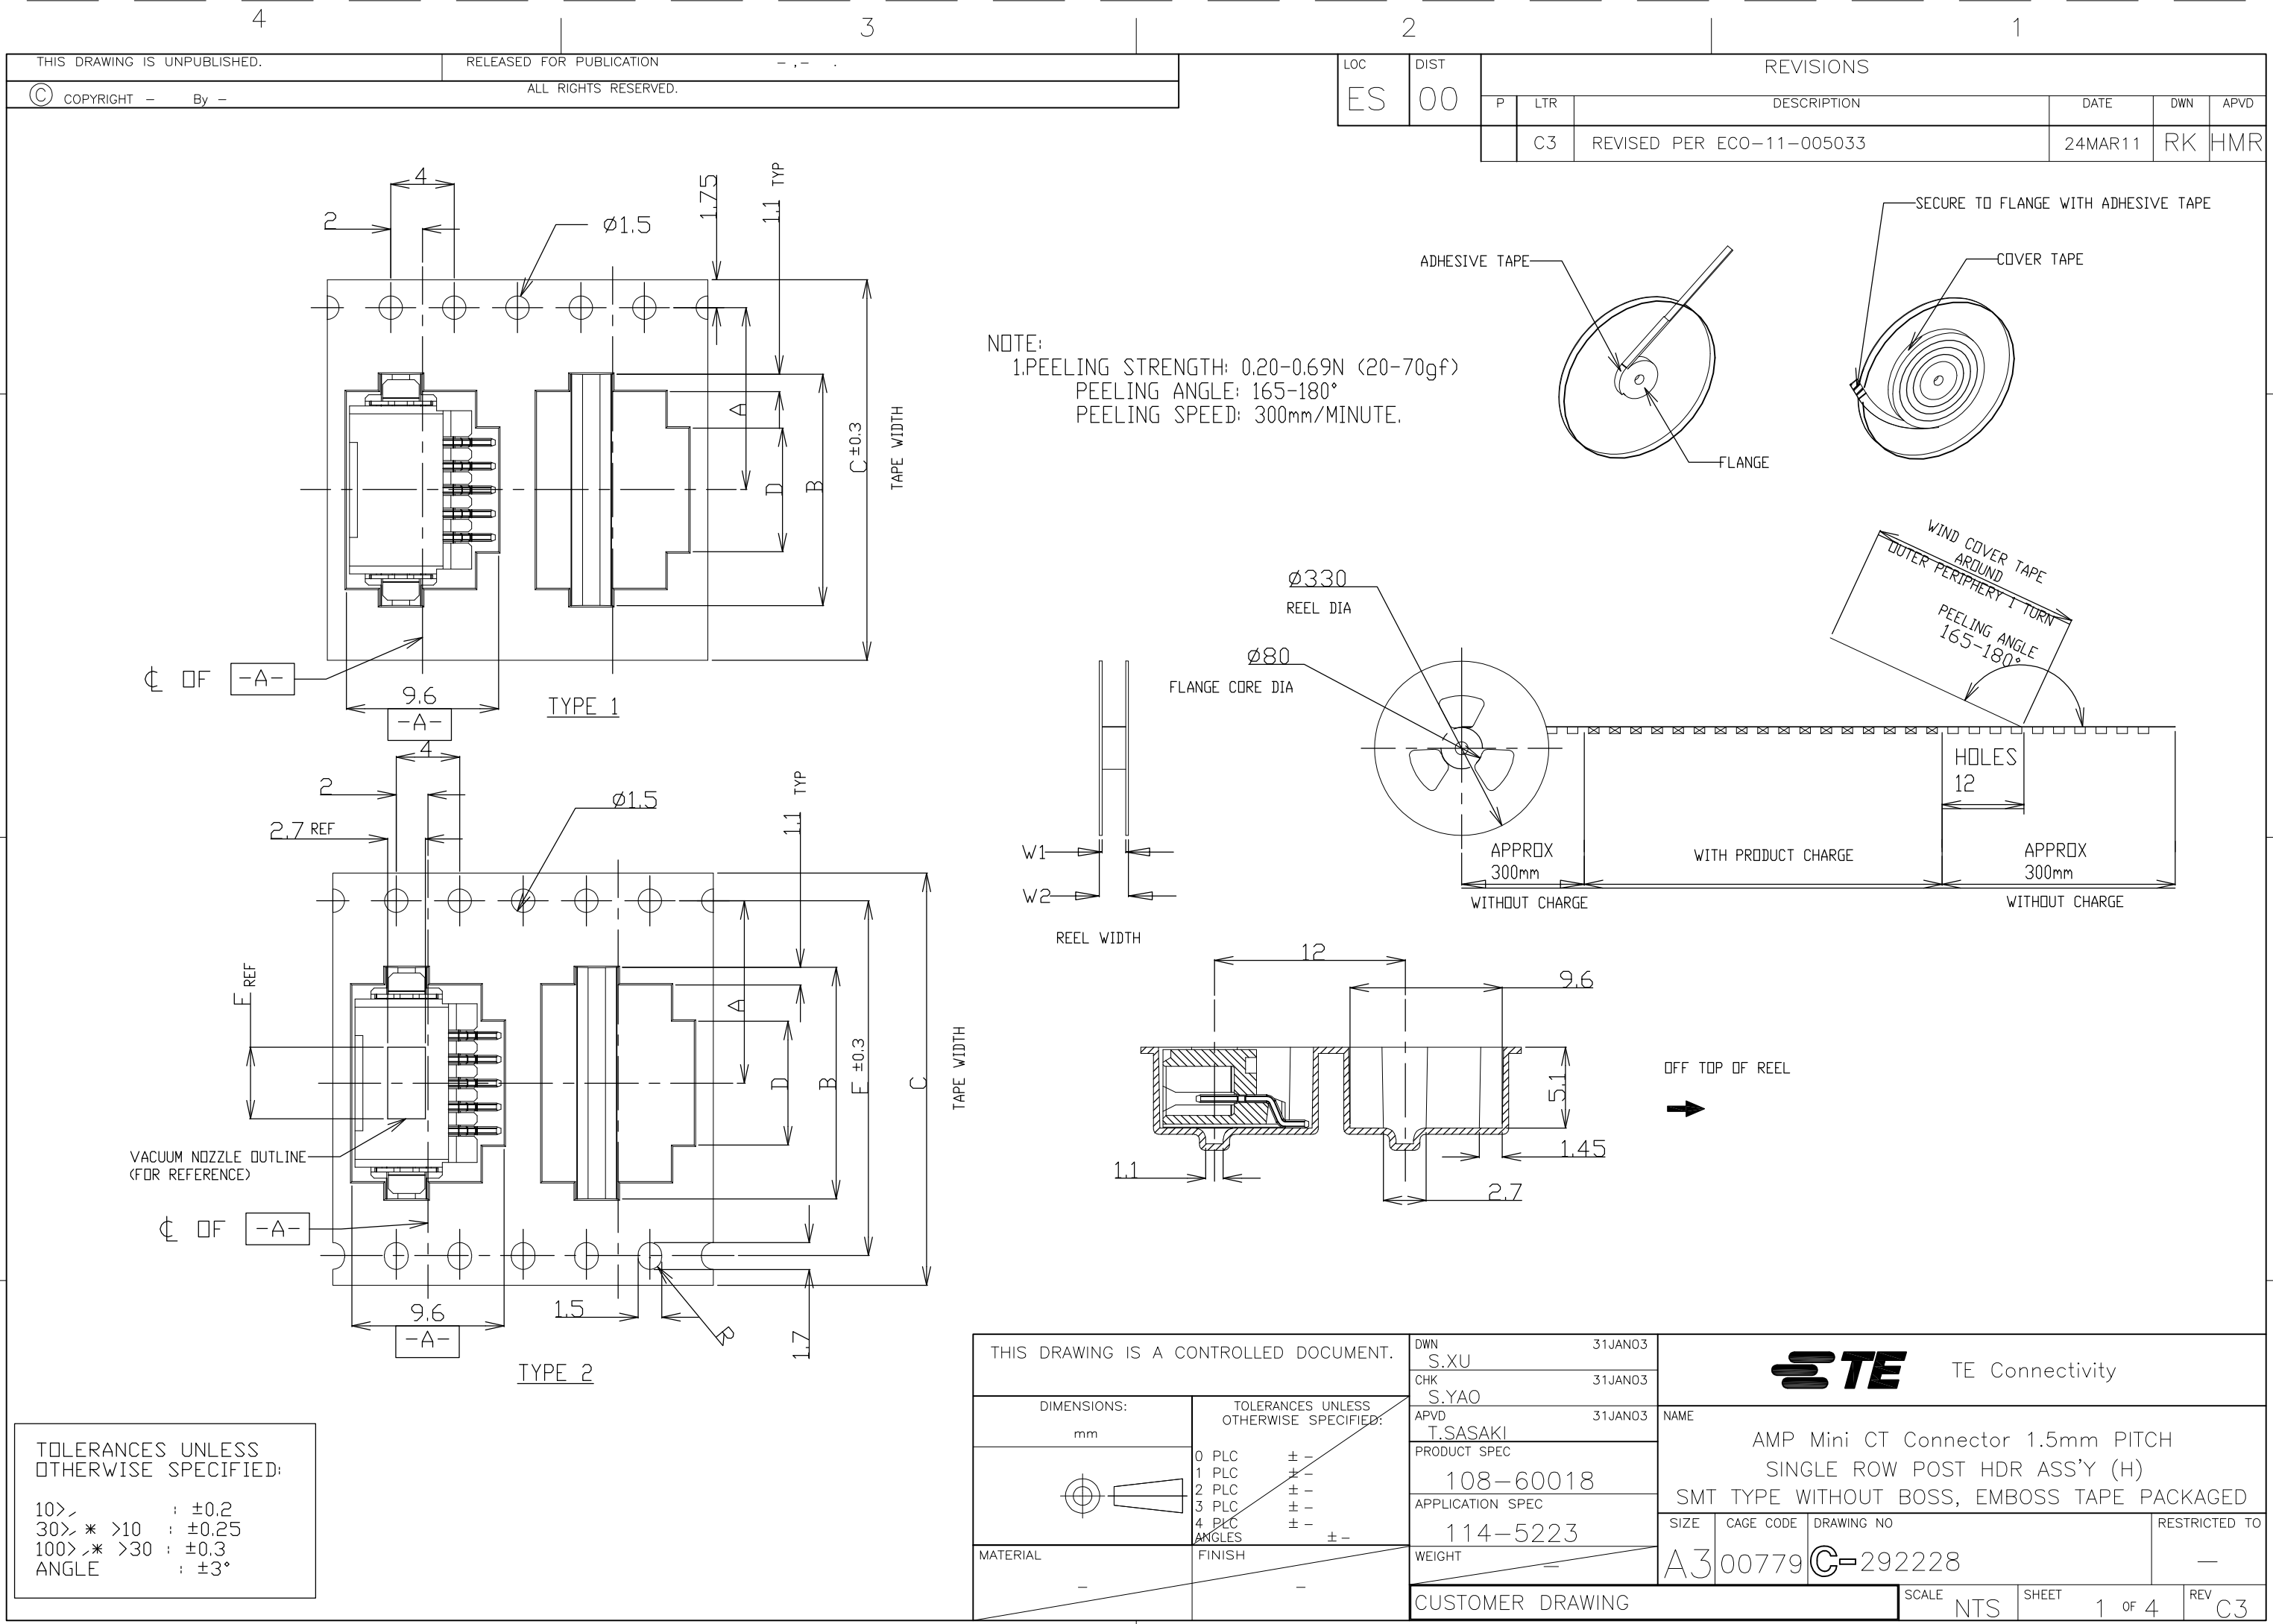

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION - , - .
© COPYRIGHT - By -	ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	APVD
			-	SEE SHEET 1	-	-

TYPE 2	61.5	57.5	6.2	52.4	30.5	56	37.1	±0.15 26.2	700	20	BLACK	7-292228-0
	61.5	57.5	6.2	52.4	29.0	56	35.6		700	19		6-292228-9
	49.5	45.5	6.2	40.4	27.5	44	34.1	20.2±0.15	700	18		6-292228-8
	49.5	45.5	6.2	40.4	26.0	44	32.6		700	17		6-292228-7
	49.5	45.5	6.2	40.4	24.5	44	31.1		700	16		6-292228-6
	49.5	45.5	6.2	40.4	23.0	44	29.6		700	15		6-292228-5
	49.5	45.5	6.2	40.4	21.5	44	28.1		700	14		6-292228-4
	49.5	45.5	6.2	40.4	20.0	44	26.6		700	13		6-292228-3
	49.5	45.5	6.2	40.4	18.5	44	25.1		700	12		6-292228-2
	49.5	45.5	6.2	40.4	17.0	44	23.6		700	11		6-292228-1
	37.5	33.5	6.2	28.4	15.5	32	22.1	14.2	700	10		6-292228-0
	37.5	33.5	6.2	28.4	14.0	32	20.6	14.2	700	9		5-292228-9
	37.5	33.5	6.2	28.4	12.5	32	19.1	14.2	700	8		5-292228-8
	37.5	33.5	6.2	28.4	11.0	32	17.6	14.2	700	7		5-292228-7
TYPE 1	29.5	25.5	6.2	-	9.5	24	16.1	11.5	700	6		5-292228-6
	29.5	25.5	6.2	-	8.0	24	14.6	11.5	700	5		5-292228-5
	29.5	25.5	6.2	-	6.5	24	13.1	11.5	700	4		5-292228-4
	29.5	25.5	4.7	-	5.0	24	11.6	11.5	700	3		5-292228-3
	29.5	25.5	2.8	-	3.5	24	10.1	11.5	700	2		5-292228-2
TAPE TYPE	W2	W1	F	E	D	C	B	A	QTY/ REEL	POS	COLOR	ON TAPE P/N
DIMENSIONS												

OBSOLETED	TYPE 2	61.5	57.5	6.2	52.4	30.5	56	37.1	±0.15 26.2	700	20	BEIGE	2-292228-0	
		61.5	57.5	6.2	52.4	29.0	56	35.6		700	19		1-292228-9	
		49.5	45.5	6.2	40.4	27.5	44	34.1	20.2±0.15	700	18		1-292228-8	
		49.5	45.5	6.2	40.4	26.0	44	32.6		700	17		1-292228-7	
		49.5	45.5	6.2	40.4	24.5	44	31.1		700	16		1-292228-6	
		49.5	45.5	6.2	40.4	23.0	44	29.6		700	15		1-292228-5	
		49.5	45.5	6.2	40.4	21.5	44	28.1		700	14		1-292228-4	
		49.5	45.5	6.2	40.4	20.0	44	26.6		700	13		1-292228-3	
		49.5	45.5	6.2	40.4	18.5	44	25.1		700	12		1-292228-2	
		49.5	45.5	6.2	40.4	17.0	44	23.6		700	11		1-292228-1	
		37.5	33.5	6.2	28.4	15.5	32	22.1	14.2	700	10		1-292228-0	
		37.5	33.5	6.2	28.4	14.0	32	20.6	14.2	700	9		292228-9	
		37.5	33.5	6.2	28.4	12.5	32	19.1	14.2	700	8		292228-8	
		37.5	33.5	6.2	28.4	11.0	32	17.6	14.2	700	7		292228-7	
		TYPE 1	29.5	25.5	6.2	-	9.5	24	16.1	11.5	700		6	292228-6
			29.5	25.5	6.2	-	8.0	24	14.6	11.5	700		5	292228-5
			29.5	25.5	6.2	-	6.5	24	13.1	11.5	700		4	292228-4
			29.5	25.5	4.7	-	5.0	24	11.6	11.5	700		3	292228-3
			29.5	25.5	2.8	-	3.5	24	10.1	11.5	700		2	292228-2
TAPE TYPE	W2	W1	F	E	D	C	B	A	QTY/ REEL	POS	COLOR	ON TAPE P/N		
	DIMENSIONS													

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH -

MATERIAL

-

DWN
S.XU
31JAN03

CHK
S.YAO
31JAN03

APVD
T.SASAKI
31JAN03

PRODUCT SPEC
108-60018

APPLICATION SPEC
114-5223

WEIGHT
-

AMP Mini CT Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (H)
SMT TYPE WITHOUT BOSS, EMBOSS TAPE PACKAGED

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-292228

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
NTS

SHEET
2 OF 4

REV
C3

TE Connectivity

1470-19 (3/11)

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC

DIST

REVISIONS

ES

00

P

LTR








DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1

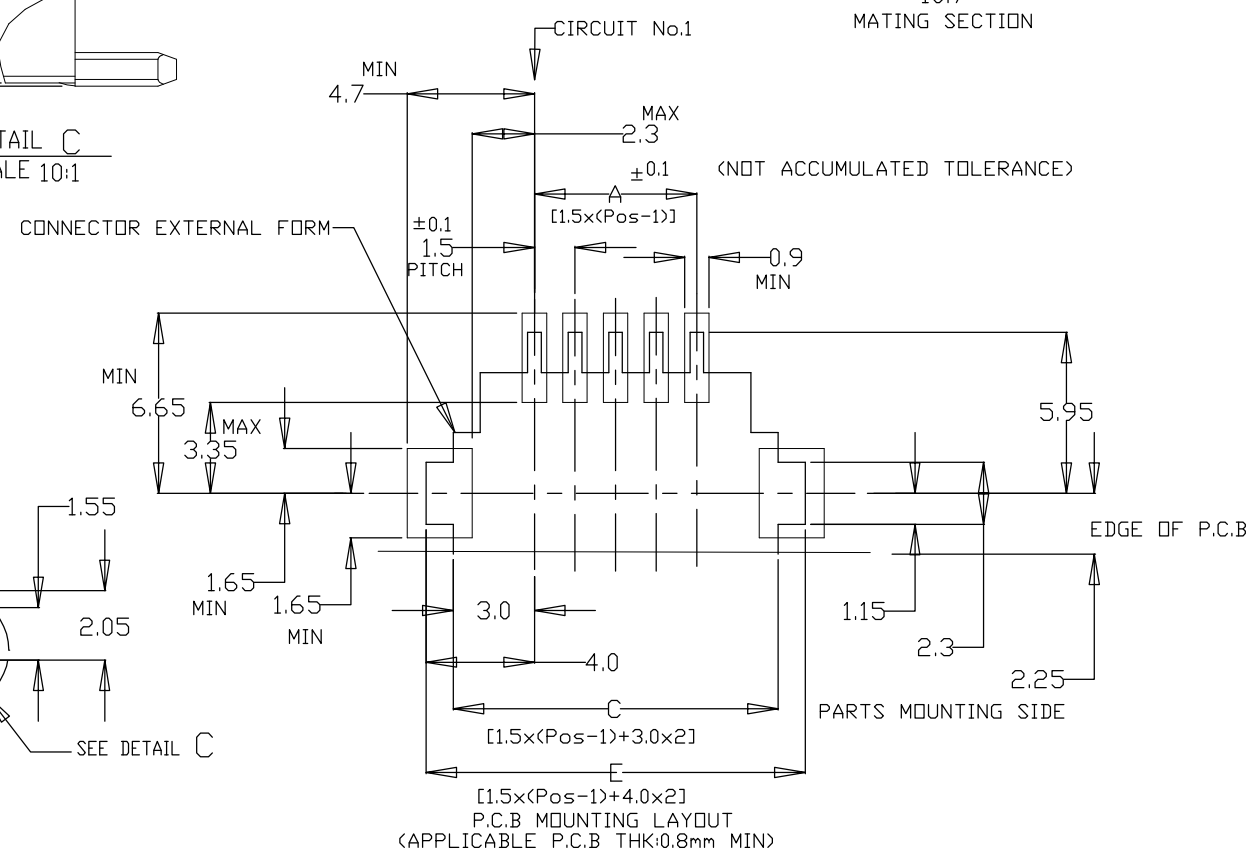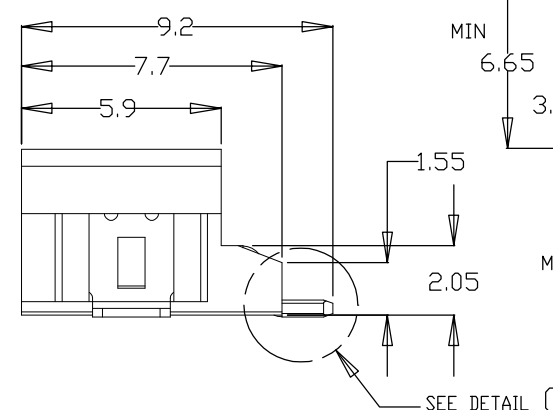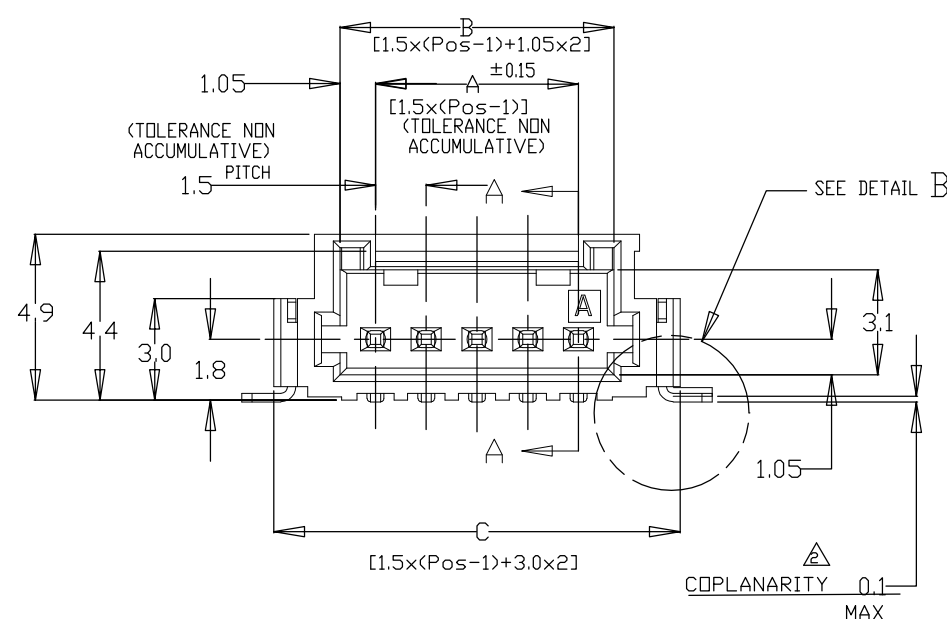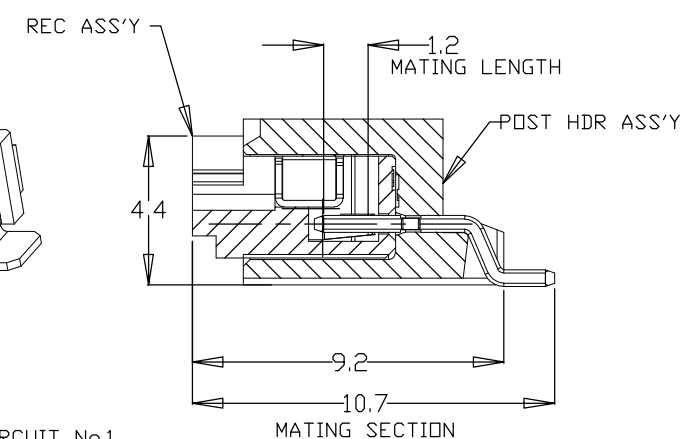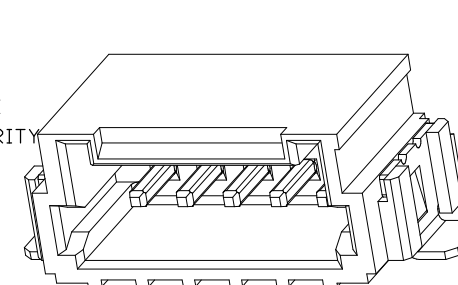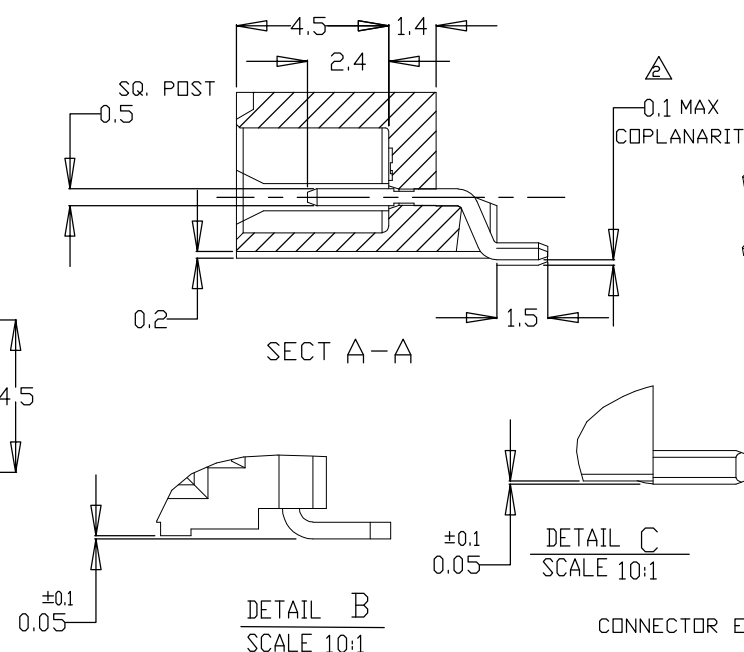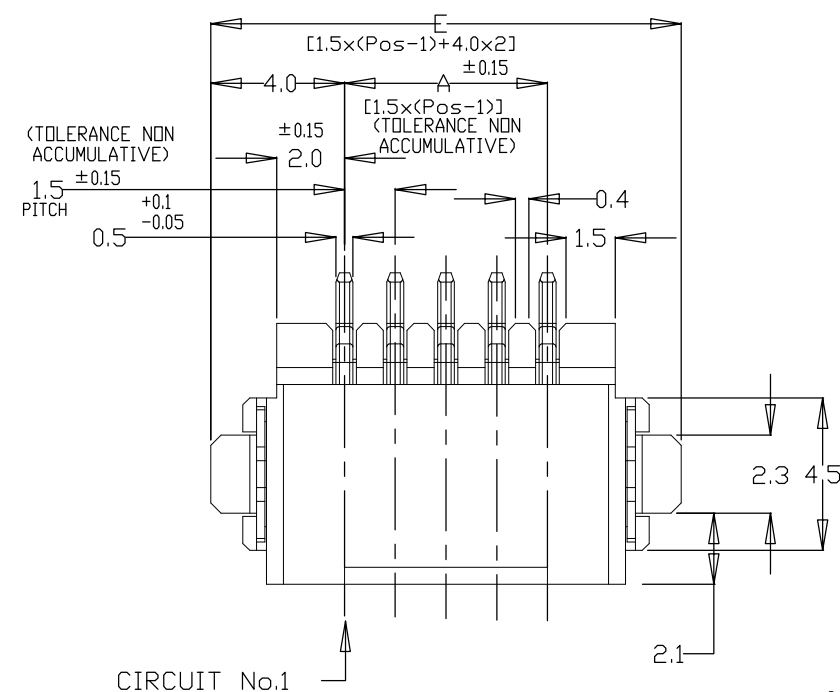

NOTES:

1. MATERIAL:

HOUSING: 6T NYLON (HIGH HEAT-RESISTED NYLON) G.F. 30%
UL94V-0, COLOR: BEIGE OR BLACK


POST: TIN BRASS WIRE

△ TO BE MEASURED WITH CONNECTOR PLACED ON HORIZONTAL DATUM SURFACE,
FLOAT OF SOLDER TINE AND SOLDER PEG 0.1mm MAX.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC $\pm$
1 PLC $\pm$
2 PLC $\pm$
3 PLC $\pm$
4 PLC $\pm$
ANGLES $\pm$
FINISH

MATERIAL

DWN

S.XU

31JAN03

CHK

S.YAO

31JAN03

APVD

T.SASAKI

31JAN03

PRODUCT SPEC

108-60018

APPLICATION SPEC

114-5223

WEIGHT

CUSTOMER DRAWING

STE

TE Connectivity

NAME

AMP Mini CT Connector 1.5mm PITCH

SINGLE ROW POST HDR ASS'Y (H)

SMT TYPE WITHOUT BOSS, EMBOSS TAPE PACKAGED

SIZE

A300779

CAGE CODE

DRAWING NO

C-292228

RESTRICTED TO

SCALE NTS

SHEET

3 OF 4

REV

C3

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION
- . - .

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC
ES

DIST
00


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

1.078	36.5	34.5	30.6	28.5	20	7-292228-0	2-292228-0
1.033	35.0	33.0	29.1	27.0	19	6-292228-9	1-292228-9
0.988	33.5	31.5	27.6	25.5	18	6-292228-8	1-292228-8
0.942	32.0	30.0	26.1	24.0	17	6-292228-7	1-292228-7
0.896	30.5	28.5	24.6	22.5	16	6-292228-6	1-292228-6
0.850	29.0	27.0	23.1	21.0	15	6-292228-5	1-292228-5
0.804	27.5	25.5	21.6	19.5	14	6-292228-4	1-292228-4
0.759	26.0	24.0	20.1	18.0	13	6-292228-3	1-292228-3
0.713	24.5	22.5	18.6	16.5	12	6-292228-2	1-292228-2
0.667	23.0	21.0	17.1	15.0	11	6-292228-1	1-292228-1
0.621	21.5	19.5	15.6	13.5	10	6-292228-0	1-292228-0
0.576	20.0	18.0	14.1	12.0	9	5-292228-9	292228-9
0.530	18.5	16.5	12.6	10.5	8	5-292228-8	292228-8
0.484	17.0	15.0	11.1	9.0	7	5-292228-7	292228-7
0.438	15.5	13.5	9.6	7.5	6	5-292228-6	292228-6
0.392	14.0	12.0	8.1	6.0	5	5-292228-5	292228-5
0.347	12.5	10.5	6.6	4.5	4	5-292228-4	292228-4
0.301	11.0	9.0	5.1	3.0	3	5-292228-3	292228-3
0.255	9.5	7.5	3.6	1.5	2	5-292228-2	292228-2
WEIGHT (g)	E	C	B	A	Pos.	BLACK	BEIGE (NAT)
	DIMENSIONS					P/N	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH -

MATERIAL
-

DWN
S.XU
31JAN03

CHK
S.YAO
31JAN03

APVD
T.SASAKI
31JAN03

PRODUCT SPEC
108-60018

APPLICATION SPEC
114-5223

WEIGHT
-

CUSTOMER DRAWING

 TE Connectivity

NAME
AMP Mini CT Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (H)
SMT TYPE WITHOUT BOSS, EMBOSS TAPE PACKAGED

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-292228

RESTRICTED TO
-

SCALE
NTS

SHEET
4 OF 4

REV
C3



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331