


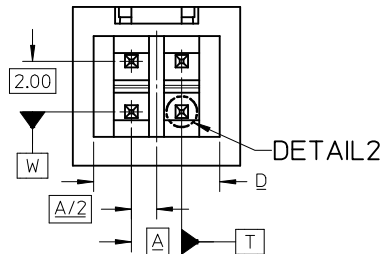

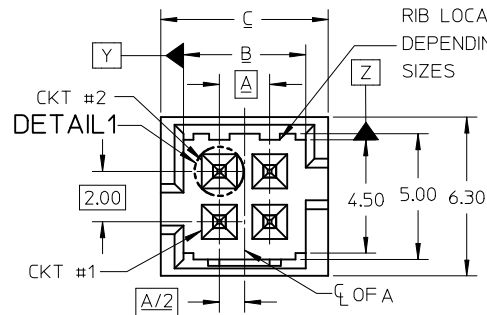



4 CIRCUITS




SECTION Z-Z




DETAIL2



VIEW FOR
HEADER WITH CAP



VIEW FOR HEADER
WITH ONLY DUAL SLOTS

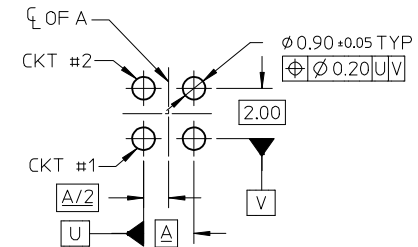

RECOMMENDED PCB LAYOUT

NOTES:

1. MATERIALS:

HOUSING: 30% GF, NYLON, UL94V-0, COLOR: BLACK

PIN: 0.50MM SQ PHOSPHOR BRONZE

2. FINISHES: REFER TO PLATING OPTIONS

3. PRODUCT SPECIFICATION: PS-87831-027

4. PACKAGING SPECIFICATION:

TUBE: PK-87831-001, TAPE AND REEL: PK-87831-300

5. MATES WITH: A. MOLEX CRIMP RECEPTACLE HOUSING: 51110 SERIES AND CRIMP TERMINAL: 50394 SERIES



B. MOLEX 2MM MILLIGRID DUAL ROW IDT: 87568 SERIES

C. MOLEX 2MM MILLIGRID DUAL ROW RECEPTACLE:
79107 (GOLD PLATED), 78787 (TIN PLATED)


RELEASED EC NO: S2015-1188 DRWN:GMENARLY CHKD:CGOH APPR:KHLIM 2015/04/15 2015/06/29 2015/06/29	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
						MM ONLY		NTS	METRIC			
						DRAWN BY DATE		TITLE				
						GMENARLY 2015/04/15						
						CHECKED BY DATE		MILLIGRID 2MM PITCH, THROUGH HOLE VERTICAL SHROUDED HEADER				
						APPROVED BY DATE		molex				
			KHLIM 2015/06/29									
			MATERIAL NO.		DOCUMENT NO.					SHEET NO.		
			ANGULAR ± 3 °		SEE TABLE		SD-87831-0001					2 OF 13
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
					SIZE							
					A3							

	10	9	8	7	6	5	4	3	2	1											
	4 CIRCUITS																				
F	CKT SIZE	ASSY P/N WITHOUT CAP IN TUBE	ASSY P/N WITH CAP IN TUBE	ASSY P/N WITH CAP IN T&R	PLATING OPTIONS	FRICTION LOCKS		SIDE SLOTS		CENTER POLARIZATION	PEG	DIMENSION						F			
						DUAL	CENTER	DUAL	SINGLE			A	B	C	D	E	F	G	H		
	4	87831-0419	N.A	N.A	1	N.A	N.A	YES	N.A	N.A	N.A	2.00	4.85	6.65	5.00	N.A	N.A	2.50	3.60±0.20		
		87831-0420	N.A	N.A	2																
		87831-0421	N.A	N.A	3																
		87831-0436	N.A	N.A	4																
E		87831-0441	87831-0456	N.A	2	N.A	YES	YES	N.A	N.A	N.A						1.00	2.50			
		87831-0442	N.A	N.A	3																
		87831-5141	N.A	N.A	2																
		87831-5142	N.A	N.A	3	N.A	YES	YES	N.A	N.A	N.A									2.80	
		87831-6141	N.A	N.A	2																
		87831-6142	N.A	N.A	3																
	87831-0443	N.A	N.A	2	N.A	YES	N.A	YES	N.A	N.A	2.50	3.60 ^{+0.15} _{-0.10}									
	87831-0444	N.A	N.A	3																	
D																					D
C																					C
B																					B
A	PLATING OPTIONS: 1 - 0.05-0.13um/2-5uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 2 - 0.38um/15uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 3 - 0.76um/30uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 4 - 2.50um/100uin MIN. MATTE TIN OVER 1.25um/50uin MIN. NICKEL OVERALL.					RELEASED EC NO: S2015-1188 DRWG:GMENARLY CHKD:CGOH APPR:KHLIM 2015/04/15 2015/06/29 2015/06/29 A	QUALITY SYMBOLS F _A =0 F _G =0 F _P =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		MILLIGRID 2MM PITCH, THROUGH HOLE VERTICAL SHROUDED HEADER molex				SHEET NO. 3 OF 13	
							DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	10	9	8	7	6	5	4	3	2	1											

6 CIRCUITS

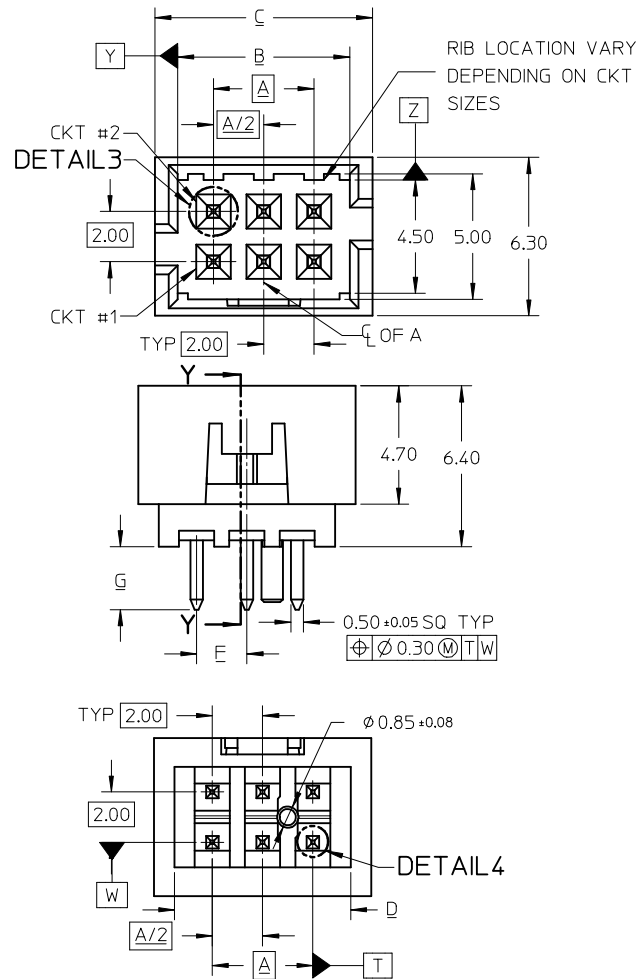


SECTION Y-Y




DETAIL3




DETAIL4



VIEW FOR
HEADER WITH CAP



VIEW FOR HEADER WITH
ONLY DUAL SLOTS

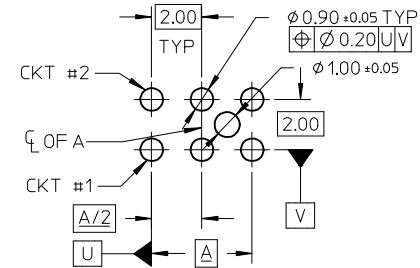

RECOMMENDED PCB LAYOUT

NOTES:

1. MATERIALS:

HOUSING: 30% GF, NYLON, UL94V-0, COLOR: BLACK

PIN: 0.50MM SQ PHOSPHOR BRONZE

2. FINISHES: REFER TO PLATING OPTIONS

3. PRODUCT SPECIFICATION: PS-87831-027

4. PACKAGING SPECIFICATION:

TUBE: PK-87831-001, TAPE AND REEL: PK-87831-300

5. MATES WITH: A. MOLEX CRIMP RECEPTACLE HOUSING: 51110 SERIES AND CRIMP TERMINAL: 50394 SERIES





B. MOLEX 2MM MILLIGRID DUAL ROW IDT: 87568 SERIES

C. MOLEX 2MM MILLIGRID DUAL ROW RECEPTACLE: 79107 (GOLD PLATED), 78787 (TIN PLATED)


RELEASED EC NO: S2015-1188 DRWNG:GEMARLY CHKD:CGOH APPR:KHLIM 2015/04/15 2015/06/29 2015/06/29	DESCRIPTION	QUALITY SYMBOLS F_A =0 F_C =0 F_P =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
					DRAWN BY GEMENARLY	DATE 2015/04/15	TITLE MILLIGRID 2MM PITCH, THROUGH HOLE VERTICAL SHROUDED HEADER				
					CHECKED BY	DATE					
					APPROVED BY KHLIM	DATE 2015/06/29	DOCUMENT NO. SD-87831-0001				
					MATERIAL NO.						
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE						
REV			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

	10	9	8	7	6	5	4	3	2	1																
	6 CIRCUITS																									
F	CKT SIZE	ASSY P/N WITHOUT CAP IN TUBE	ASSY P/N WITH CAP IN TUBE	ASSY P/N WITH CAP IN T&R	PLATING OPTIONS	FRICTION LOCKS		SIDE SLOTS		CENTER POLARIZATION	PEG	DIMENSION						F								
						DUAL	CENTER	DUAL	SINGLE			A	B	C	D	E	F	G	H							
	6	87831-0619	N.A	N.A	1	N.A	N.A	YES	N.A	N.A	N.A	4.00	6.85	8.65	7.00	N.A			3.60±0.20							
		87831-0620	N.A	N.A	2																					
		87831-0621	N.A	N.A	3																					
		87831-0636	N.A	N.A	4																					
E		87831-0628	N.A	N.A	2	N.A	N.A	YES	N.A	N.A	YES															
		87831-0629	N.A	N.A	3																					
		87831-0641	N.A	N.A	2																					
		87831-0642	N.A	87831-5552	3	N.A	YES	YES	N.A	N.A	N.A															
		87831-5241	N.A	N.A	2																					
		87831-5242	N.A	N.A	3																					
		87831-6241	N.A	N.A	2	N.A	YES	YES	N.A	N.A	N.A															
		87831-6242	N.A	N.A	3																					
		87831-0643	N.A	N.A	2																					
D		87831-0644	N.A	N.A	3	N.A	YES	N.A	YES	N.A	N.A															
		87831-0645	N.A	N.A	2																					
		87831-0646	N.A	N.A	3																					
		87831-0632	N.A	N.A	2	N.A	YES	YES	N.A	N.A	YES															
		87831-5119	N.A	N.A	1												N.A	N.A		YES	N.A	YES	N.A			
C																										
B																										
A																										
	PLATING OPTIONS:					RELEASED EC NO: S2015-1188 DRWG:GMENARLY CHKD:CGOH APPR:KHL IM		DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION										
	1 - 0.05-0.13um/2-5uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 2 - 0.38um/15uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 3 - 0.76um/30uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 4 - 2.50um/100uin MIN. MATTE TIN OVER 1.25um/50uin MIN. NICKEL OVERALL.															MILLIGRID 2MM PITCH, THROUGH HOLE VERTICAL SHROUDED HEADER molex										
						A	REV																			


8 TO 12 CIRCUITS

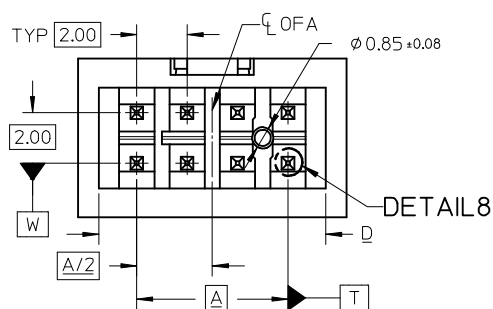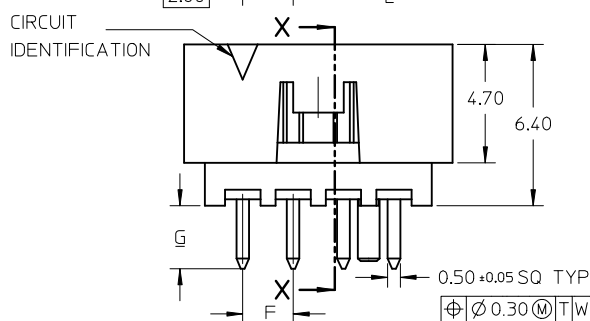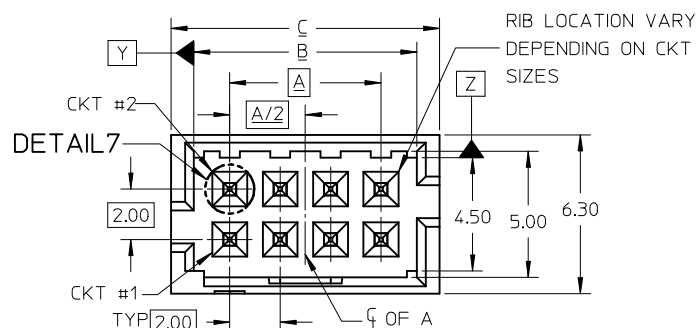


SECTION X-X




DETAIL7




DETAIL8

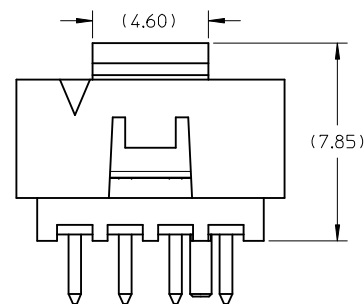

VIEW FOR HEADER WITH CAP



VIEW FOR HEADER WITH CENTER POLARIZATION AND DUAL SIDE SLOTS

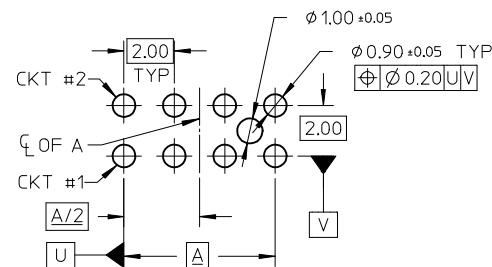

RECOMMENDED PCB LAYOUT

NOTES:

1. MATERIALS:

HOUSING: 30% GF, NYLON, UL94V-0, COLOR: BLACK

PIN: 0.50MM SQ PHOSPHOR BRONZE

2. FINISHES: REFER TO PLATING OPTIONS

3. PRODUCT SPECIFICATION: PS-87831-027

4. PACKAGING SPECIFICATION:

TUBE: PK-87831-001, TAPE AND REEL: PK-87831-300

5. MATES WITH: A. MOLEX CRIMP RECEPTACLE HOUSING: 51110 SERIES AND CRIMP TERMINAL: 50394 SERIES

B. MOLEX 2MM MILLIGRID DUAL ROW IDT: 87568 SERIES

C. MOLEX 2MM MILLIGRID DUAL ROW RECEPTACLE: 79107 (GOLD PLATED), 78787 (TIN PLATED)

RELEASED EC NO: S2015-1188 DRAWN:GMENARLY CHKD:CGOH APPR:KHLIM	2015/04/15 2015/06/29 2015/06/29	DESCRIPTION REV	QUALITY SYMBOLS F_A=0 F_B=0 F_P=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mmINCH		DRAWN BYDATE GMENARLY2015/04/15		TITLE MILLIGRID 2MM PITCH, THROUGH HOLE VERTICAL SHROUDED HEADER			
						CHECKED BYDATE					
				4 PLACES± --- ± ---		APPROVED BYDATE KHLIM2015/06/29		molex DOCUMENT NO. SD-87831-0001			
				3 PLACES± --- ± ---		MATERIAL NO.					
2 PLACES± 0.20 ± ---		ANGULAR ± 3 °		SEE TABLE							
1 PLACE± --- ± ---		DRAFT WHERE APPLICABLE		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
0 PLACE± --- ± ---		MUST REMAIN WITHIN DIMENSIONS									

10		9		8		7		6		5		4		3		2		1											
8 CIRCUITS																													
F	CKT SIZE	ASSY P/N WITHOUT CAP IN TUBE	ASSY P/N WITH CAP IN TUBE	ASSY P/N WITH CAP IN T&R	PLATING OPTIONS	FRICTION LOCKS		SIDE SLOTS		CENTER POLARIZATION	PEG	DIMENSION							F										
						DUAL	CENTER	DUAL	SINGLE			A	B	C	D	E	F	G		H									
E	8	87831-0819	N.A	N.A	1	N.A	N.A	YES	N.A	YES	N.A	6.00	8.85	10.65	9.00	N.A	N.A	2.50	3.60±0.20	E									
		87831-0820	N.A	N.A	2																								
		87831-0821	N.A	N.A	3																								
		87831-0836	N.A	N.A	4																								
		87831-0828	N.A	N.A	2	N.A	N.A	YES	N.A	YES	YES							N.A			N.A	N.A	N.A	3.00	2.50	3.60±0.15 -0.10			
		87831-0829	N.A	N.A	3																								
		87831-0841	N.A	87831-5551	2																								
		87831-0842	N.A	N.A	3																								
		87831-5441	N.A	N.A	2	N.A	YES	YES	N.A	N.A	N.A						N.A	N.A			N.A	N.A	3.00	2.50	3.60±0.15 -0.10				
		87831-5442	N.A	N.A	3																								
		N.A	87831-5541	N.A	2																								
		N.A	87831-5542	N.A	3																								
		D		87831-5741	N.A	N.A	2	N.A	YES	YES	N.A						N.A	N.A			6.00	8.85	10.65	9.00	N.A	3.00	2.50	3.60±0.15 -0.10	D
				87831-5742	N.A	N.A	3																						
87831-0832	N.A			N.A	2																								
87831-0843	N.A			N.A	2																								
87831-0844	N.A			N.A	3	N.A	YES	N.A	YES	N.A	YES	N.A	N.A	N.A	N.A	3.00	2.50	3.60±0.15 -0.10											
87831-0845	N.A			N.A	2																								
87831-0846	N.A			N.A	3																								

PLATING OPTIONS:
1 - 0.05-0.13um/2-5uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL.
2 - 0.38um/15uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL.
3 - 0.76um/30uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL.
4 - 2.50um/100uin MIN, MATTE TIN OVER 1.25um/50uin MIN, NICKEL OVERALL.

RELEASED
EC NO: S2015-1188
DRWN:GMENARLY 2015/04/15
CHKD:GEOH 2015/06/29
APPR:KHLIM 2015/06/29
A

REV
DESCRIPTION

QUALITY SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± 0.20 ± ---
1 PLACE ± --- ± ---
0 PLACE ± --- ± ---
ANGULAR ± 3 °
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY
DRAWN BY DATE
GMENARLY 2015/04/15
CHECKED BY DATE
APPROVED BY DATE
KHLIM 2015/06/29
MATERIAL NO.
SEE TABLE







SCALE
NTS
DESIGN UNITS
METRIC
THIRD ANGLE PROJECTION
MILLIGRID
2MM PITCH, THROUGH HOLE
VERTICAL SHROUDED HEADER
molex
SD-87831-0001
SHEET NO.
7 OF 13

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

| 10 | | 9 | | 8 | | 7 | | 6 | | 5 | | 4 | | 3 | | 2 | | 1 | |

10		9		8		7		6		5		4		3		2		1		
10 TO 12 CIRCUITS																				
F	CKT SIZE	ASSY P/N WITHOUT CAP IN TUBE	ASSY P/N WITH CAP IN TUBE	ASSY P/N WITH CAP IN T&R	PLATING OPTIONS	FRICTION LOCKS		SIDE SLOTS		CENTER POLARIZATION	PEG	DIMENSION								F
						DUAL	CENTER	DUAL	SINGLE			A	B	C	D	E	F	G	H	
E	10	87831-1019	N.A	N.A	1	N.A	N.A	YES	N.A	YES	N.A	8.00	10.85	12.65	11.00	N.A	N.A	2.50	3.60±0.20	E
		87831-1020	N.A	N.A	2															
		87831-1021	N.A	N.A	3															
		87831-1036	N.A	N.A	4															
		87831-1010	N.A	N.A	2	N.A	N.A	YES	N.A	YES	N.A							3.50		
		87831-1011	N.A	N.A	3															
		87831-1028	N.A	N.A	2	N.A	N.A	YES	N.A	YES	YES						2.50			
		87831-1029	N.A	N.A	3															
		87831-1035	N.A	N.A	3	N.A	N.A	YES	N.A	YES	YES						3.50			
		87831-1041	N.A	N.A	2															
87831-1042	N.A	87831-5553	3	N.A	YES	YES	N.A	N.A	N.A	4.00	2.50	3.60 ^{+0.15} _{-0.10}								
87831-1032	N.A	N.A	2																	
87831-1043	N.A	N.A	2	N.A	YES	N.A	YES	N.A	N.A	2.50										
87831-1044	N.A	N.A	3																	
87831-1045	N.A	N.A	2	N.A	YES	N.A	YES	N.A	YES	2.50										
87831-1046	N.A	N.A	3																	
D	12	87831-1219	N.A	N.A	1	N.A	N.A	YES	N.A	YES	N.A	10.00	12.85	14.65	13.00	N.A	N.A	2.50	3.60±0.20	D
		87831-1220	N.A	N.A	2															
		87831-1221	N.A	N.A	3															
		87831-1236	N.A	N.A	4															
		87831-1228	N.A	N.A	2	N.A	N.A	YES	N.A	YES	YES						2.50			
		87831-1229	N.A	N.A	3															
		87831-1241	N.A	N.A	2	N.A	YES	YES	N.A	N.A	N.A						5.00	2.50		
		87831-1242	N.A	N.A	3															
		87831-1255	87831-1256	N.A	2	N.A	YES	YES	N.A	N.A	N.A						3.50			
		87831-1232	N.A	N.A	2													N.A		
87831-1243	N.A	N.A	2	N.A	YES	N.A	YES	N.A	N.A	2.50										
87831-1244	N.A	N.A	3								N.A	YES	N.A	YES	N.A	YES	3.60 ^{+0.15} _{-0.10}			
87831-1245	N.A	N.A	2																	
87831-1246	N.A	N.A	3																	
B																				
PLATING OPTIONS: 1 - 0.05-0.13um/2-5uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 2 - 0.38um/15uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 3 - 0.76um/30uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 4 - 2.50um/100uin MIN. MATTE TIN OVER 1.25um/50uin MIN. NICKEL OVERALL.																				
A	RELEASED EC NO: S2015-1188 DRWN:GMENARLY 2015/06/29 CHKD:CGOH APPR:KHL IM					REV	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		MILLIGRID 2MM PITCH, THROUGH HOLE VERTICAL SHROUDED HEADER molex SD-87831-0001 SHEET NO. 8 OF 13			
	mm		INCH		DRAWN BY GMENARLY				DATE 2015/04/15		CHECKED BY		DATE 2015/06/29		APPROVED BY KHL IM					DATE 2015/06/29
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
tb_frame_A3_P_AM.T Rev. G 2012/01/11		9		8		7		6		5		4		3		2		1		

14 TO 50 CIRCUITS

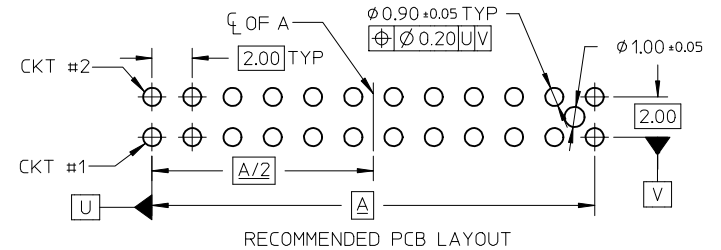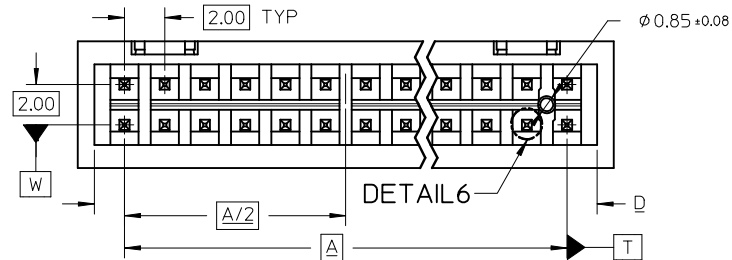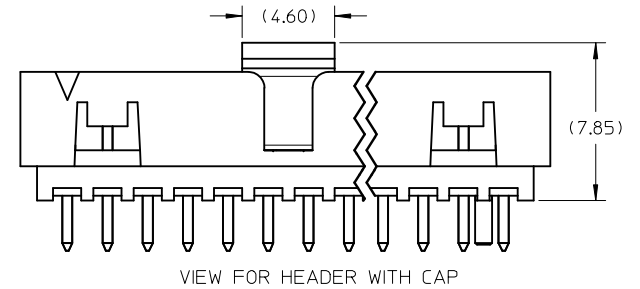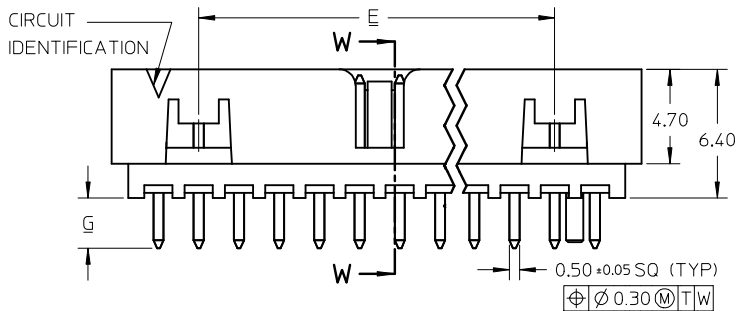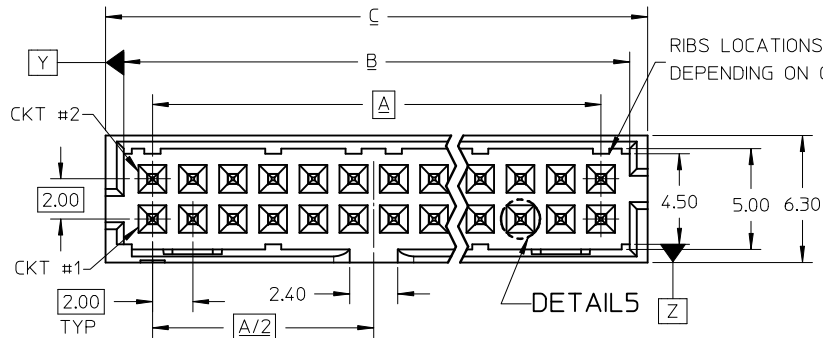

NOTES:

- MATERIALS:
HOUSING: 30% GF, NYLON, UL94V-0, COLOR: BLACK
PIN: 0.50MM SQ PHOSPHOR BRONZE
- FINISHES: REFER TO PLATING OPTIONS
- PRODUCT SPECIFICATION: PS-87831-027
- PACKAGING SPECIFICATION:
TUBE: PK-87831-001, TAPE AND REEL: PK-87831-300
- MATES WITH: A. MOLEX CRIMP RECEPTACLE HOUSING: 51110 SERIES AND CRIMP TERMINAL: 50394 SERIES
B. MOLEX 2MM MILLIGRID DUAL ROW IDT: 87568 SERIES
C. MOLEX 2MM MILLIGRID DUAL ROW RECEPTACLE: 79107 (GOLD PLATED), 78787 (TIN PLATED)

RELEASED EC NO: S2015-1188 DRWNG:GMENARLY CHKD:CGOH APPR:KHL IM 2015/04/15 2015/06/29 2015/06/29	DESCRIPTION REV A	QUALITY SYMBOLS F_A=0 F_G=0 F_P=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
					DRAWN BY GMENARLY	DATE 2015/04/15	TITLE MILLIGRID 2MM PITCH, THROUGH HOLE VERTICAL SHROUDED HEADER			
					CHECKED BY	DATE				
					APPROVED BY KHL IM	DATE 2015/06/29	molex			
					MATERIAL NO.					
			ANGULAR ± 3 °		SEE TABLE		SD-87831-0001			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

[illegible]

		10	9	8	7	6	5	4	3	2	1									
		22 TO 30 CIRCUITS																		
F	CKT SIZE	ASSY P/N WITHOUT CAP IN TUBE	ASSY P/N WITH CAP IN TUBE	ASSY P/N WITH CAP IN T&R	PLATING OPTIONS	FRICTION LOCKS		SIDE SLOTS		CENTER POLARIZATION	PEG	DIMENSION								F
						DUAL	CENTER	DUAL	SINGLE			A	B	C	D	E	F	G	H	
	22	87831-2219	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	20.00	22.85	24.65	23.00	16.00	N.A	2.50	3.60±0.20	
		87831-2220	N.A	N.A	2															
		87831-2221	N.A	N.A	3															
		87831-2236	N.A	N.A	4	YES	N.A	YES	N.A	YES	YES							2.50		
		87831-2228	N.A	N.A	2															
87831-2229	N.A	N.A	3																	
E	24	87831-2419	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	22.00	24.85	26.65	25.00	18.00	N.A	2.50	3.60±0.20	
		87831-2420	N.A	N.A	2															
		87831-2421	N.A	N.A	3															
		87831-2436	N.A	N.A	4	YES	N.A	YES	N.A	YES	YES							2.50		
		87831-2428	N.A	N.A	2															
		87831-2429	N.A	N.A	3															
		87831-2435	N.A	N.A	3	YES	N.A	YES	N.A	YES	YES							3.50		
87831-2410	N.A	N.A	2	YES	N.A	YES	N.A	YES	N.A	3.50										
D	26	87831-2619	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	24.00	26.85	28.65	27.00	20.00	N.A	2.50	3.60±0.20	
		87831-2620	N.A	N.A	2															
		87831-2621	N.A	N.A	3															
		87831-2636	N.A	N.A	4	YES	N.A	YES	N.A	YES	YES							2.50		
		87831-2628	N.A	N.A	2															
		87831-2629	N.A	N.A	3															
		87831-2610	N.A	N.A	2	YES	N.A	YES	N.A	YES	N.A							3.50		
C	28	87831-2819	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	26.00	28.85	30.65	29.00	22.00	N.A	2.50	3.60±0.20	
		87831-2820	N.A	N.A	2															
		87831-2821	N.A	N.A	3															
		87831-2836	N.A	N.A	4	YES	N.A	YES	N.A	YES	YES							2.50		
		87831-2828	N.A	N.A	2															
		87831-2829	N.A	N.A	3															
B	30	87831-3019	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	28.00	30.85	32.65	31.00	24.00	N.A	2.50	3.60±0.20	
		87831-3020	N.A	N.A	2															
		87831-3021	N.A	N.A	3															
		87831-3036	N.A	N.A	4	YES	N.A	YES	N.A	YES	YES							2.50		
		87831-3028	N.A	N.A	2															
		87831-3029	N.A	N.A	3															
		87831-3035	N.A	N.A	3	YES	N.A	YES	N.A	YES	YES							3.50		
		87831-3010	87831-3030	87831-3050	2	YES	N.A	YES	N.A	YES	N.A							3.50		
A	PLATING OPTIONS:					RELEASED EC NO: S2015-1188 DRWN:GMENARLY CHKD:GGOH APPR:KHL IM REV	QUALITY SYMBOLS F _A =0 F _B =0 F _C =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		MILLIGRID 2MM PITCH, THROUGH HOLE VERTICAL SHROUDED HEADER molex	SHEET NO. 11 OF 13			
	1 - 0.05-0.13um/2-5uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL.							4 PLACES ± --- ± ---		DRAWN BY DATE GMENARLY 2015/04/15		TITLE								
	2 - 0.38um/15uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL.							3 PLACES ± --- ± ---		CHECKED BY DATE										
	3 - 0.76um/30uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL.							2 PLACES ± 0.20 ± ---		APPROVED BY DATE KHL IM 2015/06/29										
	4 - 2.50um/100uin MIN. MATTE TIN OVER 1.25um/50uin MIN. NICKEL OVERALL.							1 PLACE ± --- ± ---												
					0 PLACE ± --- ± ---		ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.									
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
ib_frame_A3_P_AM.T Rev. G 2012/01/11		9	8	7	6	5	4	3	2	1										

10		9		8		7		6		5		4		3		2		1			
32 TO 40 CIRCUITS																					
F	CKT SIZE	ASSY P/N WITHOUT CAP IN TUBE	ASSY P/N WITH CAP IN TUBE	ASSY P/N WITH CAP IN T&R	PLATING OPTIONS	FRICTION LOCKS		SIDE SLOTS		CENTER POLARIZATION	PEG	DIMENSION							F		
						DUAL	CENTER	DUAL	SINGLE			A	B	C	D	E	F	G		H	
	32	87831-3219	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	30.00	32.85	34.65	33.00	26.00	N.A	2.50	3.60±0.20		
		87831-3220	N.A	N.A	2																
		87831-3221	N.A	N.A	3																
		87831-3236	N.A	N.A	4																
		87831-3228	N.A	N.A	2	2.50															
	32	87831-3229	N.A	N.A	3	YES	N.A	YES	N.A	YES	YES										
		E	34	87831-3419	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	32.00	34.85	36.65	35.00	28.00	N.A	2.50	3.60±0.20
				87831-3420	N.A	N.A	2														
				87831-3421	N.A	N.A	3														
				87831-3436	N.A	N.A	4														
87831-3428	N.A			N.A	2	2.50															
	34	87831-3429	N.A	N.A	3	YES	N.A	YES	N.A	YES	YES										
		87831-3435	N.A	N.A	3	YES	N.A	YES	N.A	YES	YES							3.50			
		D	36	87831-3619	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	34.00	36.85	38.65	37.00	30.00	N.A	2.50	3.60±0.20
				87831-3620	N.A	N.A	2														
				87831-3621	N.A	N.A	3														
87831-3636	N.A			N.A	4																
87831-3628	N.A			N.A	2	2.50															
	36	87831-3629	N.A	N.A	3	YES	N.A	YES	N.A	YES	YES										
		C	38	87831-3819	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	36.00	38.85	40.65	39.00	32.00	N.A	2.50	3.60±0.20
				87831-3820	N.A	N.A	2														
				87831-3821	N.A	N.A	3														
				87831-3836	N.A	N.A	4														
87831-3828	N.A			N.A	2	2.50															
	38	87831-3829	N.A	N.A	3	YES	N.A	YES	N.A	YES	YES										
		A	40	87831-4019	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	38.00	40.85	42.65	41.00	34.00	N.A	2.50	3.60±0.20
				87831-4020	N.A	N.A	2														
				87831-4021	N.A	N.A	3														
				87831-4036	N.A	N.A	4														
87831-4028	N.A			N.A	2	2.50															
	40	87831-4029	N.A	N.A	3	YES	N.A	YES	N.A	YES	YES										
		87831-4010	N.A	N.A	2	YES	N.A	YES	N.A	YES	N.A							3.50			
		B																			B
A	PLATING OPTIONS: 1 - 0.05-0.13um/2-5uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 2 - 0.38um/15uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 3 - 0.76um/30uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 4 - 2.50um/100uin MIN. MATTE TIN OVER 1.25um/50uin MIN. NICKEL OVERALL.																		A		
tb_frame_A3_P_AM.T Rev. G 2012/01/11		9		8		7		6		5		4		3		2		1			

	10	9	8	7	6	5	4	3	2	1											
42 TO 50 CIRCUITS																					
F	CKT SIZE	ASSY P/N WITHOUT CAP IN TUBE	ASSY P/N WITH CAP IN TUBE	ASSY P/N WITH CAP IN T&R	PLATING OPTIONS	FRICTION LOCKS		SIDE SLOTS		CENTER POLARIZATION	PEG	DIMENSION								F	
						DUAL	CENTER	DUAL	SINGLE			A	B	C	D	E	F	G	H		
	42	87831-4219	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	40.00	42.85	44.65	43.00	36.00	N.A	2.50	3.60±0.20		
87831-4220		N.A	N.A	2																	
87831-4221		N.A	N.A	3																	
87831-4236		N.A	N.A	4																	
87831-4228		N.A	N.A	2	YES	N.A	YES	N.A	YES	YES	2.50										
		87831-4229	N.A	N.A	3																
E																					
	44	87831-4419	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	42.00	44.85	46.65	45.00	38.00	N.A	2.50	3.60±0.20		
87831-4420		N.A	N.A	2																	
87831-4421		N.A	N.A	3																	
87831-4436		N.A	N.A	4																	
87831-4428		N.A	N.A	2	YES	N.A	YES	N.A	YES	YES	2.50										
		87831-4429	N.A	N.A	3																
		87831-4435	N.A	N.A	3	YES	N.A	YES	N.A	YES	YES							3.50			
D																					
	46	87831-4619	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	44.00	46.85	48.65	47.00	40.00	N.A	2.50	3.60±0.20		
87831-4620		N.A	N.A	2																	
87831-4621		N.A	N.A	3																	
87831-4636		N.A	N.A	4																	
87831-4628		N.A	N.A	2	YES	N.A	YES	N.A	YES	YES	2.50										
		87831-4629	N.A	N.A	3																
C																					
	48	87831-4819	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	46.00	48.85	50.65	49.00	42.00	N.A	2.50	3.60±0.20		
87831-4820		N.A	N.A	2																	
87831-4821		N.A	N.A	3																	
87831-4836		N.A	N.A	4																	
87831-4828		N.A	N.A	2	YES	N.A	YES	N.A	YES	YES	2.50										
		87831-4829	N.A	N.A	3																
A																					
	50	87831-5019	N.A	N.A	1	YES	N.A	YES	N.A	YES	N.A	48.00	50.85	52.65	51.00	44.00	N.A	2.50	3.60±0.20		
87831-5020		N.A	N.A	2																	
87831-5021		N.A	N.A	3																	
87831-5036		N.A	N.A	4																	
87831-5028		N.A	N.A	2	YES	N.A	YES	N.A	YES	YES	2.50										
		87831-5029	N.A	N.A	3																
		87831-5035	N.A	N.A	3	YES	N.A	YES	N.A	YES	YES							3.50			
B																					B
A	PLATING OPTIONS: 1 - 0.05-0.13um/2-5uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 2 - 0.38um/15uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 3 - 0.76um/30uin GOLD IN CONTACT AREA AND 1.88um/75uin MIN. MATTE TIN IN SOLDER TAIL AREA OVER 1.27um/50uin MIN. NICKEL OVERALL. 4 - 2.50um/10uin MIN. MATTE TIN OVER 1.25um/50uin MIN. NICKEL OVERALL.																				A
tb_frame_A3_P_AM_T Rev. G 2012/01/11		9	8	7	6	5	4	3	2	1											



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331