



Spring Cage Transformer Terminal Blocks

The ZTRK 4 terminal blocks with spring cage connection and SIH-TRK fuse holder were developed for direct mounting on coils with integrated mounting chambers and for snapping onto aluminum transformer rails 2 x 10 mm and 2 x 35 mm. The terminal block covers the cross section range up to 4 mm². There is also a green-yellow version with the same shape, without metal contact on the mounting surface, and a fuse terminal block. A practical test connection is provided for the 2.3 mm Ø MPS test plug. The SIH-TRK fuse holder provides space for a 5 x 20 mm replacement fuse directly on the transformer.


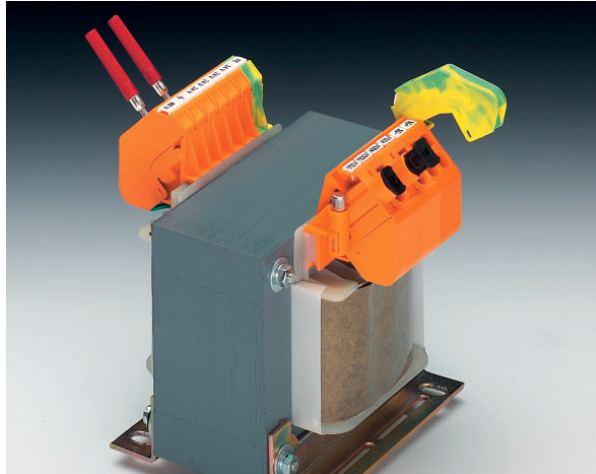


Transformer Terminal Blocks with Spring Cage Connection ZTRK 4

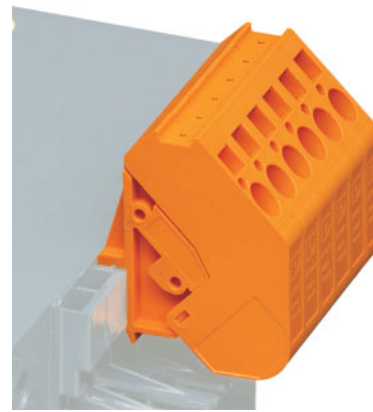

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
EN 60 947-7-1	0.2-4	0.2-4	24-10	32	630

Technical data

Spring cage transformer terminal block	orange green-yellow
Terminal block , as above, however, 2-pos.	orange
Terminal block , as above, however, 3-pos.	orange
(1) 2.3 mm Ø test plug¹⁾ , consisting of a metal part and a red insulating sleeve	
(2) Reducing plug , for transition from 4 mm Ø test plug to 2.3 mm Ø test plug socket	
(3) Marker pin, unprinted : for individual labeling with M-PEN, lettering area: 7,5 x 4 mm	
(4) Zack strip , flat, 10-section, for individual labeling with M-PEN	

Dimensions

Technical data in accordance with IEC/ DIN VDE

Maximum load current/ cross section	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / –
Surge voltage category / insulation material group	– / –

Capacity connection

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]

Stripping length	[mm]
-------------------------	------

Internal cylindrical gauge (IEC 60 947-1)

Insulating material


Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)

Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG


¹⁾ Further colors are available on request.

Type	Order No.	Pcs. Pkt.
ZTRK 4	30 29 30 5	50
ZTRK 4-GNYE	30 29 44 4	50
ZTRK 4/2	30 26 93 9	50
ZTRK 4/3	30 26 94 2	50
MPS-IH RD	02 01 67 6	10
RPS	02 01 64 7	10
BN-TRK	27 01 40 4	100
ZBF 7,5: UNPRINTED	08 09 94 2	10
see dimensional drawing		
	32 / 4	
	6 / 3	
	3 / III	
	0.25 - 4	
	0.25 - 4	
	0.5 - 1	
	12	
	A 4	
	PA	
	V2	
	600 / 30 / –	
	600 / 30 / –	



Spring Cage Transformer Fuse Terminal Block

ZTRK 4-SI

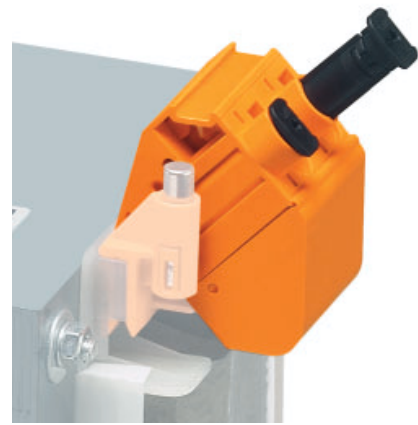

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
EN 60 127-6	0.2-4	0.2-4	24-10	6.3*	250*

* The current and voltage are determined by the fuse.

Technical data

Spring cage transformer fuse terminal block	orange
(1) 2.3 mm Ø test plug¹⁾ , consisting of a metal part and a red insulating sleeve	
(2) Reducing plug , for transition from 4 mm Ø test plug to 2.3 mm Ø test plug socket	
(3) Marker pin, unprinted : for individual labeling with M-PEN, lettering area: 7,5 x 4 mm	
(4) Zack strip , flat, 10-section, for individual labeling with M-PEN	

Dimensions

Technical data in accordance with IEC/ DIN VDE

Maximum load current/ cross section	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / –
Surge voltage category / insulation material group	– / –

Capacity connection

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]
Stripping length	[mm]

Internal cylindrical gauge (IEC 60 947-1)

Insulating material


Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)

Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG


¹⁾ Further colors are available on request.

Type	Order No.	Pcs. Pkt.
ZTRK 4-SI	30 29 43 1	50
MPS-IH RD	02 01 67 6	10
RPS	02 01 64 7	10
BN-TRK	27 01 40 4	100
ZBF 7,5: UNPRINTED	08 09 94 2	10
see dimensional drawing		
	32 / 4	
	6 / 3	
	3 / III	
	0.25 - 4	
	0.25 - 4	
	0.5 - 1	
	12	
	A 4	
	PA	
	V2	
	600 / 30 / –	
	600 / 30 / –	

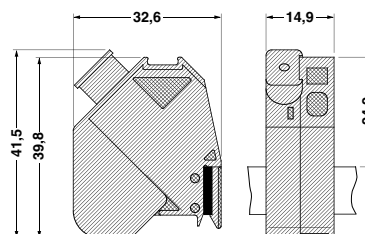


Fuse Holder

SIH-TRK

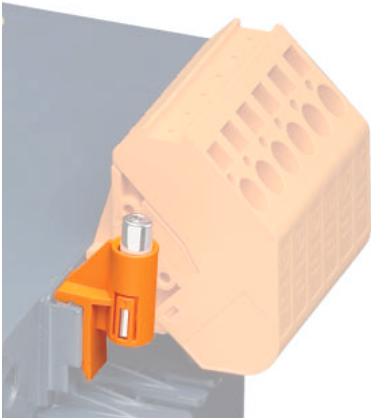

Technical data

		Type	Order No.	Pcs. Pkt.
Fuse holder, for 5 x 20 mm cartridge fuse inserts	orange	SIH-TRK	07 11 43 8	50
Technical data in accordance with IEC/ DIN VDE				
Insulating material			PA	
Inflammability class in acc. with UL 94			V2	





**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331