


# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR1220

### ■ Dimensions(mm)




Weight:0.7g


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 35        |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

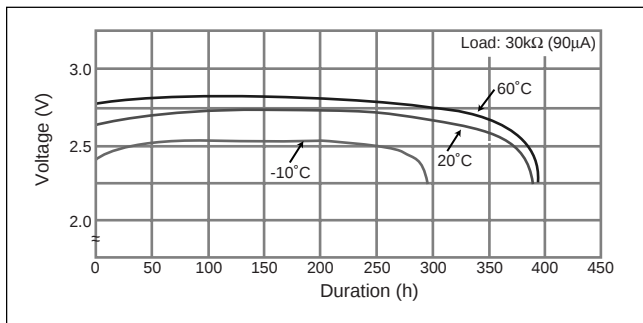

### ■ Operating voltage vs. load resistance(voltage at 50% discharge depth)

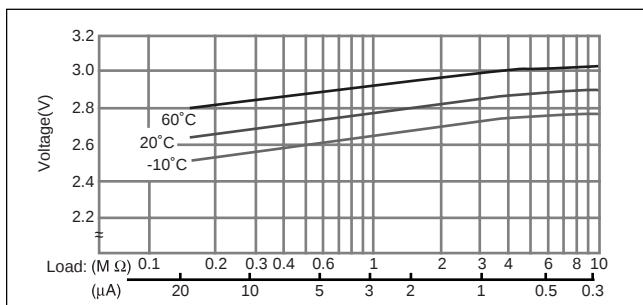


### ■ Capacity vs. load resistance

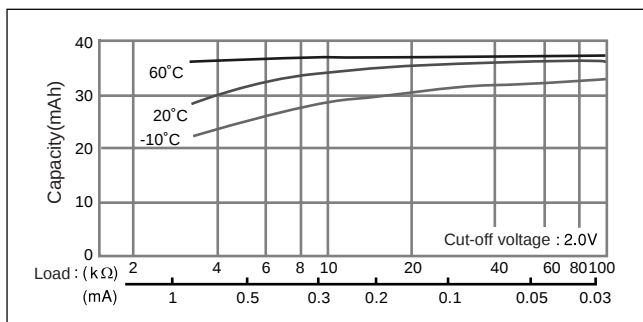

## BR1225

### ■ Dimensions(mm)




Weight:0.8g


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 48        |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

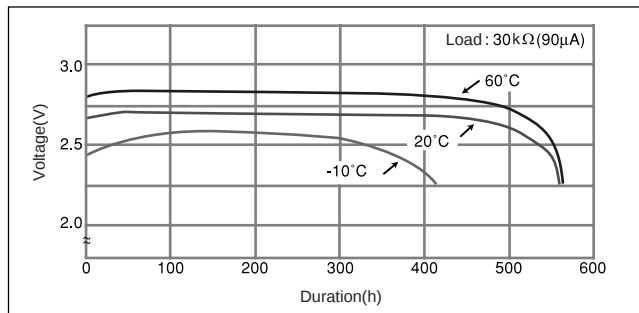

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

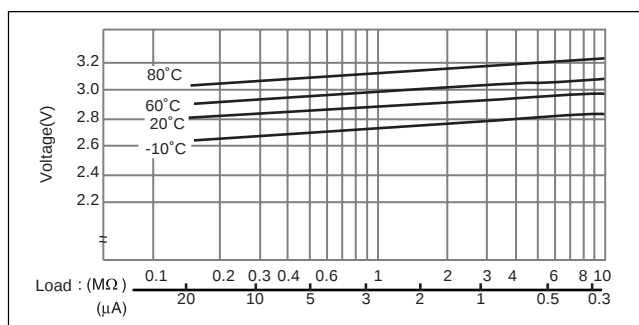


### ■ Capacity vs. load resistance

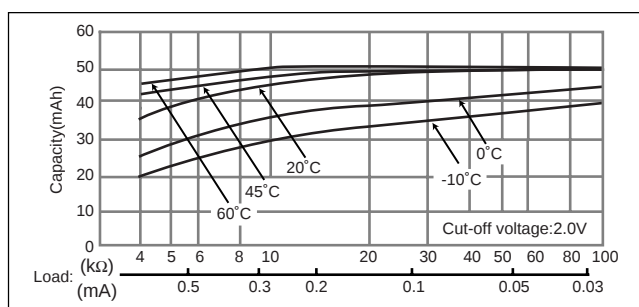

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR1220

### ■ Dimensions(mm)




Weight: 0.7g


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 35        |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

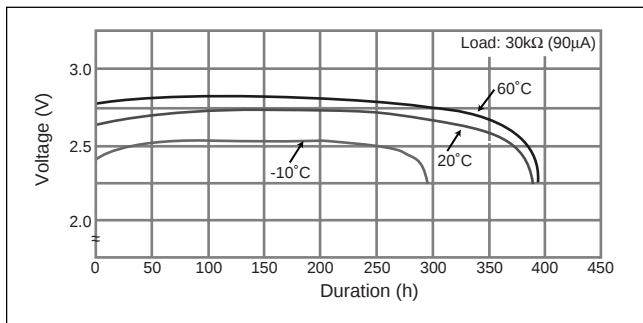

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

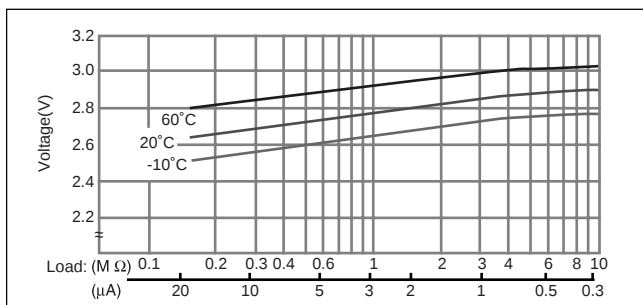


### ■ Capacity vs. load resistance

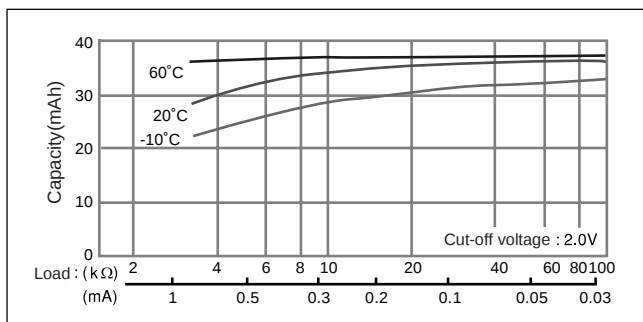

## BR1225

### ■ Dimensions(mm)




Weight: 0.8g


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 48        |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

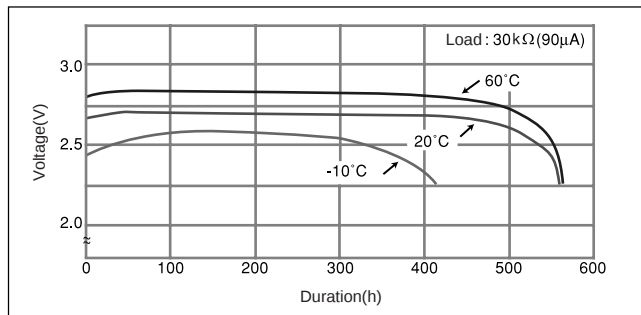

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

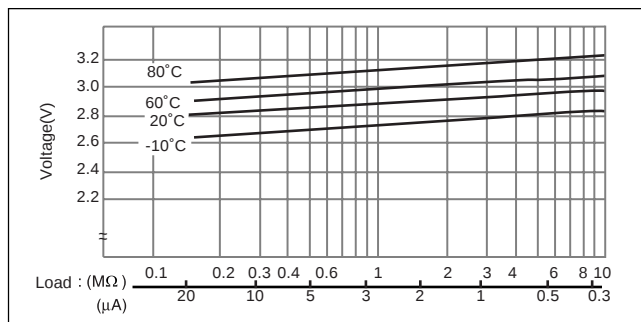


### ■ Capacity vs. load resistance

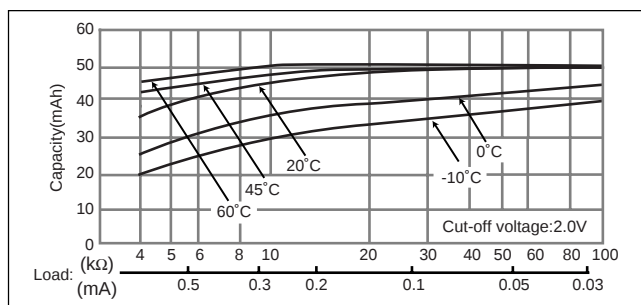

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR1632


### ■ Dimensions(mm)

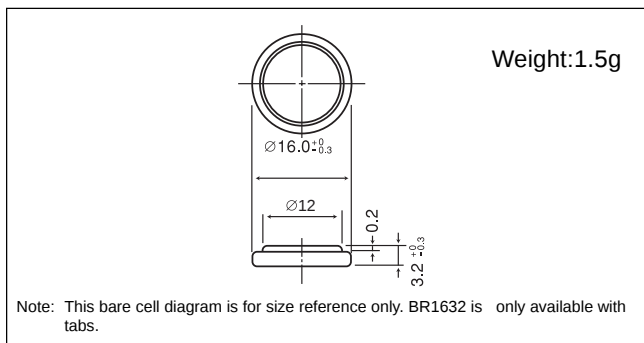


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 120       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

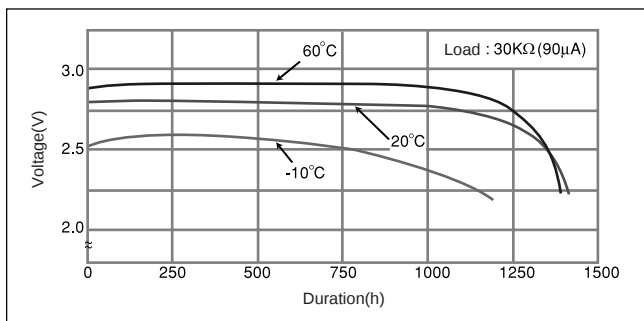

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

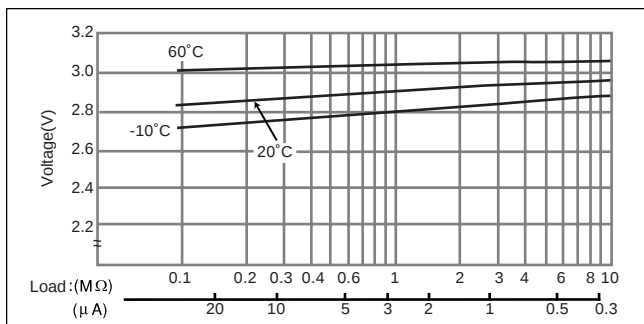


### ■ Capacity vs. load resistance

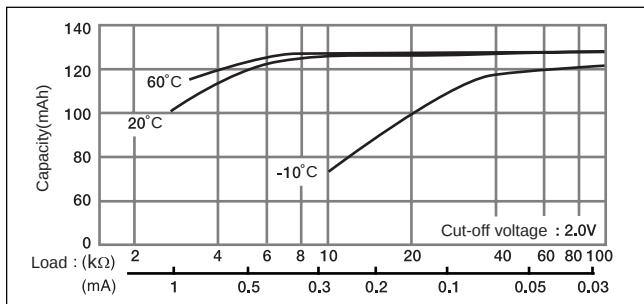

## BR2032


### ■ Dimensions(mm)

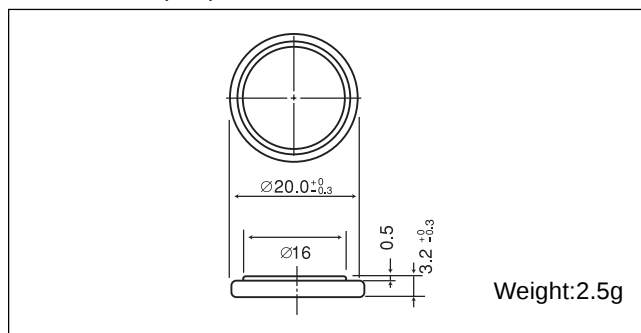


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 190       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

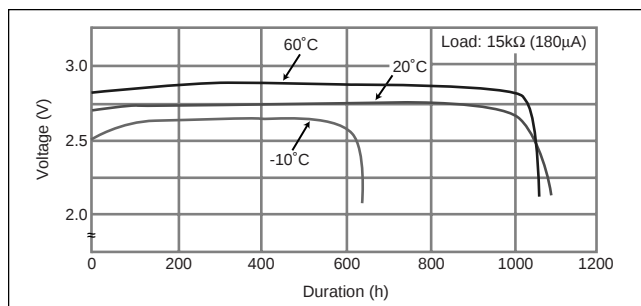

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

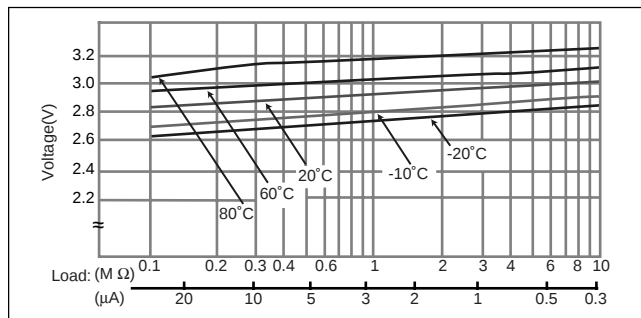


### ■ Capacity vs. load resistance

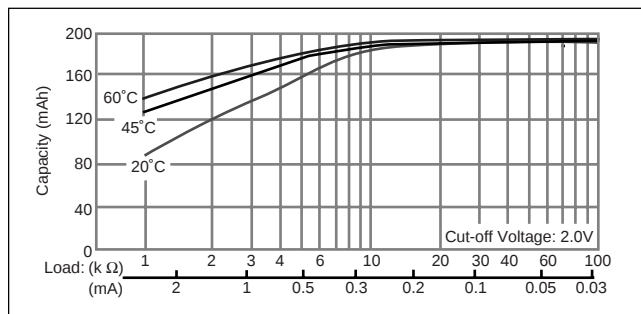

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR1632


### ■ Dimensions(mm)

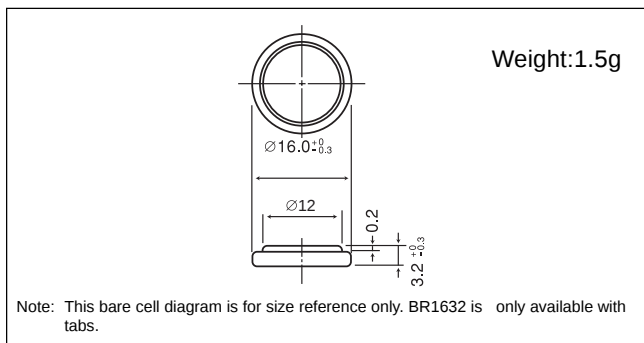


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 120       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

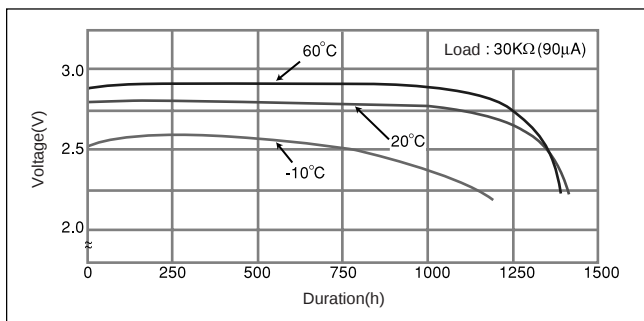

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

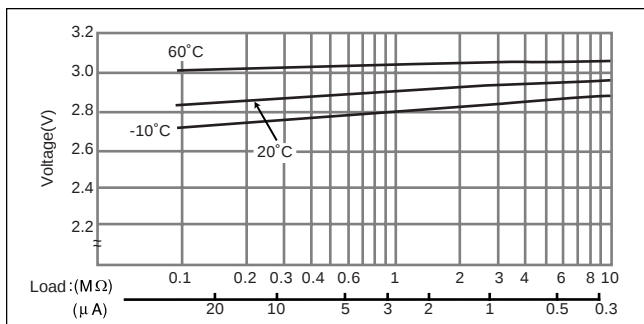


### ■ Capacity vs. load resistance

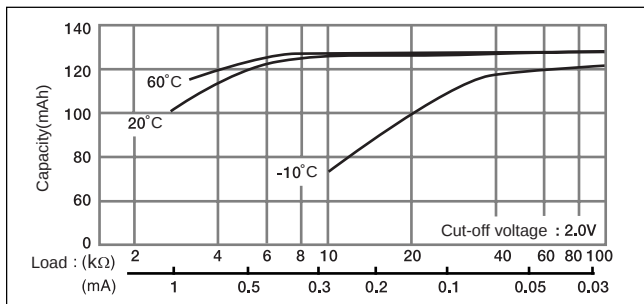

## BR2032


### ■ Dimensions(mm)

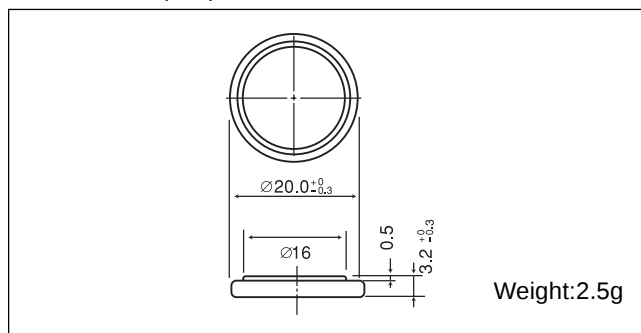


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 190       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

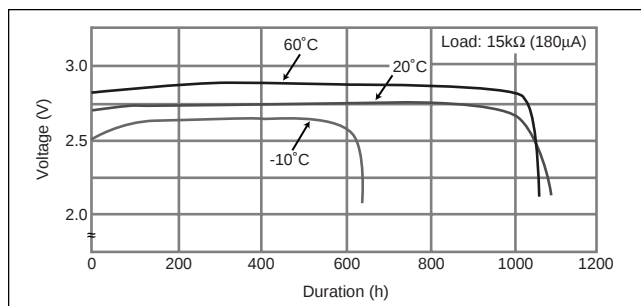

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

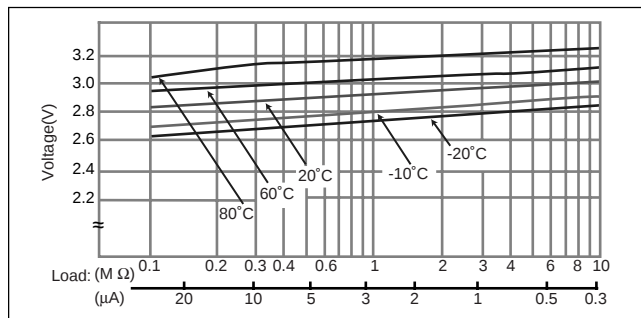


### ■ Capacity vs. load resistance

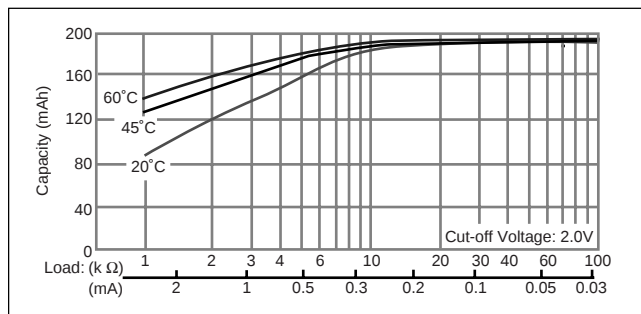

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR2325


### ■ Dimensions(mm)

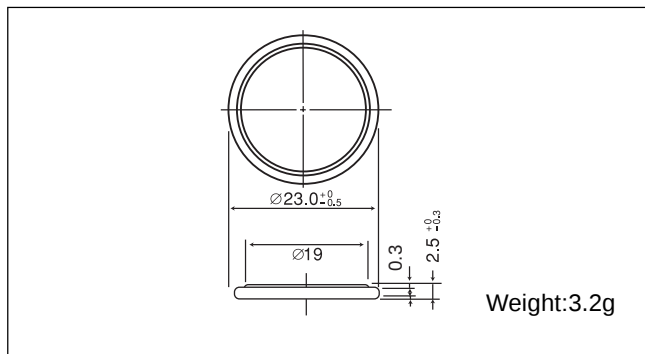


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 165       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

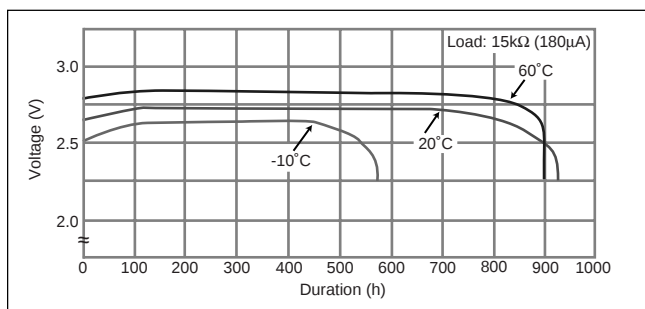

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

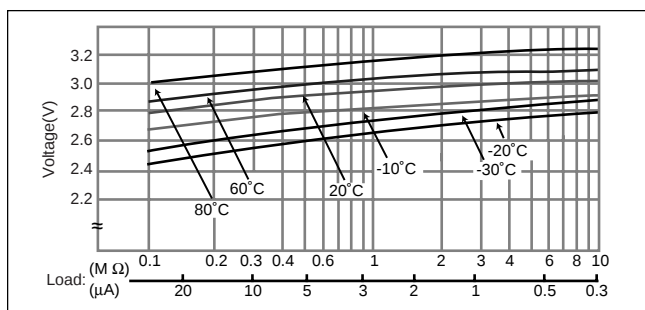


### ■ Capacity vs. load resistance

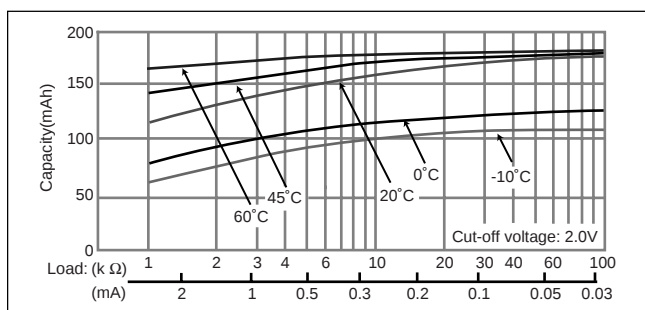

## BR2330


### ■ Dimensions(mm)

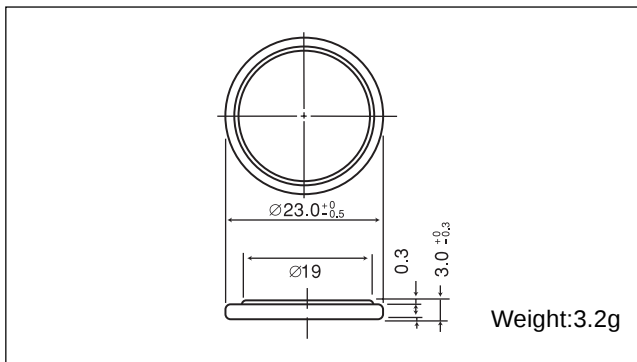


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 255       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

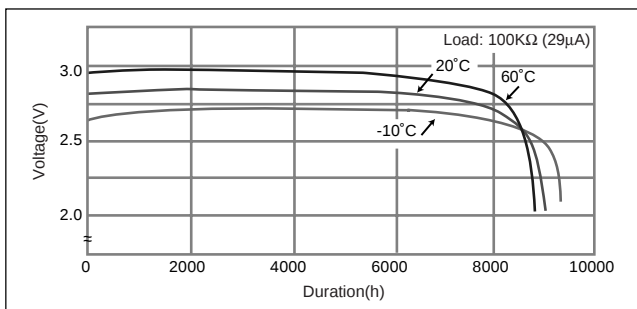

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

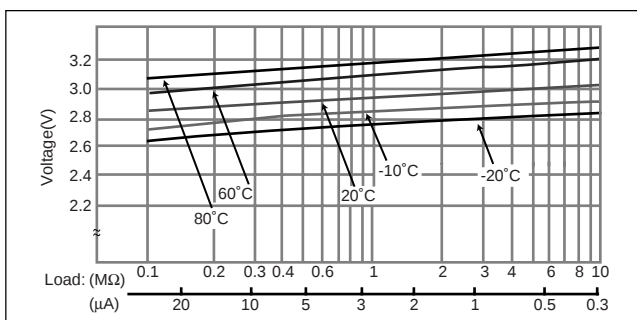


### ■ Capacity vs. load resistance

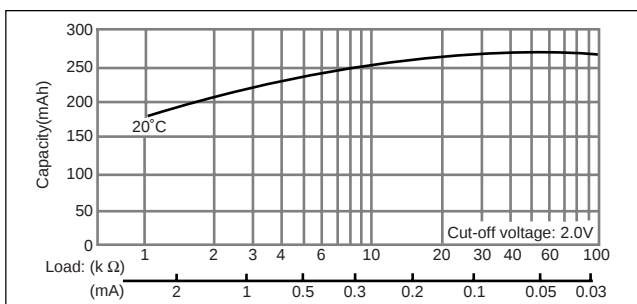

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR2325


### ■ Dimensions(mm)

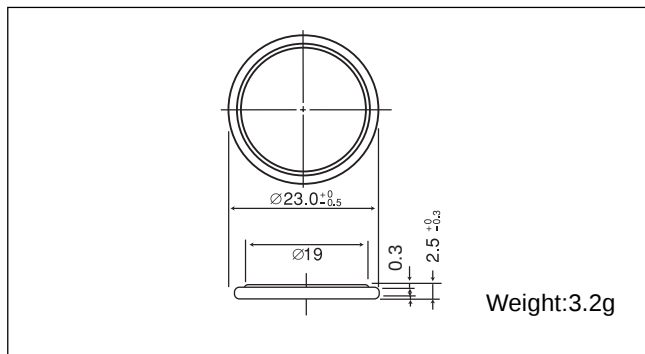


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 165       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

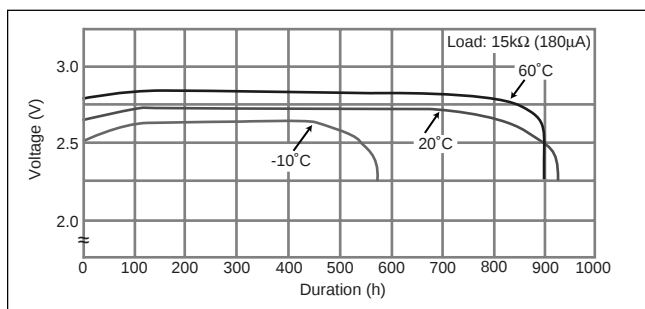

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

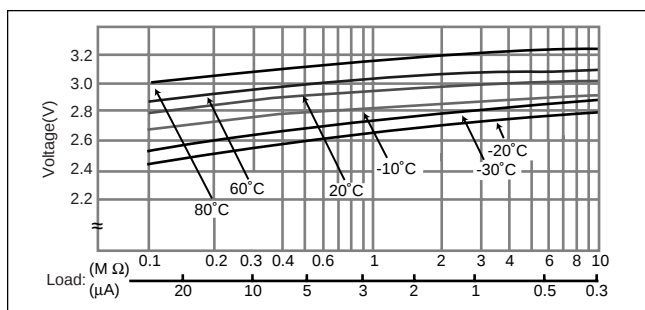


### ■ Capacity vs. load resistance

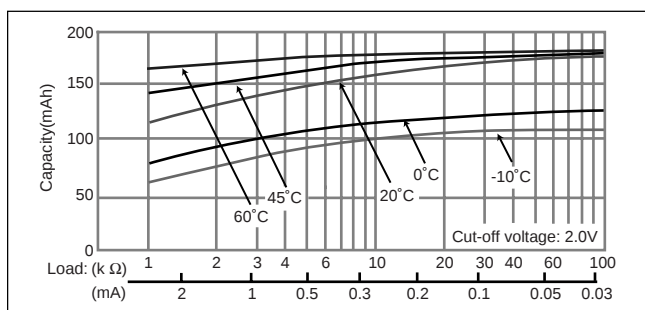

## BR2330


### ■ Dimensions(mm)

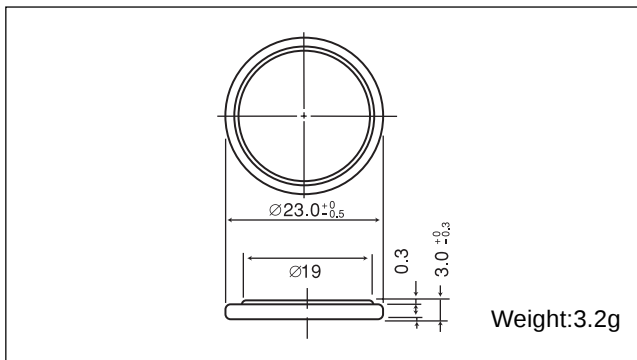


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 255       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

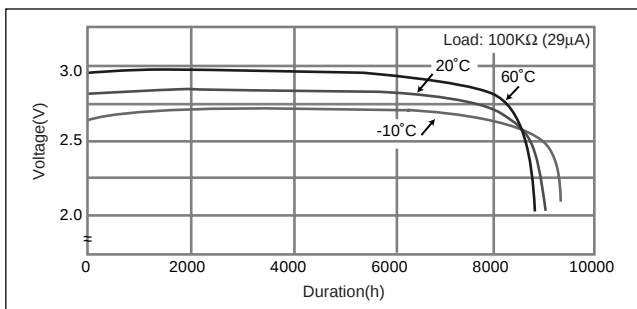

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

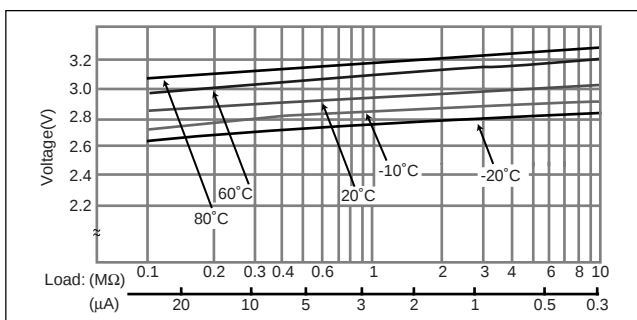


### ■ Capacity vs. load resistance

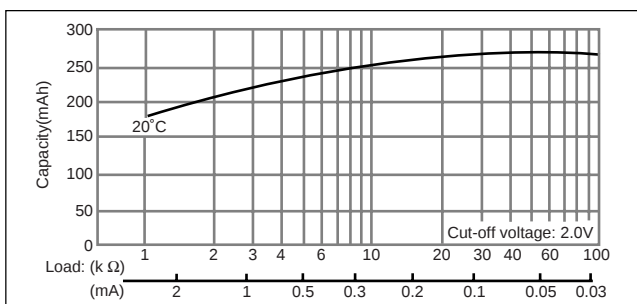

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR3032


### ■ Dimensions(mm)

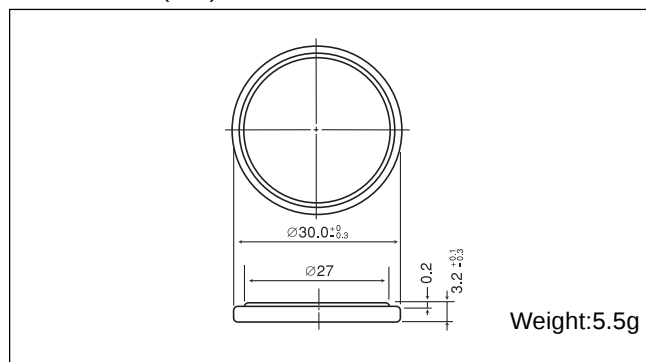


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 500       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

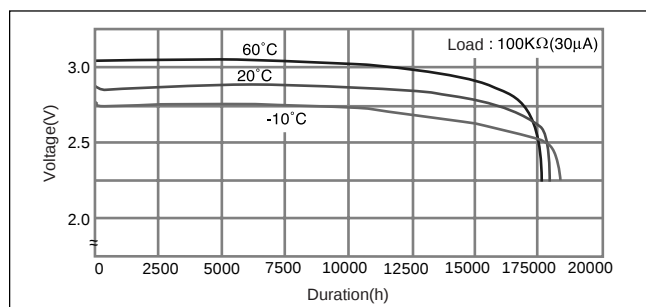

### ■ Operating voltage vs. load resistance(voltage at 50% discharge depth)

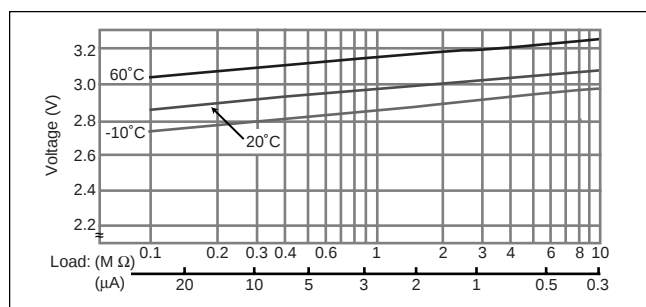

### ■ Capacity vs. load resistance

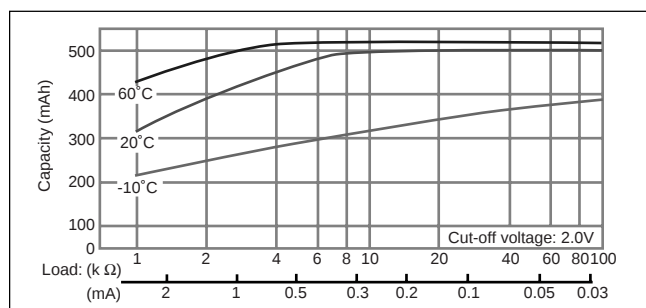



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331