

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0955016889

Status:

Active

Overview:

modular_plugs_jacks

Description:

Modular Jacks, Low Profile, SMT Jack, 8 Positions, 8 loaded

Documents:

3D Model

Drawing (PDF)

Application Specification (PDF)

Product Specification PS-95501 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E107635

General

Product Family

Series

Component Type

Magnetic

Overview

Performance Category

Power over Ethernet (PoE)

Product Name

Modular Jacks/Plugs

95501

PCB Jack

No

modular_plugs_jacks

3

N/A

RJ45

Physical

Boot Color

Color - Resin

Durability (mating cycles max)

Flammability

Inverted / Top Latch

Lightpipes/LEDs

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Orientation

PCB Locator

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

Plating min: Termination (µm)

Ports

Positions / Loaded Contacts

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

Waterproof / Dustproof

Wire/Cable Type

N/A

Black

500

94V-0

No

None

Phosphor Bronze

Gold

Tin

High Temperature Thermoplastic

Right Angle (Side Entry)

Yes

Yes

0.063 In

1.60 mm

Tube

0.040 In

1.02 mm

0.050 In

1.27 mm

50.8

1.27

76

1.9

1

8/8

Yes

-40°C to +80°C

Surface Mount

No

N/A




image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

95501Series

Mates With

FCC 68 Plugs

Use With

90075

Electrical

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	125V DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	45
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers



Packaging Specification	PK-95001
Product Specification	PS-95501
Sales Drawing	SD-95501-001

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

6 & 8 VERSIONS

8 VERSION SHOWN

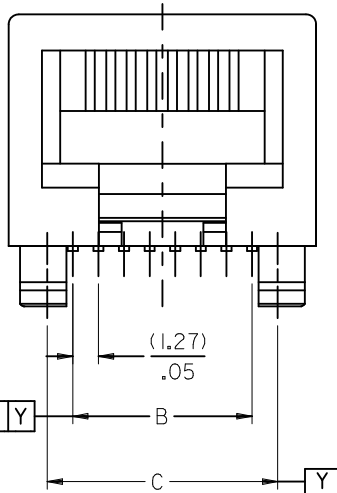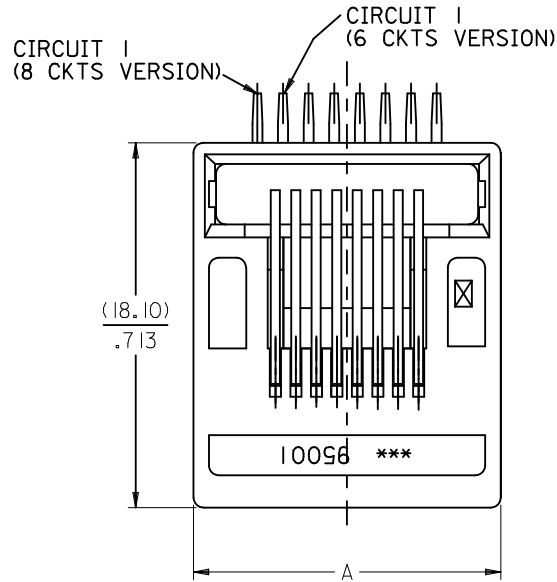

TYPE DIM.	POS. 4	POS. 6		POS. 8
	4 CKTS.	4 CKTS.	6 CKTS.	8 CKTS.
A	(11.18) / .440	(13.21) / .520	(13.21) / .520	(15.24) / .600
C	(7.62) / .300	(10.16) / .400	(10.16) / .400	(11.43) / .450
B	(3.81) / .150	(3.81) / .150	(6.35) / .250	(8.89) / .350

NOTES :

1- MATERIAL:



-HOUSING: LCP GLASS FILLED UL 94V-0,
COLOUR BLACK.

2- SEE OTHER NOTES SHEET 1

3- COPLANARITY OF SIGNAL TAILS 0.10MM


OPTIONAL KEYING

(1.24)
/ .049

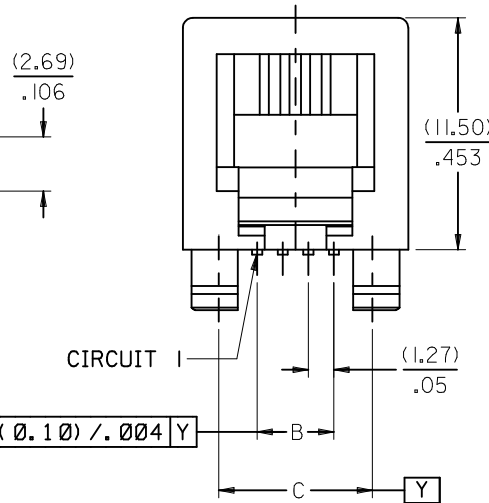


(0.10) / .004 Y

4 VERSION ONLY

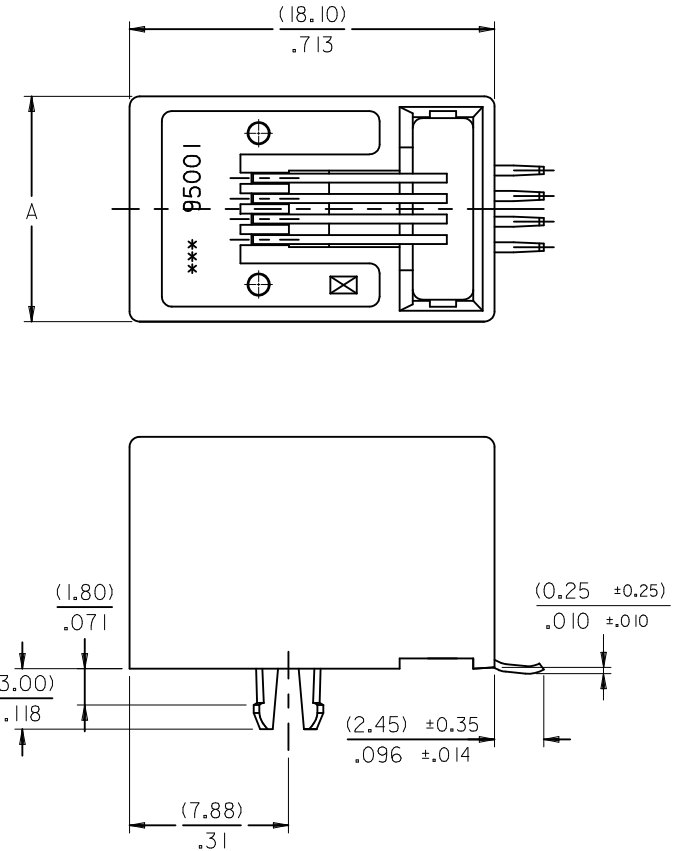

ADDED NOTE 3. EC NO: E2010-0156 DRWN: DBYRNES CHKD: APPR: J WALLACE 2010/01/08 2010/01/08 2010/01/08	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
					MM/IN		4:1	METRIC			
					DRAWN BY DATE		TITLE				
					DBYRNES 2006/08/02						
					CHECKED BY DATE		R/A LOW PROFILE PC JACK 4,6,8 CKTS SIZE SMT VERSION				
		EOMAHONY 2006/08/12									
		APPROVED BY DATE		MOLEX MOLEX INCORPORATED							
		EOMAHONY 2006/08/12									
		MATERIAL NO.		DOCUMENT NO.					SHEET NO.		
		SEE CHART SHEETS 4,5&6									
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

TYPE DIM.	POS. 4	POS. 6		POS. 8
	4 CKTS.	4 CKTS.	6 CKTS.	8 CKTS.
Y $\pm 0.05 / \pm .002$	(7.62) / .300	(10.16) / .400	(10.16) / .400	(11.43) / .450
X $\pm 0.05 / \pm .002$	(3.81) / .150	(3.81) / .150	(6.35) / .250	(8.89) / .350

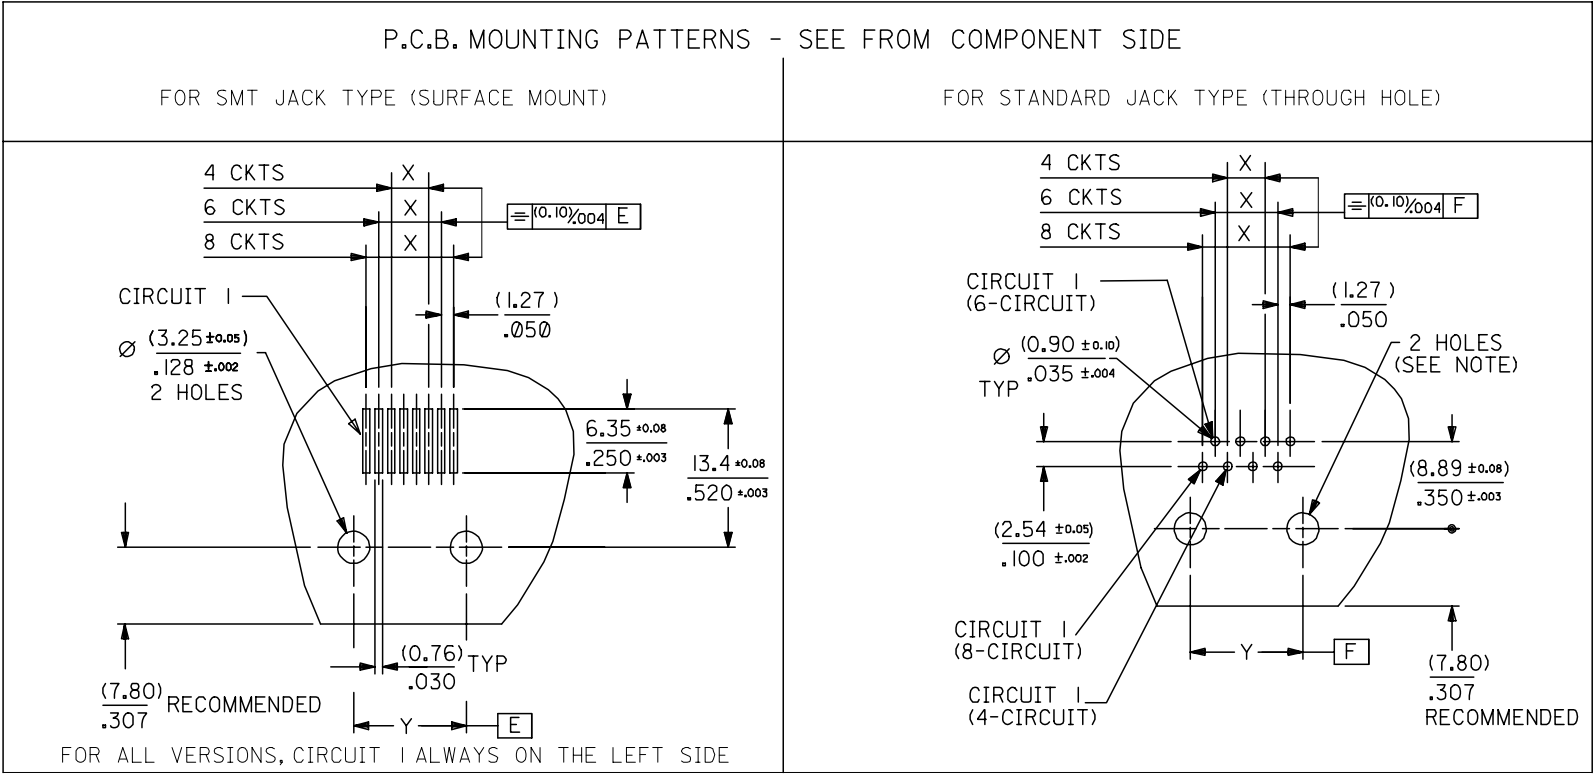

NOTE:
FOR CONVECTION SOLDERING: DIA 3.25 $\pm$ 0.05 / .128 $\pm$.002
FOR WAVE SOLDERING: DIA 3.20 $\pm$ 0.10 / .126 $\pm$.004

MODIFIED TABLE EC NO: E2008-0176 DRWN:DBYRNES CHKD: APPR:EOMAHONY		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION ◎	
					mm	INCH	DRAWN BY DBYRNES	DATE 2006/08/02	TITLE R/A LOW PROFILE JACK PC JACK 4,6,8 CKT SIZE SMT AND STANDARD VERSION		
	4 PLACES	± ---	± ---	CHECKED BY	DATE						
	3 PLACES	± ---	± .006	EOMAHONY	2006/08/12						
	2 PLACES	± 0.15	± .010	APPROVED BY	DATE	MOLEX INCORPORATED					
	1 PLACE	± 0.25	± ---	EOMAHONY	2006/08/12						
				ANGULAR ± ---°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART SHEETS 4,5&6		SD-95501-001		3 OF 5	
						SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

SPECIAL PACKAGING TUBE,SEE PACKAGING SPEC PK95001 SHEET 3

PART NO FOR JACK ASSEMBLY
THROUGH HOLE VERSION

PART NO FOR JACK ASSEMBLY
SMT VERSION

HOUSING SIZE	LOADED CONTACTS	PLATING	LOP GLASS FILED 94V0,COLOR BLACK.							
			NO KEY	TOOLED	KEY	TOOLED		TOOLED		TOOLED
			NOT RIBBED	TOOLED	NOT RIBBED	TOOLED		TOOLED		TOOLED
4	4	2	95501-2401	X						
6	4	2	95501-2601	X						
6	6	2	95501-2611	X						
8	8	2	95501-2821	X						

PLATING	LOP GLASS FILLED 94V0 COLOUR BLACK								
	NO KEY	TOOLED	KEY	TOOLED	NO KEY	TOOLED	KEY	TOOLED	
	NOT RIBBED	TOOLED	NOT RIBBED	TOOLED	NOT RIBBED	TOOLED	NOT RIBBED	TOOLED	
2	95501-6449	X							
2	95501-6649	X							
2	95501-6669	X							
2	95501-6889	X	95501-6890	X					

REMOVED GREY OPTIONS EC NO: E2007-0513 2007/01/08 DRWN:DBYRNES CHKD: 2007/01/08 APPR:EOMAHONY 2007/01/09	QUALITY SYMBOLS ▽=0 ▽C=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY DBYRNES	DATE 2006/08/02	TITLE LOW PROFILE R/A JACK STANDARD AND SMT VERSION TUBE PACKAGING				
			4 PLACES	± ---	± ---	CHECKED BY	DATE					
			3 PLACES	± ---	± ---	EOMAHONY	2006/08/12					
			2 PLACES	± ---	± ---	APPROVED BY	DATE	molex MOLEX INCORPORATED				
1 PLACE	± ---	± ---	EOMAHONY	2006/08/12								
B	REV		ANGULAR ± ---°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-95501-001		5 OF 5				
				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331