


## 100 V field-effect rectifier diode

Datasheet - production data

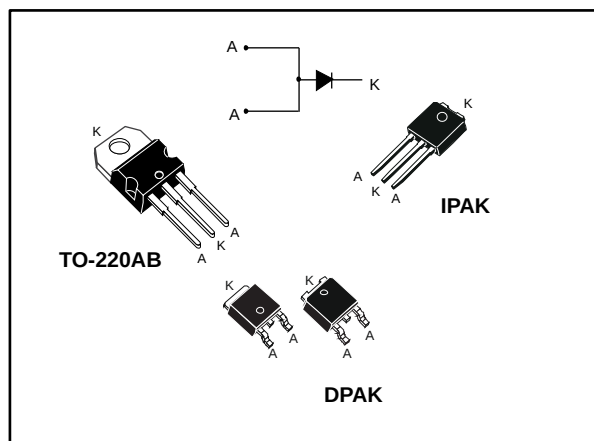

### Description

The device is based on a proprietary technology that achieves the best in class  $V_F/I_R$  trade-off for a given silicon surface. This 100 V rectifier has been optimized for use in confined casing applications where both efficiency and thermal performance matter. With a lower dependency of leakage current ( $I_R$ ) and forward voltage ( $V_F$ ) in function of temperature, the thermal runaway risk is reduced. Therefore, it can advantageously replace 100 V Schottky diodes.

Table 1: Device summary

| Symbol      | Value       |
|-------------|-------------|
| $I_{F(AV)}$ | 30 A        |
| $V_{RRM}$   | 100 V       |
| $V_F(max.)$ | 0.405 V     |
| $I_R(max.)$ | 130 $\mu$ A |
| $T_j(max.)$ | 175 °C      |

### Features

- ST advanced rectifier process
- Stable leakage current over reverse voltage
- Reduced leakage current
- Low forward voltage drop
- High frequency operation
- ECOPACK®2 compliant component

# 1 Characteristics

**Table 2: Absolute ratings (limiting values at 25 °C, unless otherwise specified, with anode terminals short circuited)**

| Symbol              | Parameter                                             |                                              | Value       | Unit |
|---------------------|-------------------------------------------------------|----------------------------------------------|-------------|------|
| V <sub>RRM</sub>    | Repetitive peak reverse voltage                       |                                              | 100         | V    |
| I <sub>F(RMS)</sub> | Forward rms current                                   |                                              | 45          | A    |
| I <sub>F(AV)</sub>  | Average forward current $\delta = 0.5$ , square wave  | T <sub>C</sub> = 145 °C                      | 30          | A    |
| I <sub>FSM</sub>    | Surge non repetitive forward current                  | t <sub>p</sub> = 10 ms sinusoidal, DPAK/IPAK | 150         | A    |
|                     |                                                       | t <sub>p</sub> = 10 ms sinusoidal, TO-220AB  | 250         |      |
| T <sub>stg</sub>    | Storage temperature range                             |                                              | -65 to +175 | °C   |
| T <sub>j</sub>      | Maximum operating junction temperature <sup>(1)</sup> |                                              | +175        | °C   |

**Notes:**

<sup>(1)</sup>(dP<sub>tot</sub>/dT<sub>j</sub>) < (1/R<sub>th(j-a)</sub>) condition to avoid thermal runaway for a diode on its own heatsink.

**Table 3: Thermal resistance parameters**

| Symbol               | Parameter        | Value | Unit |
|----------------------|------------------|-------|------|
| R <sub>th(j-c)</sub> | Junction to case | 0.9   | °C/W |

**Table 4: Static electrical characteristics with anode terminals short circuited**

| Symbol                        | Parameter               | Test conditions         |                                   | Min. | Typ.  | Max.  | Unit |
|-------------------------------|-------------------------|-------------------------|-----------------------------------|------|-------|-------|------|
| I <sub>R</sub> <sup>(1)</sup> | Reverse leakage current | T <sub>j</sub> = 25 °C  | V <sub>R</sub> = V <sub>RRM</sub> | -    |       | 130   | μA   |
|                               |                         | T <sub>j</sub> = 125 °C |                                   | -    | 8     | 16    | mA   |
|                               |                         | T <sub>j</sub> = 125 °C | V <sub>R</sub> = 70 V             | -    | 4     | 7     |      |
| V <sub>F</sub> <sup>(2)</sup> | Forward voltage drop    | T <sub>j</sub> = 25 °C  | I <sub>F</sub> = 3 A              | -    | 0.390 | 0.440 | V    |
|                               |                         | T <sub>j</sub> = 125 °C |                                   | -    | 0.350 | 0.405 |      |
|                               |                         | T <sub>j</sub> = 25 °C  | I <sub>F</sub> = 5 A              | -    | 0.440 | 0.495 |      |
|                               |                         | T <sub>j</sub> = 125 °C |                                   | -    | 0.415 | 0.470 |      |
|                               |                         | T <sub>j</sub> = 25 °C  | I <sub>F</sub> = 10 A             | -    | 0.550 | 0.620 |      |
|                               |                         | T <sub>j</sub> = 125 °C |                                   | -    | 0.530 | 0.585 |      |
|                               |                         | T <sub>j</sub> = 125 °C | I <sub>F</sub> = 30 A             | -    | 0.680 | 0.745 |      |

**Notes:**

<sup>(1)</sup>Pulse test: t<sub>p</sub> = 5 ms,  $\delta < 2\%$


<sup>(2)</sup>Pulse test: t<sub>p</sub> = 380 μs,  $\delta < 2\%$

To evaluate the conduction losses use the following equation:


$$P = 0.424 \times I_{F(AV)} + 0.0133 I_{F(RMS)}^2$$

## 1.1 Characteristics (curves)


**Figure 1: Average forward current versus ambient temperature ( $\delta = 0.5$ )**

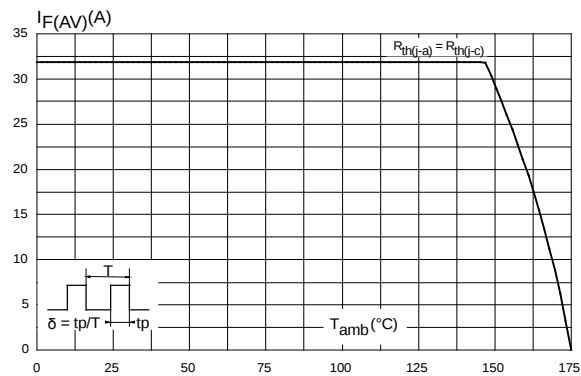


**Figure 2: Relative variation of thermal impedance junction to case versus pulse duration**

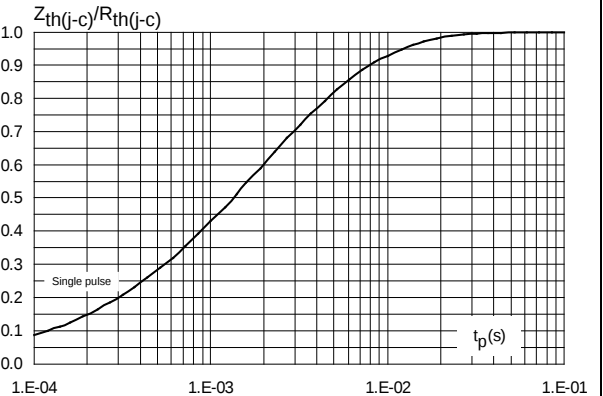


**Figure 3: Reverse leakage current versus reverse voltage applied (typical values)**

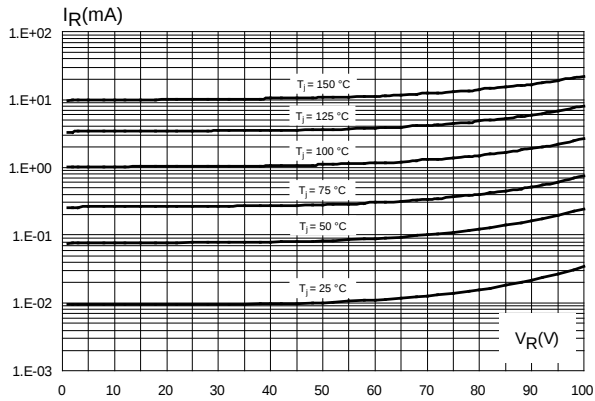

**Figure 4: Junction capacitance versus reverse voltage applied (typical values)**

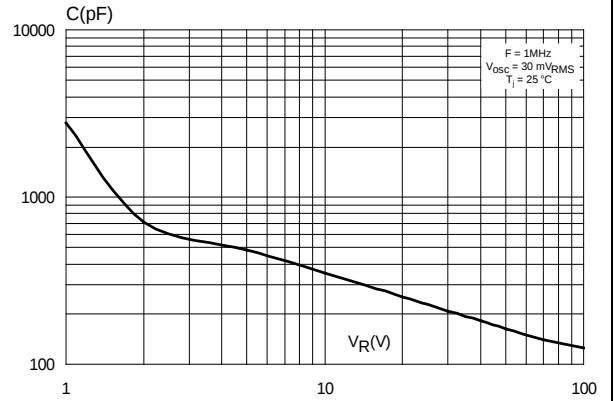

**Figure 5: Forward voltage drop versus forward current (typical values)**

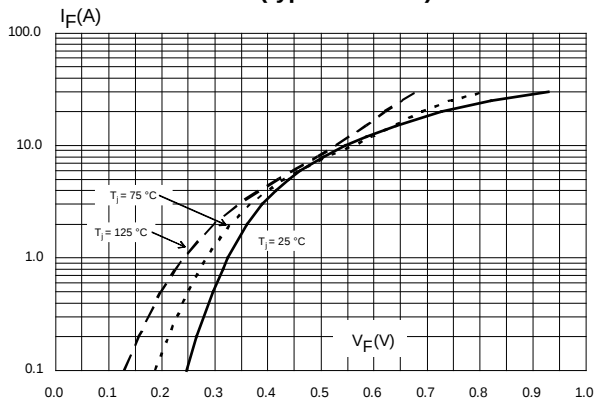

**Figure 6: Forward voltage drop versus forward current (typical values)**


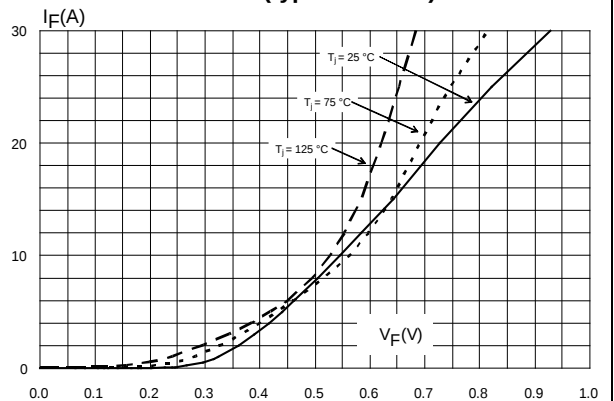


Figure 7: Thermal resistance junction to ambient versus copper surface under tab for DPAK (typical values)

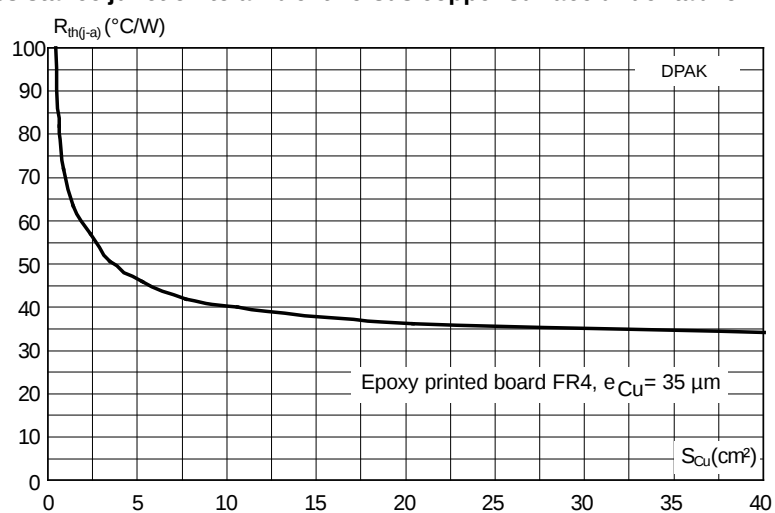

## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

- Cooling method: by conduction (C)
- Epoxy meets UL94,V0
- Recommended torque value: 0.55 N·m (for TO-220AB)
- Maximum torque value: 0.6 N·m (for TO-220AB)

## 2.1 TO-220AB package information

Figure 8: TO-220AB package outline


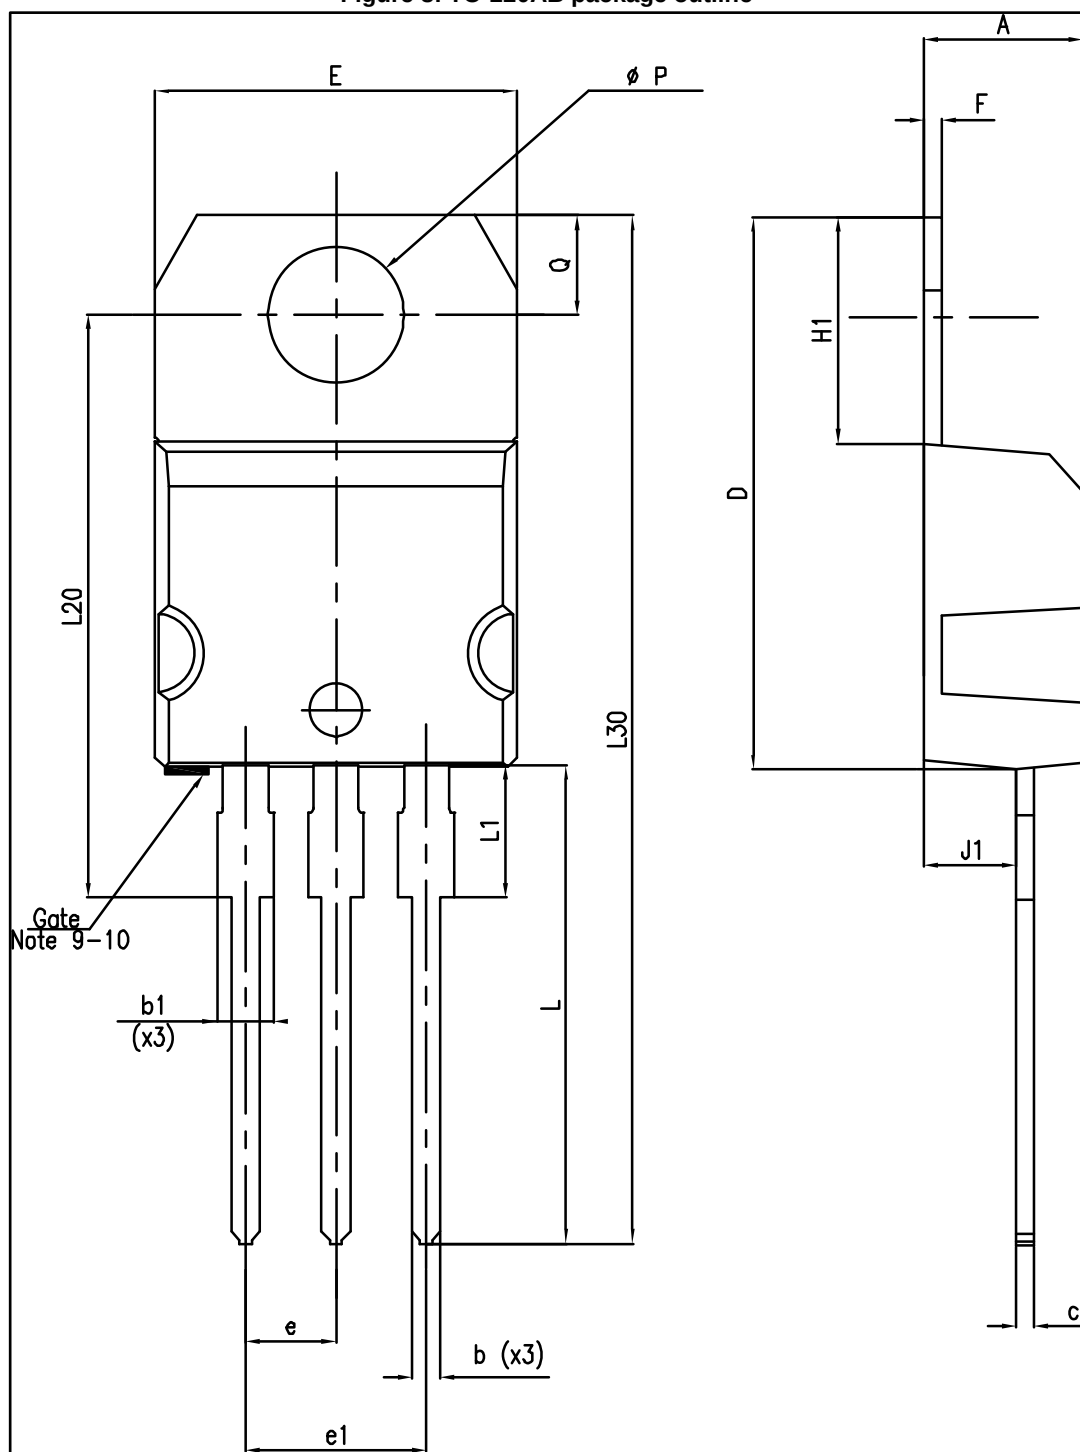


Table 5: TO-220AB package mechanical data

| Ref. | Dimensions  |       |            |       |
|------|-------------|-------|------------|-------|
|      | Millimeters |       | Inches     |       |
|      | Min.        | Max.  | Min.       | Max.  |
| A    | 4.40        | 4.60  | 0.173      | 0.181 |
| b    | 0.61        | 0.88  | 0.024      | 0.035 |
| b1   | 1.14        | 1.70  | 0.045      | 0.067 |
| c    | 0.48        | 0.70  | 0.019      | 0.028 |
| D    | 15.25       | 15.75 | 0.600      | 0.620 |
| E    | 10.00       | 10.40 | 0.394      | 0.409 |
| e    | 2.40        | 2.70  | 0.094      | 0.106 |
| e1   | 4.95        | 5.15  | 0.195      | 0.203 |
| F    | 0.51        | 0.60  | 0.020      | 0.024 |
| J1   | 2.40        | 2.72  | 0.094      | 0.107 |
| H1   | 6.20        | 6.60  | 0.244      | 0.256 |
| L    | 13.00       | 14.00 | 0.512      | 0.551 |
| L1   | 3.50        | 3.93  | 0.138      | 0.155 |
| L20  | 16.40 typ.  |       | 0.646 typ. |       |
| L30  | 28.90 typ.  |       | 1.138      |       |
| Ø P  | 3.75        | 3.85  | 0.148      | 0.156 |
| Q    | 2.65        | 2.95  | 0.104      | 0.116 |

## 2.2 DPAK package information

Figure 9: DPAK package outline

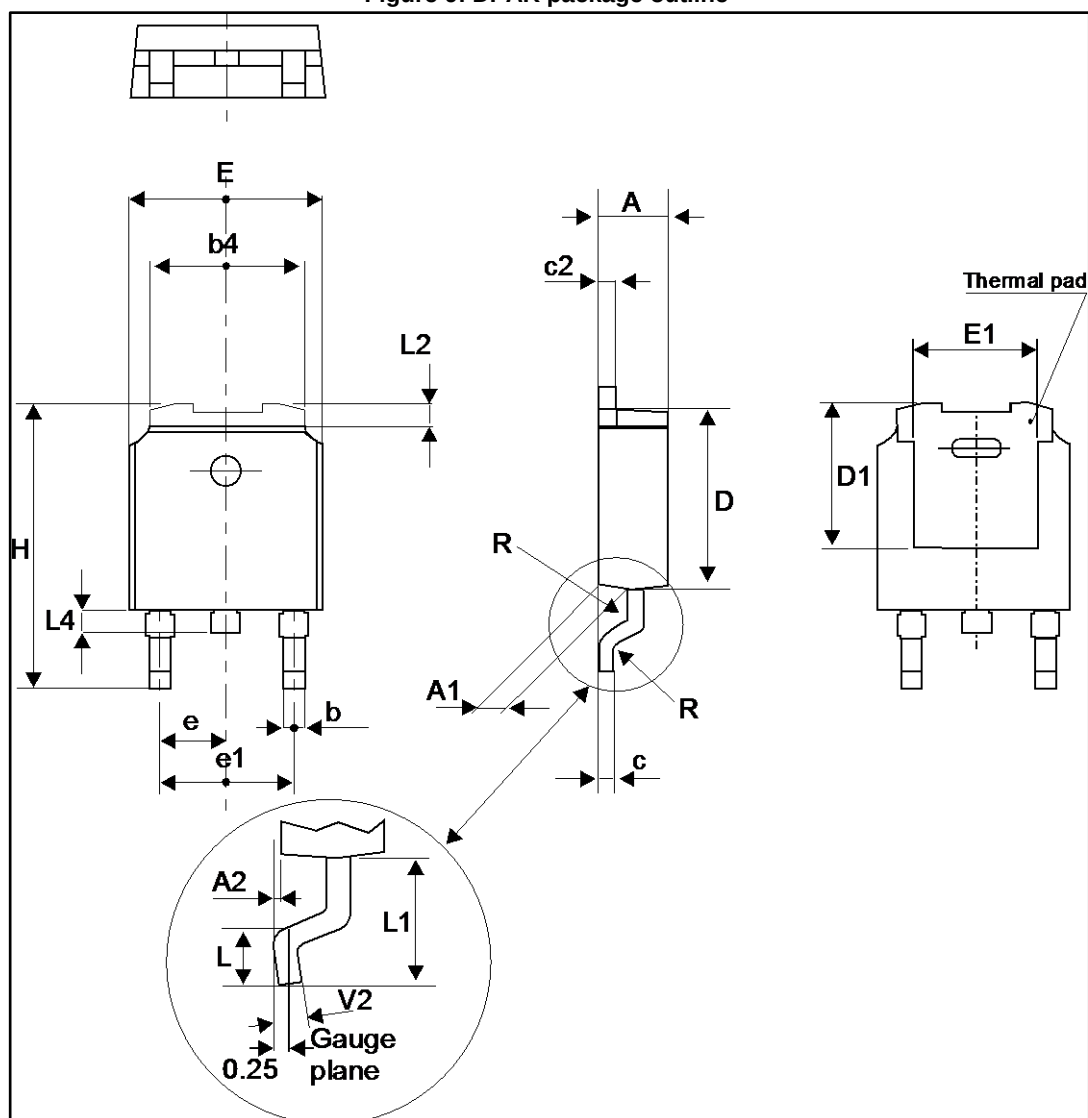


This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

Table 6: DPAK package mechanical data

| Ref. | Dimensions  |       |            |       |
|------|-------------|-------|------------|-------|
|      | Millimeters |       | Inches     |       |
|      | Min.        | Max.  | Min.       | Max.  |
| A    | 2.18        | 2.40  | 0.085      | 0.094 |
| A1   | 0.90        | 1.10  | 0.035      | 0.043 |
| A2   | 0.03        | 0.23  | 0.001      | 0.009 |
| b    | 0.64        | 0.90  | 0.025      | 0.035 |
| b4   | 4.95        | 5.46  | 0.194      | 0.215 |
| c    | 0.46        | 0.61  | 0.018      | 0.024 |
| c2   | 0.46        | 0.60  | 0.018      | 0.023 |
| D    | 5.97        | 6.22  | 0.235      | 0.244 |
| D1   | 4.95        | 5.60  | 0.194      | 0.220 |
| E    | 6.35        | 6.73  | 0.250      | 0.265 |
| E1   | 4.32        | 5.50  | 0.170      | 0.216 |
| e    | 2.286 typ.  |       | 0.090 typ. |       |
| e1   | 4.40        | 4.70  | 0.173      | 0.185 |
| H    | 9.35        | 10.40 | 0.368      | 0.409 |
| L    | 1.0         | 1.78  | 0.039      | 0.070 |
| L2   |             | 1.27  |            | 0.050 |
| L4   | 0.60        | 1.02  | 0.023      | 0.040 |
| V2   | -8°         | +8°   | -8°        | +8°   |

Figure 10: DPAK recommended footprint (dimensions in mm)

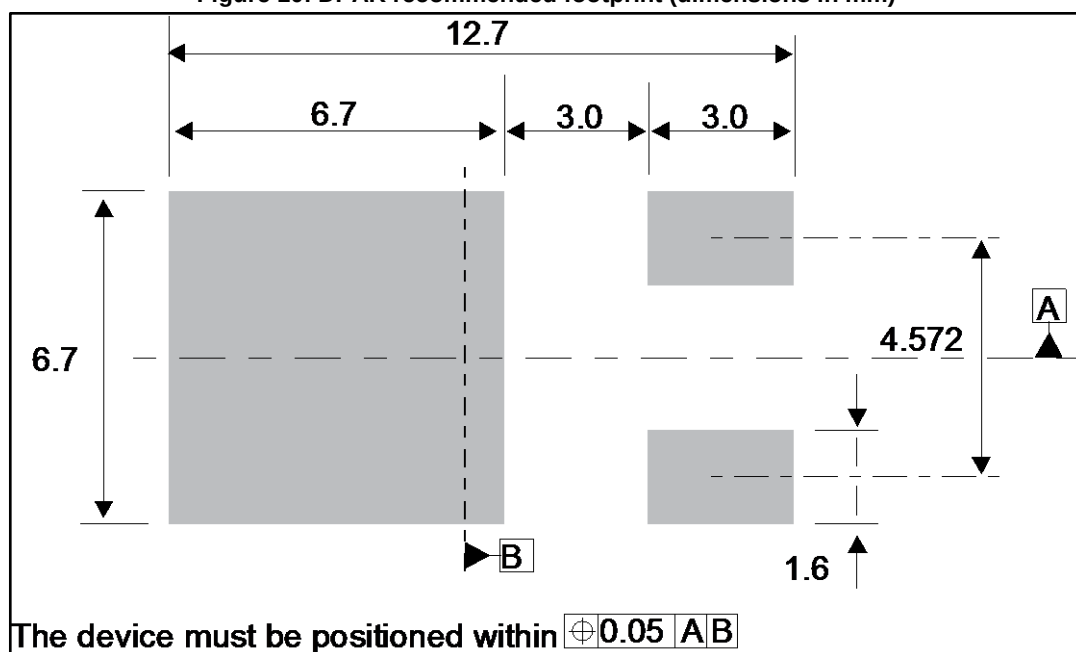

## 2.3 IPAK package information

Figure 11: IPAK package outline

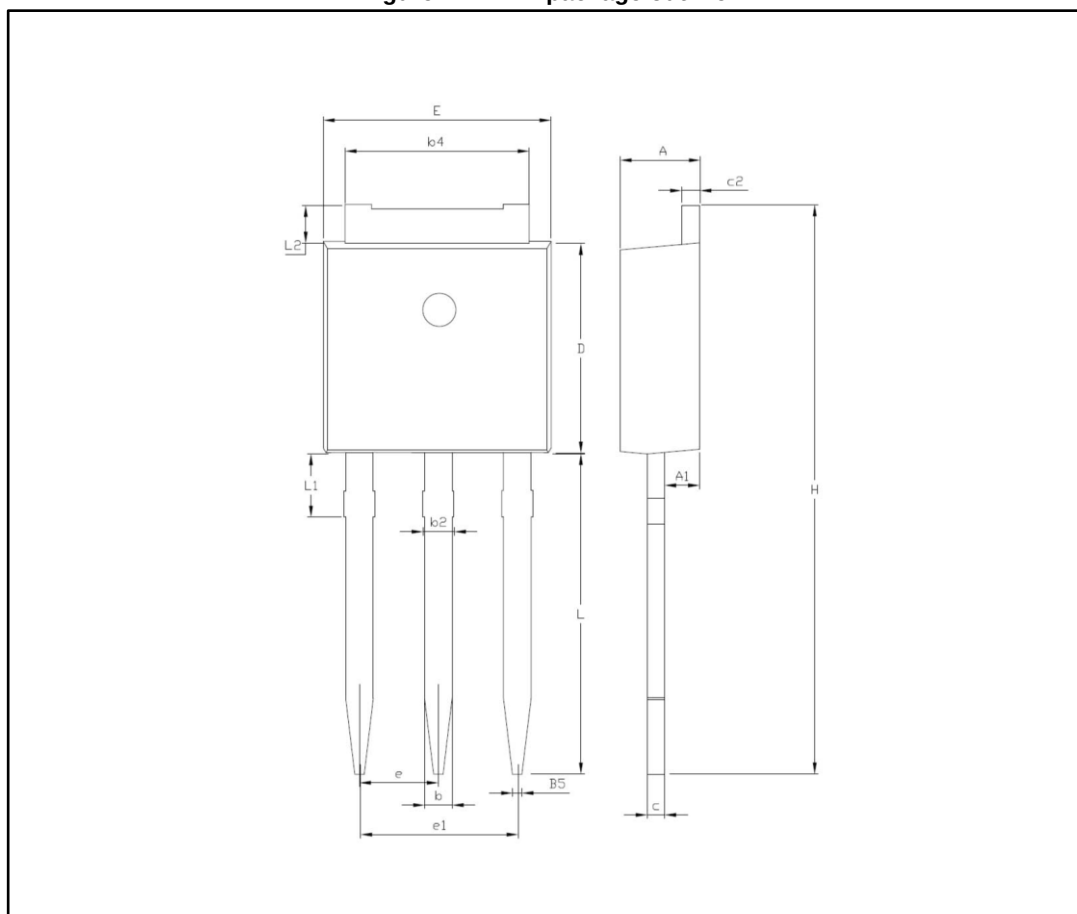


Table 7: IPAK package mechanical data

| Ref. | Dimensions  |      |            |       |
|------|-------------|------|------------|-------|
|      | Millimeters |      | Inches     |       |
|      | Min.        | Max. | Min.       | Max.  |
| A    | 2.20        | 2.40 | 0.087      | 0.094 |
| A1   | 0.90        | 1.10 | 0.035      | 0.043 |
| b    | 0.64        | 0.90 | 0.025      | 0.035 |
| b2   |             | 0.95 |            | 0.037 |
| b4   | 5.20        | 5.43 | 0.205      | 0.214 |
| B5   | 0.30 typ.   |      | 0.012 typ. |       |
| c    | 0.45        | 0.60 | 0.018      | 0.024 |
| c2   | 0.46        | 0.60 | 0.018      | 0.024 |
| D    | 6.00        | 6.20 | 0.236      | 0.244 |
| E    | 6.40        | 6.65 | 0.252      | 0.261 |
| e    | 2.28 typ.   |      | typ.0.090  |       |
| e1   | 4.40        | 4.60 | 0.173      | 0.181 |
| H    | 16.10 typ.  |      | 0.634 typ. |       |
| L    | 9.0         | 9.60 | 0.354      | 0.378 |
| L1   | 0.80        | 1.20 | 0.031      | 0.047 |
| L2   | 0.80 typ.   | 1.25 | 0.031 typ. | 0.049 |
| V1   | +10°        |      | +10        |       |

### 3 Ordering information

Table 8: Ordering information

| Order code      | Marking     | Package  | Weight | Base qty. | Delivery mode |
|-----------------|-------------|----------|--------|-----------|---------------|
| FERD30H100STS   | FD30H100STS | TO-220AB | 1.38 g | 50        | Tube          |
| FERD30H100SH    | FD30 H100S  | IPAK     | 0.32 g | 75        | Tube          |
| FERD30H100SB-TR | FD30 H100S  | DPAK     | 0.35 g | 2500      | Tape and reel |

### 4 Revision history

Table 9: Document revision history

| Date        | Revision | Changes             |
|-------------|----------|---------------------|
| 07-Apr-2016 | 1        | Initial release.    |
| 14-Nov-2017 | 2        | Updated cover page. |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331