
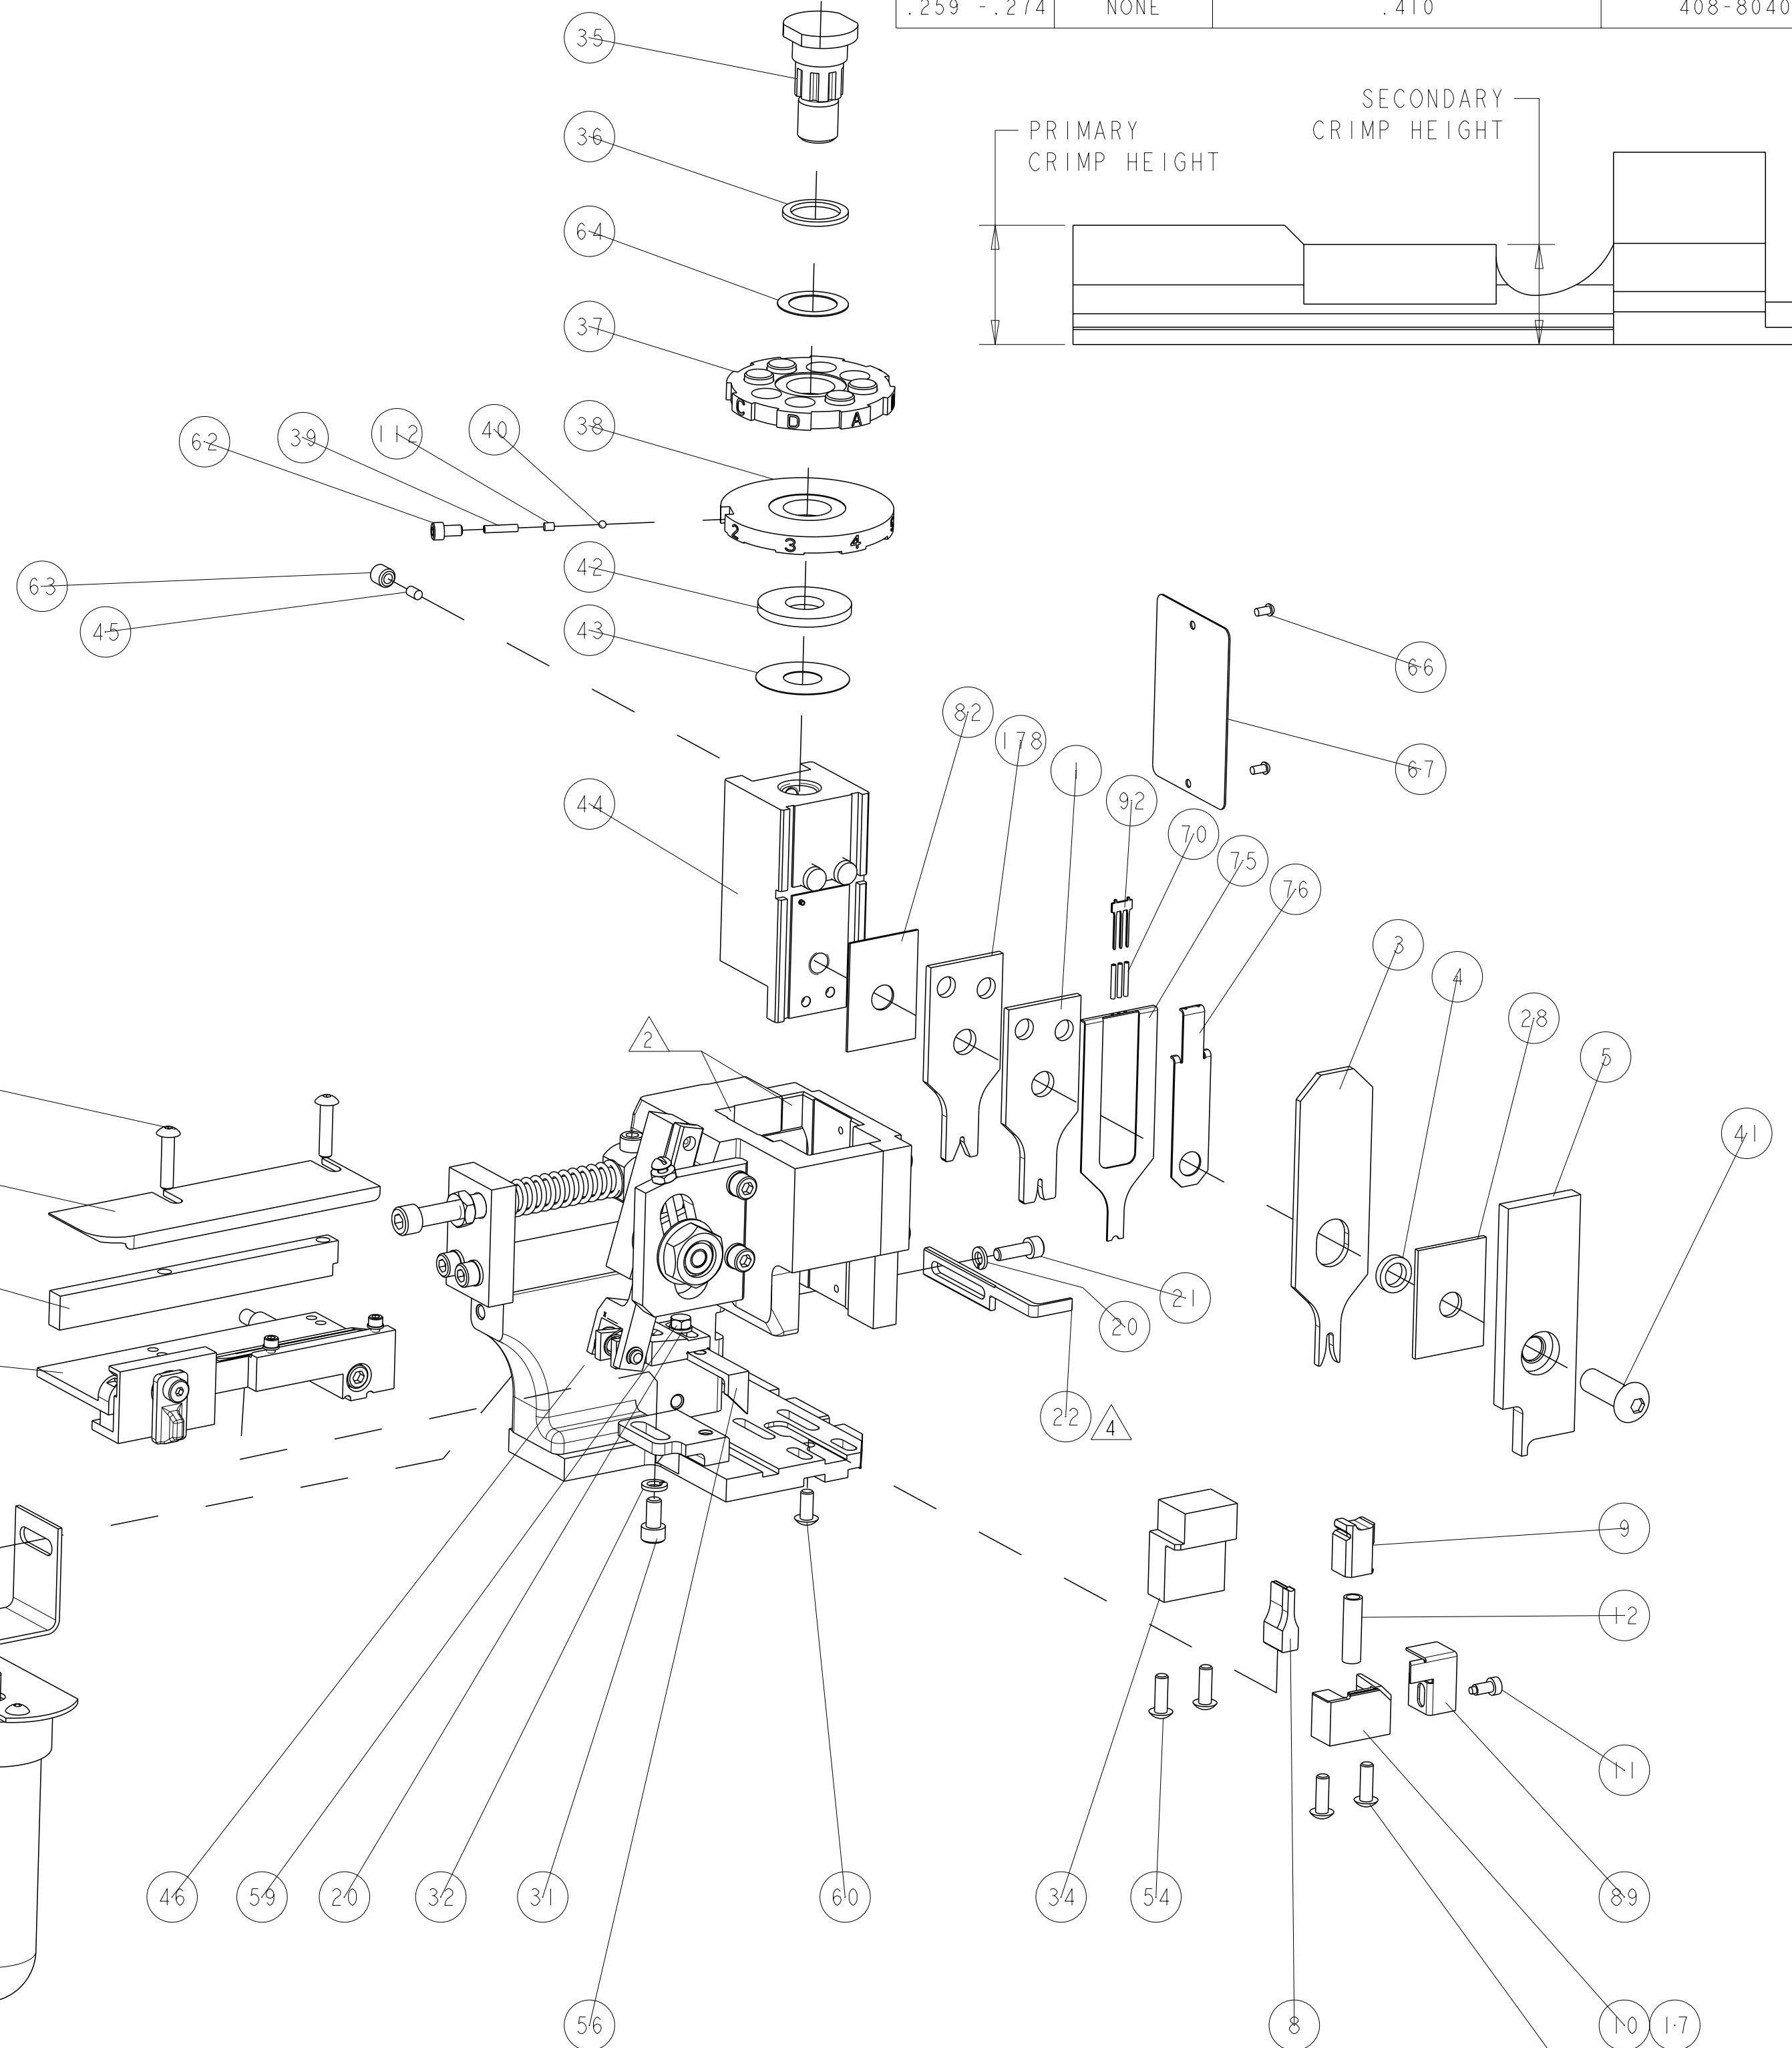
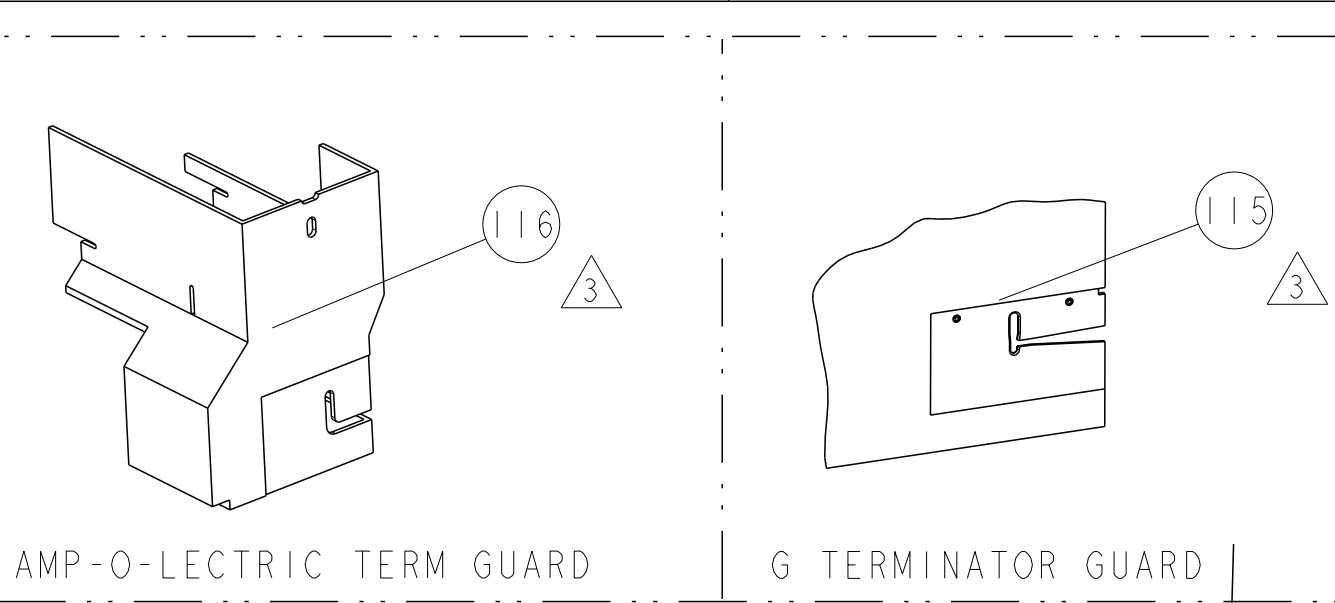
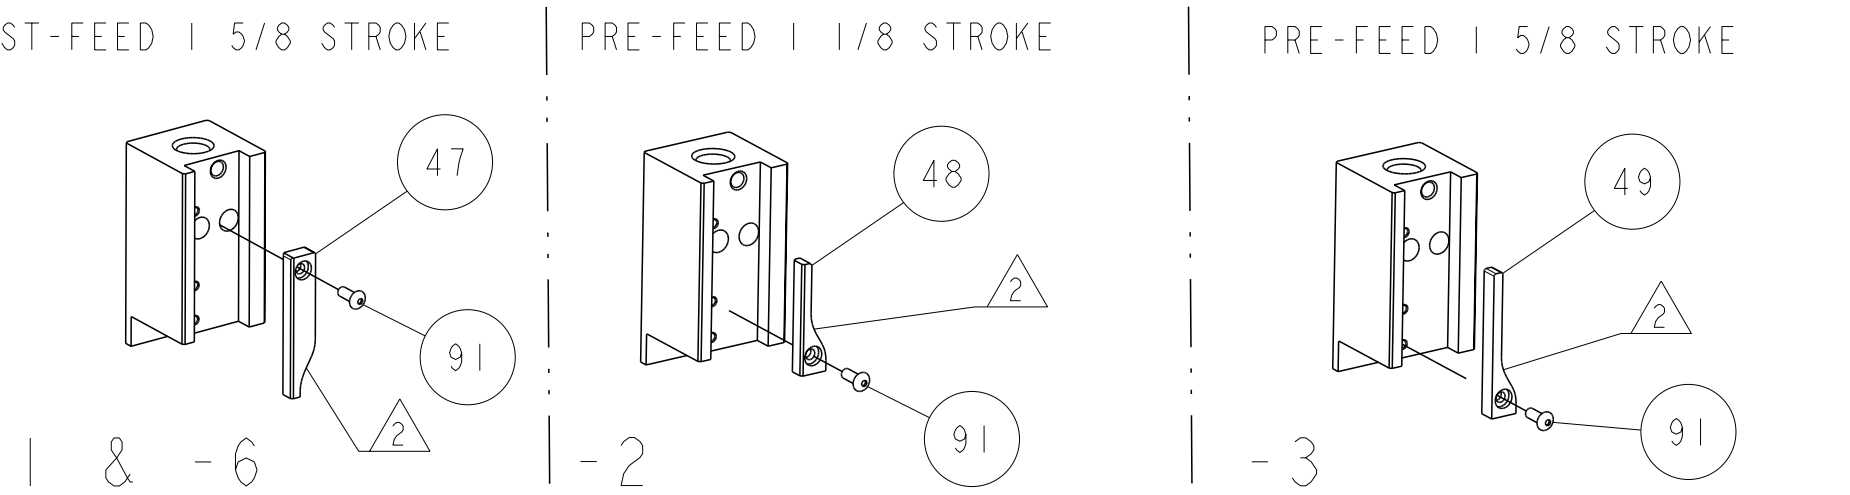
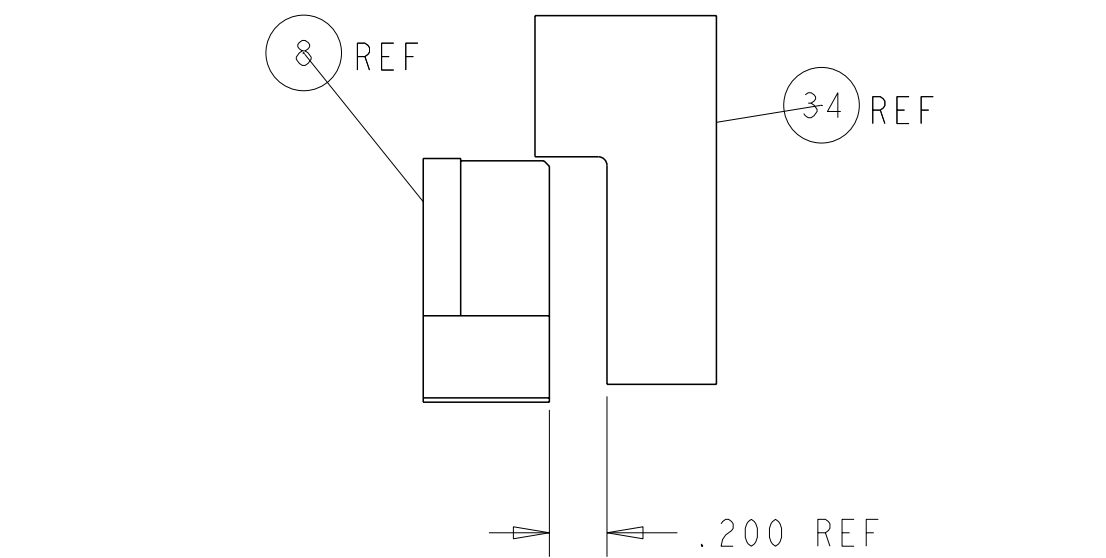
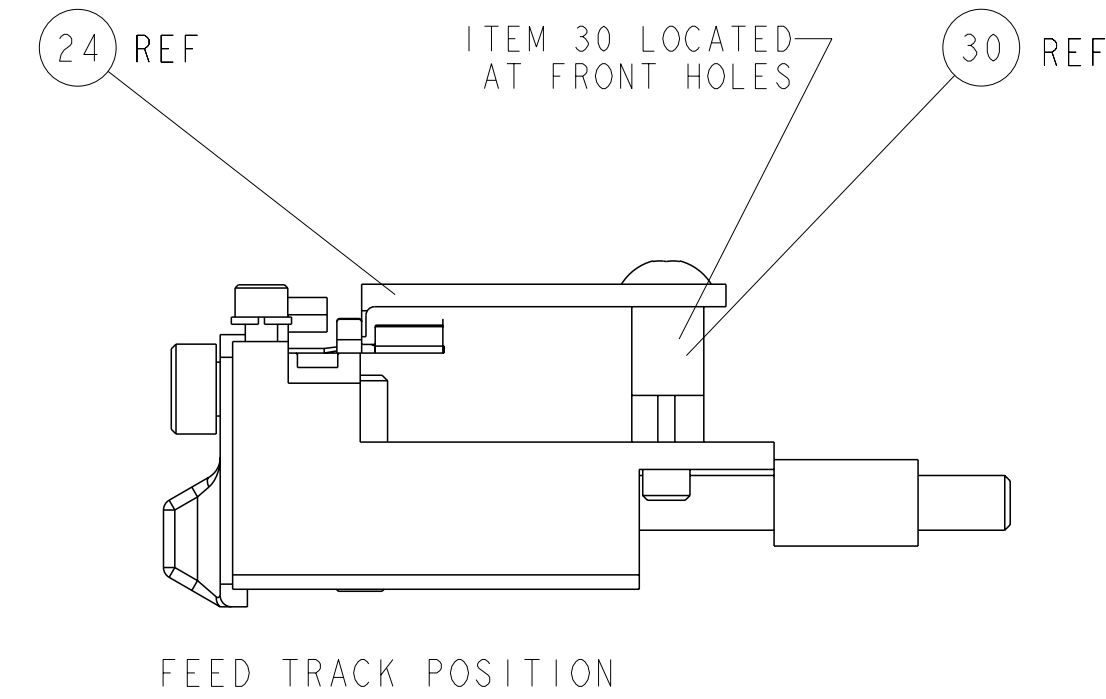



8				7							
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION				20			
© COPYRIGHT 20				BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.							
PART NUMBER		REV	FIRST USED	POWER UNIT		FEED TYPE		DESCRIPTION			
1852442-1		G	122500-1	LEADMAKER		POST FEED		CUTS CARRIER			
1852442-2		G	565435-5	BENCH MODEL K		PRE FEED		CUTS CARRIER			
1852442-3		G	354500-1	BENCH MODEL G		PRE FEED		CUTS CARRIER			
1852442-6		G	122500-1	LEADMAKER		POST FEED		CONTINUOUS CARRIER			
7-1852442-7		G	-	-		-		SPARE PARTS			

- △ RECOMMENDED SPARE PARTS
- △ GREASE LIGHTLY
- △ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE
- △ STRIPPER (ITEM 22) IS LOCATED BETWEEN INSULATION CRIMPER (ITEM 3) AND SHEAR DEPRESSOR (ITEM 5).

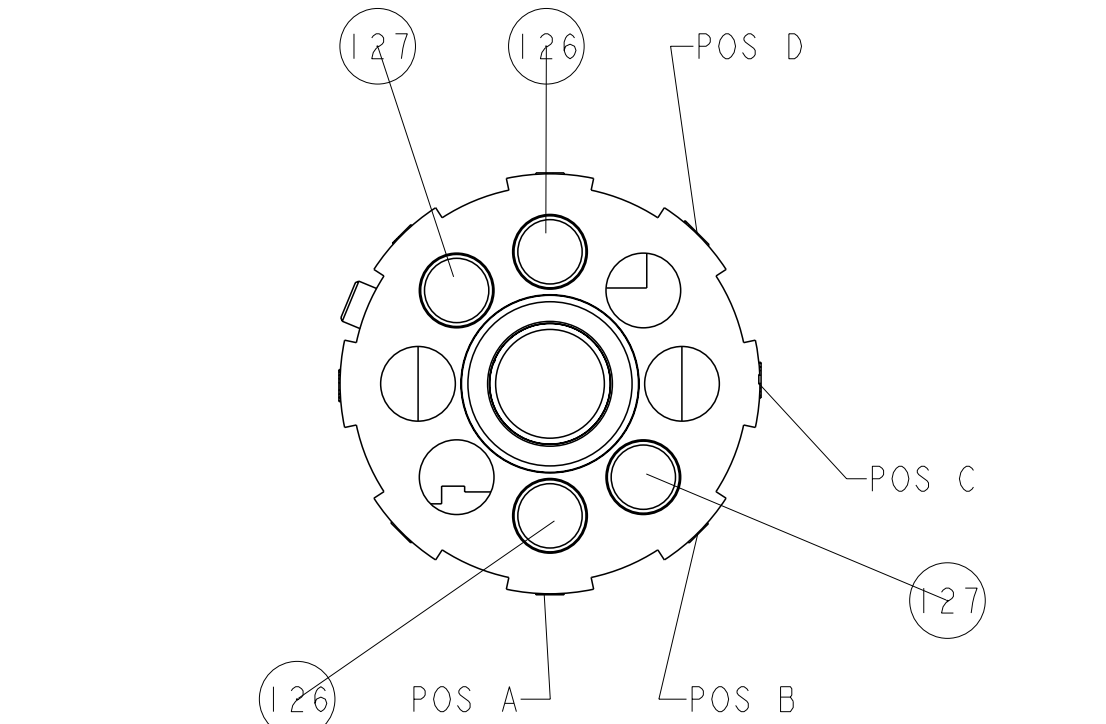

TERMINAL NAME: AMPLIVAR WIRE PIN 500-1400 CMA							
TE PN	-	TE TERMINAL - TE CRIMP SPECS					
1742451	-						
-	-	PAD LTR	PRIMARY CRIMP HEIGHT	SECONDARY CRIMP HEIGHT	WIRE SIZE		
-	-	A	.062±.002[1.57±0.05mm]	.052±.002[1.32±0.05mm]	19.5 MAG		
-	-	B	.055±.002[1.40±0.05mm]	.045±.002[1.14±0.05mm]	23 MAG		
-	-	C	-	-	-		
-	-	D	-	-	-		
-	-	CRIMP		SIZE	TYPE	RANGE	
-	-	WIRE		.062 [1.57mm]	O	23-19 MAG	
-	-	INSUL		.100 [2.54mm]	O	-	
WIRE STRIP LENGTH .259 - .274	TERM APPL SPEC NONE	FEED .410		APPLICATOR INSTRUCTIONS 408-8040		SET UP GAGE 458637-1	

1	1	1	1	1	-	1633723-9	CRIMPER, WIRE O	178
-	2	2	2	2	-	4-354779-5	PIN, WIRE DISC, .3215	127
-	2	2	2	2	-	2-354779-6	PIN, WIRE DISC, .3120	126
△	-	-	REF	-	..	455749-1	GUARD WINDOW	116
△	-	-	REF	-	..	679532-1	INSERT, GUARD	115
-	-	-	1	-	-	2-21002-6	SCR, BTN SKT HD CAP 10-32 X .375	114
-	-	-	1	-	..	1-465184-0	LUBRICATOR ASSY	113
-	1	1	1	1	-	690603-1	SPRING ASSIST AMP-O-MATOR APPLICATOR	112
-	1	1	1	1	-	1424350-1	HOLDER, PIN, WIRED	92
-	1	1	1	1	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
-	1	1	1	1	-	318563-1	GUARD, FRONT CHIP	89
-	1	1	1	1	-	455888-6	SPACER, CRIMPER	82
-	1	1	1	1	-	1490524-1	DEPRESSOR, SPACER	76
-	1	1	1	1	-	1490525-3	DEPRESSOR, WIRE	75
-	1	1	1	1	-	4088040	SF APPL INST 408-8040	72
-	1	1	1	1	-	217238-1	GENERAL INSTRUCTION PKG	71
-	3	3	3	3	-	2-23147-2	SPRING, COMPRESSION	70
-	1	1	1	1	-	461264-1	PLATE, IDENTIFICATION	67
-	2	2	2	2	-	21017-2	SCREW, DRIVE	66
-	1	1	1	1	-	986950-1	WASHER, FLAT PRECISION	64
-	1	1	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	1	1	1	1	-	23030-1	SCR, SKT HD CAP 6-32 x .25	62
-	1	1	1	1	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	1	1	1	1	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	59
-	1	1	1	1	-	458537-2	PAWL, FEED	56
-	4	4	4	4	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
-	-	1	-	-	..	690602-6	CAM, PRE FEED, 1 5/8	49
-	-	1	-	-	..	690602-5	CAM, PRE FEED, 1 1/8	48
-	1	-	-	1	-	690501-4	CAM, POST-FEED 1 5/8	47
-	1	1	1	1	-	459456-1	APPL. BASIC SUB ASSY (SIDE WISE MQCA)	46
-	1	1	1	1	-	690191-1	PLUG, NYLON	45
-	1	1	1	1	-	2-819307-8	RAM, SIDE FEED	44
-	1	1	1	1	-	690125-1	SHIM SUB-ASSY	43
-	1	1	1	1	-	690124-1	WASHER, RAM (.115)	42
-	1	1	1	1	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	1	1	1	1	-	23241-6	BALL, STEEL	40
-	1	1	1	1	-	690170-1	SPRING, COMPRESSION	39
-	1	1	1	1	-	690142-1	DISC, INSULATION	38
-	1	1	1	1	-	354777-1	WIRE DISC, ASSEMBLY	37
-	1	1	1	1	-	22480-5	SPRING, COMPRESSION	36
-	1	1	1	1	-	690212-1	POST, RAM	35
-	1	1	1	1	-	469465-3	STOP, WIRE	34
-	2	2	2	2	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	33
-	1	1	1	1	-	21024-5	WASHER, SPRG LOCK, REG NO 10	32
-	1	1	1	1	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
-	1	1	1	1	-	1320908-4	SPACER, STRIP GUIDE	30
-	1	1	1	1	-	1633091-1	ASSEMBLY, STRIP GUIDE	29
-	1	1	1	1	-	1-455888-5	SPACER, CRIMPER	28
-	1	1	1	1	-	1320928-1	PLATE, STRIP GUIDE	24
△	1	1	1	1	-	690472-6	STRIPPER	22
-	1	1	1	1	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
△	2	2	2	2	-	21024-4	WASHER, SPRG LOCK, REG NO 8	20
△	1	-	-	-	-	679625-2	SHEAR HOLDER, FRONT (NO CUT)	17
-	1	1	1	1	-	3-22280-3	SPRING, COMPRESSION	12
-	1	1	1	1	-	690461-2	STOP, SHEAR	11
△	-	-	1	1	1	1-690459-0	SHEAR HOLDER, FRONT	10
△	1	1	1	1	-	462006-6	FLOATING SHEAR, FRONT	9
△	1	1	1	1	-	3-1633382-7	ANVIL, COMBINATION	8
-	1	1	1	1	-	3-455889-8	DEPRESSOR, SHEAR	5
-	1	1	1	1	-	238011-4	BLOCK, CRIMPER SPACER	4
△	1	1	1	1	-	9-456135-6	CRIMPER, INSULATION O PREMIUM	3
△	-	-	-	-	..	-	-	2
△	1	1	1	1	1	6-459492-1	CRIMPER, WIRE O	1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2014 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED. THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2014 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.				DWN B. HIGMAN 07MAR2007		 TE Connectivity Harrisburg, PA 17105-3608	
COPYRIGHT 2014 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.				CHK B. HIGMAN 07MAR2007			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D T. ELBIN 07MAR2007		NAME	
		0. PLC ±		PRODUCT SPEC		SIDE FEED HDMM APPLICATOR	
		1. PLC ±0.1		-			
		2. PLC ±0.01		-			
		3. PLC ±0.001		APPLICATION SPEC			
		4. ANGLE ±0.0001		-			
MATERIAL		FINISH		WEIGHT		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
-		-		-		A 00779 C=1852442	
CUSTOMER ACCESSIBLE DRAWING						SCALE 3:5 SHEET 1 OF 1 REV G	



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331