

# KW DCLMS1.PC

## TOPLED® E3014

The TOPLED Compact 3014 has a wide beam angle with a compact format (3.0 mm x 1.4 mm) and is one of the smallest LED for screen backlighting. It is therefore ideal for injecting in light guides for homogeneous illumination applications where the TOPLED Compact 3014 never fails to impress with its performance on system level.



## Applications

- Electronic Equipment
- White Goods

## Features:

- Package: white SMT package, colored silicone resin
- Chip technology: InGaN on Sapphire
- Typ. Radiation: 120°
- Color: Cx = 0.35, Cy = 0.35 acc. to CIE 1931 (● white)
- Corrosion Robustness Class: 1B
- Color temperature: 4500K - 8000K
- CRI: 70 (min.)
- ESD: 2 kV acc. to ANSI/ESDA/JEDEC JS-001 (HBM, Class 2)

## Ordering Information

| Type                     | Luminous Intensity <sup>1)</sup><br>$I_F = 20 \text{ mA}$<br>$I_v$ | Color temperature | Ordering Code |
|--------------------------|--------------------------------------------------------------------|-------------------|---------------|
| KW DCLMS1.PC-BYCX-5J7K-1 | 2100 ... 3300 mcd                                                  | 4500 K            | Q65111A4105   |
| KW DCLMS1.PC-BYCX-5H7I-1 | 2100 ... 3300 mcd                                                  | 5000 K            | Q65111A4104   |
| KW DCLMS1.PC-BYCX-4A7D-1 | 2100 ... 3300 mcd                                                  | 8000 K            | Q65111A4103   |

## Maximum Ratings

| Parameter                                                                             | Symbol    |      | Values                                |
|---------------------------------------------------------------------------------------|-----------|------|---------------------------------------|
| Operating Temperature                                                                 | $T_{op}$  | min. | -40 °C                                |
|                                                                                       |           | max. | 85 °C                                 |
| Storage Temperature                                                                   | $T_{stg}$ | min. | -40 °C                                |
|                                                                                       |           | max. | 100 °C                                |
| Junction Temperature                                                                  | $T_j$     | max. | 110 °C                                |
| Forward current<br>$T_s = 25\text{ °C}$                                               | $I_F$     | max. | 30 mA                                 |
| Surge Current<br>$t \leq 10000\text{ }\mu\text{s}$ ; $D = 0.1$ ; $T_s = 25\text{ °C}$ | $I_{FS}$  | max. | 100 mA                                |
| ESD withstand voltage<br>acc. to ANSI/ESDA/JEDEC JS-001 (HBM, Class 2)                | $V_{ESD}$ |      | 2 kV                                  |
| Reverse voltage <sup>2)</sup>                                                         | $V_R$     |      | Not designed for<br>reverse operation |

## Characteristics

$I_F = 20 \text{ mA}$ ;  $T_s = 25 \text{ °C}$

| Parameter                                                  | Symbol                  |      | Values                                   |
|------------------------------------------------------------|-------------------------|------|------------------------------------------|
| Chromaticity Coordinate <sup>3)</sup>                      | Cx                      | typ. | 0.35                                     |
|                                                            | Cy                      | typ. | 0.35                                     |
| Viewing angle at 50 % $I_v$                                | 2φ                      | typ. | 110 °                                    |
| Forward Voltage <sup>4)</sup><br>$I_F = 20 \text{ mA}$     | $V_F$                   | min. | 2.80 V                                   |
|                                                            |                         | typ. | 3.05 V                                   |
|                                                            |                         | max. | 3.40 V                                   |
| Reverse current <sup>2)</sup>                              | $I_R$                   |      | Not designed<br>for reverse<br>operation |
| Color Rendering Index                                      | CRI                     | min. | 70                                       |
| Real thermal resistance junction/solderpoint <sup>5)</sup> | $R_{thJS \text{ real}}$ | typ. | 130 K / W                                |
|                                                            |                         | max. | 160 K / W                                |



## Brightness Groups

| Group | Luminous Intensity <sup>1)</sup><br>$I_F = 20 \text{ mA}$<br>min.<br>$I_v$ | Luminous Intensity <sup>1)</sup><br>$I_F = 20 \text{ mA}$<br>max.<br>$I_v$ | Luminous Flux <sup>6)</sup><br>$I_F = 20 \text{ mA}$<br>typ.<br>$\Phi_v$ |
|-------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------------------------------------------------------|
| BY    | 2100 mcd                                                                   | 2400 mcd                                                                   | 6750 mlm                                                                 |
| BZ    | 2400 mcd                                                                   | 2800 mcd                                                                   | 7800 mlm                                                                 |
| CX    | 2800 mcd                                                                   | 3300 mcd                                                                   | 9150 mlm                                                                 |

## Forward Voltage Groups

| Group | Forward Voltage <sup>4)</sup><br>$I_F = 20 \text{ mA}$<br>min.<br>$V_F$ | Forward Voltage <sup>4)</sup><br>$I_F = 20 \text{ mA}$<br>max.<br>$V_F$ |
|-------|-------------------------------------------------------------------------|-------------------------------------------------------------------------|
| 24    | 2.80 V                                                                  | 3.00 V                                                                  |
| 64    | 3.00 V                                                                  | 3.20 V                                                                  |
| A4    | 3.20 V                                                                  | 3.40 V                                                                  |

## Chromaticity Coordinate Groups

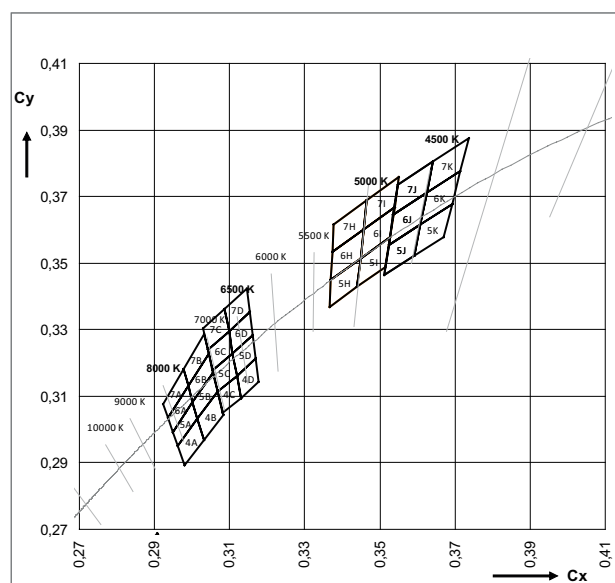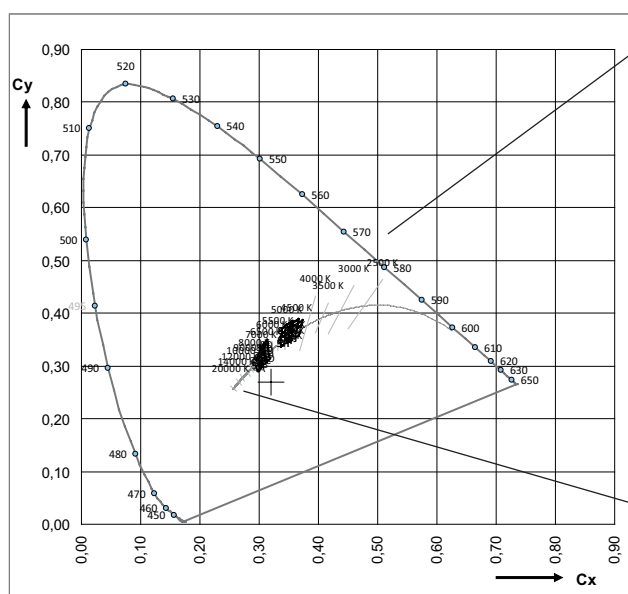

## Color Chromaticity Groups <sup>3)</sup>

| Group | Cx     | Cy     | CCT  | Group | Cx     | Cy     | CCT  | Group | Cx     | Cy     | CCT  |
|-------|--------|--------|------|-------|--------|--------|------|-------|--------|--------|------|
| 5J    | 0.3512 | 0.3465 | 4500 | 7J    | 0.3536 | 0.3646 | 4500 | 6H    | 0.3369 | 0.3451 | 5000 |
|       | 0.3524 | 0.3555 | 4500 |       | 0.3548 | 0.3736 | 4500 |       | 0.3373 | 0.3534 | 5000 |
|       | 0.3608 | 0.3616 | 4500 |       | 0.3642 | 0.3805 | 4500 |       | 0.3456 | 0.3601 | 5000 |
|       | 0.3591 | 0.3522 | 4500 |       | 0.3625 | 0.3711 | 4500 |       | 0.3448 | 0.3515 | 5000 |
| 5K    | 0.3591 | 0.3522 | 4500 | 7K    | 0.3625 | 0.3711 | 4500 | 6I    | 0.3448 | 0.3515 | 5000 |
|       | 0.3608 | 0.3616 | 4500 |       | 0.3642 | 0.3805 | 4500 |       | 0.3456 | 0.3601 | 5000 |
|       | 0.3692 | 0.3677 | 4500 |       | 0.3736 | 0.3874 | 4500 |       | 0.3539 | 0.3669 | 5000 |
|       | 0.3670 | 0.3578 | 4500 |       | 0.3714 | 0.3775 | 4500 |       | 0.3527 | 0.3578 | 5000 |
| 6J    | 0.3524 | 0.3555 | 4500 | 5H    | 0.3366 | 0.3369 | 5000 | 7H    | 0.3373 | 0.3534 | 5000 |
|       | 0.3536 | 0.3646 | 4500 |       | 0.3369 | 0.3451 | 5000 |       | 0.3376 | 0.3616 | 5000 |
|       | 0.3625 | 0.3711 | 4500 |       | 0.3448 | 0.3515 | 5000 |       | 0.3464 | 0.3688 | 5000 |
|       | 0.3608 | 0.3616 | 4500 |       | 0.3441 | 0.3428 | 5000 |       | 0.3456 | 0.3601 | 5000 |
| 6K    | 0.3608 | 0.3616 | 4500 | 5I    | 0.3441 | 0.3428 | 5000 | 7I    | 0.3456 | 0.3601 | 5000 |
|       | 0.3625 | 0.3711 | 4500 |       | 0.3448 | 0.3515 | 5000 |       | 0.3464 | 0.3688 | 5000 |
|       | 0.3714 | 0.3775 | 4500 |       | 0.3527 | 0.3578 | 5000 |       | 0.3551 | 0.3760 | 5000 |
|       | 0.3692 | 0.3677 | 4500 |       | 0.3515 | 0.3487 | 5000 |       | 0.3539 | 0.3669 | 5000 |

Not for new design

| Group | Cx     | Cy     | CCT  | Group | Cx     | Cy     | CCT  | Group | Cx     | Cy     | CCT  |
|-------|--------|--------|------|-------|--------|--------|------|-------|--------|--------|------|
| 4A    | 0.2981 | 0.2892 | 8000 | 5C    | 0.3068 | 0.3113 | 8000 | 7A    | 0.2936 | 0.3034 | 8000 |
|       | 0.2961 | 0.2952 | 8000 |       | 0.3055 | 0.3177 | 8000 |       | 0.2924 | 0.3076 | 8000 |
|       | 0.3015 | 0.3033 | 8000 |       | 0.3108 | 0.3229 | 8000 |       | 0.2978 | 0.3181 | 8000 |
|       | 0.3032 | 0.2968 | 8000 |       | 0.3119 | 0.3162 | 8000 |       | 0.2990 | 0.3131 | 8000 |
| 4B    | 0.3032 | 0.2968 | 8000 | 5D    | 0.3119 | 0.3162 | 8000 | 7B    | 0.2990 | 0.3131 | 8000 |
|       | 0.3015 | 0.3033 | 8000 |       | 0.3108 | 0.3229 | 8000 |       | 0.2978 | 0.3181 | 8000 |
|       | 0.3068 | 0.3113 | 8000 |       | 0.3162 | 0.3282 | 8000 |       | 0.3032 | 0.3286 | 8000 |
|       | 0.3083 | 0.3044 | 8000 |       | 0.3170 | 0.3212 | 8000 |       | 0.3044 | 0.3228 | 8000 |
| 4C    | 0.3081 | 0.3049 | 8000 | 6A    | 0.2949 | 0.2993 | 8000 | 7C    | 0.3041 | 0.3240 | 8000 |
|       | 0.3068 | 0.3113 | 8000 |       | 0.2936 | 0.3034 | 8000 |       | 0.3028 | 0.3304 | 8000 |
|       | 0.3119 | 0.3162 | 8000 |       | 0.2990 | 0.3131 | 8000 |       | 0.3087 | 0.3363 | 8000 |
|       | 0.3130 | 0.3095 | 8000 |       | 0.3002 | 0.3082 | 8000 |       | 0.3098 | 0.3296 | 8000 |
| 4D    | 0.3130 | 0.3095 | 8000 | 6B    | 0.3002 | 0.3082 | 8000 | 7D    | 0.3098 | 0.3296 | 8000 |
|       | 0.3119 | 0.3162 | 8000 |       | 0.2990 | 0.3131 | 8000 |       | 0.3087 | 0.3363 | 8000 |
|       | 0.3170 | 0.3212 | 8000 |       | 0.3044 | 0.3228 | 8000 |       | 0.3146 | 0.3422 | 8000 |
|       | 0.3178 | 0.3142 | 8000 |       | 0.3056 | 0.3171 | 8000 |       | 0.3154 | 0.3352 | 8000 |
| 5A    | 0.2961 | 0.2952 | 8000 | 6C    | 0.3055 | 0.3177 | 8000 |       |        |        |      |
|       | 0.2949 | 0.2993 | 8000 |       | 0.3041 | 0.3240 | 8000 |       |        |        |      |
|       | 0.3002 | 0.3082 | 8000 |       | 0.3098 | 0.3296 | 8000 |       |        |        |      |
|       | 0.3015 | 0.3033 | 8000 |       | 0.3108 | 0.3229 | 8000 |       |        |        |      |
| 5B    | 0.3015 | 0.3033 | 8000 | 6D    | 0.3108 | 0.3229 | 8000 |       |        |        |      |
|       | 0.3002 | 0.3082 | 8000 |       | 0.3098 | 0.3296 | 8000 |       |        |        |      |
|       | 0.3056 | 0.3171 | 8000 |       | 0.3154 | 0.3352 | 8000 |       |        |        |      |
|       | 0.3068 | 0.3113 | 8000 |       | 0.3162 | 0.3282 | 8000 |       |        |        |      |

Group Name on Label


Example: BY-4A-24

| Brightness | Color Chromaticity | Forward Voltage |
|------------|--------------------|-----------------|
| BY         | 4A                 | 24              |

Not for new design


## Relative Spectral Emission <sup>6)</sup>

$$I_{\text{rel}} = f(\lambda); I_F = 20 \text{ mA}; T_S = 25^\circ\text{C}$$

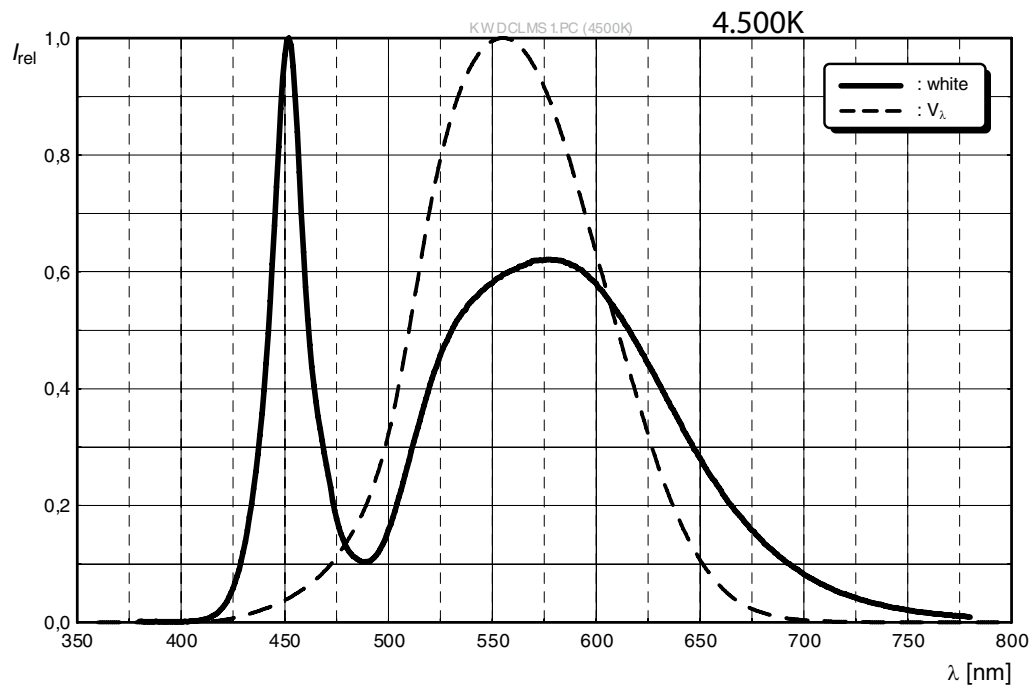


## Relative Spectral Emission <sup>6)</sup>

$$I_{\text{rel}} = f(\lambda); I_F = 20 \text{ mA}; T_S = 25^\circ\text{C}$$

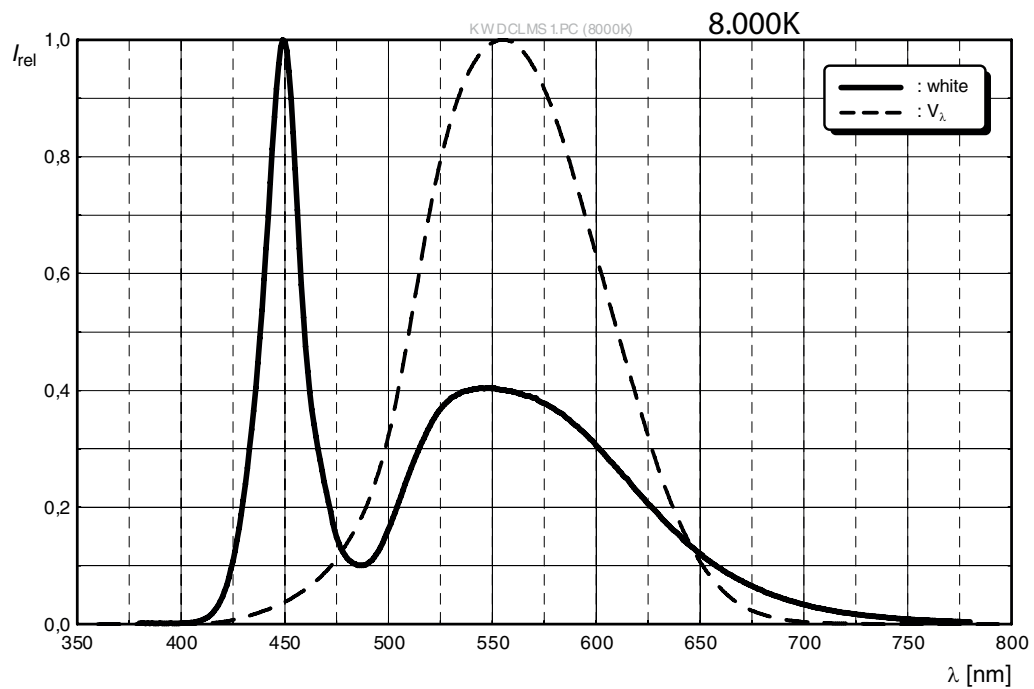


## Radiation Characteristics <sup>6)</sup>

$$I_{\text{rel}} = f(\phi); T_{\text{S}} = 25\text{ °C}$$

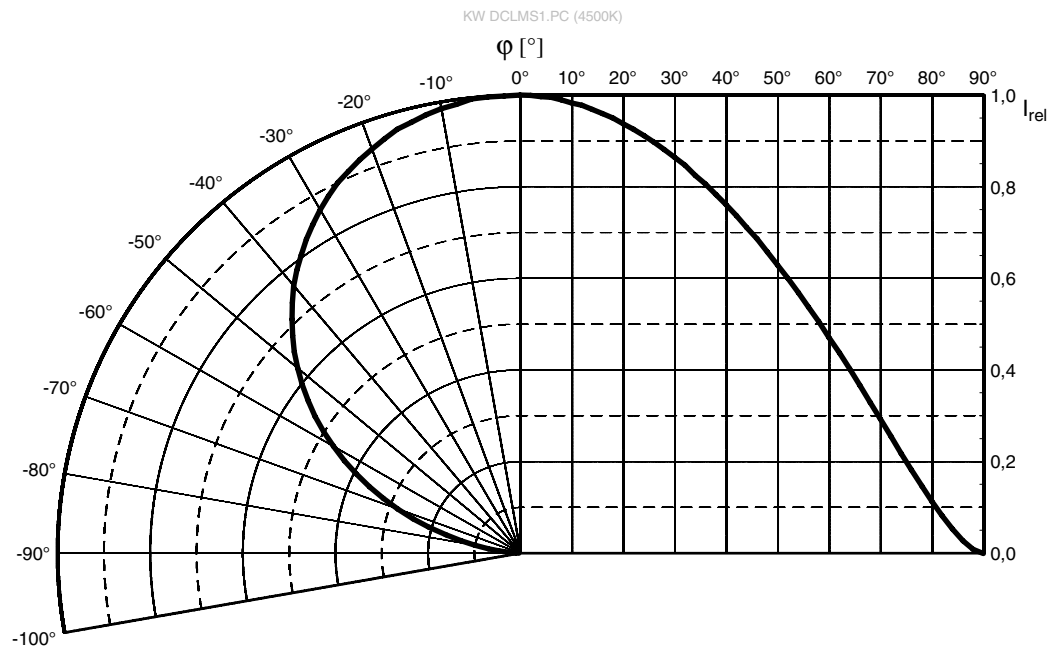


**Forward current** <sup>6), 7)</sup>


$$I_F = f(V_F); T_S = 25\text{ °C}$$

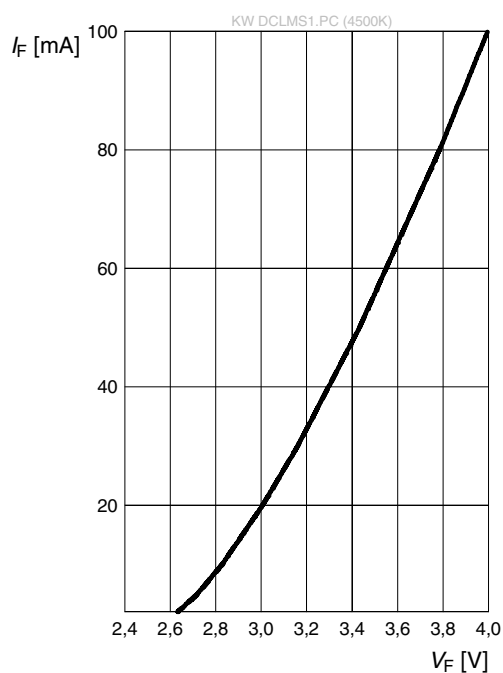**Relative Luminous Intensity** <sup>6), 7)</sup>


$$I_V/I_V(20\text{ mA}) = f(I_F); T_S = 25\text{ °C}$$

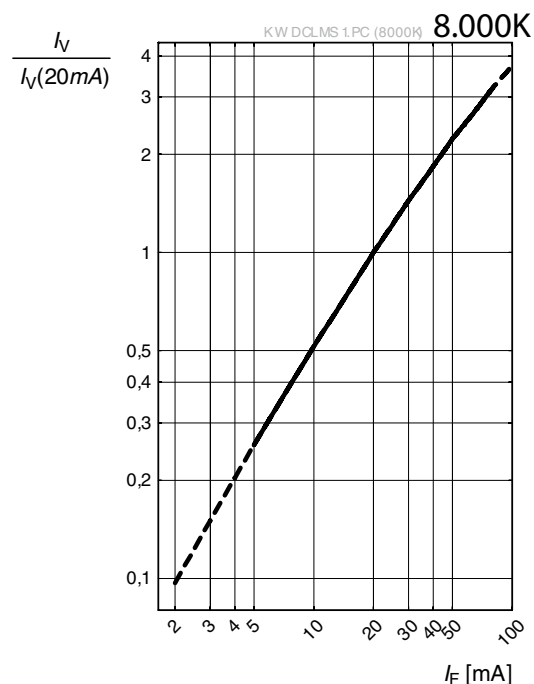**Relative Luminous Intensity** <sup>6), 7)</sup>

$$I_V/I_V(20\text{ mA}) = f(I_F); T_S = 25\text{ °C}$$

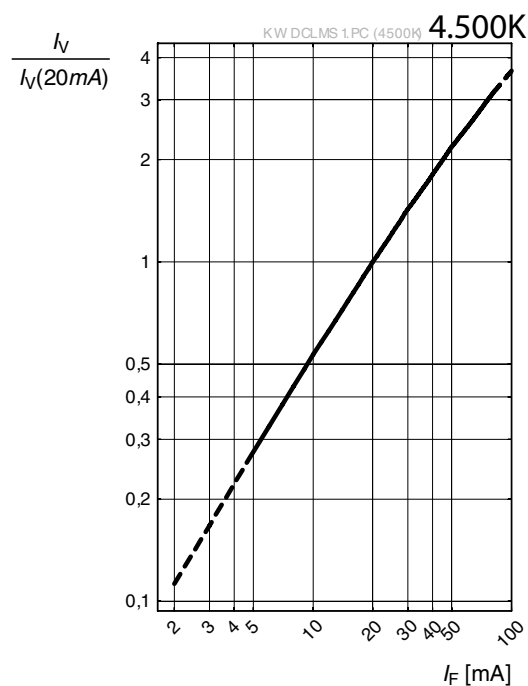
**Chromaticity Coordinate Shift** <sup>6)</sup>

$$\Delta C_x, \Delta C_y = f(I_F); T_S = 25\text{ °C}$$

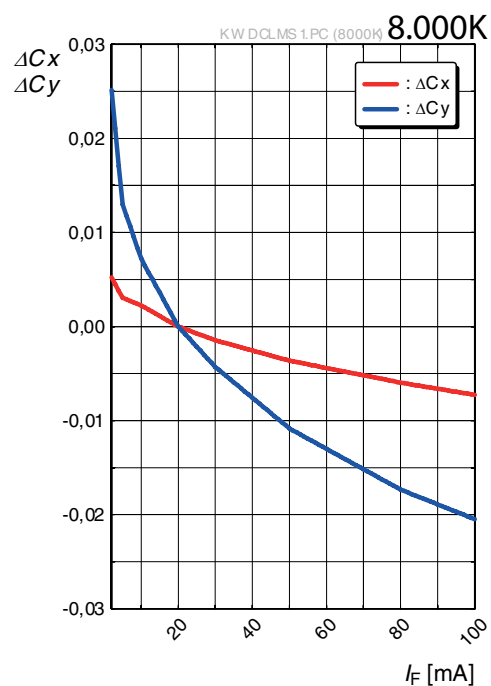


## Chromaticity Coordinate Shift <sup>6)</sup>

$$\Delta C_x, \Delta C_y = f(I_F); T_s = 25^\circ\text{C}$$

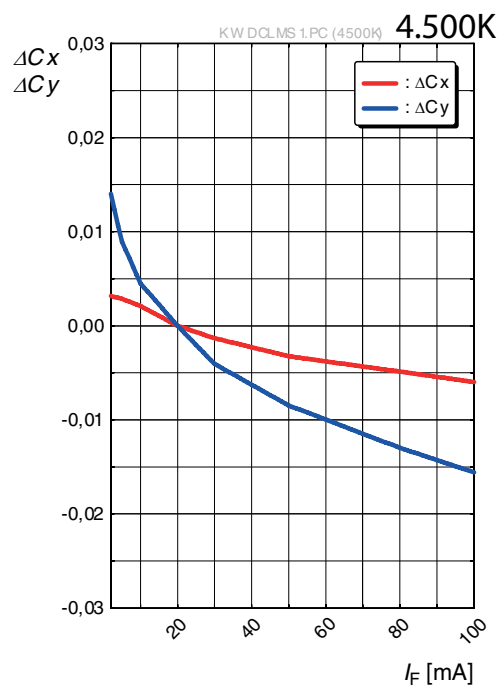


## Forward Voltage <sup>6)</sup>

$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 20\text{ mA}$$

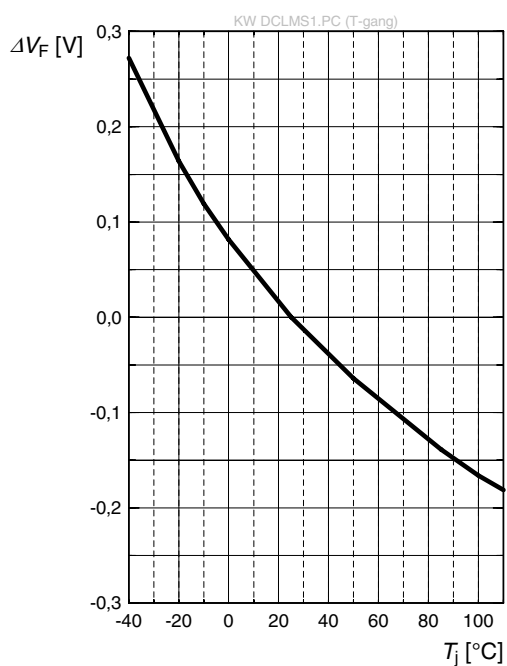


## Relative Luminous Intensity <sup>6)</sup>

$$I_V/I_V(25^\circ\text{C}) = f(T_j); I_F = 20\text{ mA}$$

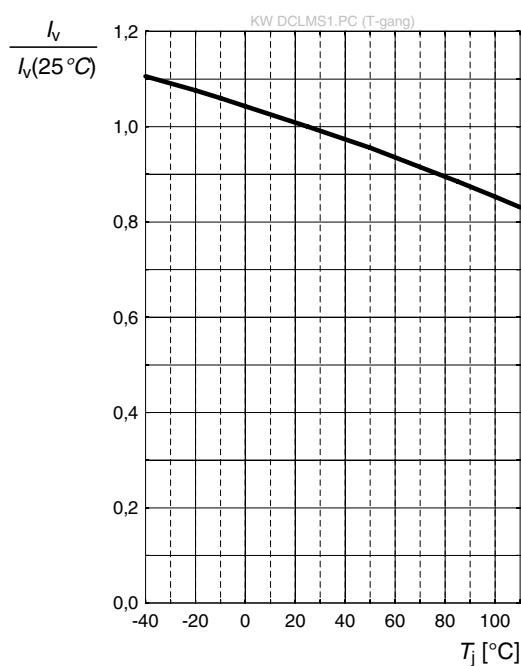


## Chromaticity Coordinate Shift <sup>6)</sup>

$$\Delta C_x, \Delta C_y = f(T_j); I_F = 20\text{ mA}$$

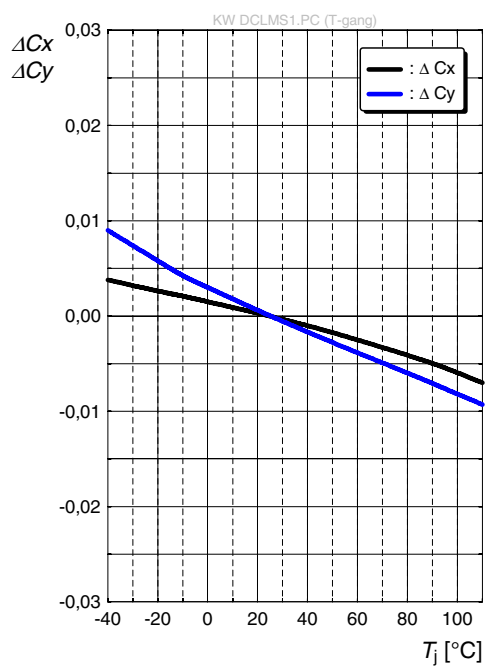


## Max. Permissible Forward Current

$$I_F = f(T)$$

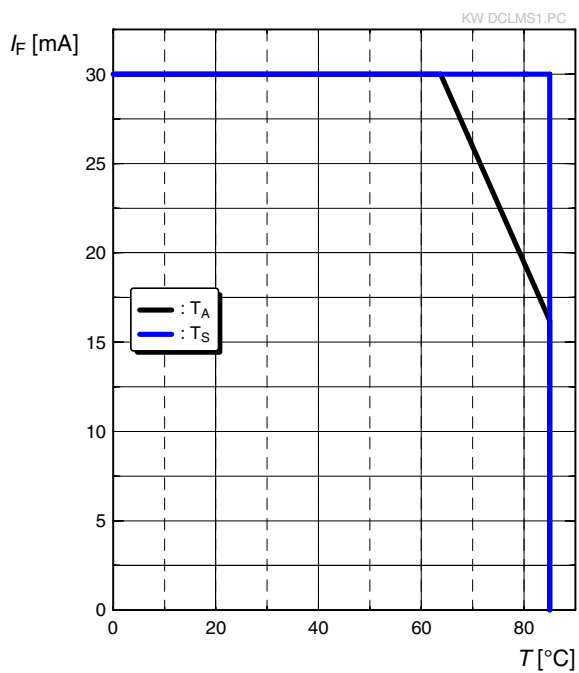


## Permissible Pulse Handling Capability

$$I_F = f(t_p); D: \text{Duty cycle}$$

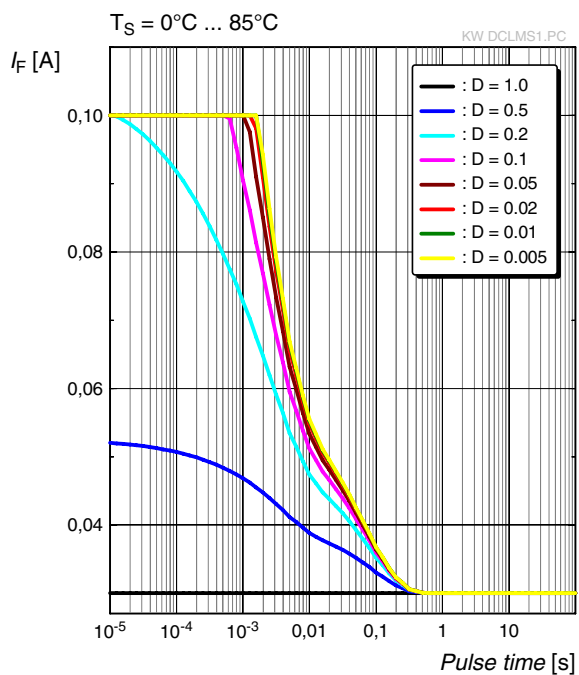

Not for new design


## Dimensional Drawing <sup>8)</sup>

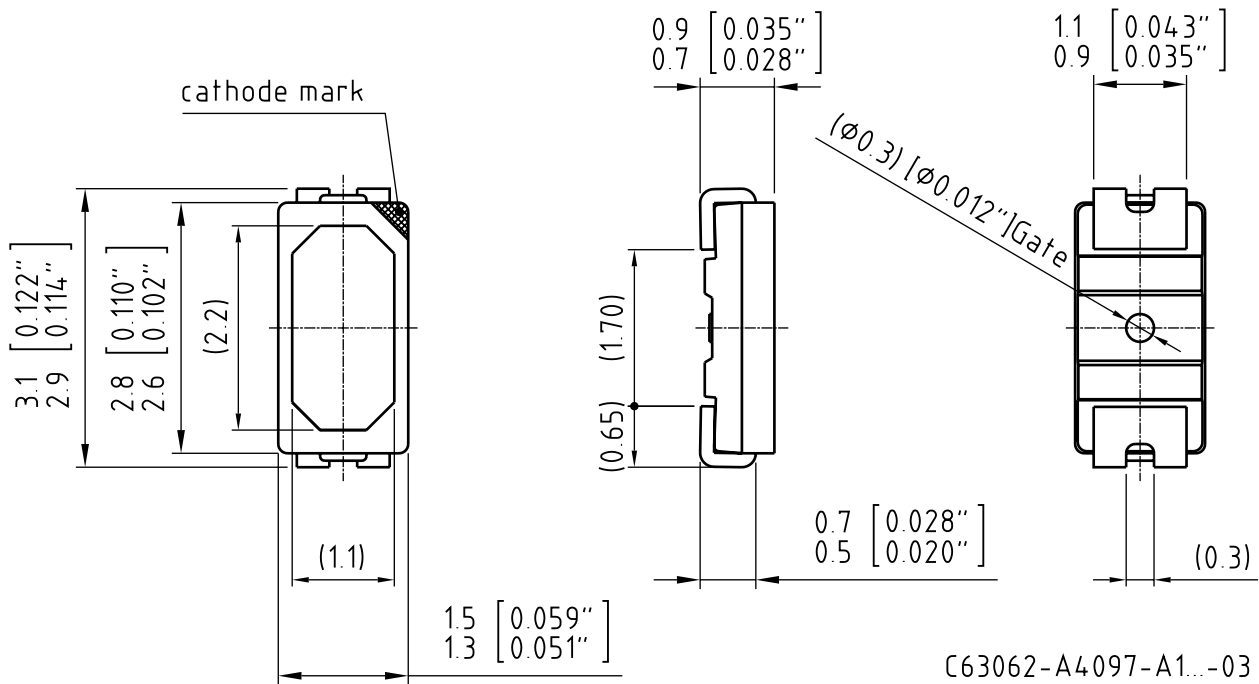


**Approximate Weight:** 10.0 mg

**Corrosion test:** Class: 1B  
 Test condition: 25°C / 75 % RH / 200ppb SO<sub>2</sub>, 200ppb NO<sub>2</sub>, 10ppb H<sub>2</sub>S,  
 10ppb Cl<sub>2</sub> / 21 days (EN 60068-2-60 (Method 4))

## Recommended Solder Pad <sup>8)</sup>

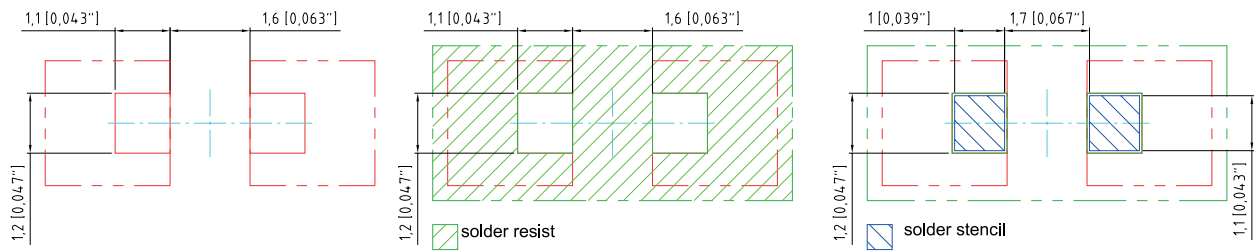

Component Location on Pad

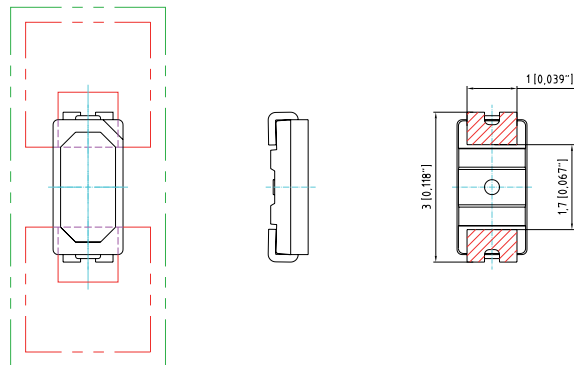


E062.3010.83-01

For superior solder joint connectivity results we recommend soldering under standard nitrogen atmosphere. Package not suitable for ultra sonic cleaning.

## Reflow Soldering Profile


Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

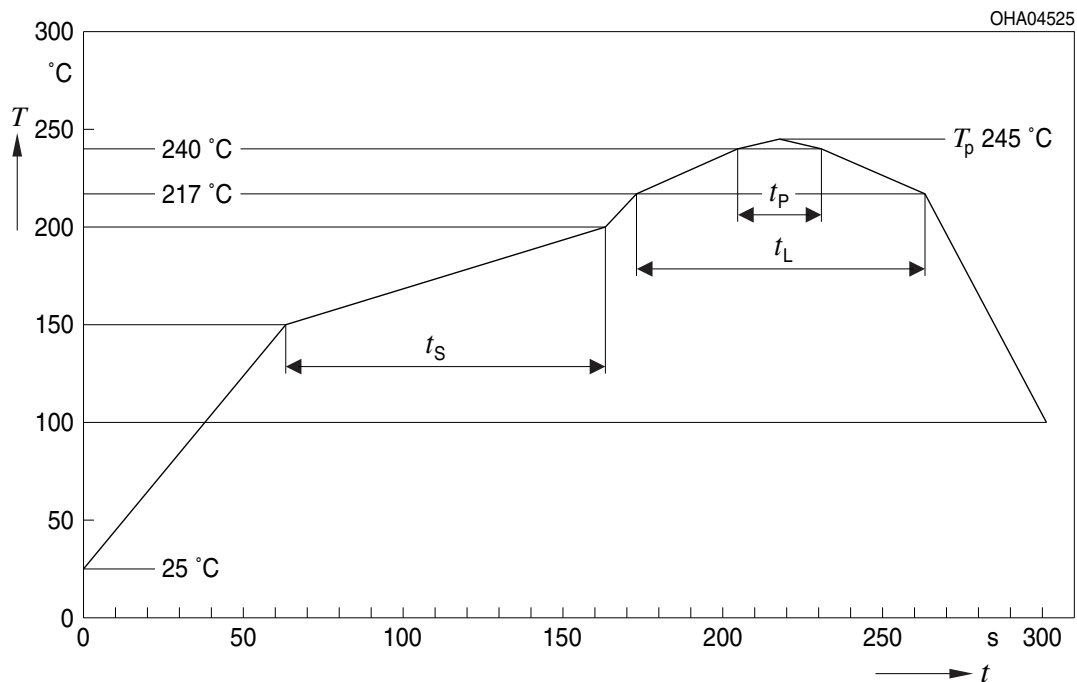

| Profile Feature                                                   | Symbol | Pb-Free (SnAgCu) Assembly |                |         | Unit |
|-------------------------------------------------------------------|--------|---------------------------|----------------|---------|------|
|                                                                   |        | Minimum                   | Recommendation | Maximum |      |
| Ramp-up rate to preheat <sup>*)</sup><br>25 °C to 150 °C          |        |                           | 2              | 3       | K/s  |
| Time $t_s$<br>$T_{Smin}$ to $T_{Smax}$                            | $t_s$  | 60                        | 100            | 120     | s    |
| Ramp-up rate to peak <sup>*)</sup><br>$T_{Smax}$ to $T_p$         |        |                           | 2              | 3       | K/s  |
| Liquidus temperature                                              | $T_L$  |                           | 217            |         | °C   |
| Time above liquidus temperature                                   | $t_L$  |                           | 80             | 100     | s    |
| Peak temperature                                                  | $T_p$  |                           | 245            | 260     | °C   |
| Time within 5 °C of the specified peak<br>temperature $T_p - 5$ K | $t_p$  | 10                        | 20             | 30      | s    |
| Ramp-down rate*<br>$T_p$ to 100 °C                                |        |                           | 3              | 6       | K/s  |
| Time<br>25 °C to $T_p$                                            |        |                           |                | 480     | s    |


All temperatures refer to the center of the package, measured on the top of the component

\* slope calculation  $DT/Dt$ :  $Dt$  max. 5 s; fulfillment for the whole T-range

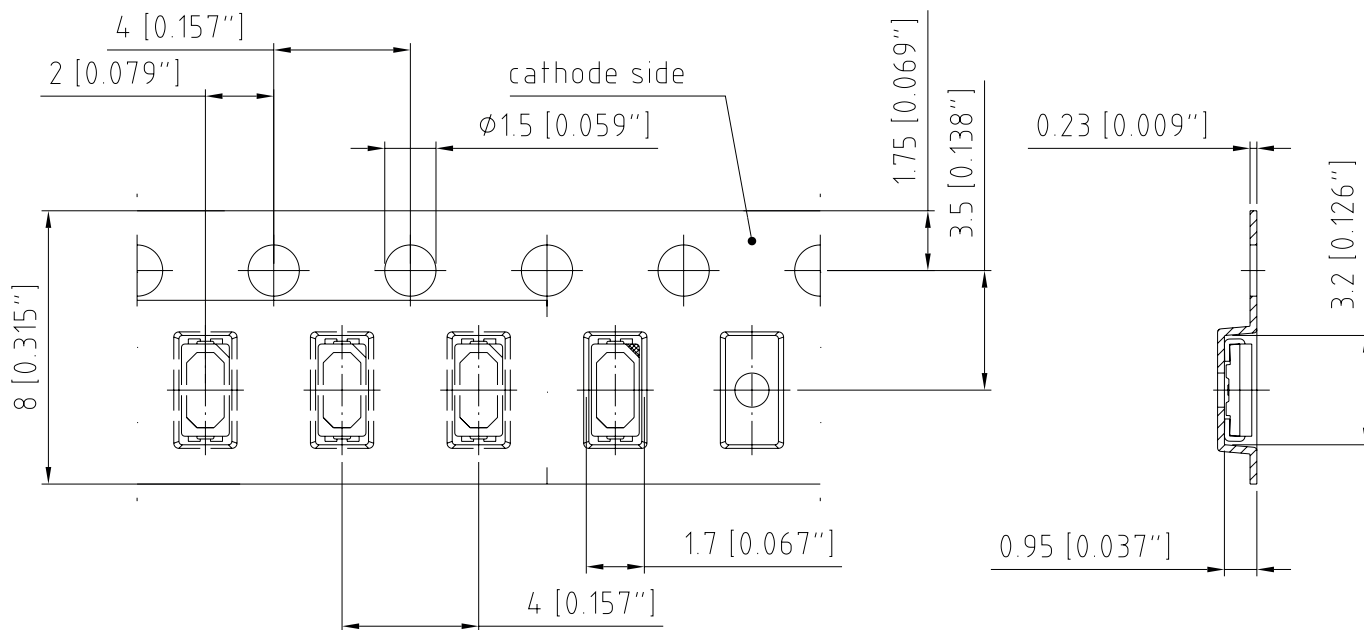**Taping** <sup>8)</sup>

C63062-A4097-B1 -02

## Tape and Reel <sup>9)</sup>

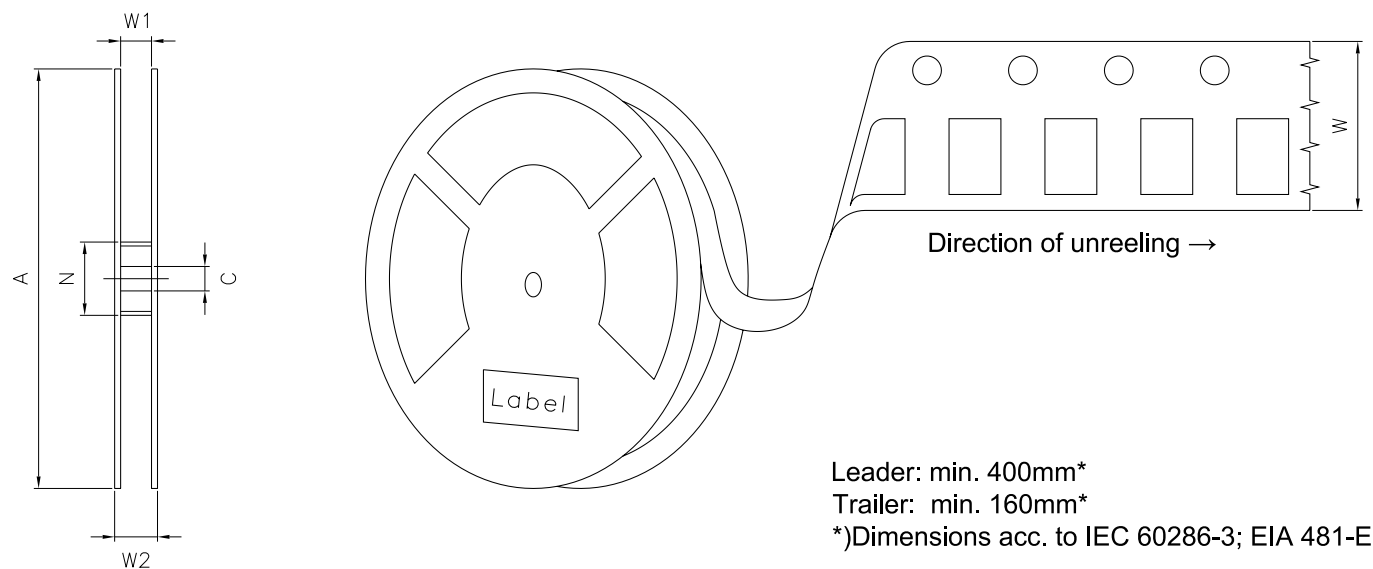

### Reel dimensions [mm]

| A      | W               | N <sub>min</sub> | W <sub>1</sub> | W <sub>2 max</sub> | Pieces per PU |
|--------|-----------------|------------------|----------------|--------------------|---------------|
| 180 mm | 8 + 0.3 / - 0.1 | 60               | 8.4 + 2        | 14.4               | 2000          |

## Barcode-Product-Label (BPL)

**OSRAM Opto Semiconductors**

LX XXXX      BIN1: XX-XX-X-XXX-X

(6P) BATCH NO: 1234567890  


RoHS Compliant  


ML Temp    ST  
X    XXX °C X




(1T) LOT NO: 1234567890  


(9D) D/C: 1234  
Pack: RXX  
DEMY    XXX  
X\_X123\_1234.1234 X

(X) PROD NO: 123456789(Q)QTY: 9999 (G) GROUP: XX-XX-X-X  


OHA04563


## Dry Packing Process and Materials <sup>8)</sup>

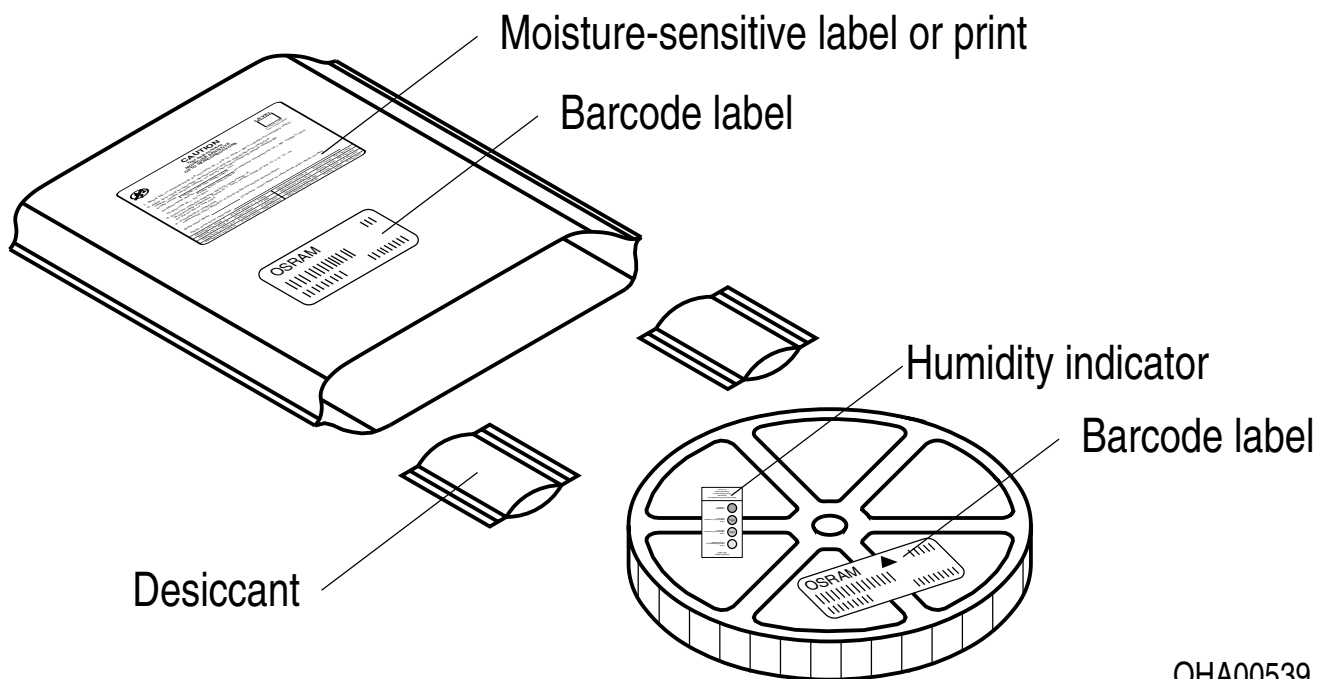

OHA00539

Moisture-sensitive product is packed in a dry bag containing desiccant and a humidity card according JEDEC-STD-033.


Transportation Packing and Materials <sup>8)</sup>

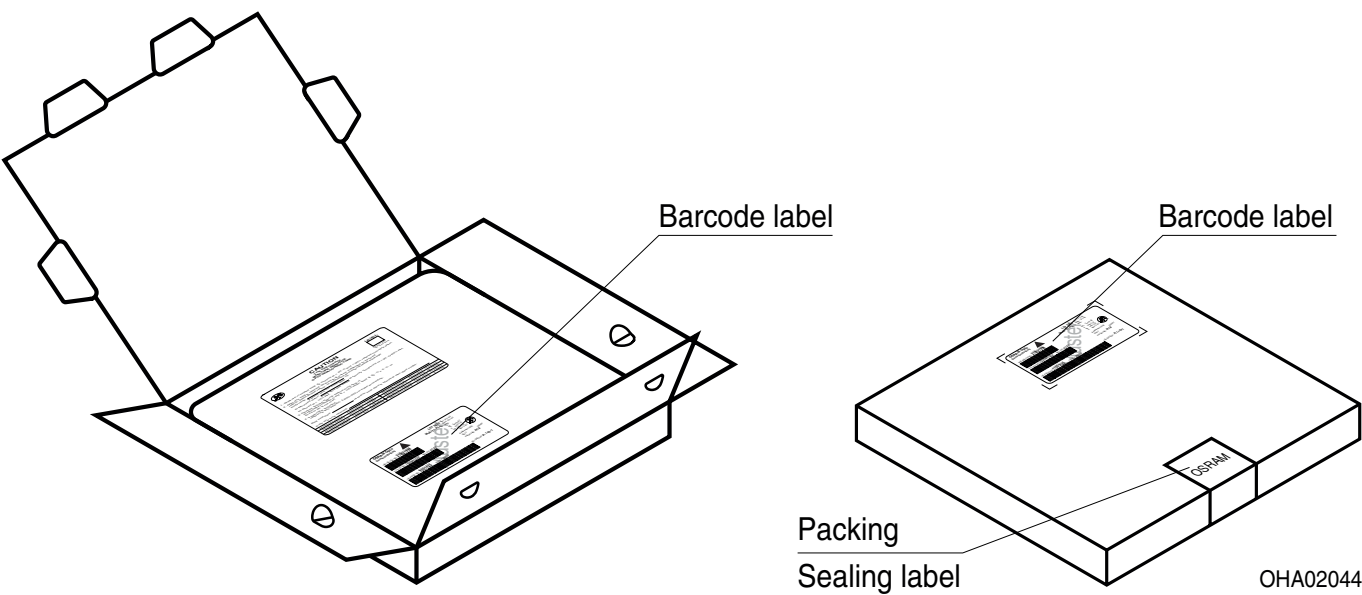

Dimensions of transportation box in mm

| Width      | Length     | Height    |
|------------|------------|-----------|
| 200 ± 5 mm | 195 ± 5 mm | 30 ± 5 mm |

## Type Designation System

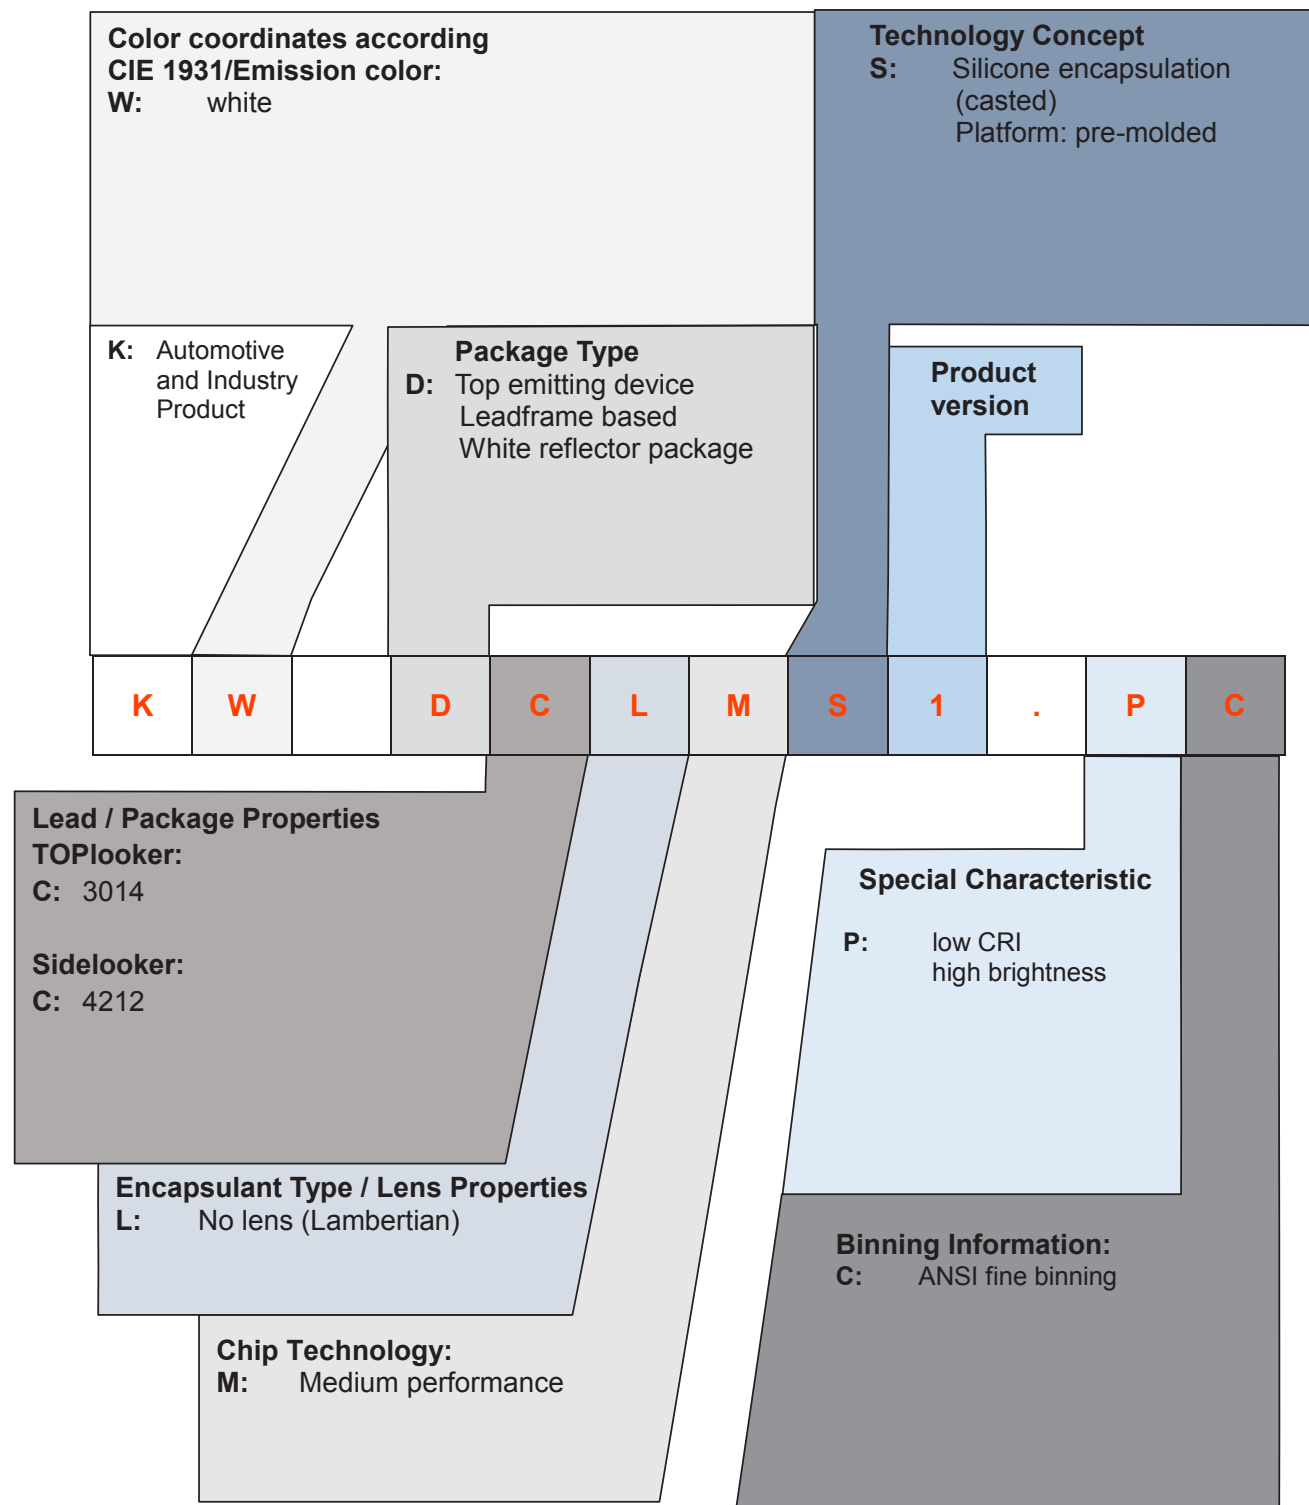

Not for new design

---

## Notes

The evaluation of eye safety occurs according to the standard IEC 62471:2006 (photo biological safety of lamps and lamp systems). Within the risk grouping system of this IEC standard, the device specified in this data sheet falls into the class **exempt group (exposure time 10000 s)**. Under real circumstances (for exposure time, conditions of the eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. When looking at bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment, and even accidents, depending on the situation.

Subcomponents of this device contain, in addition to other substances, metal filled materials including silver. Metal filled materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers minimize device exposure to aggressive substances during storage, production, and use. Devices that showed visible discoloration when tested using the described tests above did show no performance deviations within failure limits during the stated test duration. Respective failure limits are described in the IEC60810.

For further application related informations please visit [www.osram-os.com/appnotes](http://www.osram-os.com/appnotes)

## Disclaimer

### Disclaimer

Language english will prevail in case of any discrepancies or deviations between the two language wordings.

### Attention please!

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version on the OSRAM OS website.

### Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office.

By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

### Product safety devices/applications or medical devices/applications

OSRAM OS components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices.

In case Buyer – or Customer supplied by Buyer– considers using OSRAM OS components in product safety devices/applications or medical devices/applications, Buyer and/or Customer has to inform the local sales partner of OSRAM OS immediately and OSRAM OS and Buyer and /or Customer will analyze and coordinate the customer-specific request between OSRAM OS and Buyer and/or Customer.

---

## Glossary

- 1) **Brightness:** Brightness groups are tested at a current pulse duration of 25 ms and a tolerance of  $\pm 11\%$ .
- 2) **Reverse Operation:** Not designed for reverse operation. Continuous reverse operation can cause migration and damage of the device.
- 3) **Chromaticity coordinate groups:** Chromaticity coordinate groups are tested at a current pulse duration of 25 ms and a tolerance of  $\pm 0.01$ .
- 4) **Forward Voltage:** Forward voltages are tested at a current pulse duration of 1 ms and a tolerance of  $\pm 0.1$  V.
- 5) **Thermal Resistance:**  $R_{th\ max}$  is based on statistic values ( $6\sigma$ ).
- 6) **Typical Values:** Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- 7) **Characteristic curve:** In the range where the line of the graph is broken, you must expect higher differences between single devices within one packing unit.
- 8) **Tolerance of Measure:** Unless otherwise noted in drawing, tolerances are specified with  $\pm 0.1$  and dimensions are specified in mm.
- 9) **Tape and Reel:** All dimensions and tolerances are specified acc. IEC 60286-3 and specified in mm.

**Published by OSRAM Opto Semiconductors GmbH**  
**Leibnizstraße 4, D-93055 Regensburg**  
**[www.osram-os.com](http://www.osram-os.com) © All Rights Reserved.**

EU RoHS and China RoHS compliant product



此产品符合欧盟 RoHS 指令的要求；  
按照中国的相关法规和标准，不含有毒有害物质或元素。



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331