



## Low Voltage Avalanche 500 mW Zener Diodes DO-35 *Qualified per MIL-PRF-19500/437*

Qualified Levels:  
JAN, JANTX and  
JANTXV

### DESCRIPTION

The 1N5518 thru 1N5546 series of 0.5 watt axial-leaded glass Zener Voltage Regulators provides a selection from 3.3 to 33 volts with tolerances ranging from plus/minus 1% to 20%. The standard tolerance is plus/minus 5% with the B suffix unless ordered otherwise. These axial-leaded glass DO-35 Zeners are also available with an internal metallurgical bond option. This type of bonded Zener package construction is also available in JAN, JANTX, and JANTXV military qualifications. Microsemi also offers numerous other Zener products to meet higher and lower power applications.

**Important:** For the latest information, visit our website <http://www.microsemi.com>.

### FEATURES

- JEDEC registered 1N5518 thru 1N5546.
- Voltage tolerances of plus/minus 20%, 10%, 5%, 2%, and 1% available. See [Note 1](#) on page 3.
- Internal metallurgical bond option available with "-1" suffix.
- JAN, JANTX, and JANTXV qualification per MIL-PRF-19500/437 available (requires metallurgical bond option as well as plus/minus 5% voltage tolerance or tighter with B-1, C-1 or D-1 suffix).
- RoHS compliant versions available (commercial grade only).


### APPLICATIONS / BENEFITS

- Regulates voltage over a broad operating current and temperature range.
- Guaranteed voltage regulation ( $\Delta V_Z$ ) from  $I_{ZL}$  to  $I_{ZT}$ .
- Voltage selection from 3.3 to 33 V.
- Flexible axial-lead mounting terminals.
- Nonsensitive to ESD per MIL-STD-750 Method 1020.
- Minimal capacitance (see [Figure 3](#)).
- Inherently radiation hard as described in Microsemi "[MicroNote 050](#)" which is available at [Microsemi.com](http://Microsemi.com).

### MAXIMUM RATINGS

| Parameters/Test Conditions                                                                 | Symbol              | Value       | Unit                 |
|--------------------------------------------------------------------------------------------|---------------------|-------------|----------------------|
| Junction and Storage Temperature                                                           | $T_J$ and $T_{STG}$ | -65 to +175 | $^{\circ}\text{C}$   |
| Steady-State Power <sup>(Note 1)</sup><br>(Also see derating in <a href="#">Figure 2</a> ) | $P_D$               | 0.5         | W                    |
| Thermal Resistance Junction-to-Lead <sup>(Note 2)</sup>                                    | $R_{\theta JL}$     | 250         | $^{\circ}\text{C/W}$ |
| Thermal Resistance Junction-to-Ambient <sup>(Note 3)</sup>                                 | $R_{\theta JA}$     | 300         | $^{\circ}\text{C/W}$ |
| Forward Voltage @ 200 mA                                                                   | $V_F$               | 1.1         | V                    |
| Solder Pad Temperature @ 10 s                                                              | $T_{SP}$            | 260         | $^{\circ}\text{C}$   |

- Notes:**
1. At  $T_L \leq 50^{\circ}\text{C}$  3/8 inch (10 mm) from body or 0.48 W at  $T_A \leq 25^{\circ}\text{C}$  when mounted on FR4 PC board as described for thermal resistance above.
  2. At 3/8 (10 mm) lead length from body.
  3. When mounted on FR4 PC board (1 oz Cu) with 4 mm<sup>2</sup> copper pads and track width 1 mm, length 25 mm.



**DO-35 (DO-204AH)  
Package**

Also available in:

**DO-213AA MELF**  
(surface mount)

 [1N5518BUR-1 thru 1N5546BUR-1](#)

**MSC – Lawrence**

6 Lake Street,  
Lawrence, MA 01841  
1-800-446-1158  
(978) 620-2600  
Fax: (978) 689-0803

**MSC – Ireland**


Gort Road Business Park,  
Ennis, Co. Clare, Ireland  
Tel: +353 (0) 65 6840044  
Fax: +353 (0) 65 6822298

**Website:**

[www.microsemi.com](http://www.microsemi.com)

**MECHANICAL and PACKAGING**

- CASE: Hermetically sealed axial-lead glass DO-35 (DO-204AH) package.
- TERMINALS: Leads, tin-lead plated solderable per MIL-STD-750, method 2026. RoHS compliant matte-Tin available for commercial only.
- POLARITY: Cathode indicated by band where diode is to be operated with the banded end positive with respect to the opposite end for Zener regulation.
- MARKING: Part number.
- TAPE & REEL option: Standard per EIA-296 (add "TR" suffix to part number). Consult factory for quantities.
- WEIGHT: 0.2 grams.
- See [Package Dimensions](#) on last page.

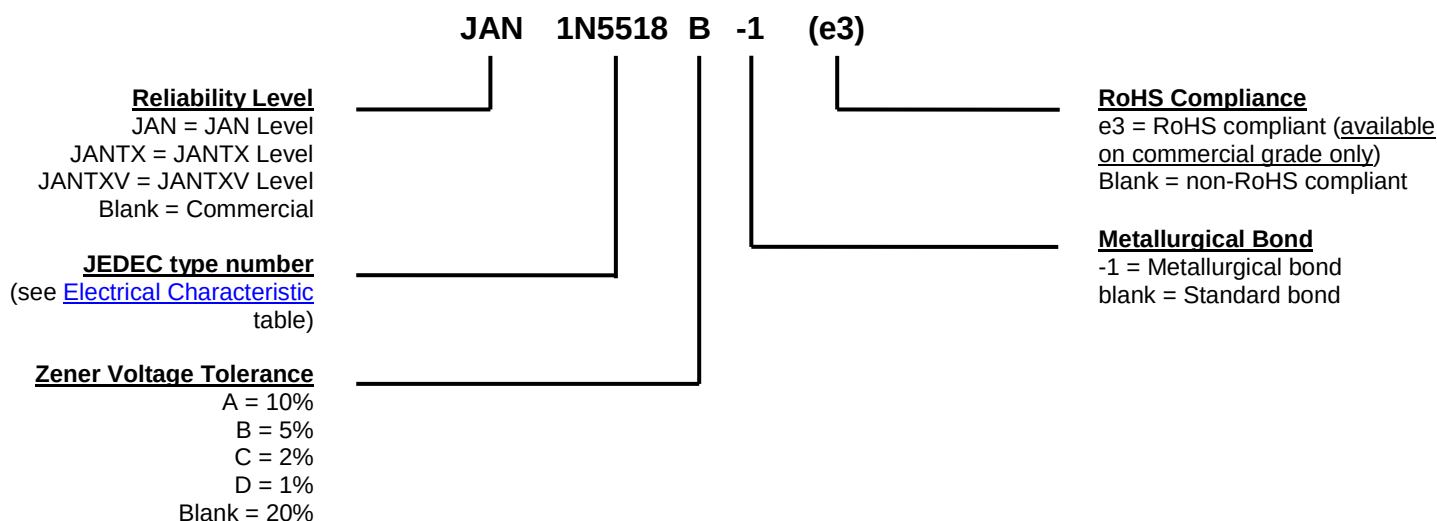**PART NOMENCLATURE**

**SYMBOLS & DEFINITIONS**

| Symbol                | Definition                                                                                                                                                                                                                                      |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $I_R$                 | Reverse Current: The maximum reverse (leakage) current that will flow at the specified voltage and temperature.                                                                                                                                 |
| $I_Z, I_{ZT}, I_{ZK}$ | Regulator Current: The dc regulator current ( $I_Z$ ), at a specified test point ( $I_{ZT}$ ), near breakdown knee ( $I_{ZK}$ ).                                                                                                                |
| $I_{ZL}$              | Low Regulator (Zener) Current: The lowest rated dc current for the specified power rating.                                                                                                                                                      |
| $I_{ZM}$              | Maximum Regulator (Zener) Current: The maximum rated dc current for the specified power rating.                                                                                                                                                 |
| $V_Z$                 | Zener Voltage: The zener voltage the device will exhibit at a specified current ( $I_Z$ ) in its breakdown region.                                                                                                                              |
| $\Delta V_Z$          | Voltage Regulation: The change in zener voltage between two specified currents or percentage of $I_{ZM}$ .                                                                                                                                      |
| $Z_{ZT}$ or $Z_{ZK}$  | Dynamic Impedance: The small signal impedance of the diode when biased to operate in its breakdown region at a specified rms current modulation (typically 10% of $I_{ZT}$ or $I_{ZK}$ ) and superimposed on $I_{ZT}$ or $I_{ZK}$ respectively. |

**ELECTRICAL CHARACTERISTICS**

(T<sub>A</sub> = 25°C unless otherwise noted. Based on DC measurements at thermal equilibrium; V<sub>F</sub> = 1.1 Max @ I<sub>F</sub> = 200 mA for all types.)

| JEDEC<br>TYPE<br>NUMBER<br>(Note 1) | NOMINAL<br>ZENER<br>VOLTAGE<br>V <sub>Z</sub> @ I <sub>ZT</sub><br>(Note 2) | TEST<br>CURRENT<br>I <sub>ZT</sub><br><br>mA | MAX. ZENER<br>IMPEDANCE<br>B-C-D SUFFIX<br>Z <sub>ZT</sub> @ I <sub>ZT</sub><br>(Note 3) | MAX. REVERSE LEAKAGE<br>CURRENT (Note 4) |                        |                 | B-C-D<br>SUFFIX<br>MAXIMUM<br>DC ZENER<br>CURRENT<br>I <sub>ZM</sub><br>(Note 5)<br>mAdc | B-C-D SUFFIX<br>MAX. NOISE<br>DENSITY<br>AT I <sub>Z</sub> = 250μA<br>N <sub>D</sub><br><br>μV/ √Hz | REGULATION<br>FACTOR<br>ΔV <sub>Z</sub><br>(Note 6)<br><br>Volts | LOW V <sub>Z</sub><br>CURRENT<br>I <sub>ZL</sub><br>(Note 6)<br><br>mA |
|-------------------------------------|-----------------------------------------------------------------------------|----------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------|------------------------|-----------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------------|
|                                     |                                                                             |                                              |                                                                                          | I <sub>R</sub><br><br>μA                 | V <sub>R</sub> – Volts |                 |                                                                                          |                                                                                                     |                                                                  |                                                                        |
|                                     |                                                                             |                                              |                                                                                          |                                          | NON & A-<br>SUFFIX     | B-C-D<br>SUFFIX |                                                                                          |                                                                                                     |                                                                  |                                                                        |
|                                     | Volts                                                                       |                                              | Ohms                                                                                     |                                          |                        |                 |                                                                                          |                                                                                                     |                                                                  |                                                                        |
| 1N5518                              | 3.3                                                                         | 20                                           | 26                                                                                       | 5.0                                      | 0.90                   | 1.0             | 115                                                                                      | 0.5                                                                                                 | 0.90                                                             | 2.0                                                                    |
| 1N5519                              | 3.6                                                                         | 20                                           | 24                                                                                       | 3.0                                      | 0.90                   | 1.0             | 105                                                                                      | 0.5                                                                                                 | 0.90                                                             | 2.0                                                                    |
| 1N5520                              | 3.9                                                                         | 20                                           | 22                                                                                       | 1.0                                      | 0.90                   | 1.0             | 98                                                                                       | 0.5                                                                                                 | 0.85                                                             | 2.0                                                                    |
| 1N5521                              | 4.3                                                                         | 20                                           | 18                                                                                       | 3.0                                      | 1.0                    | 1.5             | 88                                                                                       | 0.5                                                                                                 | 0.75                                                             | 2.0                                                                    |
| 1N5522                              | 4.7                                                                         | 10                                           | 22                                                                                       | 2.0                                      | 1.5                    | 2.0             | 81                                                                                       | 0.5                                                                                                 | 0.60                                                             | 1.0                                                                    |
| 1N5523                              | 5.1                                                                         | 5.0                                          | 26                                                                                       | 2.0                                      | 2.0                    | 2.5             | 75                                                                                       | 0.5                                                                                                 | 0.65                                                             | 0.25                                                                   |
| 1N5524                              | 5.6                                                                         | 3.0                                          | 30                                                                                       | 2.0                                      | 3.0                    | 3.5             | 68                                                                                       | 1.0                                                                                                 | 0.30                                                             | 0.25                                                                   |
| 1N5525                              | 6.2                                                                         | 1.0                                          | 30                                                                                       | 1.0                                      | 4.5                    | 5.0             | 61                                                                                       | 1.0                                                                                                 | 0.20                                                             | 0.01                                                                   |
| 1N5526                              | 6.8                                                                         | 1.0                                          | 30                                                                                       | 1.0                                      | 5.5                    | 6.2             | 56                                                                                       | 1.0                                                                                                 | 0.10                                                             | 0.01                                                                   |
| 1N5527                              | 7.5                                                                         | 1.0                                          | 35                                                                                       | 0.5                                      | 6.0                    | 6.8             | 51                                                                                       | 2.0                                                                                                 | 0.05                                                             | 0.01                                                                   |
| 1N5528                              | 8.2                                                                         | 1.0                                          | 40                                                                                       | 0.5                                      | 6.5                    | 7.5             | 46                                                                                       | 4.0                                                                                                 | 0.05                                                             | 0.01                                                                   |
| 1N5529                              | 9.1                                                                         | 1.0                                          | 45                                                                                       | 0.1                                      | 7.0                    | 8.2             | 42                                                                                       | 4.0                                                                                                 | 0.05                                                             | 0.01                                                                   |
| 1N5530                              | 10.0                                                                        | 1.0                                          | 60                                                                                       | 0.05                                     | 8.0                    | 9.1             | 38                                                                                       | 4.0                                                                                                 | 0.10                                                             | 0.01                                                                   |
| 1N5531                              | 11.0                                                                        | 1.0                                          | 80                                                                                       | 0.05                                     | 9.0                    | 9.9             | 35                                                                                       | 5.0                                                                                                 | 0.20                                                             | 0.01                                                                   |
| 1N5532                              | 12.0                                                                        | 1.0                                          | 90                                                                                       | 0.05                                     | 9.5                    | 10.8            | 32                                                                                       | 10                                                                                                  | 0.20                                                             | 0.01                                                                   |
| 1N5533                              | 13.0                                                                        | 1.0                                          | 90                                                                                       | 0.01                                     | 10.5                   | 11.7            | 29                                                                                       | 15                                                                                                  | 0.20                                                             | 0.01                                                                   |
| 1N5534                              | 14.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 11.5                   | 12.6            | 27                                                                                       | 20                                                                                                  | 0.20                                                             | 0.01                                                                   |
| 1N5535                              | 15.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 12.5                   | 13.5            | 25                                                                                       | 20                                                                                                  | 0.20                                                             | 0.01                                                                   |
| 1N5536                              | 16.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 13.0                   | 14.4            | 24                                                                                       | 20                                                                                                  | 0.20                                                             | 0.01                                                                   |
| 1N5537                              | 17.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 14.0                   | 15.3            | 22                                                                                       | 20                                                                                                  | 0.20                                                             | 0.01                                                                   |
| 1N5538                              | 18.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 15.0                   | 16.2            | 21                                                                                       | 20                                                                                                  | 0.20                                                             | 0.01                                                                   |
| 1N5539                              | 19.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 16.0                   | 17.1            | 20                                                                                       | 20                                                                                                  | 0.20                                                             | 0.01                                                                   |
| 1N5540                              | 20.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 17.0                   | 18.0            | 19                                                                                       | 20                                                                                                  | 0.20                                                             | 0.01                                                                   |
| 1N5541                              | 22.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 18.0                   | 19.8            | 17                                                                                       | 25                                                                                                  | 0.25                                                             | 0.01                                                                   |
| 1N5542                              | 24.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 20.0                   | 21.6            | 16                                                                                       | 30                                                                                                  | 0.30                                                             | 0.01                                                                   |
| 1N5543                              | 25.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 21.0                   | 22.4            | 15                                                                                       | 35                                                                                                  | 0.35                                                             | 0.01                                                                   |
| 1N5544                              | 28.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 23.0                   | 25.2            | 14                                                                                       | 40                                                                                                  | 0.40                                                             | 0.01                                                                   |
| 1N5545                              | 30.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 24.0                   | 27.0            | 13                                                                                       | 45                                                                                                  | 0.45                                                             | 0.01                                                                   |
| 1N5546                              | 33.0                                                                        | 1.0                                          | 100                                                                                      | 0.01                                     | 28.0                   | 29.7            | 12                                                                                       | 50                                                                                                  | 0.50                                                             | 0.01                                                                   |

**NOTES:**

- TOLERANCE AND VOLTAGE DESIGNATION –**  
The JEDEC type numbers shown are +/-20% with guaranteed limits for only V<sub>Z</sub>, I<sub>R</sub>, and V<sub>F</sub>. Units with A suffix are +/-10% with guaranteed limits for V<sub>Z</sub>, I<sub>R</sub>, and V<sub>F</sub>. Units with guaranteed limits for all six parameters are indicated by a B suffix for +/-5.0% units, C suffix for +/-2.0% and D suffix for +/-1.0%.
- ZENER VOLTAGE (V<sub>Z</sub>) MEASUREMENT –**  
Nominal zener voltage is measured with the device junction in thermal equilibrium with ambient temperature of 25 °C.
- ZENER IMPEDANCE (Z<sub>Z</sub>) MEASUREMENT –**  
The zener impedance is derived from the 60 Hz ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (I<sub>ZT</sub>) is superimposed on I<sub>ZT</sub>.
- REVERSE LEAKAGE CURRENT (I<sub>R</sub>) –**  
Reverse leakage currents are guaranteed and are measured at V<sub>R</sub> as shown on the table.
- MAXIMUM REGULATOR CURRENT (I<sub>ZM</sub>) –**  
The maximum current shown is as shown in MIL-PRF-19500/437.
- MAXIMUM REGULATION FACTOR (ΔV<sub>Z</sub>) –**  
ΔV<sub>Z</sub> is the maximum difference between V<sub>Z</sub> at I<sub>ZT</sub> and V<sub>Z</sub> at I<sub>ZL</sub> measured with the device junction in thermal equilibrium.

## GRAPHS

Noise density, ( $N_D$ ) is specified in microvolts rms per square-root-hertz ( $\mu\text{V}/\sqrt{\text{Hz}}$ ). Actual measurement is performed using a 1 kHz to 3 kHz frequency bandpass filter with a constant Zener test current ( $I_{ZT}$ ) at 25 °C ambient temperature.

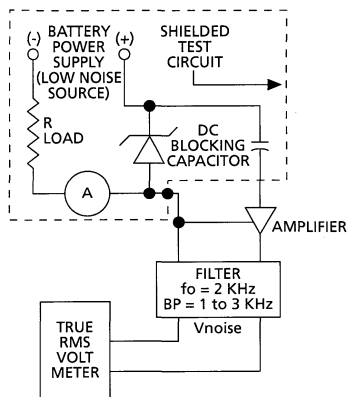


**FIGURE 1**

Noise Density Measurement Circuit

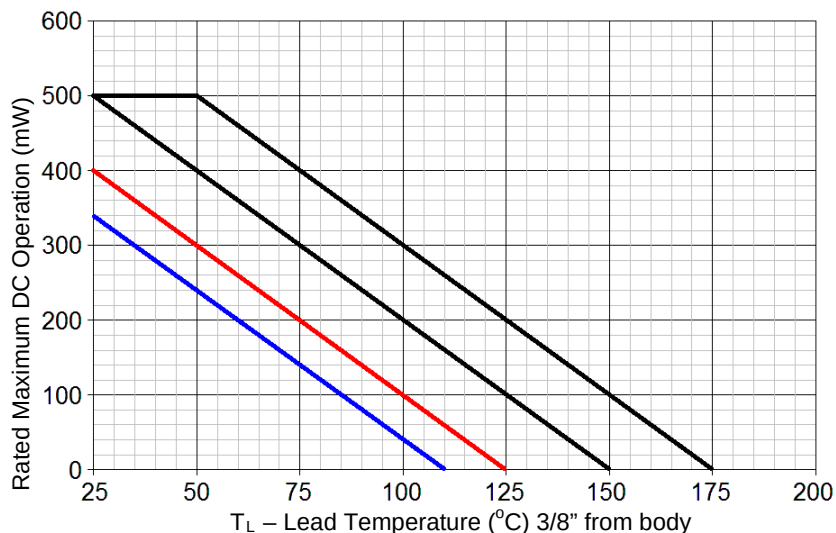


**FIGURE 2 – Temperature-Power Derating Curve**

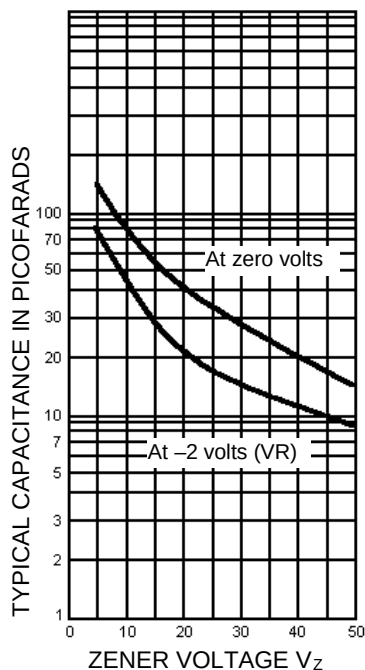


**FIGURE 3**

Capacitance vs. Zener Voltage  
(TYPICAL)

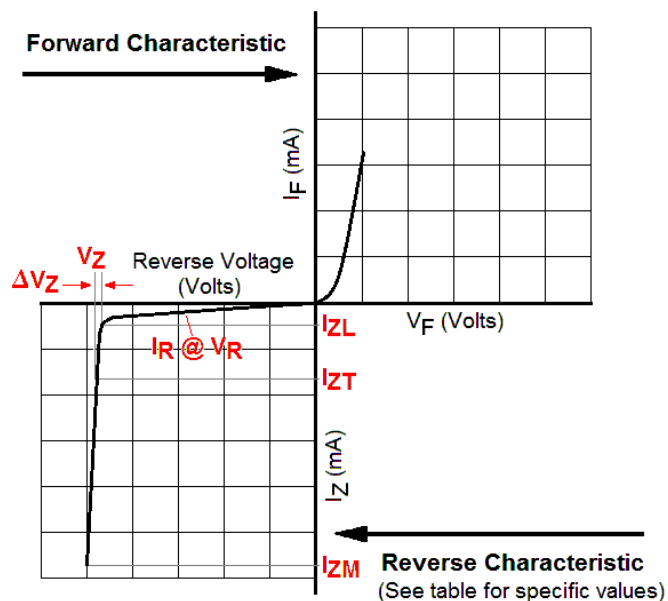
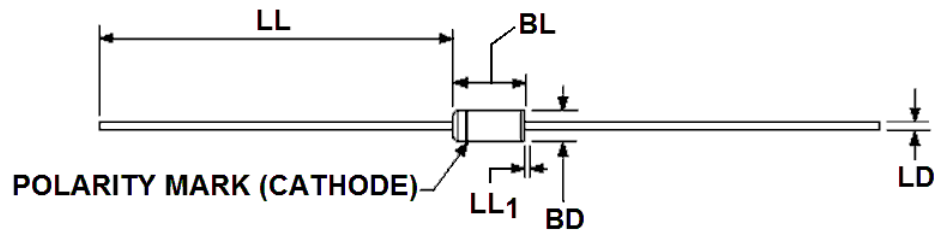


**FIGURE 4**

Zener Diode Characteristics and Symbol Identification

**PACKAGE DIMENSIONS**


| Ltr             | Dimensions |       |             |       | Notes |
|-----------------|------------|-------|-------------|-------|-------|
|                 | Inch       |       | Millimeters |       |       |
|                 | Min        | Max   | Min         | Max   |       |
| BD              | .055       | .090  | 1.40        | 2.29  | 3     |
| BL              | .120       | .200  | 3.05        | 5.08  | 3     |
| LD              | .018       | .022  | 0.46        | 0.56  |       |
| LL              | 1.000      | 1.500 | 25.40       | 38.10 |       |
| LL <sub>1</sub> |            | .050  |             | 1.27  | 4     |

**NOTES:**

1. Dimensions are in inch.
2. Millimeters are given for general information only.
3. Package contour optional within BD and length BL. Heat slugs, if any, shall be included within this cylinder but shall not be subject to minimum limit of BD. The BL dimension shall include the entire body including slugs.
4. Within this zone lead, diameter may vary to allow for lead finishes and irregularities other than heat slugs.
5. In accordance with ASME Y14.5M, diameters are equivalent to  $\phi$ x symbology.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Microchip:

[JANTX1N5530B-1](#) [JANTX1N5526B-1](#) [JANTX1N5523B-1](#) [1N5541B](#) [1N5546B](#) [1N5520B \(DO35\)](#) [1N5521B \(DO35\)](#)  
[1N5518B \(DO35\)](#) [1N5526B \(DO35\)](#) [1N5524B \(DO35\)](#) [1N5522B \(DO35\)](#) [1N5527B \(DO35\)](#) [1N5519B \(DO35\)](#)  
[1N5543B](#) [1N5542B](#) [1N5529B \(DO35\)](#) [1N5528B \(DO35\)](#) [1N5540B](#) [1N5545B](#) [1N5544B](#) [1N5525B \(DO35\)](#) [1N5538B](#)  
[1N5533B](#) [1N5535B](#) [1N5537B](#) [1N5536B](#) [1N5534B](#) [1N5539B](#) [JANTX1N5523D-1](#) [JANTX1N5532B-1](#) [1N5532B](#)  
[1N5531B](#) [1N5530B](#) [1N5529B](#) [1N5524B](#) [1N5528B](#) [1N5522B](#) [1N5523B-1](#) [1N5520B](#) [1N5519B](#) [1N5518B](#) [1N5521B](#)  
[1N5525B](#) [1N5527B](#) [1N5532B \(DO35\)](#) [1N5531B \(DO35\)](#) [1N5530B \(DO35\)](#) [JANTX1N5545B-1](#) [JANTXV1N5523B-1](#)  
[JAN1N5519B-1](#) [JANTXV1N5545B-1](#) [JANTXV1N5534B-1](#) [JANTXV1N5520B-1](#) [JAN1N5524B-1](#) [JANTX1N5519B-1](#)  
[JAN1N5535B-1](#) [JAN1N5538B-1](#) [JANTX1N5518B-1](#) [JANTXV1N5532B-1](#) [JAN1N5530B-1](#) [JAN1N5544B-1](#)  
[JANTXV1N5541B-1](#) [JANTXV1N5526B-1](#) [JANTXV1N5543B-1](#) [JANTX1N5531B-1](#) [JANTXV1N5521B-1](#)  
[JANTXV1N5537B-1](#) [JANTXV1N5546B-1](#) [JANTX1N5529B-1](#) [JAN1N5533B-1](#) [JANTXV1N5528B-1](#) [JAN1N5527B-1](#)  
[JANTX1N5524B-1](#) [JANTX1N5528B-1](#) [JANTXV1N5542B-1](#) [JAN1N5537B-1](#) [JAN1N5529B-1](#) [JANTXV1N5530B-1](#)  
[JANTXV1N5518B-1](#) [JANTX1N5533B-1](#) [JANTXV1N5529B-1](#) [JAN1N5526B-1](#) [JANTX1N5541B-1](#) [JAN1N5520B-1](#)  
[JAN1N5542B-1](#) [JANTXV1N5524B-1](#) [JANTX1N5527B-1](#) [JANTXV1N5535B-1](#) [JANTX1N5537B-1](#) [JAN1N5523B-1](#)  
[JAN1N5522B-1](#) [JANTXV1N5519B-1](#) [JANTX1N5543B-1](#) [JAN1N5532B-1](#) [JAN1N5539B-1](#) [JAN1N5525B-1](#)  
[JANTXV1N5533B-1](#) [JAN1N5521B-1](#) [JAN1N5536B-1](#) [JANTXV1N5538B-1](#)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331