

# NVMFD5C650NL

## MOSFET – Power, Dual N-Channel

### 60 V, 4.2 mΩ, 111 A

#### Features

- Small Footprint (5x6 mm) for Compact Design
- Low  $R_{DS(on)}$  to Minimize Conduction Losses
- Low  $Q_G$  and Capacitance to Minimize Driver Losses
- NVMFD5C650NLWF – Wettable Flank Option for Enhanced Optical Inspection
- AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant

#### MAXIMUM RATINGS ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

| Parameter                                                                                              |                                                   |                           | Symbol         | Value       | Unit             |
|--------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------------------------|----------------|-------------|------------------|
| Drain-to-Source Voltage                                                                                |                                                   |                           | $V_{DS}$       | 60          | V                |
| Gate-to-Source Voltage                                                                                 |                                                   |                           | $V_{GS}$       | $\pm 20$    | V                |
| Continuous Drain Current $R_{\theta JC}$ (Notes 1, 2, 3)                                               | Steady State                                      | $T_C = 25^\circ\text{C}$  | $I_D$          | 111         | A                |
|                                                                                                        |                                                   | $T_C = 100^\circ\text{C}$ |                | 88          |                  |
| Power Dissipation $R_{\theta JC}$ (Notes 1, 2)                                                         | Steady State                                      | $T_C = 25^\circ\text{C}$  | $P_D$          | 125         | W                |
|                                                                                                        |                                                   | $T_C = 100^\circ\text{C}$ |                | 62          |                  |
| Continuous Drain Current $R_{\theta JA}$ (Notes 1, 2, 3)                                               | Steady State                                      | $T_A = 25^\circ\text{C}$  | $I_D$          | 21          | A                |
|                                                                                                        |                                                   | $T_A = 100^\circ\text{C}$ |                | 15          |                  |
| Power Dissipation $R_{\theta JA}$ (Notes 1 & 2)                                                        | Steady State                                      | $T_A = 25^\circ\text{C}$  | $P_D$          | 3.5         | W                |
|                                                                                                        |                                                   | $T_A = 100^\circ\text{C}$ |                | 1.8         |                  |
| Pulsed Drain Current                                                                                   | $T_A = 25^\circ\text{C}$ , $t_p = 10 \mu\text{s}$ |                           | $I_{DM}$       | 502         | A                |
| Operating Junction and Storage Temperature                                                             |                                                   |                           | $T_J, T_{stg}$ | -55 to +175 | $^\circ\text{C}$ |
| Source Current (Body Diode)                                                                            |                                                   |                           | $I_S$          | 91          | A                |
| Single Pulse Drain-to-Source Avalanche Energy ( $T_J = 25^\circ\text{C}$ , $I_{L(pk)} = 6 \text{ A}$ ) |                                                   |                           | $E_{AS}$       | 186         | mJ               |
| Lead Temperature for Soldering Purposes (1/8" from case for 10 s)                                      |                                                   |                           | $T_L$          | 260         | $^\circ\text{C}$ |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### THERMAL RESISTANCE MAXIMUM RATINGS

| Parameter                                   | Symbol          | Value | Unit               |
|---------------------------------------------|-----------------|-------|--------------------|
| Junction-to-Case – Steady State             | $R_{\theta JC}$ | 1.37  | $^\circ\text{C/W}$ |
| Junction-to-Ambient – Steady State (Note 2) | $R_{\theta JA}$ | 46.9  |                    |

1. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
2. Surface-mounted on FR4 board using a 650 mm<sup>2</sup>, 2 oz. Cu pad.
3. Maximum current for pulses as long as 1 second is higher but is dependent on pulse duration and duty cycle.





ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)


| $V_{(BR)DSS}$ | $R_{DS(ON)} \text{ MAX}$ | $I_D \text{ MAX}$ |
|---------------|--------------------------|-------------------|
| 60 V          | 4.2 mΩ @ 10 V            | 111 A             |
|               | 5.8 mΩ @ 4.5 V           |                   |

#### Dual N-Channel

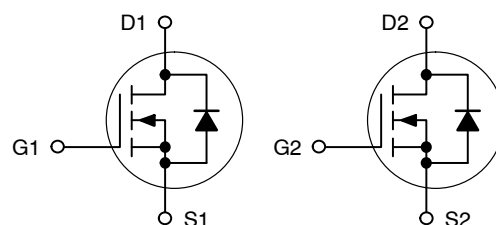

DFN8 5x6 (SO8FL) CASE 506BT

#### MARKING DIAGRAM



- A = Assembly Location
- Y = Year
- W = Work Week
- ZZ = Lot Traceability

#### ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 5 of this data sheet.

# NVMFD5C650NL

## ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------|--------|----------------|-----|-----|-----|------|
|-----------|--------|----------------|-----|-----|-----|------|

### OFF CHARACTERISTICS

|                                                           |                   |                                                     |                                  |      |     |                      |
|-----------------------------------------------------------|-------------------|-----------------------------------------------------|----------------------------------|------|-----|----------------------|
| Drain-to-Source Breakdown Voltage                         | $V_{(BR)DSS}$     | $V_{GS} = 0\text{ V}, I_D = 250\text{ }\mu\text{A}$ | 60                               |      |     | V                    |
| Drain-to-Source Breakdown Voltage Temperature Coefficient | $V_{(BR)DSS}/T_J$ |                                                     |                                  | 27.1 |     | mV/ $^\circ\text{C}$ |
| Zero Gate Voltage Drain Current                           | $I_{DSS}$         | $V_{GS} = 0\text{ V}, V_{DS} = 60\text{ V}$         | $T_J = 25\text{ }^\circ\text{C}$ |      | 10  | $\mu\text{A}$        |
|                                                           |                   |                                                     | $T_J = 125^\circ\text{C}$        |      | 100 |                      |
| Gate-to-Source Leakage Current                            | $I_{GSS}$         | $V_{DS} = 0\text{ V}, V_{GS} = 20\text{ V}$         |                                  |      | 100 | nA                   |

### ON CHARACTERISTICS (Note 4)

|                                            |                  |                                                |     |      |     |                      |
|--------------------------------------------|------------------|------------------------------------------------|-----|------|-----|----------------------|
| Gate Threshold Voltage                     | $V_{GS(TH)}$     | $V_{GS} = V_{DS}, I_D = 98\text{ }\mu\text{A}$ | 1.2 |      | 2.2 | V                    |
| Negative Threshold Temperature Coefficient | $V_{GS(TH)}/T_J$ |                                                |     | -5.0 |     | mV/ $^\circ\text{C}$ |
| Drain-to-Source On Resistance              | $R_{DS(on)}$     | $V_{GS} = 10\text{ V}, I_D = 20\text{ A}$      |     | 3.5  | 4.2 | m $\Omega$           |
|                                            |                  | $V_{GS} = 4.5\text{ V}, I_D = 20\text{ A}$     |     | 4.6  | 5.8 |                      |
| Forward Transconductance                   | $g_{FS}$         | $V_{DS} = 15\text{ V}, I_D = 50\text{ A}$      |     | 120  |     | S                    |

### CHARGES, CAPACITANCES & GATE RESISTANCE

|                              |              |                                                                  |  |      |  |    |
|------------------------------|--------------|------------------------------------------------------------------|--|------|--|----|
| Input Capacitance            | $C_{ISS}$    | $V_{GS} = 0\text{ V}, f = 1\text{ MHz}, V_{DS} = 25\text{ V}$    |  | 2546 |  | pF |
| Output Capacitance           | $C_{OSS}$    |                                                                  |  | 1258 |  |    |
| Reverse Transfer Capacitance | $C_{RSS}$    |                                                                  |  | 17   |  |    |
| Total Gate Charge            | $Q_{G(TOT)}$ | $V_{GS} = 4.5\text{ V}, V_{DS} = 48\text{ V}, I_D = 50\text{ A}$ |  | 16   |  | nC |
| Total Gate Charge            | $Q_{G(TOT)}$ | $V_{GS} = 10\text{ V}, V_{DS} = 48\text{ V}, I_D = 50\text{ A}$  |  | 37   |  |    |
| Threshold Gate Charge        | $Q_{G(TH)}$  | $V_{GS} = 4.5\text{ V}, V_{DS} = 48\text{ V}, I_D = 50\text{ A}$ |  | 4.3  |  |    |
| Gate-to-Source Charge        | $Q_{GS}$     |                                                                  |  | 8.3  |  |    |
| Gate-to-Drain Charge         | $Q_{GD}$     |                                                                  |  | 3.1  |  |    |
| Plateau Voltage              | $V_{GP}$     |                                                                  |  | 3.3  |  | V  |

### SWITCHING CHARACTERISTICS (Note 5)

|                     |              |                                                                                          |  |    |  |    |
|---------------------|--------------|------------------------------------------------------------------------------------------|--|----|--|----|
| Turn-On Delay Time  | $t_{d(ON)}$  | $V_{GS} = 4.5\text{ V}, V_{DS} = 48\text{ V}, I_D = 5\text{ A}, R_G = 1.0\text{ }\Omega$ |  | 13 |  | ns |
| Rise Time           | $t_r$        |                                                                                          |  | 24 |  |    |
| Turn-Off Delay Time | $t_{d(OFF)}$ |                                                                                          |  | 37 |  |    |
| Fall Time           | $t_f$        |                                                                                          |  | 13 |  |    |

### DRAIN-SOURCE DIODE CHARACTERISTICS

|                         |          |                                                                             |                           |    |     |     |   |
|-------------------------|----------|-----------------------------------------------------------------------------|---------------------------|----|-----|-----|---|
| Forward Diode Voltage   | $V_{SD}$ | $V_{GS} = 0\text{ V}, I_S = 20\text{ A}$                                    | $T_J = 25^\circ\text{C}$  |    | 0.9 | 1.2 | V |
|                         |          |                                                                             | $T_J = 125^\circ\text{C}$ |    | 0.8 |     |   |
| Reverse Recovery Time   | $t_{RR}$ | $V_{GS} = 0\text{ V}, dI_S/dt = 50\text{ A}/\mu\text{s}, I_S = 50\text{ A}$ |                           | 44 |     | ns  |   |
| Charge Time             | $t_a$    |                                                                             |                           | 22 |     |     |   |
| Discharge Time          | $t_b$    |                                                                             |                           | 22 |     |     |   |
| Reverse Recovery Charge | $Q_{RR}$ |                                                                             |                           | 35 |     | nC  |   |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Pulse Test: pulse width  $\leq 300\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$ .

5. Switching characteristics are independent of operating junction temperatures.

TYPICAL CHARACTERISTICS

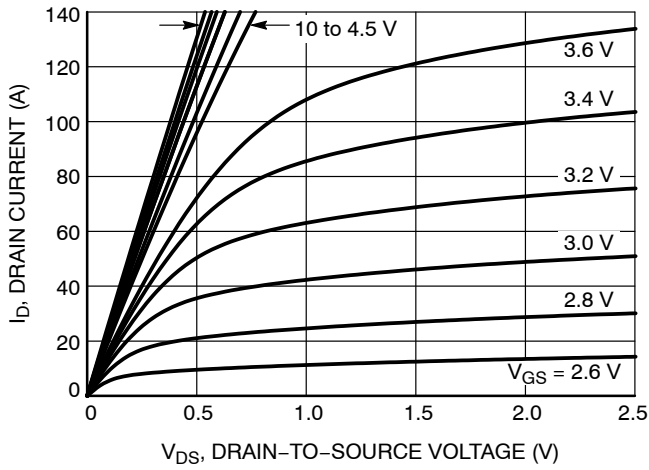


Figure 1. On-Region Characteristics

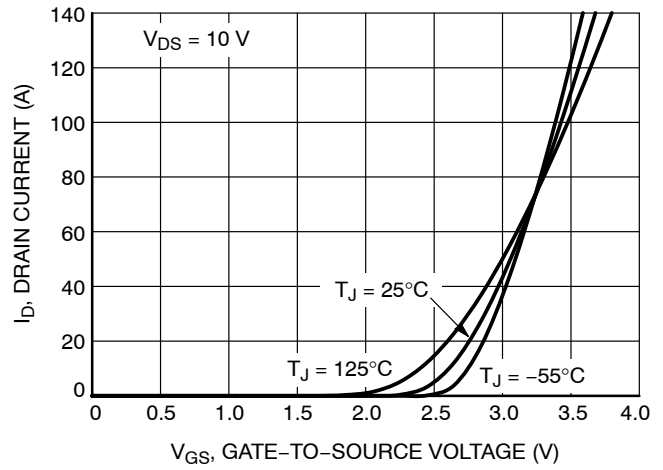


Figure 2. Transfer Characteristics

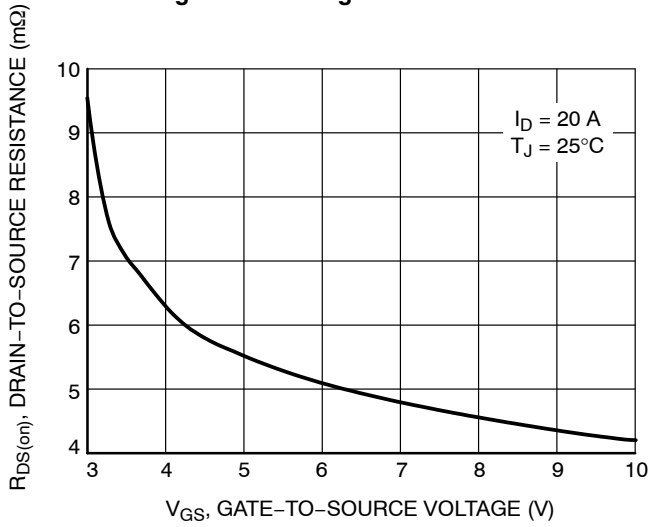


Figure 3. On-Resistance vs. Gate-to-Source Voltage

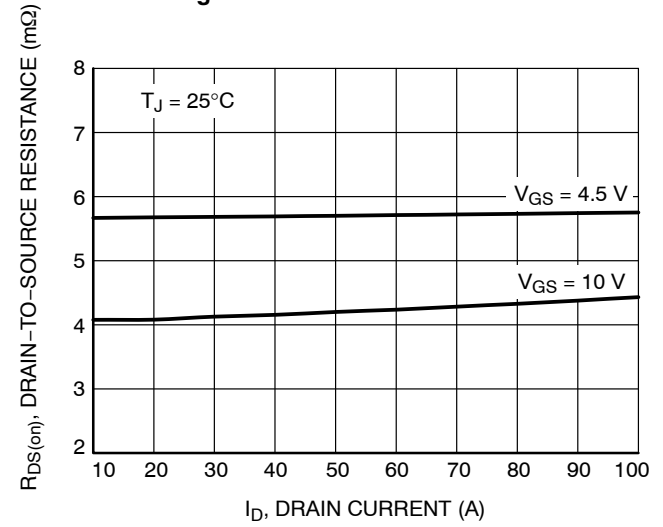


Figure 4. On-Resistance vs. Drain Current and Gate Voltage

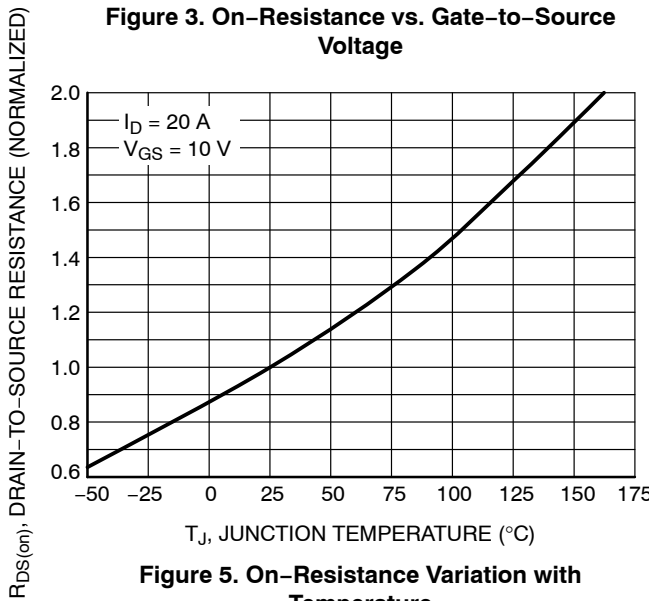


Figure 5. On-Resistance Variation with Temperature

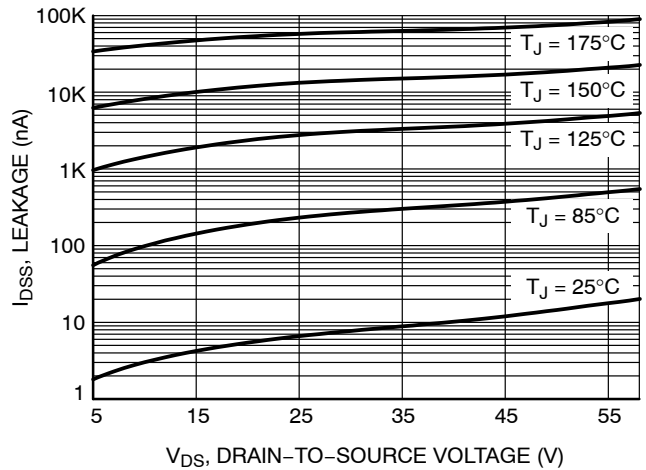


Figure 6. Drain-to-Source Leakage Current vs. Voltage

TYPICAL CHARACTERISTICS

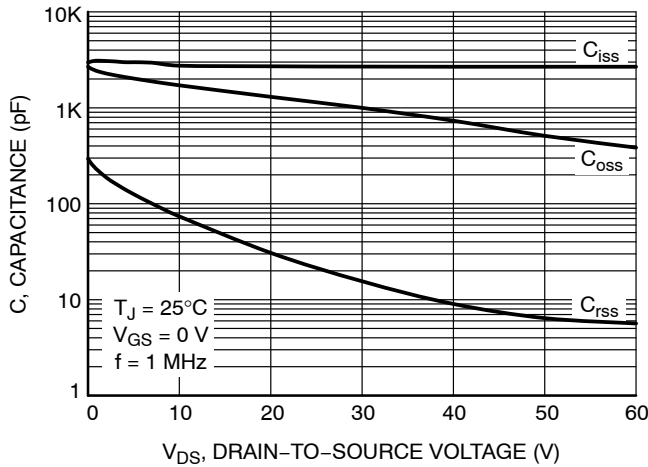


Figure 7. Capacitance Variation

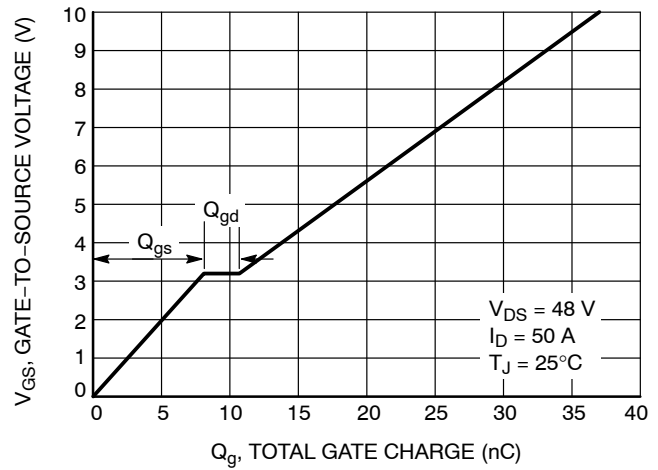


Figure 8. Gate-to-Source vs. Total Charge

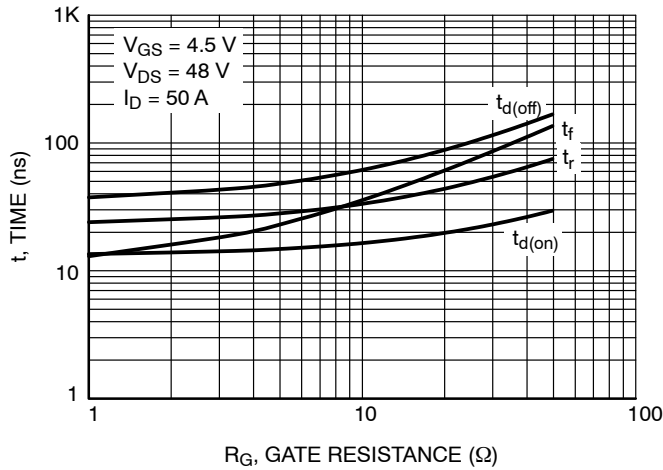


Figure 9. Resistive Switching Time Variation vs. Gate Resistance

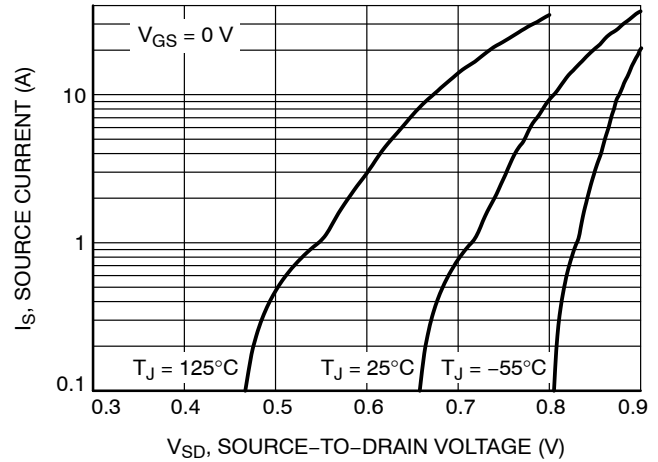


Figure 10. Diode Forward Voltage vs. Current

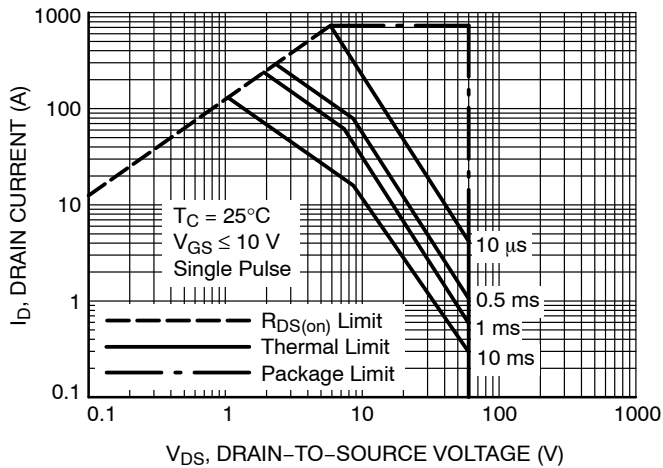


Figure 11. Maximum Rated Forward Biased Safe Operating Area

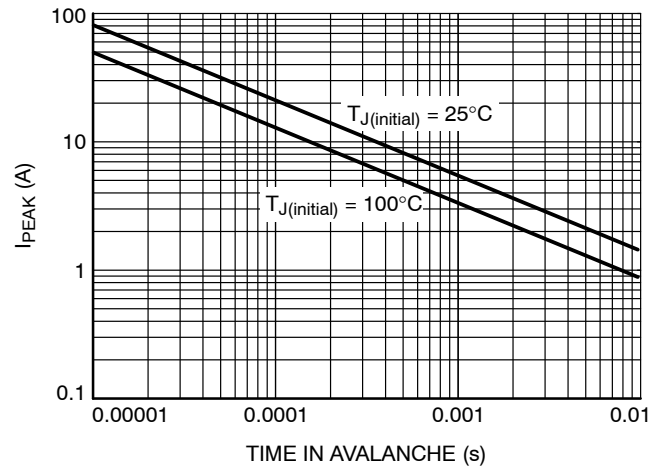
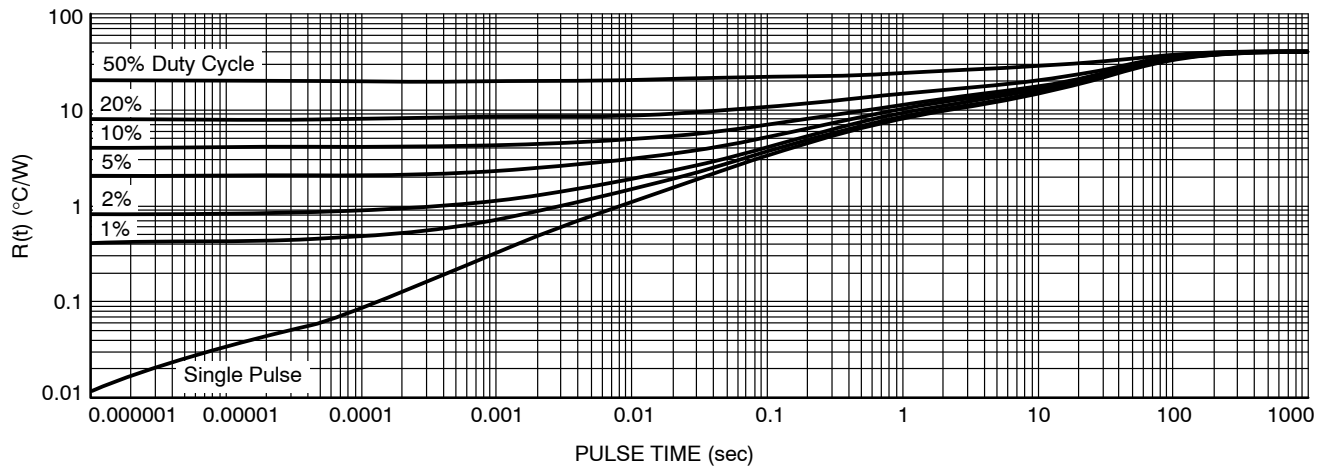


Figure 12. Maximum Drain Current vs. Time in Avalanche

# NVMFD5C650NL

## TYPICAL CHARACTERISTICS



**Figure 13. Thermal Response**

### DEVICE ORDERING INFORMATION

| Device            | Marking | Package                            | Shipping <sup>†</sup> |
|-------------------|---------|------------------------------------|-----------------------|
| NVMFD5C650NLT1G   | 5C650L  | DFN8<br>(Pb-Free)                  | 1500 / Tape & Reel    |
| NVMFD5C650NLWFT1G | 650LWF  | DFN8<br>(Pb-Free, Wettable Flanks) | 1500 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.





**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331