


**SANYO Semiconductors**

# DATA SHEET

An ON Semiconductor Company

## LV8827LFQA — Bi-CMOS IC For Brushless Motor Drive PWM Driver IC

### Overview

The LV8827LFQA is a PWM-type driver IC designed for 3-phase brushless motors. The rotational speed can be controlled by inputting the PWM pulse from the outside, and changing Duty. The IC incorporates a latch-type constraint protection circuit.

### Features

- $I_O$  max = 1.5A (built-in output Tr)
- Speed control and synchronous rectification using direct PWM input (supports 3.3V inputs)
- 1-Hall FG output
- Latch type constraint protection circuit (the latch is released by S/S and F/R.)
- Forward/reverse switching circuit, Hall bias pin
- Power save circuit (Power save in stop mode)
- Current limiter circuit, Low-voltage protection circuit, Overheat protection circuit
- Charge pump circuit, 5V regulator output.
- Start/stop circuit (short brake when motor is to be stopped)

### Specifications

**Absolute Maximum Ratings** at  $T_a = 25^\circ\text{C}$

| Parameter                   | Symbol       | Conditions                     | Ratings     | Unit             |
|-----------------------------|--------------|--------------------------------|-------------|------------------|
| Supply voltage              | $V_{CC}$ max | $V_{CC}$ pin                   | 36          | V                |
|                             | $V_G$ max    | $V_G$ pin                      | 42          | V                |
| Output current              | $I_O$ max    | $t \leq 500\text{ms} \times 1$ | 1.5         | A                |
| Allowable power dissipation | $P_d$ max2   | Mounted on a circuit board.*2  | 1.35        | W                |
| Junction temperature        | $T_J$ max    |                                | 150         | $^\circ\text{C}$ |
| Operating temperature       | $T_{opr}$    |                                | -40 to +80  | $^\circ\text{C}$ |
| Storage temperature         | $T_{stg}$    |                                | -55 to +150 | $^\circ\text{C}$ |

Continued on next page.

■ Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment. The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for new introduction or other application different from current conditions on the usage of automotive device, communication device, office equipment, industrial equipment etc. , please consult with us about usage condition (temperature, operation time etc.) prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.

■ Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

**SANYO Semiconductor Co., Ltd.**
<http://semicon.sanyo.com/en/network>

# LV8827LFQA

Continued from preceding page.

\*1 : Tj cannot exceed Tj max = 150°C

\*2 : Specified circuit board : 40mm × 50mm × 0.8mm, glass epoxy (four-layer board)

Caution 1) Absolute maximum ratings represent the value which cannot be exceeded for any length of time.

Caution 2) Even when the device is used within the range of absolute maximum ratings, as a result of continuous usage under high temperature, high current, high voltage, or drastic temperature change, the reliability of the IC may be degraded. Please contact us for the further details.

## Allowable Operating range at Ta = 25°C

| Parameter                          | Symbol           | Conditions | Ratings   | Unit |
|------------------------------------|------------------|------------|-----------|------|
| Supply voltage range               | V <sub>CC</sub>  |            | 8.0 to 35 | V    |
| 5V constant voltage output current | I <sub>REG</sub> |            | 0 to -10  | mA   |
| HB pin output current              | I <sub>HB</sub>  |            | 0 to -200 | μA   |
| FG pin applied voltage             | V <sub>FG</sub>  |            | 0 to 6    | V    |
| FG pin output current              | I <sub>FG</sub>  |            | 0 to 10   | mA   |

## Electrical Characteristics at Ta = 25°C, V<sub>CC</sub> = 24V

| Parameter                            | Symbol                  | Conditions                                          | Ratings |                      |                       | Unit  |
|--------------------------------------|-------------------------|-----------------------------------------------------|---------|----------------------|-----------------------|-------|
|                                      |                         |                                                     | min     | typ                  | max                   |       |
| Supply current 1                     | I <sub>CC1</sub>        |                                                     |         | 3.3                  | 4.0                   | mA    |
| Supply current 2                     | I <sub>CC2</sub>        | At stop                                             |         | 0.7                  | 0.8                   | mA    |
| <b>Output block</b>                  |                         |                                                     |         |                      |                       |       |
| Low-side output ON resistance        | R <sub>ON</sub> (L1)    | I <sub>O</sub> = 1.0A                               |         | 0.47                 | 0.65                  | Ω     |
| High-side output ON resistance       | R <sub>ON</sub> (H1)    | I <sub>O</sub> = -1.0A                              |         | 0.67                 | 0.9                   | Ω     |
| Low-side output leak current         | I <sub>L</sub> (L)      |                                                     |         |                      | 50                    | μA    |
| High-side output leak current        | I <sub>L</sub> (H)      |                                                     | -50     |                      |                       | μA    |
| Low-side diode forward voltage       | V <sub>D</sub> (L1)     | I <sub>D</sub> = -1.0A                              |         | 1.0                  | 1.2                   | V     |
| High-side diode forward voltage      | V <sub>D</sub> (H1)     | I <sub>D</sub> = 1.0A                               |         | 1.1                  | 1.3                   | V     |
| <b>5V Constant-voltage Output</b>    |                         |                                                     |         |                      |                       |       |
| Output voltage                       | V <sub>REG</sub>        | I <sub>O</sub> = -5mA                               | 4.8     | 5.1                  | 5.4                   | V     |
| Line regulation                      | ΔV (REG1)               | V <sub>CC</sub> = 8.0 to 35V, I <sub>O</sub> = -5mA |         |                      | 50                    | mV    |
| Load regulation                      | ΔV (REG2)               | I <sub>O</sub> = -5m to -10mA                       |         |                      | 100                   | mV    |
| <b>Hall Amplifier</b>                |                         |                                                     |         |                      |                       |       |
| Input bias current                   | I <sub>B</sub> (HA)     |                                                     | -2      |                      |                       | μA    |
| Common-mode input voltage range 1    | V <sub>ICM1</sub>       | When using Hall elements                            | 0.3     |                      | V <sub>REG</sub> -1.7 | V     |
| Common-mode input voltage range 2    | V <sub>ICM2</sub>       | At one-side input bias (Hall IC application)        | 0       |                      | V <sub>REG</sub>      | V     |
| Hall input sensitivity               | V <sub>HIN</sub>        | SIN wave                                            | 80      |                      |                       | mVp-p |
| Hysteresis width                     | ΔV <sub>IN</sub> (HA)   |                                                     | 9       | 20                   | 35                    | mV    |
| Input voltage Low → High             | V <sub>SLH</sub>        |                                                     | 3       | 9                    | 16                    | mV    |
| Input voltage High → Low             | V <sub>SHL</sub>        |                                                     | -19     | -11                  | -5                    | mV    |
| <b>CSD oscillator circuit</b>        |                         |                                                     |         |                      |                       |       |
| High level output voltage            | V <sub>OH</sub> (CSD)   |                                                     | 2.7     | 3.0                  | 3.3                   | V     |
| Low level output voltage             | V <sub>OL</sub> (CSD)   |                                                     | 0.9     | 1.1                  | 1.3                   | V     |
| Amplitude                            | V (CSD)                 |                                                     | 1.6     | 1.9                  | 2.2                   | Vp-p  |
| External capacitor charge current    | I <sub>CHG1</sub> (CSD) | V <sub>CHG1</sub> = 2.0V                            | -14     | -11.5                | -9                    | μA    |
| External capacitor discharge current | I <sub>CHG2</sub> (CSD) | V <sub>CHG2</sub> = 2.0V                            | 9.5     | 12                   | 14.5                  | μA    |
| Oscillation frequency                | f (CSD)                 | C = 0.022μF (Design target value)                   |         | 130                  |                       | Hz    |
| <b>Charge pump output (VG pin)</b>   |                         |                                                     |         |                      |                       |       |
| Output voltage                       | V <sub>GOUT</sub>       |                                                     |         | V <sub>CC</sub> +4.5 |                       | V     |
| <b>CP1 pin</b>                       |                         |                                                     |         |                      |                       |       |
| Output ON resistance (High level)    | V <sub>OH</sub> (CP1)   | ICP1 = -2mA                                         |         | 500                  | 700                   | Ω     |
| Output ON resistance (Low level)     | V <sub>OL</sub> (CP1)   | ICP1 = 2mA                                          |         | 350                  | 500                   | Ω     |
| Charge pump frequency                | f (CP)                  |                                                     | 82      | 103                  | 124                   | kHz   |
| <b>Internal PWM frequency</b>        |                         |                                                     |         |                      |                       |       |
| Oscillation frequency                | f (PWM)                 |                                                     | 41      | 51.5                 | 62                    | kHz   |
| <b>Current limiter operation</b>     |                         |                                                     |         |                      |                       |       |
| Limiter voltage                      | V <sub>RF</sub>         |                                                     | 0.19    | 0.21                 | 0.23                  | V     |

Continued on next page.

# LV8827LFQA

Continued from preceding page.



| Parameter                                                     | Symbol     | Conditions                                  | Ratings  |          |          | Unit |
|---------------------------------------------------------------|------------|---------------------------------------------|----------|----------|----------|------|
|                                                               |            |                                             | min      | typ      | max      |      |
| Thermal shutdown operation                                    |            |                                             |          |          |          |      |
| Thermal shutdown operation temperature                        | TSD        | *Design target value (junction temperature) | 150      | 165      | 180      | °C   |
| Hysteresis width                                              | ΔTSD       | *Design target value (junction temperature) |          | 30       |          | °C   |
| HB pin                                                        |            |                                             |          |          |          |      |
| Output voltage                                                | VHB        | IHB = -100μA                                | 3.4      | 3.6      | 3.8      | V    |
| Low-voltage protection (5V constant-voltage output detection) |            |                                             |          |          |          |      |
| Operation voltage                                             | VSD        |                                             | 3.95     | 4.15     | 4.35     | V    |
| Hysteresis width                                              | ΔVSD       |                                             | 0.2      | 0.3      | 0.4      | V    |
| FG pin (3FG pin)                                              |            |                                             |          |          |          |      |
| Output ON resistance                                          | VOL (FG)   | IFG = 5mA                                   |          | 40       | 60       | Ω    |
| Output leak current                                           | IL (FG)    | VO = 5V                                     |          |          | 10       | μA   |
| S/S pin                                                       |            |                                             |          |          |          |      |
| High level input voltage                                      | VIH (SS)   |                                             | 2.0      |          | VREG     | V    |
| Low level input voltage                                       | VIL (SS)   |                                             | 0        |          | 1.0      | V    |
| Input open voltage                                            | VO (SS)    |                                             | VREG-2.2 | VREG-2.0 | VREG-1.8 | V    |
| Hysteresis width                                              | VIS (SS)   |                                             | 0.25     | 0.33     | 0.4      | V    |
| High level input current                                      | IIH (SS)   | VSS = VREG                                  | 45       | 60       | 75       | μA   |
| Low level input current                                       | IIL (SS)   | VSS = 0V                                    | -115     | -90      | -65      | μA   |
| PWIN pin                                                      |            |                                             |          |          |          |      |
| Recommended input frequency                                   | f (PWIN)   |                                             | 0.5      |          | 60       | kHz  |
| High level input voltage                                      | VIH (PWIN) |                                             | 2.0      |          | VREG     | V    |
| Low level input voltage                                       | VIL (PWIN) |                                             | 0        |          | 1.0      | V    |
| Input open voltage                                            | VO (PWIN)  |                                             | VREG-2.2 | VREG-2.0 | VREG-1.8 | V    |
| Hysteresis width                                              | VIS (PWIN) |                                             | 0.25     | 0.33     | 0.4      | V    |
| High level input current                                      | IIH (PWIN) | VPWIN = VREG                                | 45       | 60       | 75       | μA   |
| Low level input current                                       | IIL (PWIN) | VPWIN = 0V                                  | -115     | -90      | -65      | μA   |
| F/R pin                                                       |            |                                             |          |          |          |      |
| High level input voltage                                      | VIH (FR)   | *Design target value                        | 2.0      |          | VREG     | V    |
| Low level input voltage                                       | VIL (FR)   | *Design target value                        | 0        |          | 1.0      | V    |
| Input open voltage                                            | VO (FR)    |                                             | VREG-2.2 | VREG-2.0 | VREG-1.8 | V    |
| Hysteresis width                                              | VIS (FR)   | *Design target value                        | 0.25     | 0.33     | 0.4      | V    |
| High level input current                                      | IIH (FR)   | VF/R = VREG                                 | 45       | 60       | 75       | μA   |
| Low level input current                                       | IIL (FR)   | VF/R = 0V                                   | -115     | -90      | -65      | μA   |

\* : Design target value and no measurement is made.


Package Dimensions

unit : mm (typ)

3430

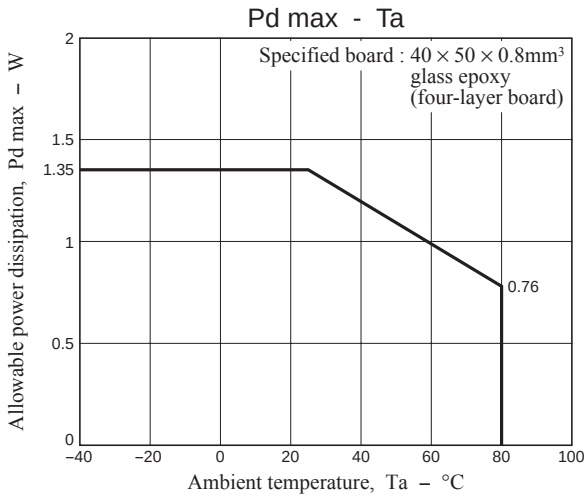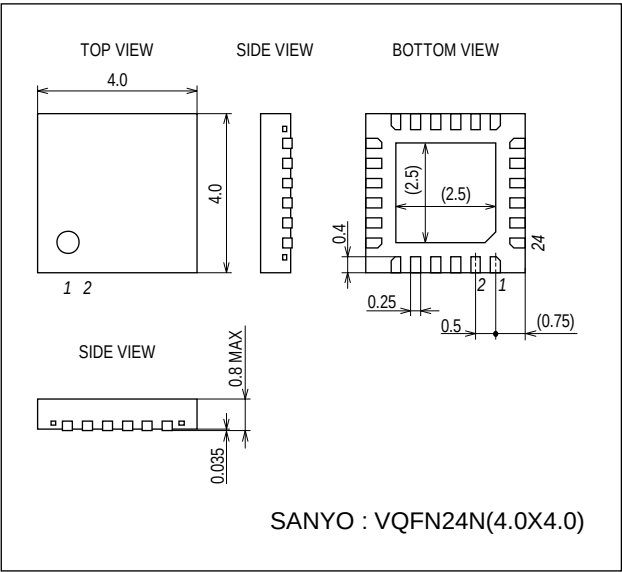

Pin Assignment

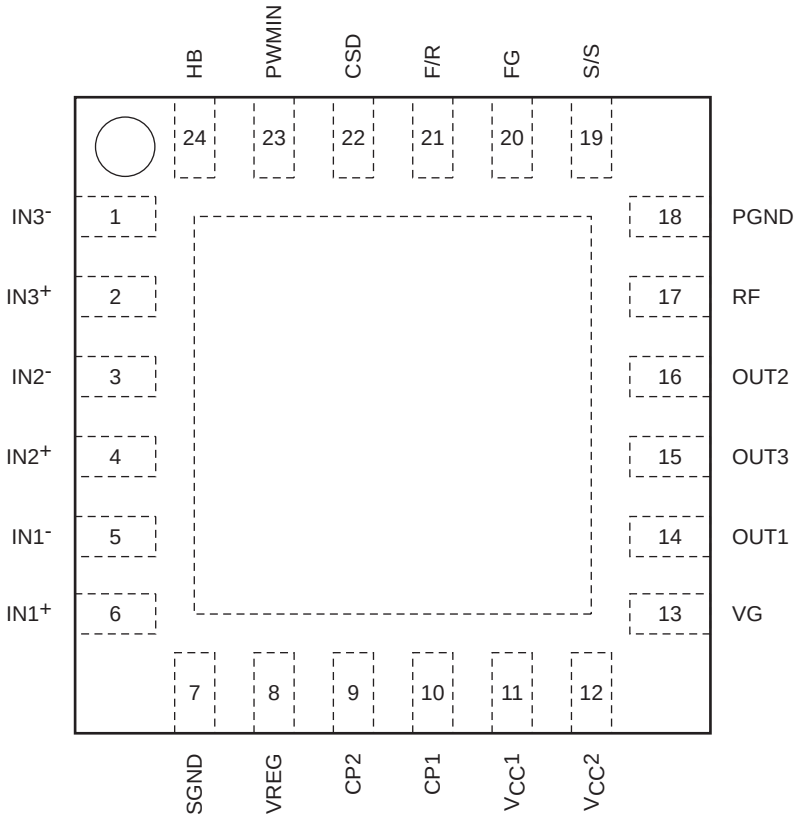

### Three-phase logic truth table (IN = "High" indicates the state where IN+ > IN-.)

("H" = SOURCE, "L" = SINK, and "M" = output OFF are shown with OUT1 to 3.)

| F/R = [H] |     |     | F/R = [L] |     |     | Output |      |      |
|-----------|-----|-----|-----------|-----|-----|--------|------|------|
| IN1       | IN2 | IN3 | IN1       | IN2 | IN3 | OUT1   | OUT2 | OUT3 |
| H         | L   | H   | L         | H   | L   | L      | H    | M    |
| H         | L   | L   | L         | H   | H   | L      | M    | H    |
| H         | H   | L   | L         | L   | H   | M      | L    | H    |
| L         | H   | L   | H         | L   | H   | H      | L    | M    |
| L         | H   | H   | H         | L   | L   | H      | M    | L    |
| L         | L   | H   | H         | H   | L   | M      | H    | L    |

| FG output |     |     |    |
|-----------|-----|-----|----|
| IN1       | IN2 | IN3 | FG |
| H         | L   | H   | L  |
| H         | L   | L   | L  |
| H         | H   | L   | L  |
| L         | H   | L   | H  |
| L         | H   | H   | H  |
| L         | L   | H   | H  |

### S/S pin, PWMIN pin

| Input state  | S/S pin            | PWMIN pin  |
|--------------|--------------------|------------|
| High or Open | Stop (short brake) | Output OFF |
| Low          | Start              | Output ON  |

### CSD function

When the S/S pin is in a STOP state

→ Protection released and count reset (Initial reset)

When the F/R pin is switched

→ Protection released and count reset

When 0% duty is detected at the PWMIN pin input

→ Protection released and count reset

When low-voltage condition is detected


→ Protection released and count reset (Initial reset)

When TSD condition is detected

→ Stop counting

# LV8827LFQA

## Internal Equivalent Circuit and Sample External Component Circuit

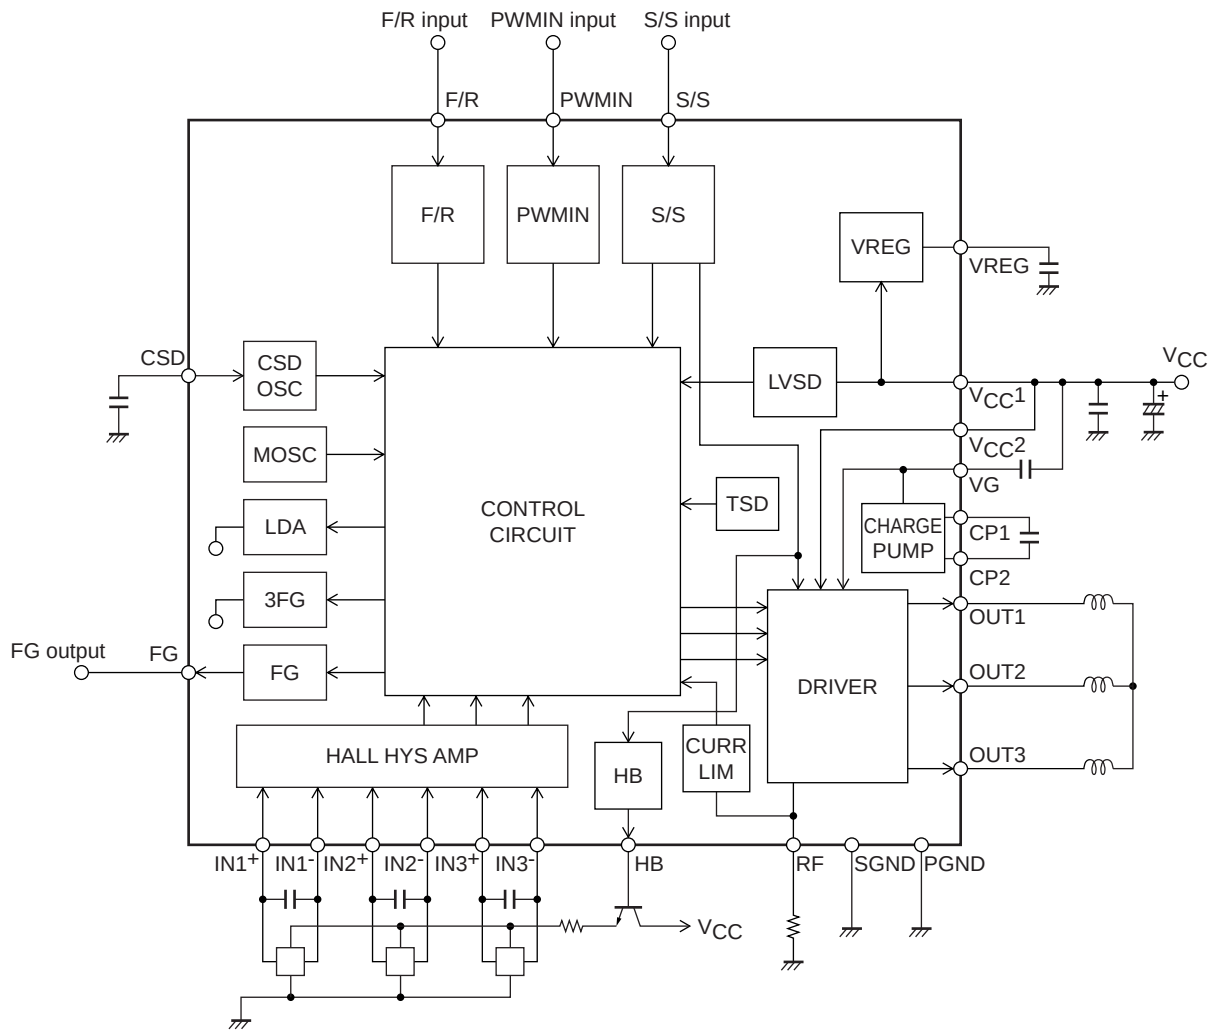





# Pin Functions

| Pin No.                    | Pin Name                                                                                                             | Pin function                                                                                                                                                                                                                                                                                                    | Equivalent Circuit |
|----------------------------|----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| 1<br>2<br>3<br>4<br>5<br>6 | IN3 <sup>-</sup><br>IN3 <sup>+</sup><br>IN2 <sup>-</sup><br>IN2 <sup>+</sup><br>IN1 <sup>-</sup><br>IN1 <sup>+</sup> | Hall input pin.<br>•High when IN <sup>+</sup> > IN <sup>-</sup> .<br>Low in reverse relationship.<br>The input amplitude of over 100mVp-p (differential) is desirable in the Hall inputs. Insert a capacitor between the IN <sup>+</sup> and IN <sup>-</sup> pins if the noise on the Hall signal is a problem. |                    |
| 7                          | SGND                                                                                                                 | Control circuit block ground pin.                                                                                                                                                                                                                                                                               |                    |
| 8                          | VREG                                                                                                                 | 5V regulator output pin (control circuit power supply).<br>Insert a capacitor between this pin and ground for stabilization.<br>About 0.1μF is necessary.<br>(Refer to 11 pages "5 is Low-voltage Protection Circuit.", 12 pages "10 is VREG Stabilization.")                                                   |                    |
| 9<br>10                    | CP2<br>CP1                                                                                                           | Charge pump capacitor connection pin.<br>Insert capacitor between CP1 and CP2.                                                                                                                                                                                                                                  |                    |
| 11<br>12                   | VCC1<br>VCC2                                                                                                         | For Control (Pin 11) and for output (Pin 12) power pin.<br>Insert a capacitor between this pin and ground to prevent the influence of noise, etc.<br>(Refer to 12 pages "9 is Power Supply Stabilization.")                                                                                                     |                    |
| 13                         | VG                                                                                                                   | Charge pump output pin.<br>(Upper-side FET gate power supply)<br>Insert a capacitor between this pin and VCC.<br>(Refer to 12 pages "11 is Charge pump Circuit.")                                                                                                                                               |                    |

Continued on next page.

# LV8827LFQA

Continued from preceding page.
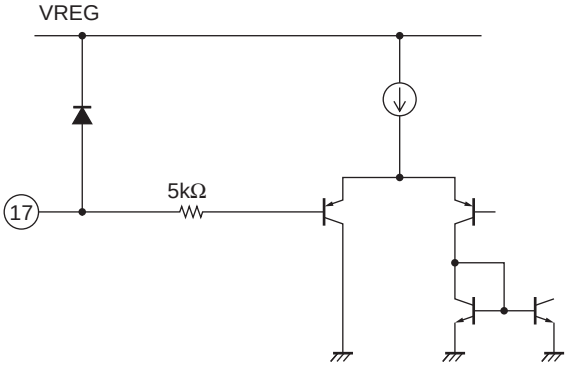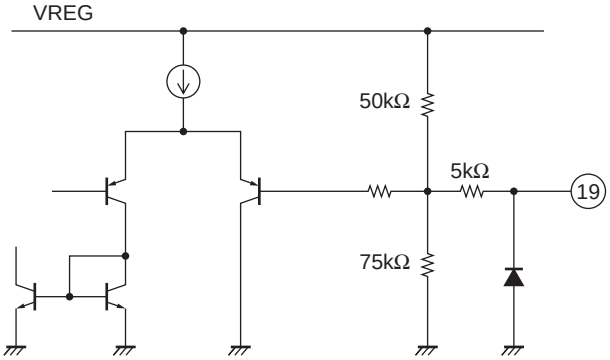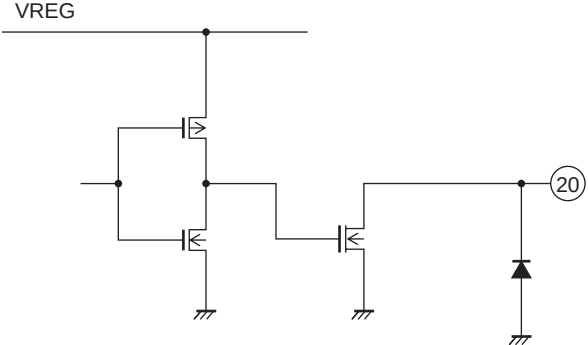
| Pin No.        | Pin Name             | Pin function                                                                                                                                               | Equivalent Circuit                                                                   |
|----------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 14<br>15<br>16 | OUT1<br>OUT3<br>OUT2 | Output pin.<br>PWM is controlled by the upper-side FET.                                                                                                    |    |
| 17             | RF                   | Output current detection pin.<br>Insert a low resistance resistor (Rf) between this pin and ground.<br>(Refer to 10 pages "2 is Current Limiter Circuit.") |    |
| 18             | PGND                 | Out circuit block ground pin.                                                                                                                              |                                                                                      |
| 19             | S/S                  | Pin to select the start/stop type.<br>Stop = High or open<br>Start = Low<br>(Refer to 12 pages "8 is Power Saving Circuit.")                               |  |
| 20             | FG                   | 1-Hall FG signal output pin.<br>Open drain output.                                                                                                         |  |

Continued on next page.



# LV8827LFQA

Continued from preceding page.

| Pin No. | Pin Name | Pin function                                                                                                                                                                                                                                                                                          | Equivalent Circuit |
|---------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| 21      | F/R      | Pin to select the forward/reverse type.<br>This pin goes to the high level when open.                                                                                                                                                                                                                 |                    |
| 22      | CSD      | Pin to set the constraint protection circuit operating time and initial reset pulse.<br>Insert a capacitor between this pin and ground.<br>Insert a resistor in parallel with the capacitor if the protection circuit is not to be used.<br>(Refer to 10 pages "4 is Constraint Protection Circuit.") |                    |
| 23      | PWMIN    | External PWM input pin.<br>Apply an external PWM input signal to this pin.<br>(Input frequency range is from 0.5 to 60kHz.)<br>PWM ON = Low<br>PWM OFF = High or open<br>(Refer to 10 pages "3 is Speed control method.")                                                                             |                    |
| 24      | HB       | HALL bias pin (3.6V output).<br>Connect an NPN transistor.<br>(Refer to 11 pages "7 Hall Input Signal.")                                                                                                                                                                                              |                    |

**Description of LV8827LFQA****1. Output Drive Circuit**

This IC adopts a direct PWM drive method to reduce power loss in the output. It regulates the drive force of the motor by changing the output on duty. The output PWM switching is performed by the upper-side output transistor.

The current regeneration route during the normal PWM OFF passes through the parasitic diode of the output DMOS.

This IC performs synchronous rectification, and is intended to reduce heat generation compared to diode regeneration.

**2. Current Limiter Circuit**

The current limiter circuit limits the output current peak value to a level determined by the equation  $I = V_{RF}/R_f$  ( $V_{RF} = 0.21V$  (typical),  $R_f$ : current detection resistor). This circuit suppresses the output current by reducing the output on duty.

The current limiter circuit has an operation delay (approx. 700ns) to detect reverse recovery current flowing in the diode due to the PWM operation, and prevent a malfunction of the current limiting operation. If the coil resistance of the motor is small, or the inductance is low, the current at startup (the state in which there is no back electromotive force generated in the motor) will change rapidly. As a result, the operation delay may sometimes cause the current limiting operation to take place at a value above the set current. In such a case, it is necessary to set the current limit value while taking into consideration the increase in current due to the delay.

\* Regarding the PWM frequency in the current limiter circuit

The PWM frequency in the current limiter circuit is determined by the internal reference oscillator, and is approximately 50kHz.

**3. Speed control method**

Pulses are input to the PWMIN pin, and the output can be controlled by varying the duty cycle of these pulses.

When a low-level input voltage is applied to the PWMIN pin, the output at the PWM side (upper side) is set to ON.

When a high-level input voltage is applied to the PWMIN pin, the output at the PWM side (upper side) is set to OFF.

If it is necessary to input pulses using inverted logic, this can be done by adding an external transistor (NPN).

It is judged Duty=0%, count reset and the HB pin output of the CSD circuit become "L" when the input of the PWMIN pin becomes "H" level during the fixed time, and it enters the state of a short brake.

**4. Constraint Protection Circuit**

The LV8827LFQA includes a constraint protection circuit for protecting the IC and the motor in a motor constraint mode.

This circuit operates when the motor is in an operation condition and the Hall signal does not switch over for a certain period. Note that while this constraint protection is operating, the upper-side output transistor will be OFF.

Time setting is performed according to the capacitance of the capacitor connected to the CSD pin.

$$\text{Set time (s)} \approx 90 \times C (\mu\text{F})$$

When a 0.022μF capacitor is connected, the protection time becomes approximately 2.0 seconds. The set time must be selected to a value that provides adequate margin with respect to the motor startup time.

Conditions for releasing the constraint protection state:

- |                                                   |                                                       |
|---------------------------------------------------|-------------------------------------------------------|
| • When the S/S pin is in a STOP state             | → Protection released and count reset (Initial reset) |
| • When the F/R pin is switched                    | → Protection released and count reset                 |
| • When 0% duty is detected at the PWMIN pin input | → Protection released and count reset                 |
| • When low-voltage condition is detected          | → Protection released and count reset (Initial reset) |
| (• When TSD condition is detected                 | → Stop counting)                                      |

The CSD pin also functions as the initial reset pulse generation pin. If it is connected to ground, the logic circuit will go into a reset state, preventing speed control from taking place. Consequently, when not using constraint protection, connect a resistor of approximately 220kΩ and a capacitor of about 4700pF in parallel to ground.

**5. Low-voltage Protection Circuit**

The LV8827LFQA incorporates a comparator that uses the band gap voltage as the reference. The circuit monitors the voltage at the VREG pin (5V) while the S/S pin is low and activates the protection circuit when the voltage at the VREG pin falls below 4.15V (typ.).

When this happens, the state of the output transistors for all phases, and the short brake (bottom side is short) mode is established.

Source side: All OFF. Synchronous rectification is not performed.

Sink side: All ON.

Furthermore, when the VREG voltage falls even further and the internal circuit can no longer operate properly, all the

output transistors are set to OFF.

In order to ensure that the IC does not exhibit any unstable behavior when the VREG voltage has increased or decreased around 4.15V, a hysteresis of 0.3V (typ.) is provided. As a result, when the VREG voltage recovers to 4.45V (typ.) after the low-voltage protection circuit has been activated, all output transistors return to their operating state.

## 6. Thermal shutdown Circuit

When the IC junction temperature exceeds 165°C (design target value), the thermal shutdown circuit is activated, and all the output transistors are set to OFF.

When the IC junction temperature goes below the hysteresis temperature of 30°C (design target value) or more, all the output transistors return to their operating state.

However, as the thermal shutdown circuit is activated only when the junction temperature of the IC has exceeded the rating, its activation does not constitute a guarantee that the product that incorporates this circuit will be protected from damage or destruction.

## 7. Hall Input Signal

A pulse input with the amplitude in excess of the hysteresis (35mV maximum) is required for the Hall inputs.

It is desirable that the amplitude of the Hall input signal be 100mVp-p or more in consideration of the effect of noise and phase displacement.

If disturbances to the output waveform (during phase switching) occur due to noise, connect a capacitor between the Hall input pins to prevent such disturbances. In the constraint protection circuit, the Hall input is utilized as a judgment signal. Although the circuit ignores a certain amount of noise, caution is necessary.

If all three phases of the Hall input signal go to the same input state (HHH or LLL), the outputs are all set to the OFF state.

If the Hall IC is used, fixing one side of the inputs (either the + or – side) at a voltage within the common-mode input voltage range (between 0.3V and VREG-1.7V) allows the other input side to be used as an input over the 0V to VREG range.

### ○ Method of connecting Hall elements

Type (1) connection (three Hall elements connected in series)

Advantages

- Because the current flowing in Hall elements can be shared by connecting the Hall elements in series, the current consumption is less than that of a parallel-connected arrangement.
- The use of a current limiting resistor can be eliminated.
- Fluctuations of amplitude with temperature are reduced.

Disadvantages

- Because only 1V can be applied to one Hall device, there is a possibility that adequate amplitude cannot be obtained.
- The current flowing in the Hall elements varies with temperature.
- HALL element unevenness (input resistance in particular) is easy to influence the amplitude.


Type (2) connection (three Hall elements connected in parallel)

Advantages

- The current flowing in the Hall elements can be determined by the current limiting resistor.
- The voltage applied to the Hall elements can be varied, enabling adequate amplitude to be obtained.

Disadvantages

- Because it is necessary to supply current separately to each Hall element, the current consumption becomes large.
- A current limiting resistor is necessary.
- The amplitude varies with temperature.

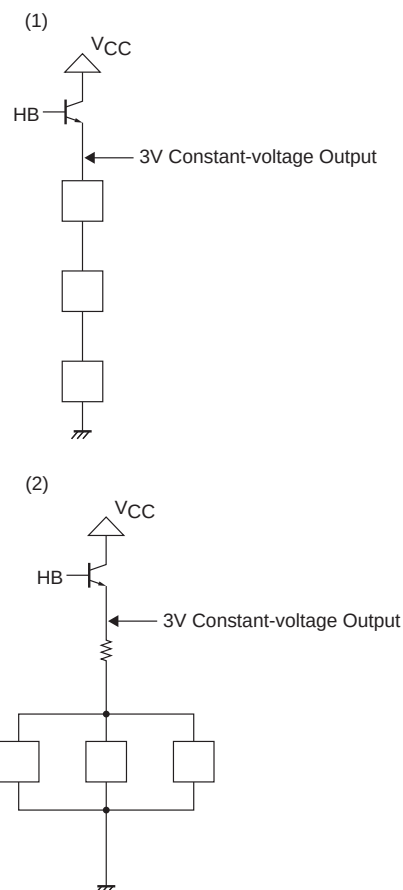

## ○ HB pin

The HB pin is used for cutting off the current flowing in the Hall elements during standby (for saving electricity). The output from the HB pin is set to OFF in the following cases.

- When the S/S pin is in a STOP state
- When 0% duty is detected at the PWMIN pin input

## 8. Power Saving Circuit (Start/Stop circuit)

To save power when the LV8827LFQA is in the stop state, most of the circuit is stopped, aiming at reducing current consumption. If the Hall bias pin is used, the current consumption in the power-saving mode will be approximately 700μA. Even in the power-saving mode, a 5V regulator voltage is output. Also, in the power-saving mode, the IC is in a short break state. (lower-side shorted)

## 9. Power Supply Stabilization

This IC generates a large output current, and employs a switching drive method, so the power supply line level can be disturbed easily. For this reason, it is necessary to connect a capacitor (electrolytic) of sufficient capacitance between the VCC pin and ground to ensure a stable voltage. Connect the ground side of the capacitor to the PGND pin, which is the power ground, as close as possible to the pin. If it is not possible to connect a capacitor of sufficiently large capacitance close to the pin, connect a ceramic capacitor of approximately 0.1μF to the vicinity of the pin.

If diodes are inserted in the power supply line to prevent IC destruction resulting from reverse-connecting the power supply, the power supply lines are even more easily disrupted. And even larger capacitor is required.

## 10. VREG Stabilization

To stabilize the VREG voltage, which is the power supply for the control circuit, connect a capacitor of 0.1μF or larger. Connect the ground of this capacitor as close as possible to the control block ground (SGND pin) of the IC.

## 11. Charge pump Circuit

The voltage is stepped-up by the charge pump circuit, causing the gate voltage of the upper-side output FET to be generated. The voltage is stepped-up by capacitor CP connected between pins CP1 and CP2, causing charge to accumulate in capacitor CG connected between pins VG and VCC. The capacitance of CP and CG must always satisfy the following relationship.

$$CG \geq 4 \times CP$$

Charging and discharging of capacitor CP take place based on a frequency of 100kHz. When the capacitance of capacitor CP is large, the current supply capability of power supply VG will increase. However, if the capacitance is too large, the charging and discharging operations will be insufficient. The larger the capacitance of capacitor CG, the more stable voltage VG will become. However, if the capacitance is made too large, the period during which voltage VG is generated when the power is switched ON will become long, so caution is necessary.

The capacitance settings of CP and CG should be the following.

$$CP = 0.01\mu F$$

$$CG = 0.1\mu F$$

## 12. Difference point of LV8827LFQA and LV8829LFQA

This difference that IC is the more following compared with LV8829LFQA exists.

|                                                                              | LV8827LFQA                        | LV8829LFQA                                                |
|------------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------|
| When Duty=0% of PWM input is detected                                        | Short brake                       | Synchronous rectification OFF<br>(Free run)               |
| At the low frequency number of PWM input<br>(About 7.5kHz under)             | Like synchronous rectification ON | Synchronous rectification OFF                             |
| At low ON Duty of the PWM input<br>(ex. frequency: 20kHz, ON Duty: 3% under) | Like synchronous rectification ON | Synchronous rectification OFF                             |
| Backflow current detecting function                                          | non                               | It is.<br>(At detection -> Synchronous rectification OFF) |

## 13. Metal part at the rear of the IC

The metal part at the rear of the IC (exposed die-pad) constitutes the sub ground of the IC, so connect it to the control ground (SGND pin) and power ground pin (PGND) at points close to the IC.

## 14. Notes on Using the IC

This IC performs synchronous rectification in order to achieve high-efficiency drive.

The synchronous rectification operation reduces the output transistor loss so it has the effect of reducing heat generation and improving efficiency.

However, the synchronous rectification operation may cause the supply voltage to rise depending on the conditions under which the IC is used, such as:

- When the output duty ratio has suddenly decreased
- When the PWM input frequency is low, etc.

Protective measures must be taken to ensure that the maximum ratings are not exceeded even when the supply voltage has risen. These measures include:

- Appropriate selection of the capacitance of the capacitor inserted between the power supply and the ground
- Insertion of a zener diode between the power supply and the ground

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- Regarding monolithic semiconductors, if you should intend to use this IC continuously under high temperature, high current, high voltage, or drastic temperature change, even if it is used within the range of absolute maximum ratings or operating conditions, there is a possibility of decrease reliability. Please contact us for a confirmation.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of May, 2012. Specifications and information herein are subject to change without notice.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331