



### BTA16-600SW3G, BTA16-800SW3G,

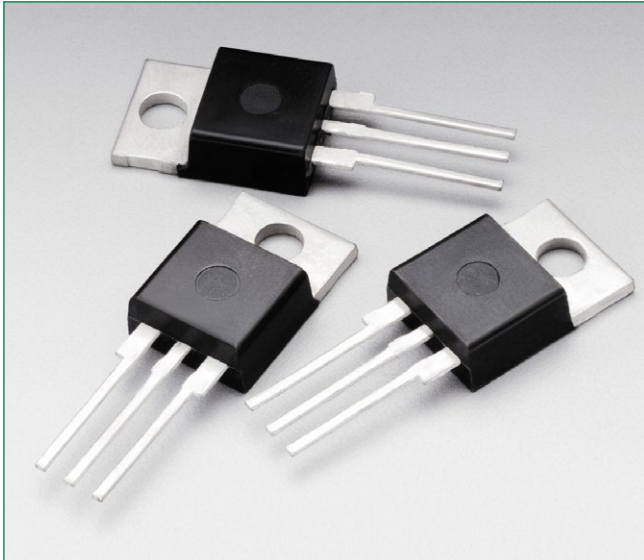

#### Pin Out

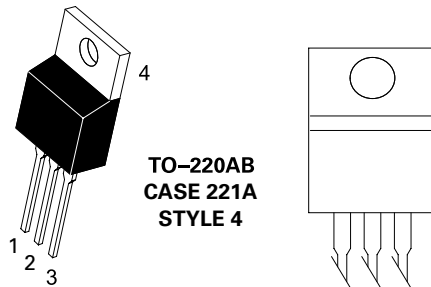


#### Description

Designed for high performance full-wave ac control applications where high noise immunity and high commutating di/dt are required.

#### Features

- Blocking Voltage to 800 V
- On-State Current Rating of 16 A RMS at 25°C
- Uniform Gate Trigger Currents in Three Quadrants
- High Immunity to dV/dt – 250 V/μs minimum at 110°C
- Minimizes Snubber Networks for Protection
- Industry Standard TO-220AB Package
- High Commutating di/dt – 2 A/ms minimum at 110°C
- Internally Isolated (2500 V<sub>RMS</sub>)
- These Devices are Pb-Free

#### Functional Diagram



#### Additional Information



Datasheet



Resources



Samples

### Maximum Ratings ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

| Rating                                                                                                                      | Symbol                                 | Value                                 | Unit               |
|-----------------------------------------------------------------------------------------------------------------------------|----------------------------------------|---------------------------------------|--------------------|
| Peak Repetitive Off-State Voltage (Note 1)<br>(Gate Open, Sine Wave 50 to 60 Hz, $T_J = -40^\circ$ to $125^\circ\text{C}$ ) | $V_{\text{DRM}}^*$<br>$V_{\text{RRM}}$ | 600<br>800                            | V                  |
| On-State RMS Current (Full Cycle Sine Wave, 60 Hz, $T_C = 25^\circ\text{C}$ )                                               | $I_T$ (RMS)                            | 16                                    | A                  |
| Peak Non-Repetitive Surge Current<br>(One Full Cycle Sine Wave, 60 Hz, $T_C = 25^\circ\text{C}$ )                           | $I_{\text{TSM}}$                       | 170                                   | A                  |
| Circuit Fusing Consideration ( $t = 8.3$ ms)                                                                                | $I^2t$                                 | 120                                   | A <sup>2</sup> sec |
| Non-Repetitive Surge Peak Off-State Voltage ( $T_J = 25^\circ\text{C}$ , $t = 8.3$ ms)                                      | $V_{\text{DSM}}/V_{\text{RSM}}$        | $V_{\text{DSM}}/V_{\text{RSM}} + 100$ | V                  |
| Peak Gate Current ( $T_J = 110^\circ\text{C}$ , $t \leq 20$ $\mu\text{s}$ )                                                 | $I_{\text{GM}}$                        | 4.0                                   | A                  |
| Peak Gate Power (Pulse Width $\leq 20$ $\mu\text{s}$ , $T_C = 80^\circ\text{C}$ )                                           | $P_{\text{GM}}$                        | 20                                    | W                  |
| Average Gate Power ( $T_J = 125^\circ\text{C}$ )                                                                            | $P_{\text{G(AV)}}$                     | 1.0                                   | W                  |
| Operating Junction Temperature Range                                                                                        | $T_J$                                  | -40 to +125                           | $^\circ\text{C}$   |
| Storage Temperature Range                                                                                                   | $T_{\text{stg}}$                       | -40 to +125                           | $^\circ\text{C}$   |
| RMS Isolation Voltage ( $t = 300$ ms, R.H. $\leq 30\%$ , $T_A = 25^\circ\text{C}$ )                                         | $V_{\text{iso}}$                       | 2500                                  | V                  |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1.  $V_{\text{DRM}}$  and  $V_{\text{RRM}}$  for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

### Thermal Characteristics

| Rating                                                                         | Symbol                                         | Value      | Unit               |
|--------------------------------------------------------------------------------|------------------------------------------------|------------|--------------------|
| Thermal Resistance, Junction-to-Case (AC)<br>Junction-to-Ambient               | $R_{\theta\text{JC}}$<br>$R_{\theta\text{JA}}$ | 2.13<br>60 | $^\circ\text{C/W}$ |
| Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds | $T_L$                                          | 260        | $^\circ\text{C}$   |

### Electrical Characteristics - OFF ( $T_J = 25^\circ\text{C}$ unless otherwise noted ; Electricals apply in both directions)

| Characteristic                                                                             | Symbol                                 | Min | Typ | Max   | Unit |
|--------------------------------------------------------------------------------------------|----------------------------------------|-----|-----|-------|------|
| Peak Repetitive Blocking Current<br>( $V_D = V_{\text{DRM}} = V_{\text{RRM}}$ ; Gate Open) | $I_{\text{DRM}}^*$<br>$I_{\text{RRM}}$ | -   | -   | 0.005 | mA   |
|                                                                                            |                                        | -   | -   | 2.0   |      |

### Electrical Characteristics - ON ( $T_J = 25^\circ\text{C}$ unless otherwise noted; Electricals apply in both directions)

| Characteristic                                                                   | Symbol          | Min | Typ | Max  | Unit |
|----------------------------------------------------------------------------------|-----------------|-----|-----|------|------|
| Forward On-State Voltage (Note 2) ( $I_{\text{TM}} = \pm 22.5$ A Peak)           | $V_{\text{TM}}$ | -   | -   | 1.55 | V    |
| Gate Trigger Current (Continuous dc) ( $V_D = 12$ V, $R_L = 30$ $\Omega$ )       | MT2(+), G(+)    | 2.0 | -   | 10   | mA   |
|                                                                                  | MT2(+), G(-)    | 2.0 | -   | 10   |      |
|                                                                                  | MT2(-), G(-)    | 2.0 | -   | 10   |      |
| Holding Current<br>( $V_D = 12$ V, Gate Open, Initiating Current = $\pm 500$ mA) | $I_H$           | -   | -   | 20   | mA   |
| Latching Current ( $V_D = 12$ V, $I_G = 12$ mA)                                  | MT2(+), G(+)    | -   | -   | 25   | mA   |
|                                                                                  | MT2(+), G(-)    | -   | -   | 30   |      |
|                                                                                  | MT2(-), G(-)    | -   | -   | 25   |      |
| Gate Trigger Voltage ( $V_D = 12$ V, $R_L = 30$ $\Omega$ )                       | MT2(+), G(+)    | 0.5 | -   | 1.3  | V    |
|                                                                                  | MT2(+), G(-)    | 0.5 | -   | 1.3  |      |
|                                                                                  | MT2(-), G(-)    | 0.5 | -   | 1.3  |      |
| Gate Non-Trigger Voltage ( $T_J = 110^\circ\text{C}$ )                           | MT2(+), G(+)    | 0.2 | -   | -    | V    |
|                                                                                  | MT2(+), G(-)    | 0.2 | -   | -    |      |
|                                                                                  | MT2(-), G(-)    | 0.2 | -   | -    |      |


2. Indicates Pulse Test: Pulse Width  $\leq 2.0$  ms, Duty Cycle  $\leq 2\%$ .

### Dynamic Characteristics


| Characteristic                                                                                                                                     | Symbol      | Min | Typ | Max | Unit             |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----|-----|-----|------------------|
| Rate of Change of Commutating Current, See Figure 10.<br>(Gate Open, $T_J = 110^\circ\text{C}$ , No Snubber)                                       | $(di/dt)_c$ | 2.0 | –   | –   | A/ms             |
| Critical Rate of Rise of On-State Current<br>( $T_J = 110^\circ\text{C}$ , $f = 120\text{ Hz}$ , $I_G = 20\text{ mA}$ , $t_r \leq 100\text{ ns}$ ) | $di/dt$     | –   | –   | 50  | A/ $\mu\text{s}$ |
| Critical Rate of Rise of Off-State Voltage<br>( $V_D = 0.66 \times V_{DRM}$ , Exponential Waveform, Gate Open, $T_J = 110^\circ\text{C}$ )         | $dV/dt$     | 250 | –   | –   | V/ $\mu\text{s}$ |

### Voltage Current Characteristic of SCR

| Symbol    | Parameter                                 |
|-----------|-------------------------------------------|
| $V_{DRM}$ | Peak Repetitive Forward Off State Voltage |
| $I_{DRM}$ | Peak Forward Blocking Current             |
| $V_{RRM}$ | Peak Repetitive Reverse Off State Voltage |
| $I_{RRM}$ | Peak Reverse Blocking Current             |
| $V_{TM}$  | Maximum On State Voltage                  |
| $I_H$     | Holding Current                           |

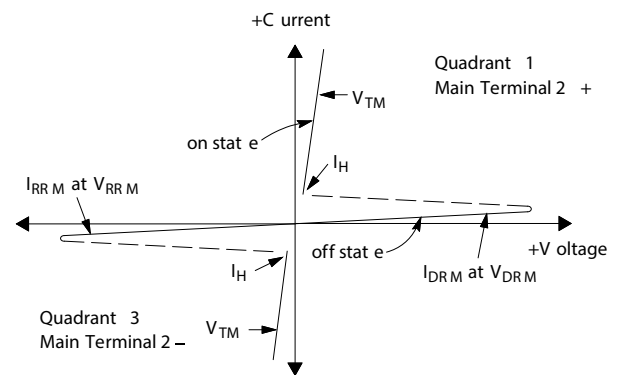


### Quadrant Definitions for a Triac

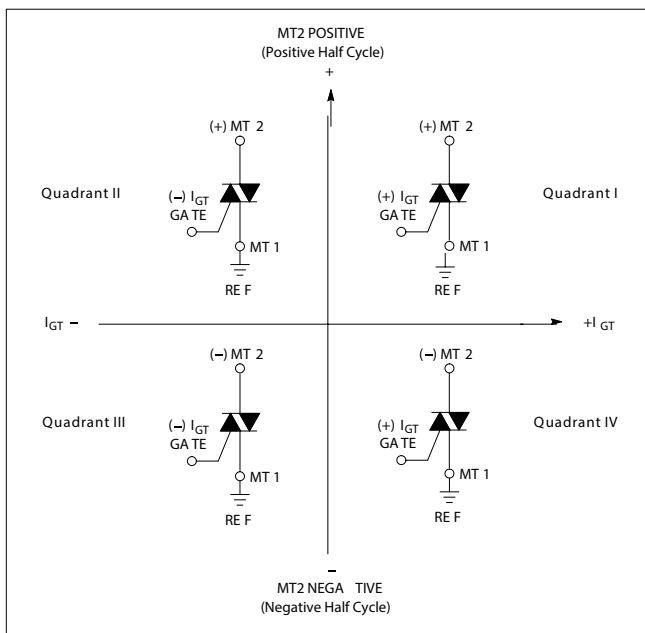


All polarities are referenced to MT1.  
With in-phase signals (using standard AC lines) quadrants I and III are used


**Figure 1. Typical RMS Current Derating**

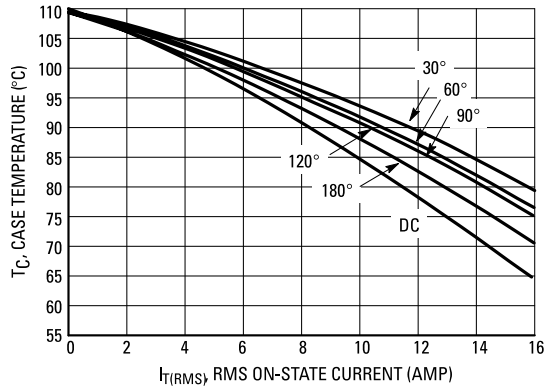


**Figure 2. On-State Power Dissipation**

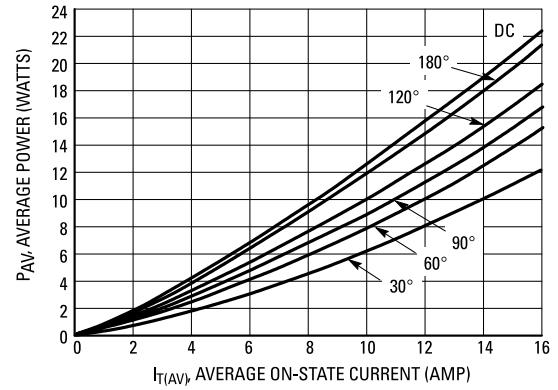


**Figure 3. On-State Characteristics**

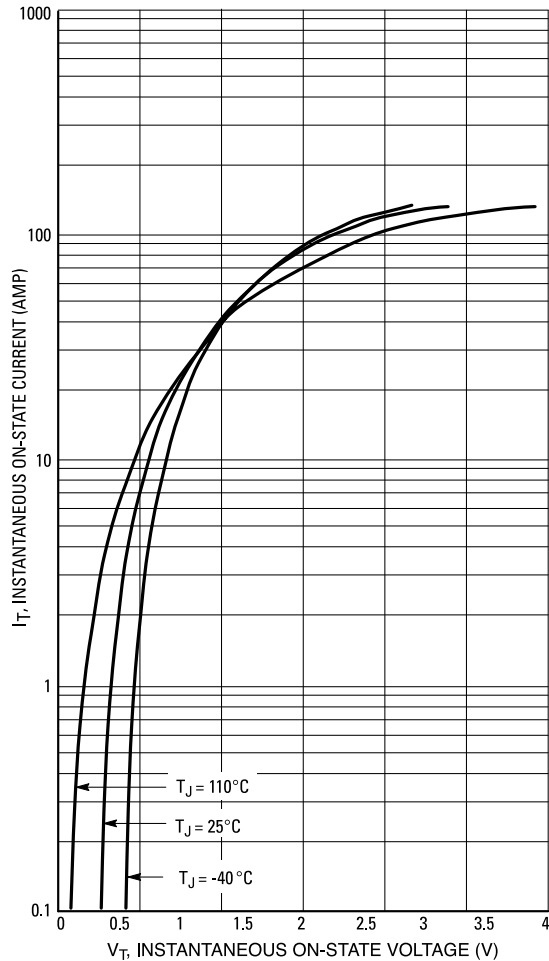


**Figure 4. Thermal Response**

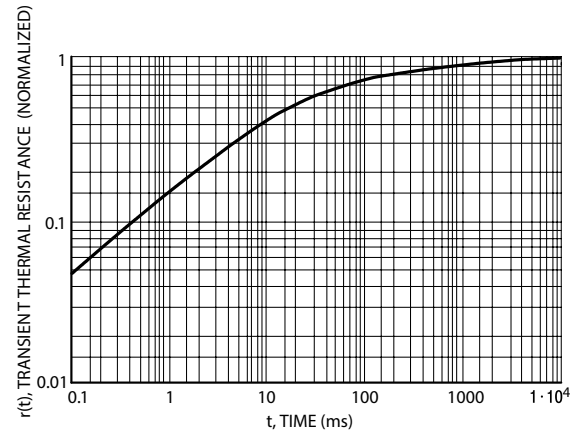


**Figure 5. Hold Current Variation**

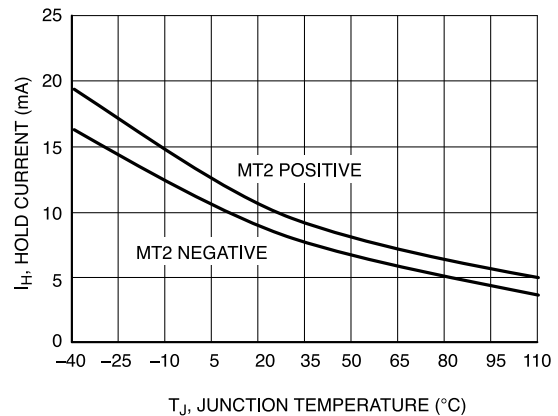


**Figure 6. Gate Trigger Current Variation**

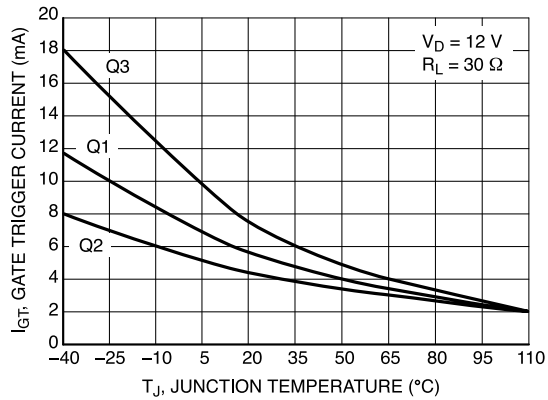


**Figure 7. Gate Trigger Voltage Variation**

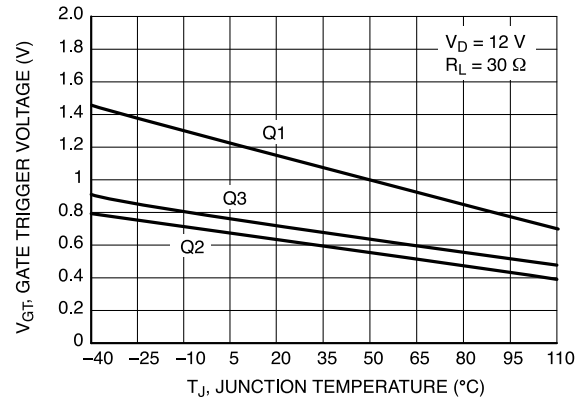

**Figure 8. Typical Latching Current Variation**

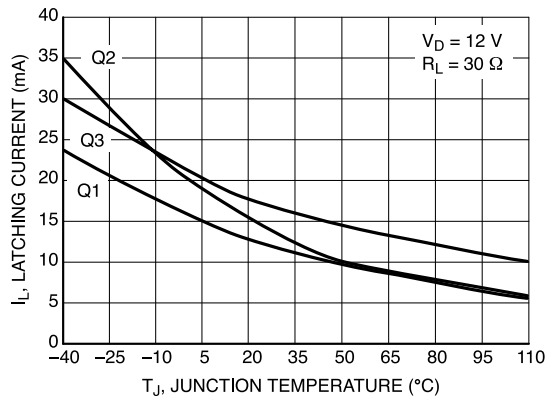


**Figure 9. Simplified Test Circuit to Measure the Critical Rate of Rise of Commutating Current ( $di/dt$ )**

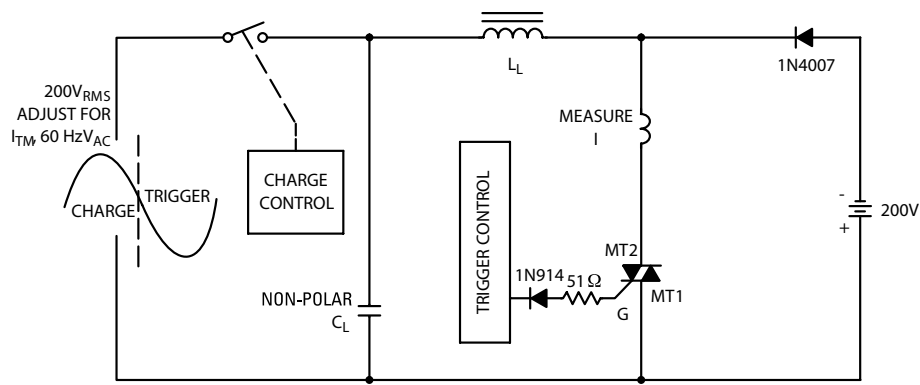

Note: Component values are for verification of rated ( $di/dt$ ). See AN1048 for additional information.

Note: Component values are for verification of rated ( $di/dt$ ). See AN1048 for additional information.


### Dimensions

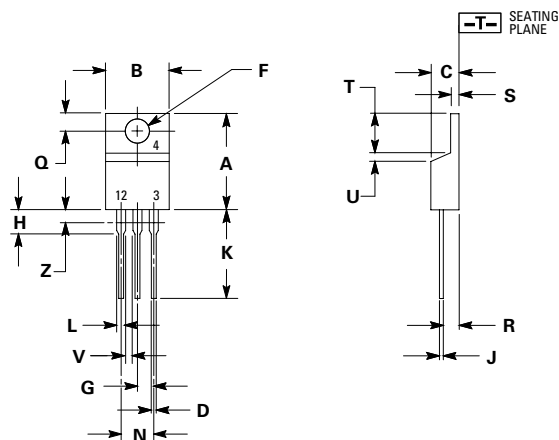

| Dim | Inches |       | Millimeters |       |
|-----|--------|-------|-------------|-------|
|     | Min    | Max   | Min         | Max   |
| A   | 0.590  | 0.620 | 14.99       | 15.75 |
| B   | 0.380  | 0.420 | 9.65        | 10.67 |
| C   | 0.178  | 0.188 | 4.52        | 4.78  |
| D   | 0.025  | 0.035 | 0.64        | 0.89  |
| F   | 0.142  | 0.147 | 3.61        | 3.73  |
| G   | 0.095  | 0.105 | 2.41        | 2.67  |
| H   | 0.110  | 0.130 | 2.79        | 3.30  |
| J   | 0.018  | 0.024 | 0.46        | 0.61  |
| K   | 0.540  | 0.575 | 13.72       | 14.61 |
| L   | 0.060  | 0.075 | 1.52        | 1.91  |
| N   | 0.195  | 0.205 | 4.95        | 5.21  |
| Q   | 0.105  | 0.115 | 2.67        | 2.92  |
| R   | 0.085  | 0.095 | 2.16        | 2.41  |
| S   | 0.045  | 0.060 | 1.14        | 1.52  |
| T   | 0.235  | 0.255 | 5.97        | 6.47  |
| U   | 0.000  | 0.050 | 0.00        | 1.27  |
| V   | 0.045  | —     | 1.15        | —     |
| Z   | —      | 0.080 | —           | 2.04  |

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

### Part Marking System



**TO-220AB  
CASE 221A  
STYLE 12**

x = 6 or 8  
Y = Year  
M = Month  
A = Assembly Site  
XX = Lot Serial Code  
G = Pb-Free Package



| Pin Assignment |                 |
|----------------|-----------------|
| 1              | Main Terminal 1 |
| 2              | Main Terminal 2 |
| 3              | Gate            |
| 4              | No Connection   |

### Ordering Information

| Device        | Package            | Shipping         |
|---------------|--------------------|------------------|
| BTA16-600SW3G | TO-220AB (Pb-Free) | 500 Units / Rail |
| BTA16-800SW3G | TO-220AB (Pb-Free) | 500 Units / Rail |

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331