

## Radiation Hardened N-Channel MOSFET

*Qualified per MIL-PRF-19500/614*


Qualified Levels:  
JANSD, JANSR and  
JANSF

QPL RANGE and RAD LEVEL			
Radiation Level	JANSD2N7380	JANSR2N7380	JANSF2N7380
TID	10 Krad	100 Krad	300 Krad

### DESCRIPTION

These products are well suited for Space level applications requiring Total Dose radiation (TID) tolerance and Single Event capability. This 2N7381 is available in three qualified radiation levels and is packaged in a hermetic TO-257 outline. These products have all the same performance features of industry standard MOSFETs and may be used for most voltage control and fast switching applications.

**Important:** For the latest information, visit our website <http://www.microsemi.com>.



**TO-257AA  
Package**

### FEATURES

- Ease of paralleling
- Hermetically sealed package
- Low gate charge
- Single event hardened for space applications
- RHA level JANS qualifications available per MIL-PRF-19500/614.  
(See [part nomenclature](#) for all available options.)

### APPLICATIONS / BENEFITS

- Space level DC-DC converters
- Satellite Motor Control circuits
- Synchronous rectification
- Linear-mode applications

### MAXIMUM RATINGS @ $T_C = +25^\circ\text{C}$ unless otherwise stated

Parameters / Test Conditions	Symbol	Value	Unit
Operating & Storage Junction Temperature Range	$T_J$ & $T_{stg}$	-55 to +150	°C
Thermal Resistance Junction-to-Case (see <a href="#">Figure 4</a> )	$R_{eJC}$	1.67	°C/W
Total Power Dissipation @ $T_A = +25^\circ\text{C}$ @ $T_C = +25^\circ\text{C}$ <sup>(1)</sup>	$P_T$	2 75	W
Gate-Source Voltage, dc	$V_{GS}$	± 20	V
Drain Current, dc @ $T_C = +25^\circ\text{C}$ <sup>(2) (3)</sup>	$I_{D1}$	14.4	A
Drain Current, dc @ $T_C = +100^\circ\text{C}$ <sup>(2) (3)</sup>	$I_{D2}$	9.1	A
Off-State Current (Peak Total Value) <sup>(4)</sup>	$I_{DM}$	57.6	A
Source Current	$I_S$	14.4	A

- NOTES:**
1. Derated linearly 0.6 W/°C for  $T_C > +25^\circ\text{C}$
  2. The following formula derives the maximum theoretical  $I_D$  limit.  $I_D$  is limited by package and internal wires and may also be limited by pin diameter:

$$I_D = \sqrt{\frac{T_J(\text{max}) - T_C}{R_{eJC} \times R_{DS(on)} @ T_J(\text{max})}}$$

3. See [Figure 3](#) for maximum drain current graphs
4.  $I_{DM} = 4 \times I_{D1}$  as calculated in note (2)

### MSC – Lawrence

6 Lake Street,  
Lawrence, MA 01841  
Tel: 1-800-446-1158 or  
(978) 620-2600  
Fax: (978) 689-0803

### MSC – Ireland

Gort Road Business Park,  
Ennis, Co. Clare, Ireland  
Tel: +353 (0) 65 6840044  
Fax: +353 (0) 65 6822298

### Website:

[www.microsemi.com](http://www.microsemi.com)

### MECHANICAL and PACKAGING

- CASE: Nickel plated copper base & 1020 steel frame
- TERMINALS: Solder dipped copper cored 52 alloy plating
- MARKING: Alpha numeric
- POLARITY: See [Schematic](#) on last page
- WEIGHT: Approximately 3.43 grams
- See [Package Dimensions](#) on last page.

### PART NOMENCLATURE

**JANSR      2N7380**

**Reliability Level**

JANSR = 10K Rads (Si)

JANSR = 100K Rads (Si)

JANSF = 300K Rads (Si)

**JEDEC type number**

SYMBOLS & DEFINITIONS	
Symbol	Definition
di/dt	Rate of change of diode current while in reverse-recovery mode, recorded as maximum value.
I <sub>D</sub>	Drain current, dc: The direct current into the drain terminal.
I <sub>DSS</sub>	Zero-Gate-Voltage Drain Current: The direct current into the gate terminal when the gate-source voltage is zero.
I <sub>F</sub>	Forward current: The current flowing from the p-type region to the n-type region.
I <sub>GSS</sub>	Reverse-Gate Current, Drain Short-Circuited to Source: The direct current into the gate terminal with a forward gate source voltage applied (I <sub>GSSF</sub> ) or reverse gate source voltage applied (I <sub>GSSF</sub> ) and the drain terminal short-circuited to the source terminal.
I <sub>S</sub>	Source current, dc: The direct current into the source terminal.
r <sub>DS(on)</sub>	Static Drain-Source On-State Resistance: The dc resistance between the drain and source terminals with a specified gate-source voltage applied to bias the device to the on state.
R <sub>G</sub>	Gate drive impedance or Gate resistance
V <sub>(BR)DSS</sub>	Drain-Source Breakdown Voltage: Gate short-circuited to the source terminal.
V <sub>DD</sub>	Drain supply voltage, dc: The dc supply voltage applied to a circuit connected to the drain terminal.
V <sub>DG</sub>	Drain-gate voltage, dc: The dc voltage between the drain and gate terminals.
V <sub>DS</sub>	Drain source voltage, dc: The dc voltage between the drain terminal and the source terminal.
V <sub>GS</sub>	Gate source voltage, dc: The dc voltage between the gate terminal and the source terminal.

**ELECTRICAL CHARACTERISTICS @  $T_A = +25^\circ\text{C}$ , unless otherwise noted**

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
<b>PRE-IRRADIATION CHARACTERISTICS</b>				
Drain-Source Breakdown Voltage $V_{GS} = 0 \text{ V}, I_D = 1.0 \text{ mA}$	$V_{(BR)DSS}$	100		V
Gate-Source Voltage (Threshold) $V_{DS} \geq V_{GS}, I_D = 1 \text{ mA}$ $V_{DS} \geq V_{GS}, I_D = 1 \text{ mA}, T_J = +125^\circ\text{C}$ $V_{DS} \geq V_{GS}, I_D = 1 \text{ mA}, T_J = -55^\circ\text{C}$	$V_{GS(\text{th})1}$ $V_{GS(\text{th})2}$ $V_{GS(\text{th})3}$	2.0 1.0 5.0	4.0 5.0	V
Gate Current $V_{GS} = \pm 20 \text{ V}, V_{DS} = 0 \text{ V}$ $V_{GS} = \pm 20 \text{ V}, V_{DS} = 0 \text{ V}, T_J = +125^\circ\text{C}$	$I_{GSS1}$ $I_{GSS2}$		$\pm 100$ $\pm 200$	nA
Drain Current $V_{GS} = 0 \text{ V}, V_{DS} = 80 \text{ V}$	$I_{DSS1}$		25	$\mu\text{A}$
Drain Current $V_{GS} = 0 \text{ V}, V_{DS} = 80 \text{ V}, T_J = +125^\circ\text{C}$	$I_{DSS2}$		0.25	mA
Static Drain-Source On-State Resistance $V_{GS} = 12 \text{ V}, I_D = 9.1 \text{ A pulsed}$	$r_{DS(\text{on})1}$		0.18	$\Omega$
Static Drain-Source On-State Resistance $V_{GS} = 12 \text{ V}, I_D = 14.4 \text{ A pulsed}$	$r_{DS(\text{on})2}$		0.20	$\Omega$
Static Drain-Source On-State Resistance $T_J = +125^\circ\text{C}$ $V_{GS} = 12 \text{ V}, I_D = 9.1 \text{ A pulsed}$	$r_{DS(\text{on})3}$		0.35	$\Omega$
Diode Forward Voltage $V_{GS} = 0 \text{ V}, I_D = 14.4 \text{ A pulsed}$	$V_{SD}$		1.8	V

**DYNAMIC CHARACTERISTICS**

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Gate Charge:				
On-State Gate Charge $V_{GS} = 12 \text{ V}, I_D = 14.4 \text{ A}, V_{DS} = 50 \text{ V}$	$Q_{g(\text{on})}$		40	nC
Gate to Source Charge $V_{GS} = 12 \text{ V}, I_D = 14.4 \text{ A}, V_{DS} = 50 \text{ V}$	$Q_{gs}$		10	nC
Gate to Drain Charge $V_{GS} = 12 \text{ V}, I_D = 14.4 \text{ A}, V_{DS} = 50 \text{ V}$	$Q_{gd}$		20	nC

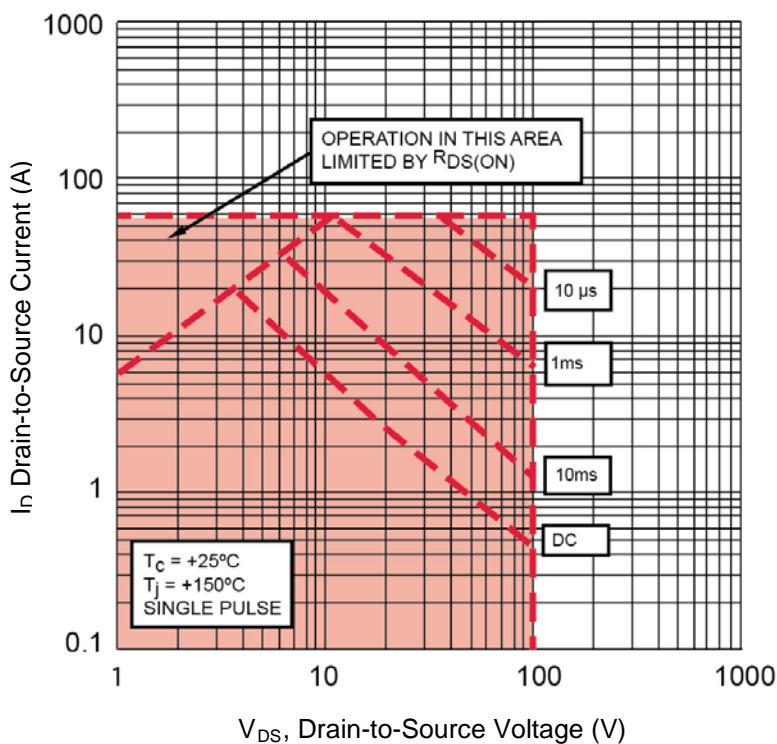
**SWITCHING CHARACTERISTICS**

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Turn-on delay time $I_D = 14.4 \text{ A}, V_{GS} = 12 \text{ V}, R_G = 7.5 \Omega, V_{DD} = 50 \text{ V}$	$t_{d(\text{on})}$		25	ns
Rise time $I_D = 14.4 \text{ A}, V_{GS} = 12 \text{ V}, R_G = 7.5 \Omega, V_{DD} = 50 \text{ V}$	$t_r$		60	ns
Turn-off delay time $I_D = 14.4 \text{ A}, V_{GS} = 12 \text{ V}, R_G = 7.5 \Omega, V_{DD} = 50 \text{ V}$	$t_{d(\text{off})}$		40	ns
Fall time $I_D = 14.4 \text{ A}, V_{GS} = 12 \text{ V}, R_G = 7.5 \Omega, V_{DD} = 50 \text{ V}$	$t_f$		30	ns
Diode Reverse Recovery Time $di/dt \leq 100 \text{ A}/\mu\text{s}, V_{DD} \leq 50 \text{ V}, I_F = 14.4 \text{ A}$	$t_{rr}$		275	ns

**ELECTRICAL CHARACTERISTICS @  $T_A = +25^\circ\text{C}$ , unless otherwise noted (continued)**
**POST-IRRADIATION <sup>(1)</sup>**

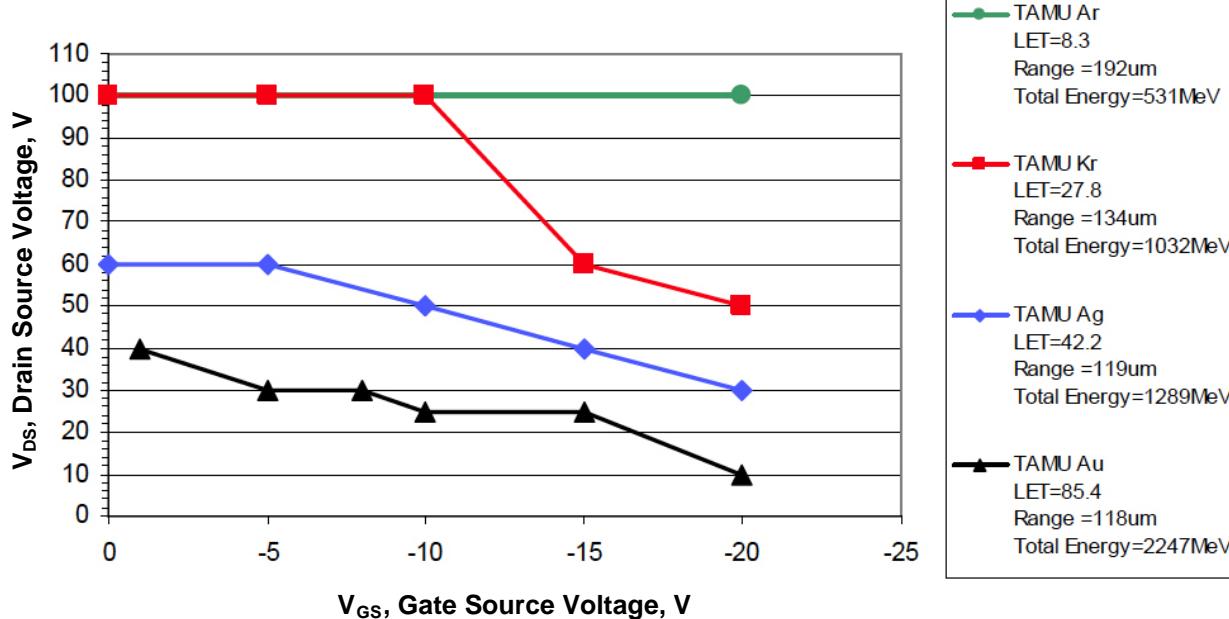
Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Drain-Source Breakdown Voltage $V_{GS} = 0 \text{ V}, I_D = 1 \text{ mA}$	$V_{(BR)DSS}$	100		V
Gate-Source Voltage (Threshold) $V_{DS} \geq V_{GS}, I_D = 1.0 \text{ mA}$ JANSR, R $V_{DS} \geq V_{GS}, I_D = 1.0 \text{ mA}$ JANSF	$V_{GS(\text{th})1}$ $V_{GS(\text{th})1}$	2.0 1.25	4.0 4.5	V
Gate Current $V_{GS} = \pm 20 \text{ V}, V_{DS} = 0 \text{ V}$	$I_{GSS1}$		$\pm 100$	nA
Drain Current $V_{GS} = 0 \text{ V}, V_{DS} = 80\% \text{ of } V_{DS}$ (pre-irradiated) JANSR, R $V_{GS} = 0 \text{ V}, V_{DS} = 80\% \text{ of } V_{DS}$ (pre-irradiated) JANSF	$I_{DSS1}$		25 50	$\mu\text{A}$
Static Drain-Source On-State Voltage $V_{GS} = 12 \text{ V}, I_D = 9.1 \text{ pulsed}$ JANSR, R $V_{GS} = 12 \text{ V}, I_D = 9.1 \text{ pulsed}$ JANSF	$r_{DS(\text{on})}$		1.638 2.184	V
Diode Forward Voltage $V_{GS} = 0 \text{ V}, I_D = 14.4 \text{ pulsed}$	$V_{SD}$		1.8	V

**NOTE:** 1. Post-irradiation electrical characteristics apply to devices subjected to steady state total dose irradiation testing in accordance with MIL-STD-750, method 1019. Separate samples are tested for  $V_{GS}$  bias (12V), and  $V_{DS}$  bias (80V) conditions.

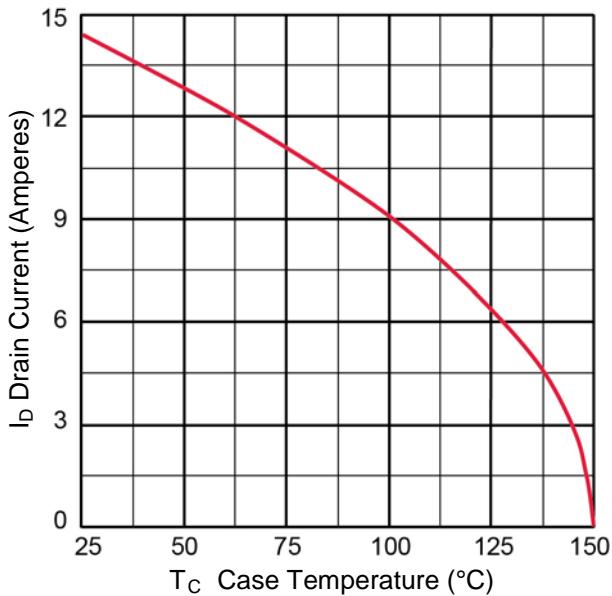
**SAFE OPERATING AREA**

**FIGURE 1**

**GRAPHS**
**SEE (Single Event Effect) Typical Response:**

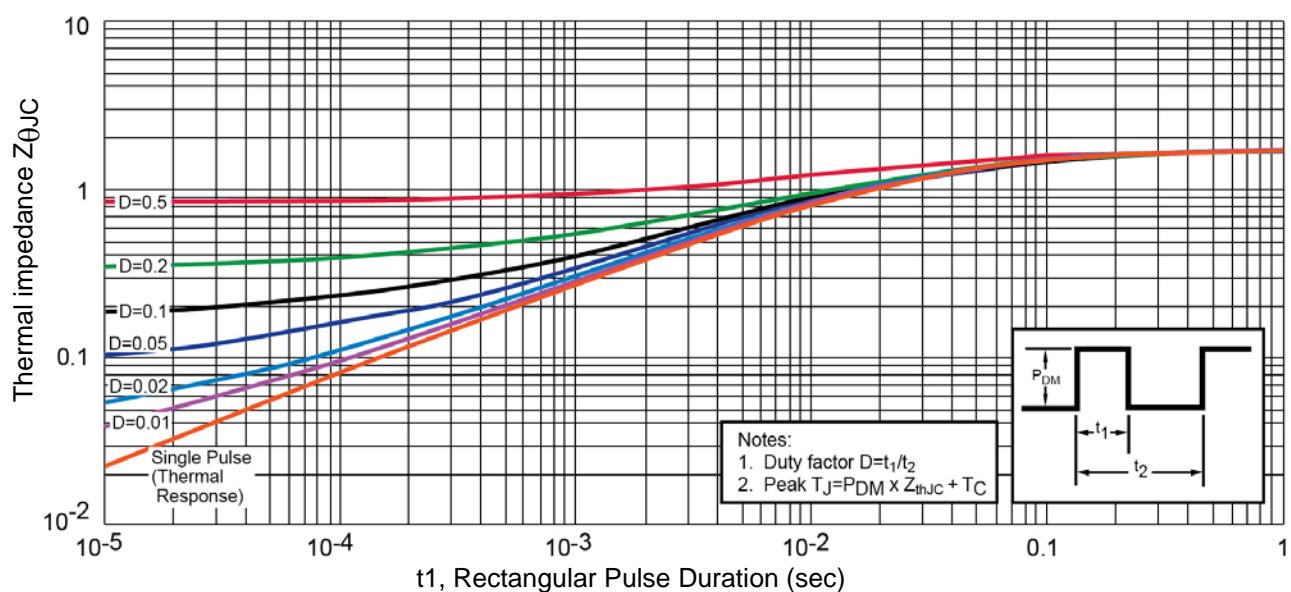
Heavy Ion testing of the 2N7380 device was completed by similarity of die structure to the 2N7261. The 2N7261 has been characterized at the Texas A&M cyclotron. The following SEE curve has been established using the elements, LET, range, and Total Energy conditions as shown:

**FIGURE 2 2N7380 (2N7261)**


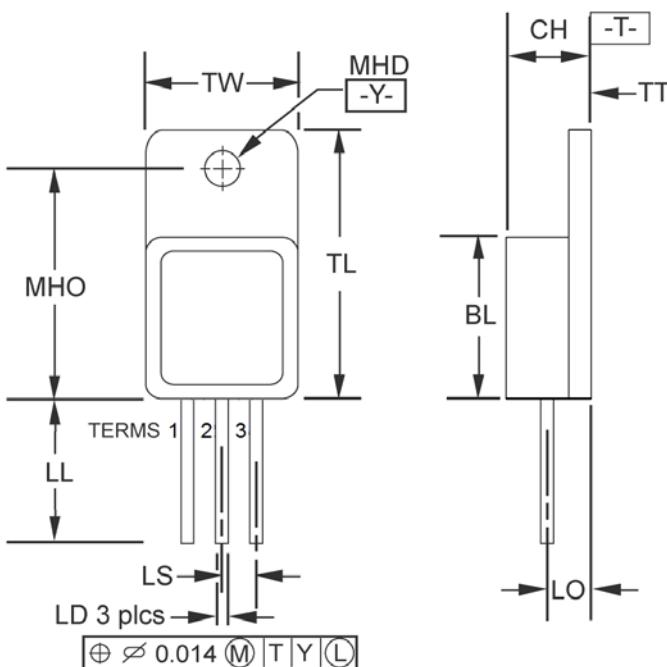
It should be noted that total energy levels are considered to be a factor in SEE characterization. Comparisons to other datasets should not be based on LET alone. Please consult factory for more information.

**GRAPHS**


**FIGURE 3**  
Maximum Drain Current vs Case Temperature



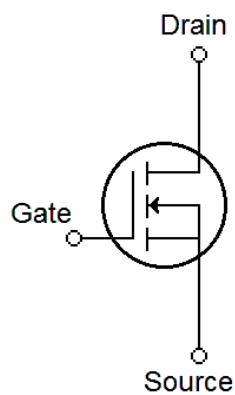
**FIGURE 4**  
Thermal Impedance Curves

**PACKAGE DIMENSIONS**


Ltr	Dimensions			
	Inch		Millimeters	
	Min	Max	Min	Max
<b>BL</b>	0.410	0.430	10.41	10.92
<b>CH</b>	0.190	0.200	4.83	5.08
<b>LD</b>	0.025	0.035	0.64	0.89
<b>LL</b>	0.505	0.595	12.82	15.11
<b>LO</b>	0.120 BSC		3.05 BSC	
<b>LS</b>	0.100 BSC		2.54 BSC	
<b>MHD</b>	0.140	0.150	3.56	3.81
<b>MHO</b>	0.527	0.537	13.39	13.64
<b>TL</b>	0.645	0.665	16.38	16.89
<b>TT</b>	0.035	0.045	0.89	1.14
<b>TW</b>	0.410	0.420	10.41	10.67
<b>TERM 1</b>	DRAIN			
<b>TERM 2</b>	SOURCE			
<b>TERM 3</b>	GATE			

**NOTES:**

1. Dimensions are in inches.
2. Millimeter equivalents are given for information only.
3. Glass meniscus included in dimension TL and BL.

**SCHEMATIC**


# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Microchip:

[JANSF2N7380](#) [JANSF2N7269U](#)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литер Н,  
помещение 100-Н Офис 331