19.6mm X 68.2mm WATER RESISTANT LED MODULES

FEATURES

VOLTAGE: 12V DC PER MODULE
CURRENT: 45mA PER MODULE
LED VIEWING ANGLE (2 0 1/2): 120°
MODULE THICKNESS: 5.7mm
PACKAGE: 20 PIECES PER REEL
WATER RESISTANCE IP65

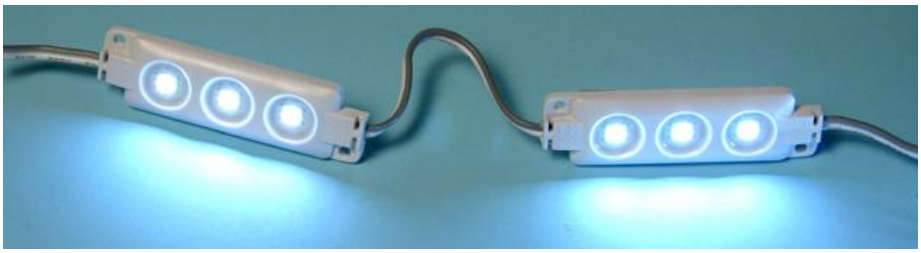

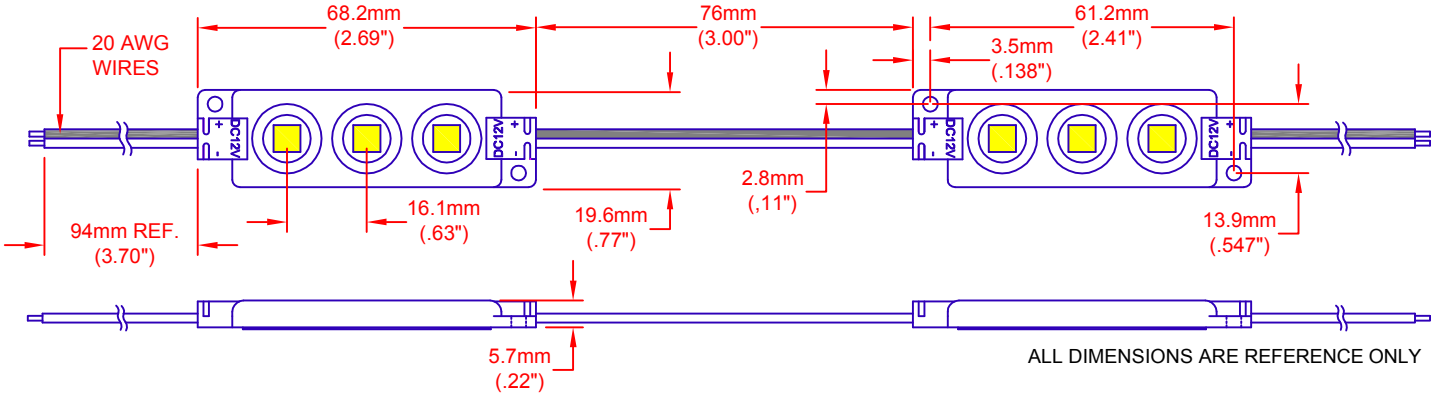

JKL PART NO.: ZM-1968-WW (WARM WHITE)

Absolute Maximum Rating at TA = 25ºC

Parameter	Symbol	Absolute MAX. Rating	Unit
Forward Current	IF	45	mA
Power Dissipation	PD	0.54	W
Electrostatic Discharge	ESD	800	V
Operating Temperature	Topr	-20~+40	ºC
Storage Temperature	Tstg	-25~+60	ºC

Electrical/Optical Characteristics at TA = 25ºC

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage DC	VF	IF = 45mA	- -	12	- -	V
Color Temperature	TC	IF = 45mA		3000		K
Luminous Flux per Module	φV/Mod	IF = 45mA	- -	35	- -	lm/mod
Luminous Flux per Ft.	φV/Ft	- -	- -	75	- -	lm/ft
Recommend Forward Current	IF(rec)	- -	- -	45	- -	mA

JKL PART NO.: ZM-1968-CW (COOL WHITE)

Electrical/Optical Characteristics at TA = 25ºC

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage DC	VF	IF = 45mA	- -	12	- -	V
Color Temperature	TC	IF = 45mA		6000		K
Luminous Flux per Module	φV/Mod	IF = 45mA	- -	43	- -	lm/mod
Luminous Flux per Ft.	φV/Ft	- -	- -	90	- -	lm/ft
Recommend Forward Current	IF(rec)	- -	- -	45	- -	mA

NOTES:
1. STANDARD MOUNTING INCLUDES ADHESIVE BACKING AND MOUNTING TABS FOR A #6 SCREW (SCREWS NOT INCLUDED).
2. JKL ACCESSORIES TO BE ORDERED SEPARATELY: ZPS-1235 OR ZPS-1260 POWER SUPPLIES.
3. DUE TO WIRE GAUGE USED IN THE CONSTRUCTION OF THE MODULES SERIAL RUNS SHOULD BE LIMITED TO 38 FEET OR 80 MODULES.
4. POWER CONSUMPTION 1 WATTS PER FOOT.

PLEASE REFER TO JKL APPLICATION SHEET: JKL-AS-ZM-CHANNEL-LED FOR INSTALLATION AND POWER RECOMMENDATIONS.

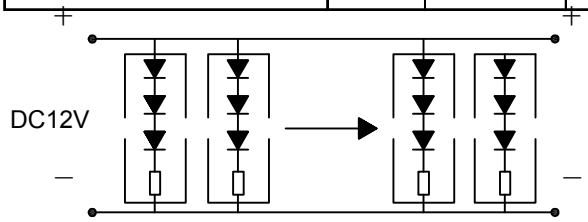

ATTENTION

OBSERVE PRECAUTION FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE DEVICES

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
B	ADD IP65 TO WATER RESISTANCE	4/18/16
A	ADDED DIMENSIONS FOR MOUNTING HOLES	11/22/12
	RELEASED	2/14/12

METRIC — THIRD ANGLE PROJECTION

DIMENSIONS ARE IN mm & (INCHES)
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- REF.
2 PL +/-
ANGLE +/-

JKL COMPONENTS CORPORATION

TITLE: WHITE 3-LED CHANNEL LIGHT

DRAWN BY	APPV'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.	
L. WENGSTROM	L.R.	4/18/16	A	55335		ZM-1968 MULTI

- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED

SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
NONE	2/14/12	4/18/16	B	1 OF 1

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург, Промышленная ул, дом № 19, литера Н, помещение 100-Н Офис 331