



[illegible]

## DOUBLE POLE

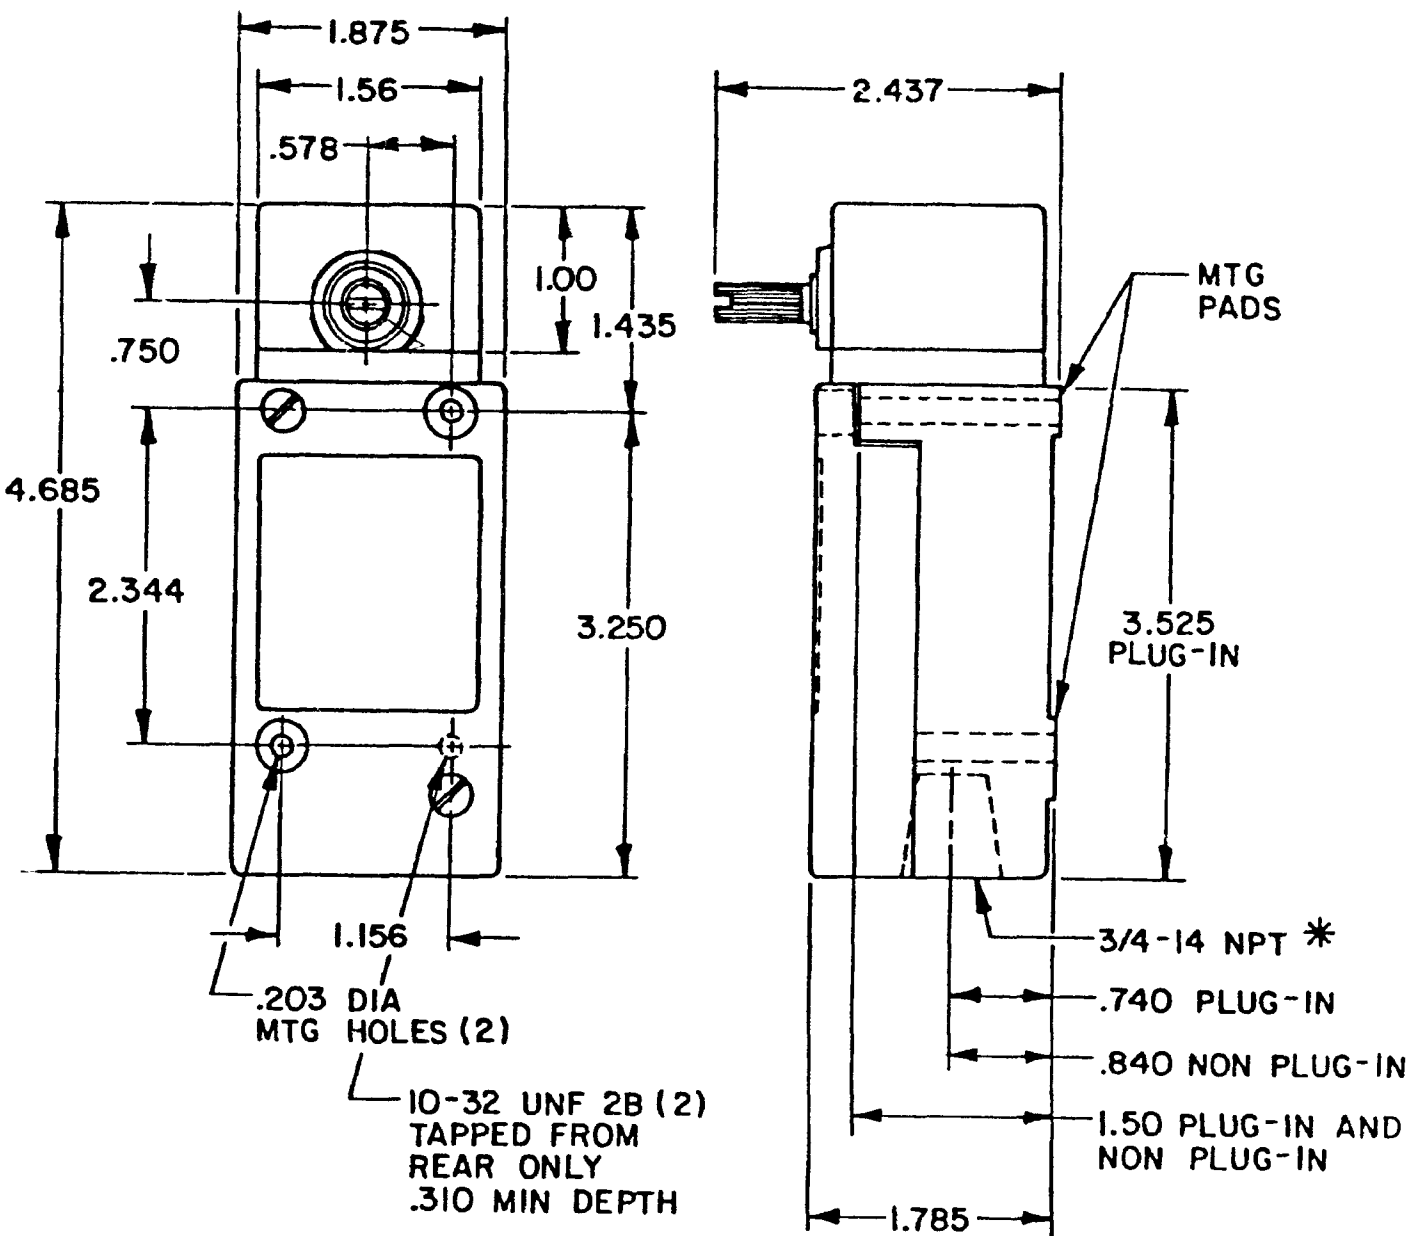


TYPE: LSA2, LSH2, LSM2, LSN2, LSP2, LSR2  
LSA4, LSH4, LSM4, LSN4, LSP4, LSR4

\*(LSA6, LSH6, LSM6, LSN6, LSP6, LSR6  
LSA7, LSH7, LSM7, LSN7, LSP7, LSR7 HAVE  
1/2-14 NPT CONDUIT HOLE)

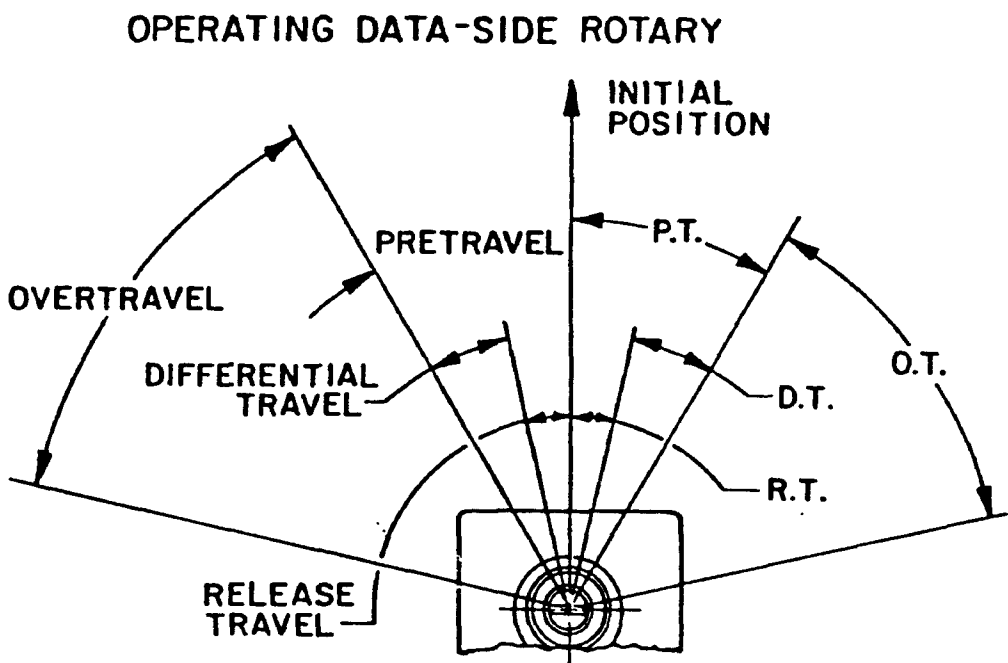


MANIFOLD MOUNT (PLUG-IN ONLY)  
SINGLE POLE AND DOUBLE POLE  
TYPE LSA THROUGH LSW SERIES

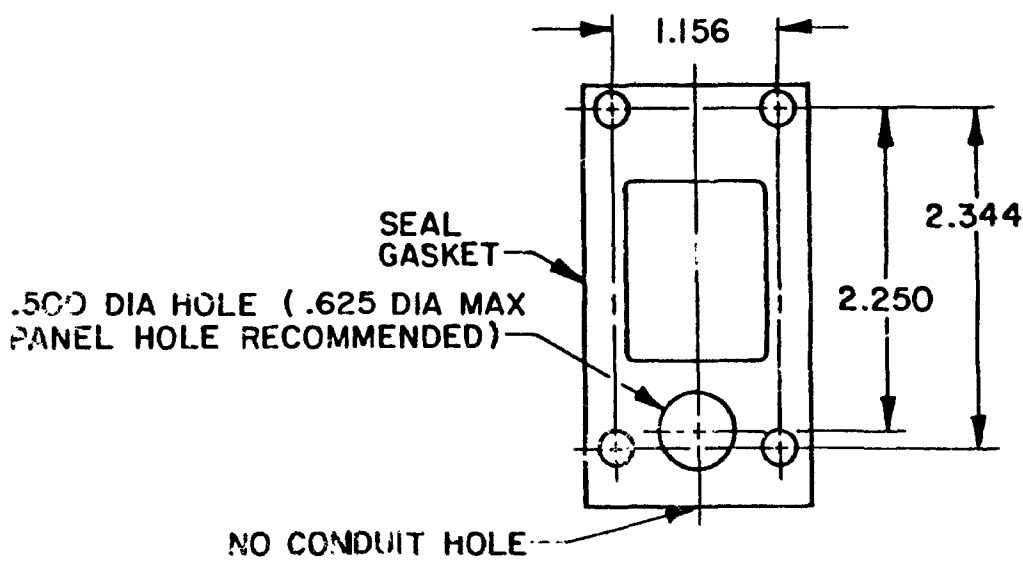


|                                                                                                                                                                                     |                          |                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------------------------------------------|
| THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH. |                          |                                          |
| <b>MICRO SWITCH</b><br>a Honeywell Division<br>FED. MFG. CODE 91929                                                                                                                 | <b>SWITCH - ENCLOSED</b> | CATALOG LISTING<br><b>LSA-LSW SERIES</b> |
|                                                                                                                                                                                     |                          | <b>CHART 1</b>                           |

|                                                                                       |                                                                                       |       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------|
| THIRD ANGLE PROJECTION                                                                |                                                                                       |       |
|  |  |       |
| SCALE NONE                                                                            |                                                                                       |       |
| DO NOT SCALE PRINT                                                                    |                                                                                       |       |
| UNLESS OTHERWISE SPECIFIED<br>TOLERANCES ARE                                          |                                                                                       |       |
| ONE PLACE                                                                             | (.0)                                                                                  | ±.030 |
| TWO PLACES                                                                            | (.00)                                                                                 | ±.015 |
| THREE PLACES                                                                          | (.000)                                                                                | ±.005 |
| ANGLES                                                                                |                                                                                       | ±.    |
| WEIGHT                                                                                |                                                                                       |       |


# SIDE ROTARY CAM TRACKING

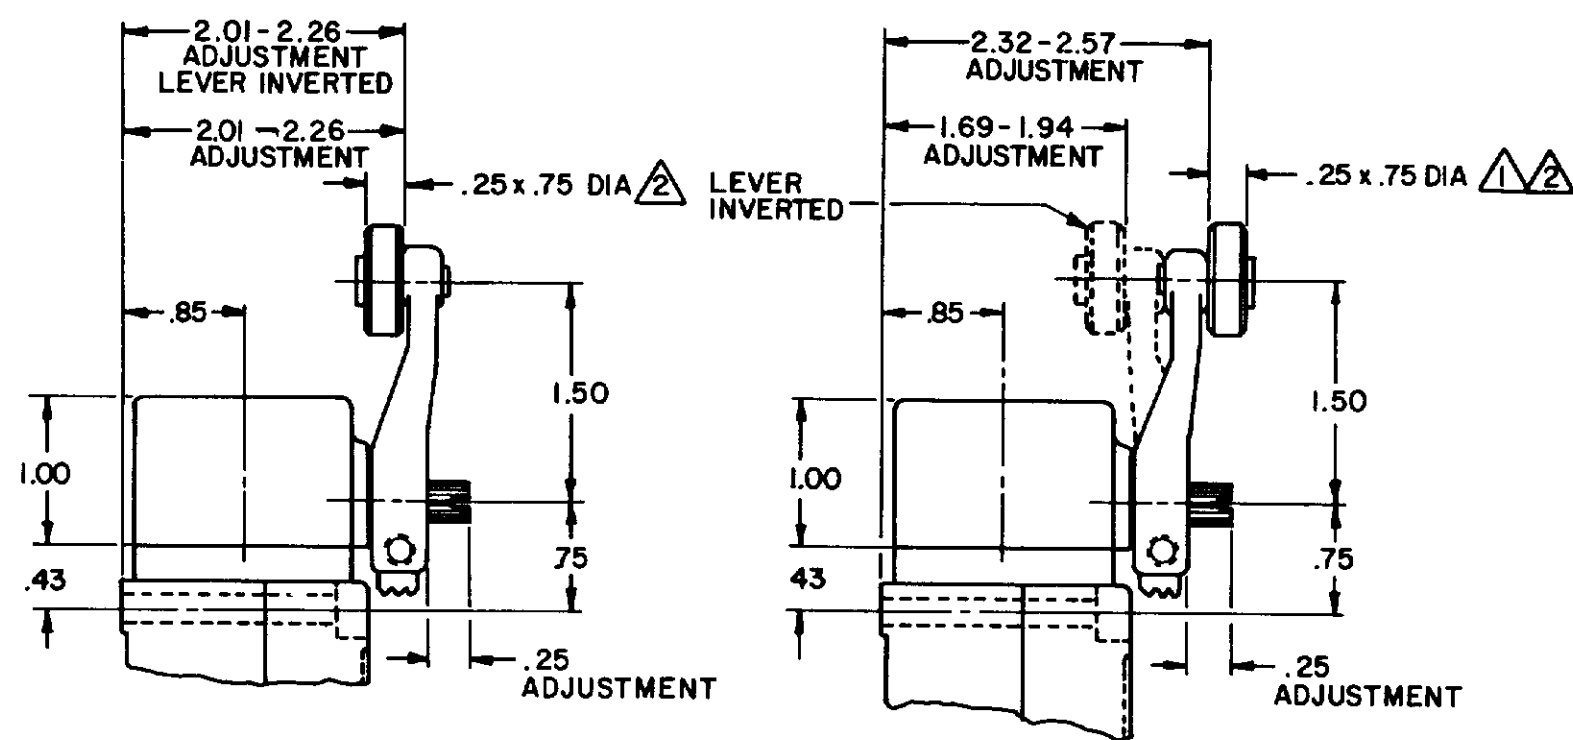


LSZ51 TYPE LEVERS

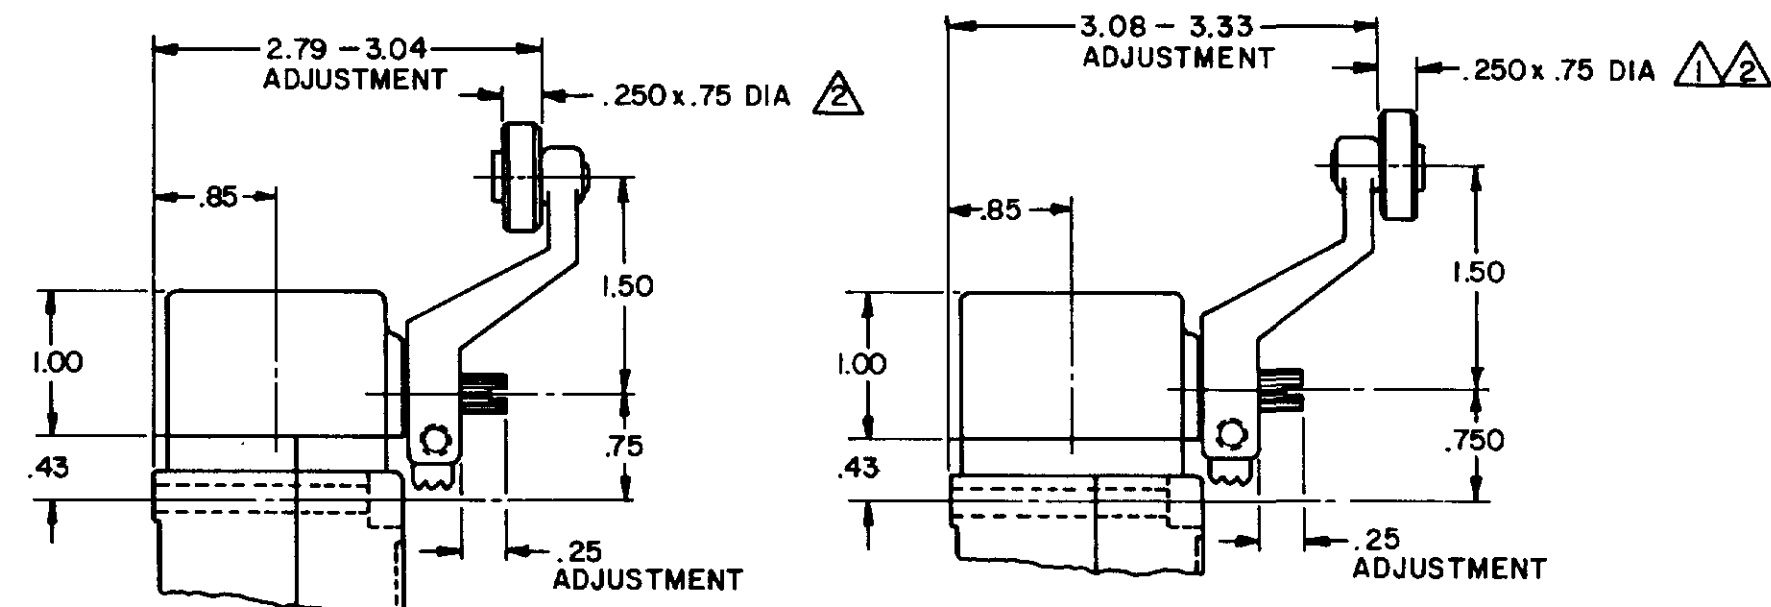


LSZ55 TYPE LEVERS

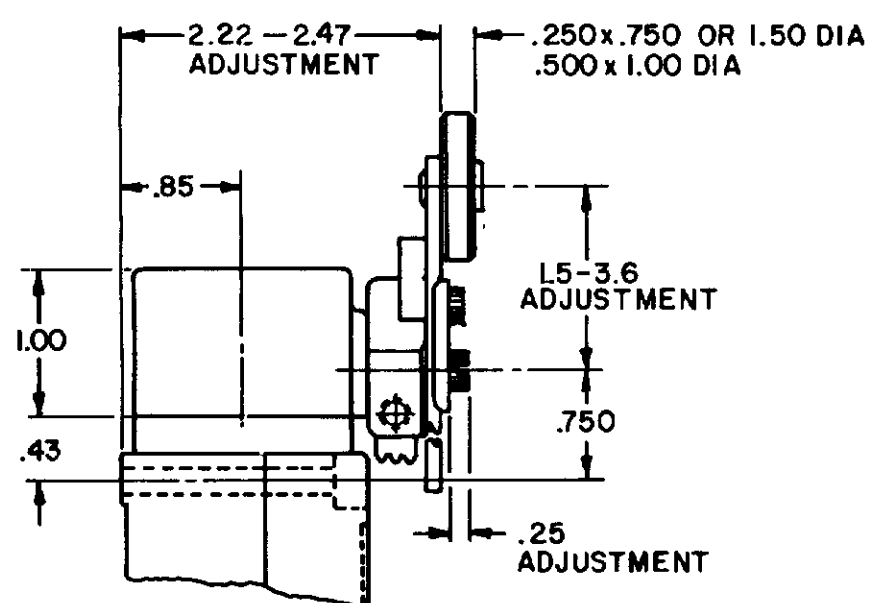


LSZ52 TYPE LEVER

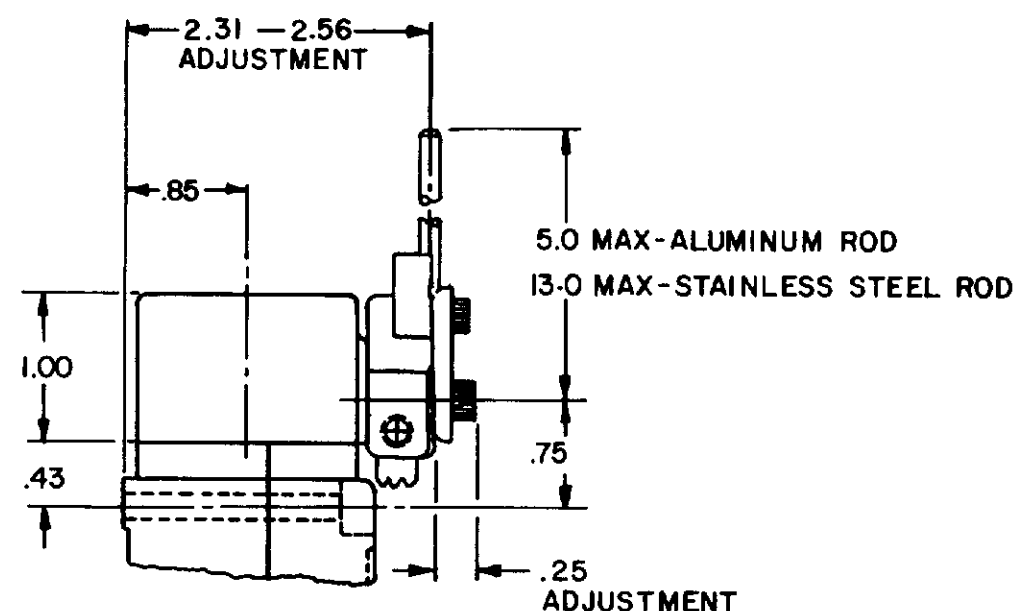

LSZ54 TYPE LEVER

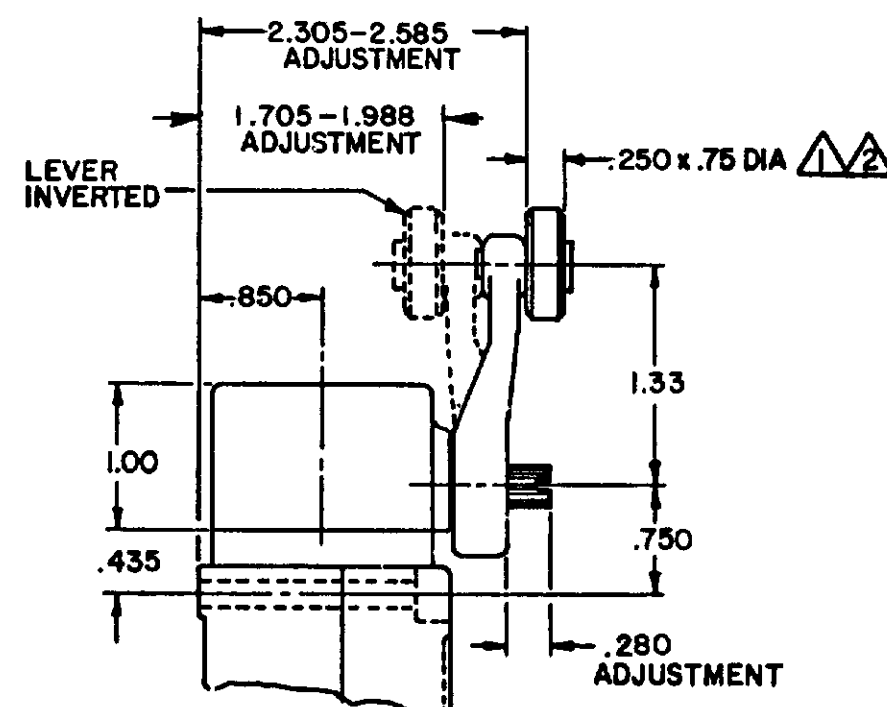

OPEN MOUNTED ROLLER

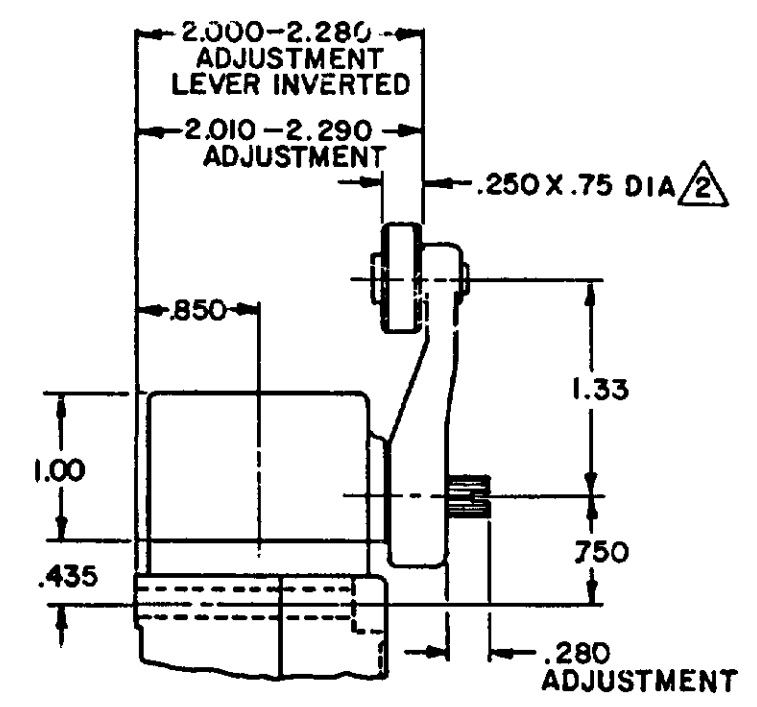

CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

- NOTES
- 1 ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT LEVER CANNOT BE INVERTED
  - 2 FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO "M" DRAWING
  - 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 "M" DRAWING


CATALOG LISTING  
LSA-LSW SERIES CHART 1  
PAGE 2 OF 10  
REPLACES LSA-LSW SERIES  
10JUL07 RELEASE NO. CO-78498  
PSR  
CHECK  
11AUG04  
AK  
11JUL94  
JAF  
15JUN94  
MAM  
15JUN94  
JAF  
15JUN94  
MAM

| THIRD ANGLE PROJECTION                    |        |       |  |
|-------------------------------------------|--------|-------|--|
| SCALE NONE                                |        |       |  |
| DO NOT SCALE PRINT                        |        |       |  |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |        |       |  |
| ONE PLACE                                 | (0)    | ±.030 |  |
| TWO PLACES                                | (.00)  | ±.015 |  |
| THREE PLACES                              | (.000) | ±.005 |  |
| ANGLES                                    |        | ±     |  |
| WEIGHT                                    |        |       |  |

# TOP ROTARY

# SINGLE POLE

# DOUBLE POLE

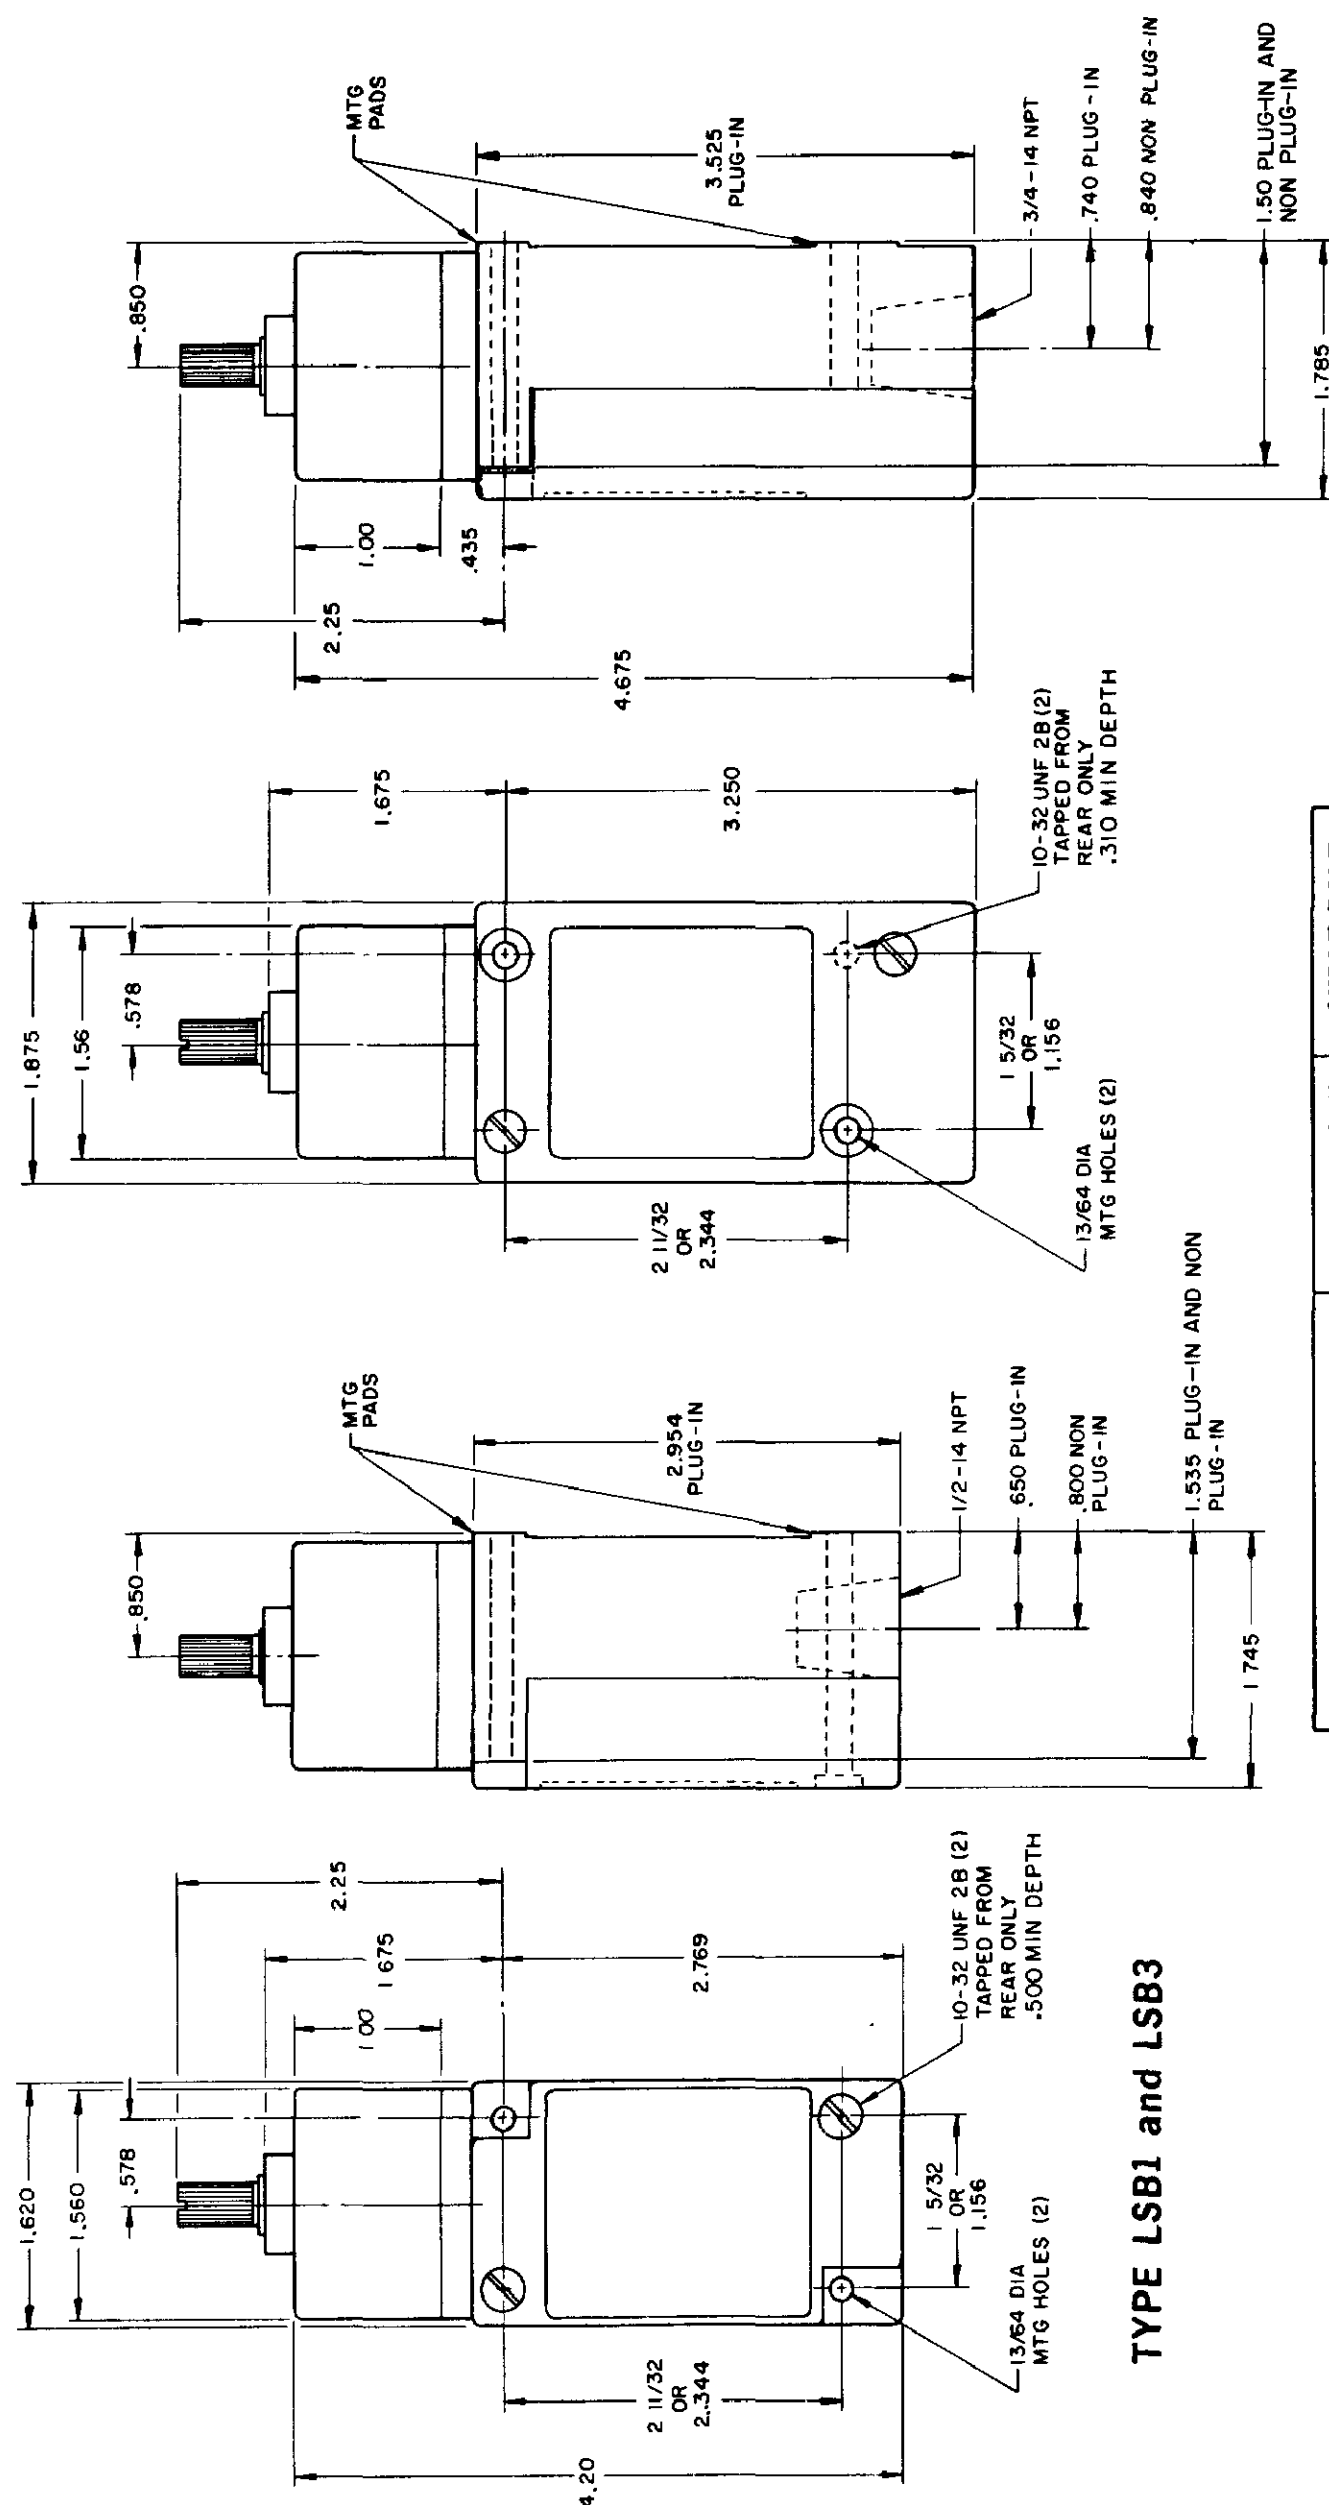

### TYPE LSB1 and LSB3

**TYPE LSB2 and LSB4  
LSB6 and LSB7 have 1/2" - 14 NPT  
CONDUIT HOLE**

|                         |                    |                    |
|-------------------------|--------------------|--------------------|
| PRETRAVEL MAX           | SINGLE POLE<br>25° | DOUBLE POLE<br>25° |
| OVERTRAVEL MIN          | 110°               | 110°               |
| DIFFERENTIAL TRAVEL MAX | 10°                | 12°                |
| OPERATING TORQUE MAX    | 2 5 IN. LBS        | 2 5 IN. LBS        |
| TOTAL TRAVEL (REF)      | 135°               | 135°               |

## ELECTRICAL RATINGS

| 10 AMP CONT. | A.C. VOLTAGE | AMPS AT 35 POWER FACTOR |       |             |       |  |  |
|--------------|--------------|-------------------------|-------|-------------|-------|--|--|
|              |              | SINGL POLE              |       | DOUBLE POLE |       |  |  |
|              |              | MAKE                    | BREAK | MAKE        | BREAK |  |  |
|              | 120          | 60                      | 6     | 30          | 3     |  |  |
|              | 240          | 30                      | 3     | 15          | 1.5   |  |  |
|              | 480          | 15                      | 1.5   | 7.5         | .75   |  |  |
|              | 600          | 12                      | 1.2   | 6           | .6    |  |  |

| D. C. VOLTAGE | MAKE & BREAK<br>INDUCTIVE | RESISTIVE |
|---------------|---------------------------|-----------|
| 120           | 0.25                      | 0.80      |
| 240           | 0.15                      | 0.40      |

ELECTRONIC DUTY BASIC SWITCH  
10 AMP CONT


|                |            |
|----------------|------------|
| VOLTAGE        |            |
| 5 AC OR DC MIN | 01 AMP MIN |
| 600 AC         | 720 VA     |
| 240 DC         | 30 WATT    |

**DIRECT ACTING (ALSO RATED AT A. C. 10  
AMP CONT.)**


| D. C. VOLTAGE | MAKE AND BREAK AMPS |           |
|---------------|---------------------|-----------|
|               | INDUCTIVE           | RESISTIVE |
| 30            | 4.2                 | 4.2       |
| 120           | 1.1                 | 1.1       |
| 240           | .55                 | .55       |

**WIRING BASIC SWITCH  
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)**


### DOUBLE POLE

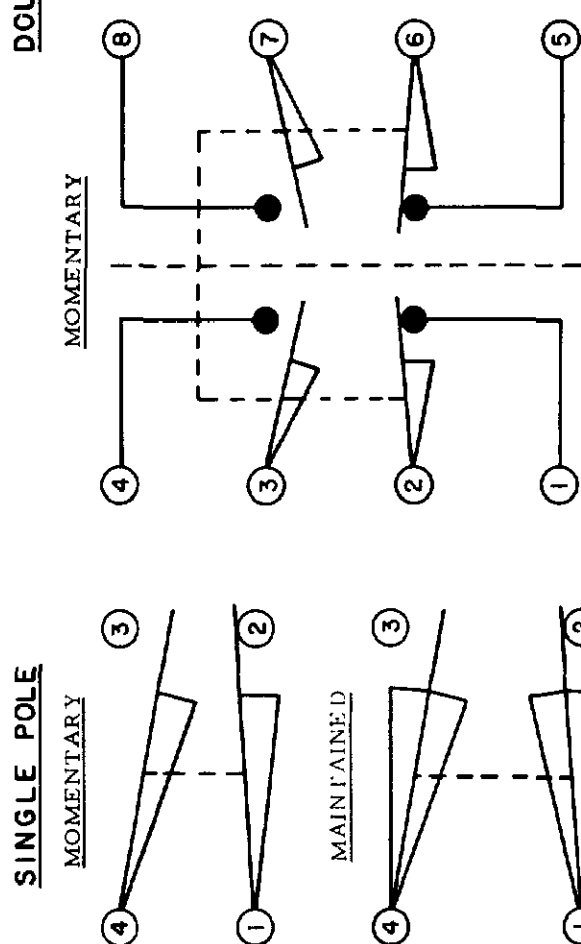


**SINGLE POLE**

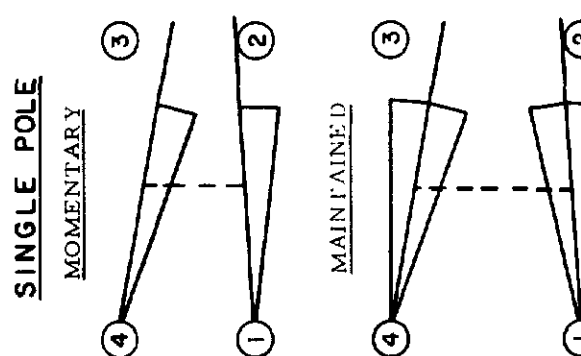

**SINGLE POLE**

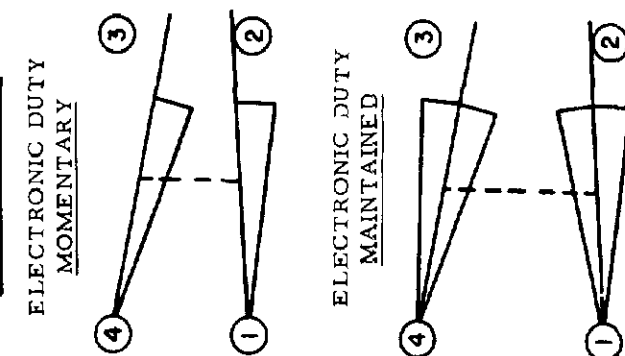


## ELECTRONIC DUTY

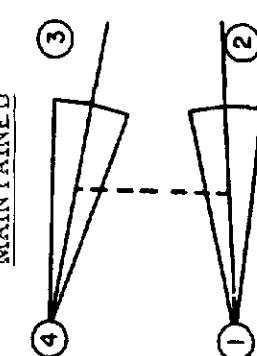

**DIRECT ACTING** 




# SINGLE POLE

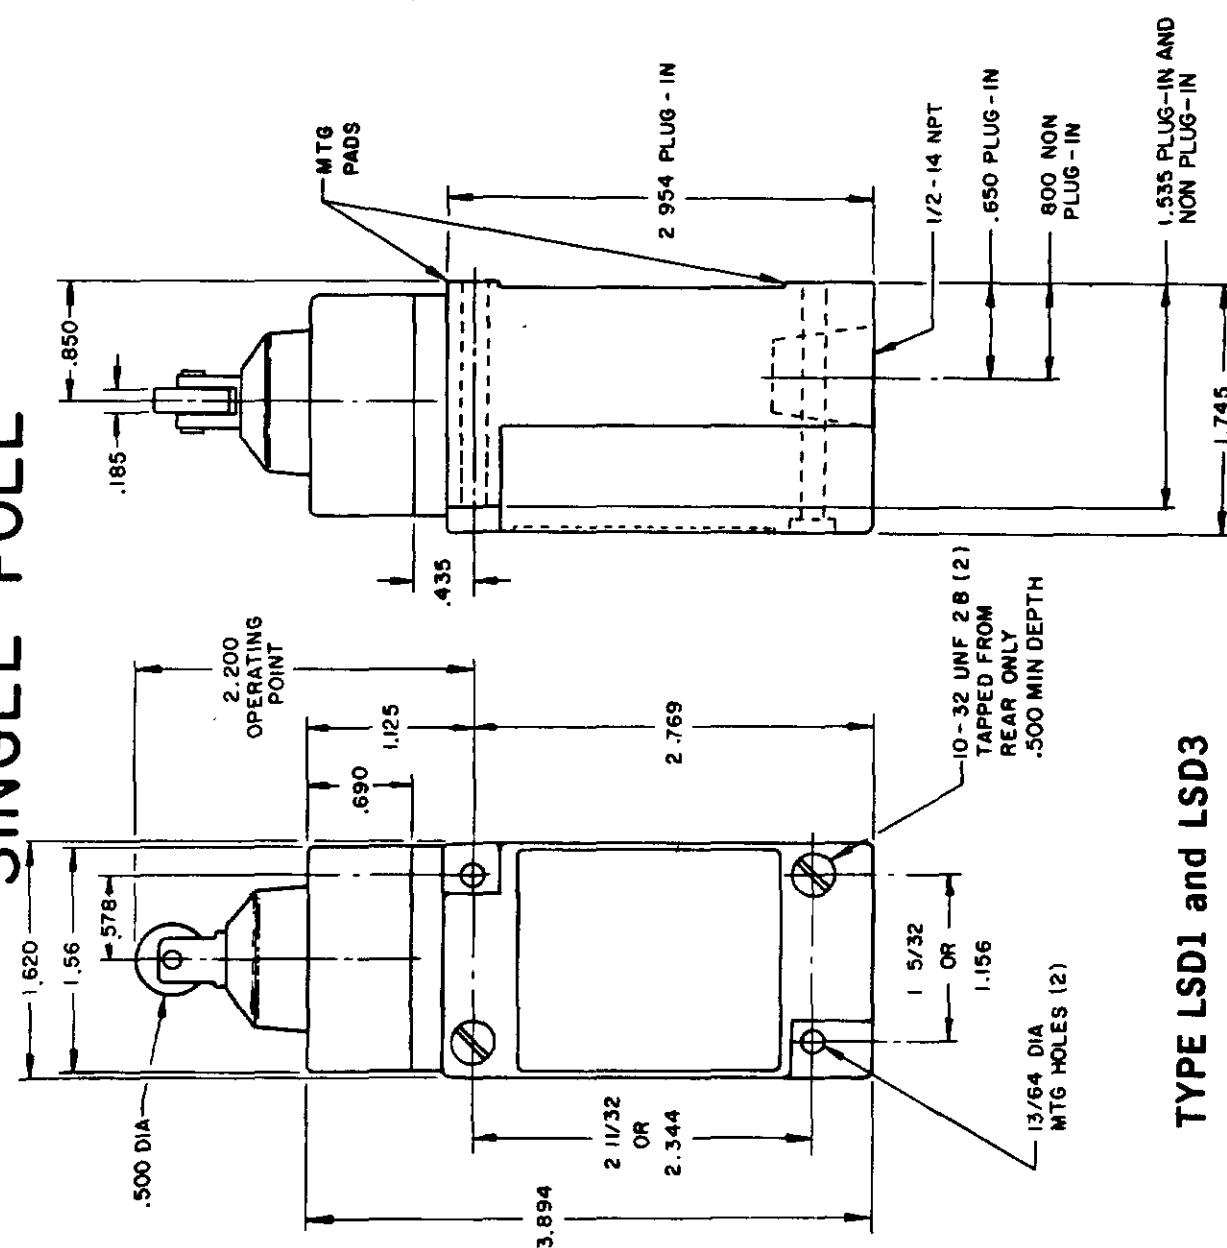


### TYPE LSD1 and LSD3

# DOUBLE POLE

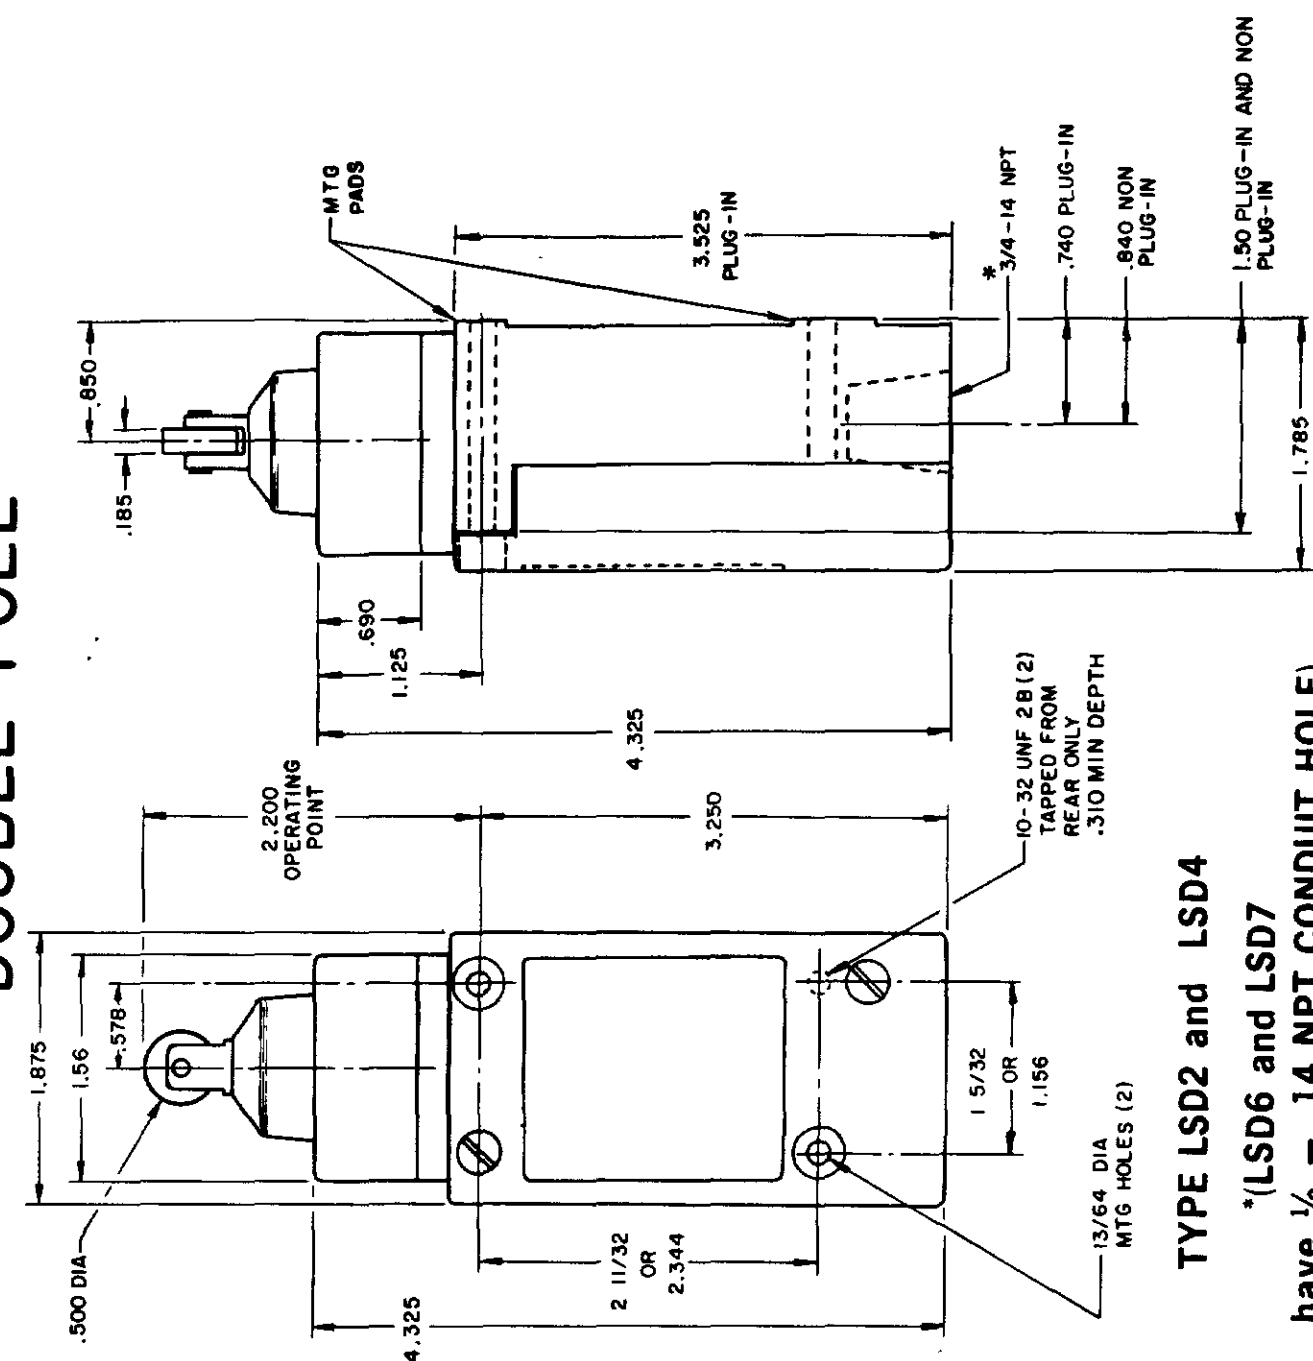


#### TYPE LSD2 and LSD4


\*(LSD6 and LSD7 have 1/2 - 14 NPT CON

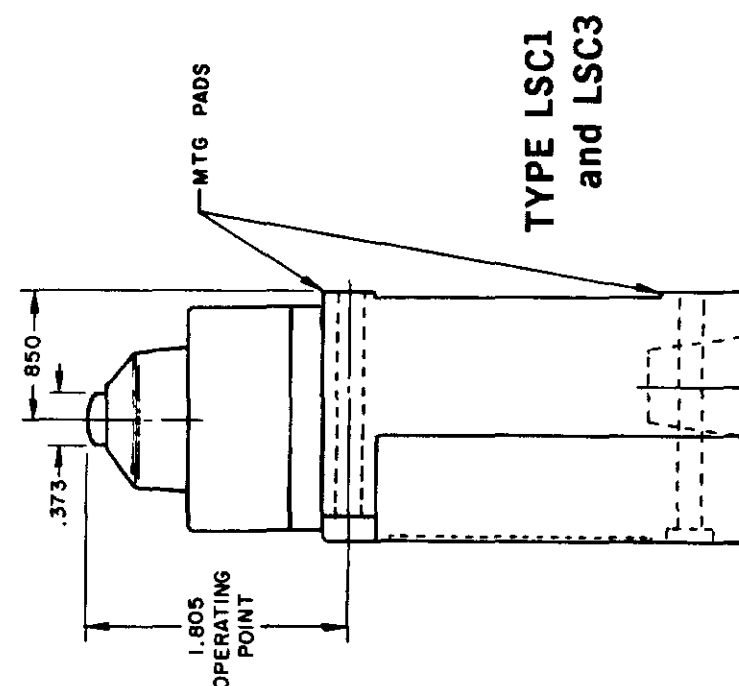

### TYPE LSC1 and LSC3

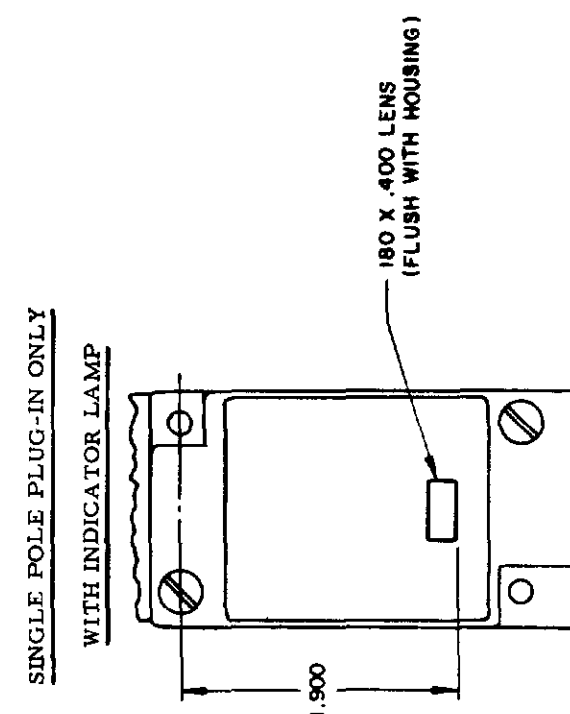


**TYPE LSC2  
and LSC4**

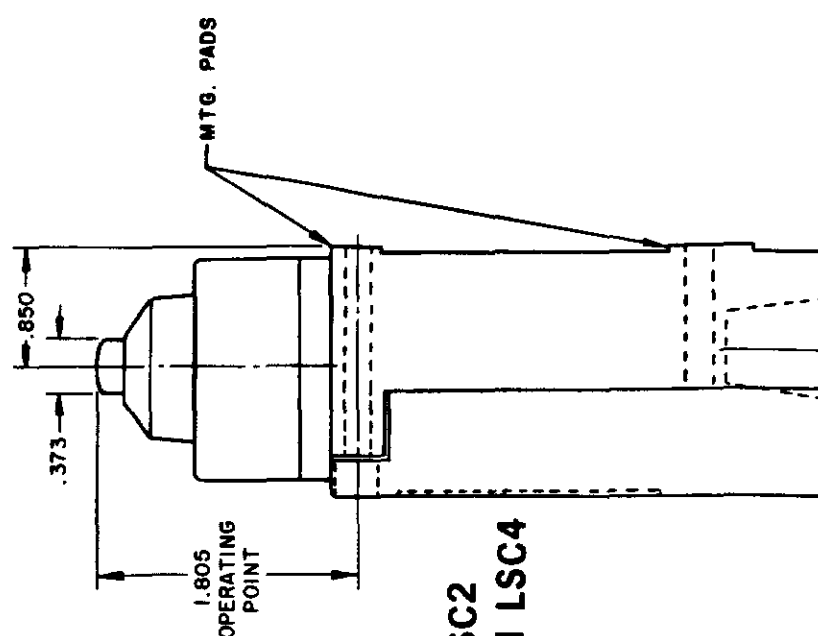


**120 LAMP VOLTAGE -  
TYPE LSC5, LSD5 or LSV5**


**240 LAMP VOLTAGE .  
TYPE LSC8, LSD8 or LSV8**

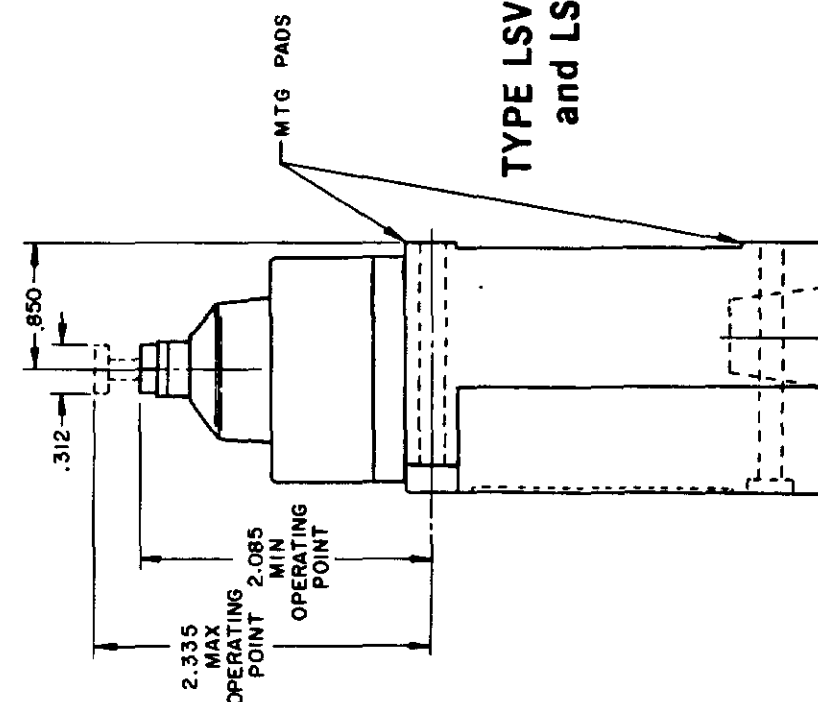

## TYPE LSV1 and LSV3

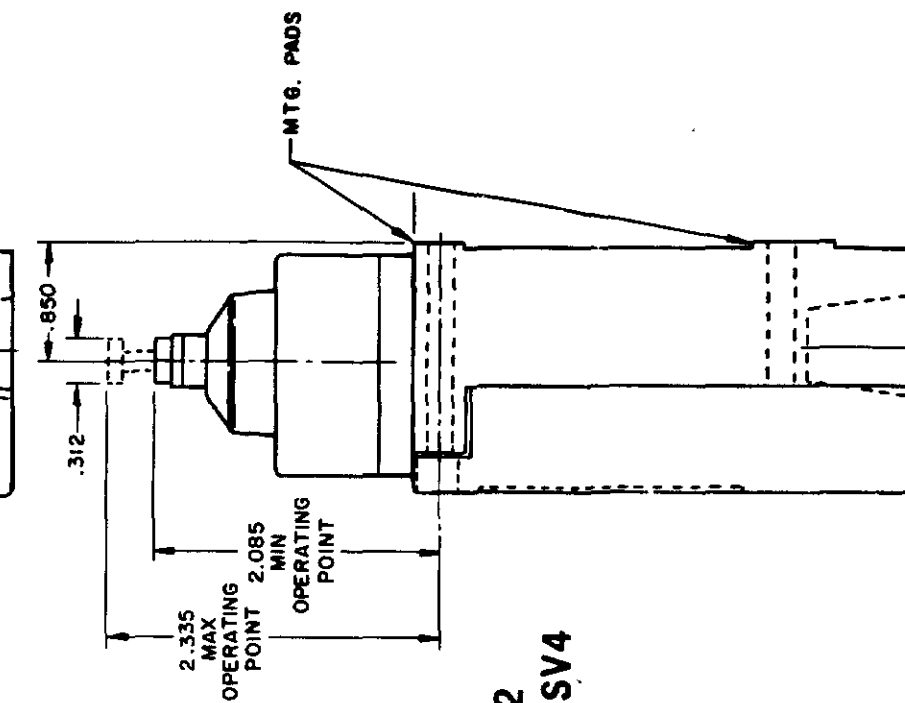

**TYPE LSV2  
and LSV4**

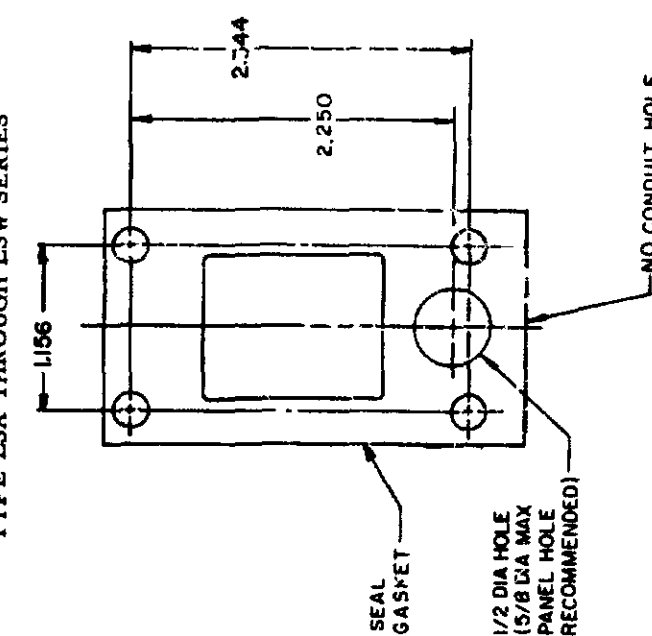

PAGE 4 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**MICRO SWITCH**  
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING



**LSA-LSW SERIES**

**CHART 1**

SCALE NON8


DO NOT SCALE PRINT

SINGLE POLE DOUBLE POLE

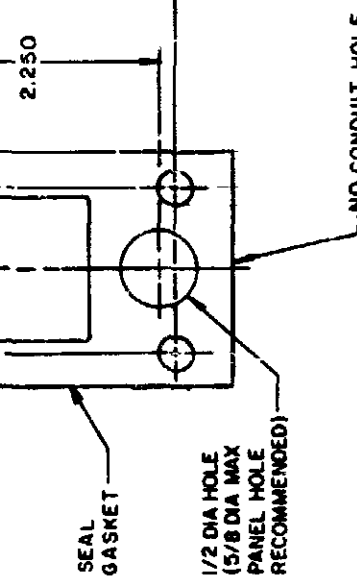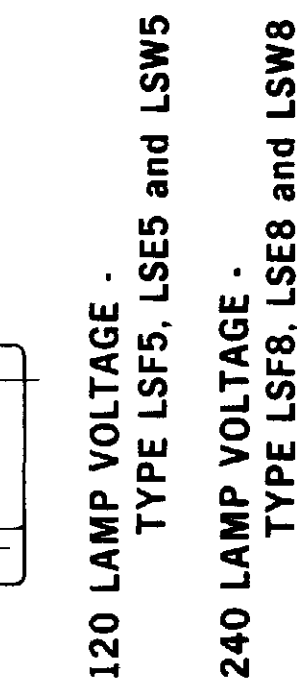

SCALE NONE

DO NOT SCALE PRINT

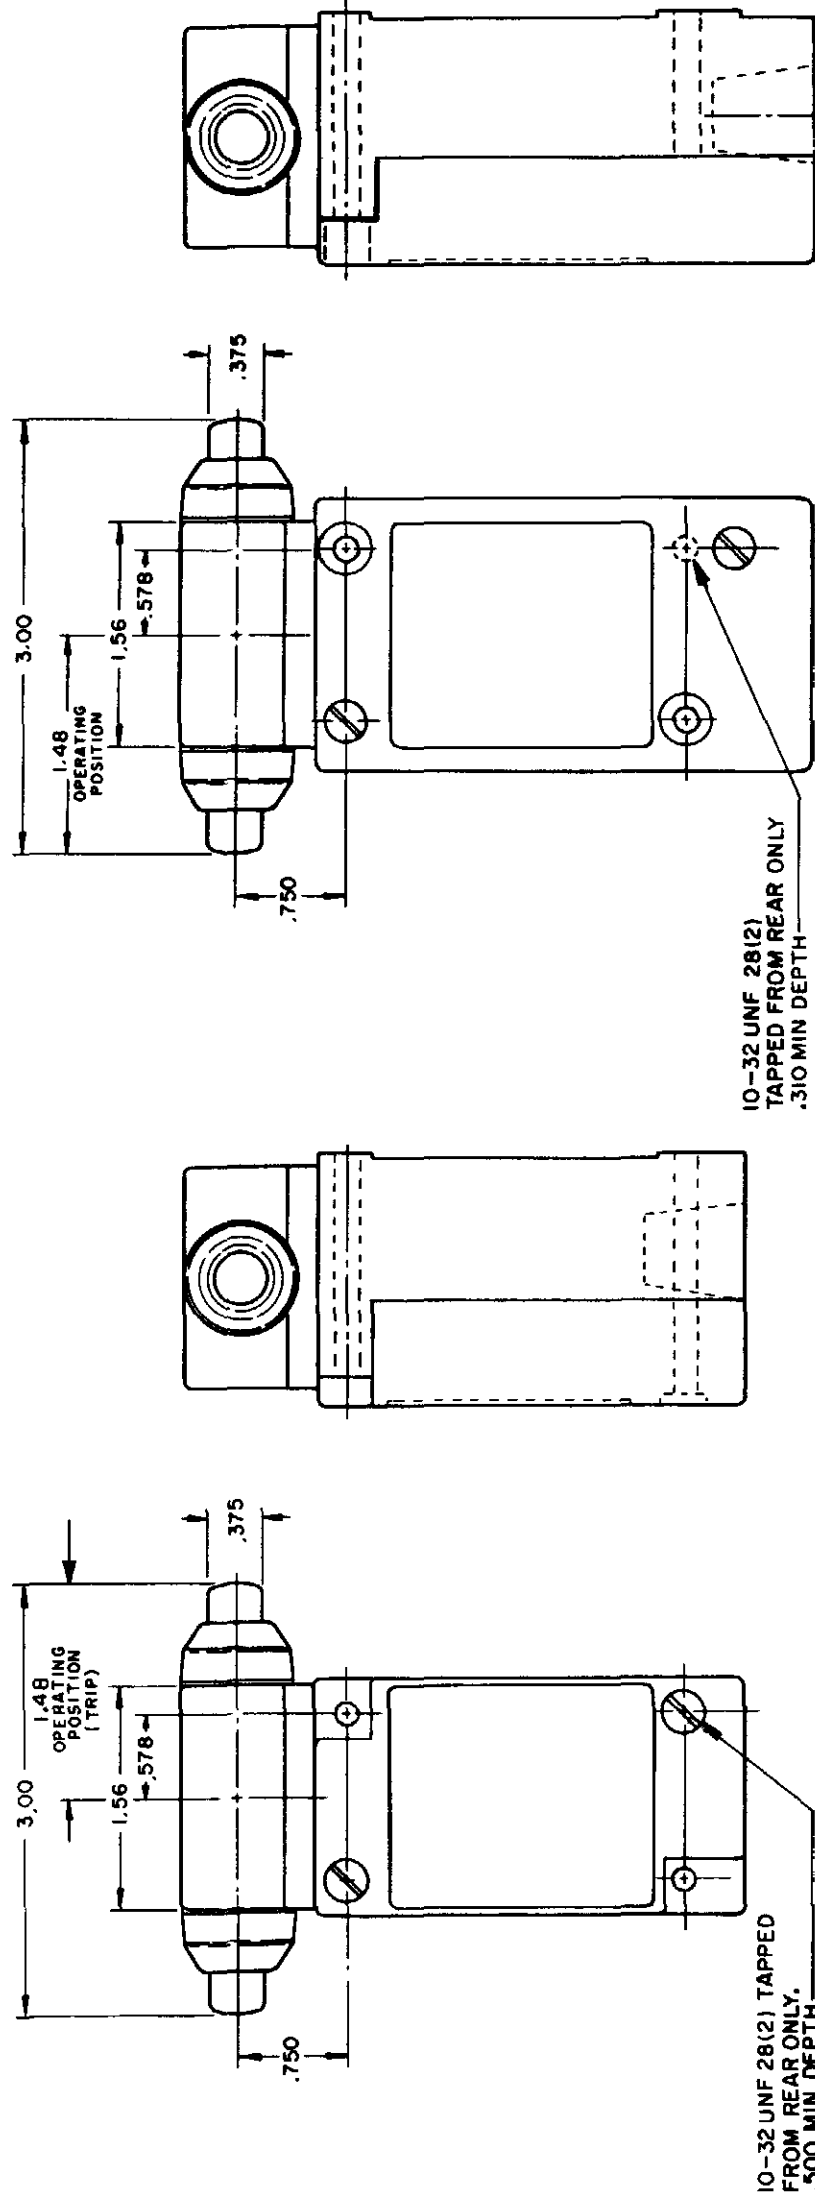

TYPE LSG1 and LSG3

TYPE LSG2 and LSG4

INITIAL POSITION —  
(FREE POSITION) } PRETRAVEL  
OPERATING POINT } DIFFERENTIAL TRAVEL  
FULL TRAVEL — } OVERTRAVEL

TOP PLUNGER TYPES

| CHARACTERISTICS             | LSC PLUNGER                  | LSD ROLLER PLUNGER           | LSV ADJ PLUNGER              | SEQUENCE BASIC                              |     |     |
|-----------------------------|------------------------------|------------------------------|------------------------------|---------------------------------------------|-----|-----|
|                             |                              |                              |                              | LSC                                         | LSD | LSV |
| PRETRAVEL (MAX)             | .070                         | .070                         | .070                         | 1ST STEP .070                               |     |     |
| DIFFERENTIAL TRAVEL (MAX)   | SINGLE POLE DOUBLE POLE .015 | SINGLE POLE DOUBLE POLE .020 | SINGLE POLE DOUBLE POLE .015 | 2ND STEP .016 MIN ADD'L                     |     |     |
| OVERTRAVEL (MIN)            | .190                         | .190                         | .190                         | .015 EACH STEP                              |     |     |
| OPERATING FORCE (MAX)       | 4 LBS                        | 4 LBS                        | 4 LBS                        | .170                                        |     |     |
| OPERATING POINT             | 1.805 ± .030                 | 2.200 ± .040                 | 2.085 MIN                    | 1ST STEP                                    |     |     |
| FULL OVERTRAVEL FORCE (MAX) | 7 LBS                        | 7 LBS                        | 7 LBS                        | 1.815±.030 2.210±.040 2.095 MIN / 2.345 MAX |     |     |

SIDE PLUNGER TYPES

| CHARACTERISTICS             | LSE PLUNGER  | LSF ROLLER PLUNGER | LSW ADJ PLUNGER                     | SEQUENCE BASIC                              |     |     |
|-----------------------------|--------------|--------------------|-------------------------------------|---------------------------------------------|-----|-----|
|                             |              |                    |                                     | LSE                                         | LSF | LSW |
| PRETRAVEL (MAX)             | .100         | .100               | .170                                | 1ST STEP .100                               |     |     |
| DIFFERENTIAL TRAVEL (MAX)   | .045         | .045               | .090                                | 2ND STEP .020 MIN ADD'L                     |     |     |
| OVERTRAVEL (MIN)            | .190         | .190               | .080                                | .025 EACH STEP                              |     |     |
| OPERATING FORCE (MAX)       | 6 LBS        | 6 LBS              | 10 LBS                              | .170                                        |     |     |
| OPERATING POINT             | 1.300 ± .030 | 1.735 ± .040       | ADJUSTABLE FROM 1.615 MIN 1.865 MAX | 1ST STEP                                    |     |     |
| FULL OVERTRAVEL FORCE (MAX) | 6 LBS        | 6 LBS              | 10 LBS                              | 1.310±.030 1.745±.040 1.625 MIN / 1.875 MAX |     |     |

|           |           |     |      |      |
|-----------|-----------|-----|------|------|
| REVISIONS | DATE      | BY  | CHKD | APPD |
| L 0031956 | 10 JUL 07 | BS  |      |      |
| B 201004  | 10 AUG 00 | CST |      |      |
| C 201748  | 17 NOV 00 | CST |      |      |
| D 202198  | 23 JAN 01 | CST |      |      |
| E 204871  | 11 JUL 94 | AK  |      |      |
| F 206581  | 14 OCT 02 | GLH |      |      |
| G 206763  | 31 OCT 02 | CST |      |      |
| H 207179  | 14 JAN 03 | GLH |      |      |
| J 207474  | 18 FEB 03 | SP  |      |      |
| K 0006871 | 11 AUG 04 | RR  |      |      |


|       |                        |            |          |          |                |
|-------|------------------------|------------|----------|----------|----------------|
| ISSUE | CATALOG LISTING        | RELEASE NO | CO-78498 | REPLACES | LSA-LSW SERIES |
| 12    | LSA-LSW SERIES CHART 1 | 10 JUL 07  |          |          |                |
| PSR   | 10 JUL 07              | CHECK      |          |          |                |

|        |           |           |
|--------|-----------|-----------|
| MAILED | 15 JUN 94 | 11 AUG 04 |
|--------|-----------|-----------|

|       |                        |            |          |          |                |
|-------|------------------------|------------|----------|----------|----------------|
| ISSUE | CATALOG LISTING        | RELEASE NO | CO-78498 | REPLACES | LSA-LSW SERIES |
| 12    | LSA-LSW SERIES CHART 1 | 10 JUL 07  |          |          |                |
| PSR   | 10 JUL 07              | CHECK      |          |          |                |

|       |                        |            |          |          |                |
|-------|------------------------|------------|----------|----------|----------------|
| ISSUE | CATALOG LISTING        | RELEASE NO | CO-78498 | REPLACES | LSA-LSW SERIES |
| 12    | LSA-LSW SERIES CHART 1 | 10 JUL 07  |          |          |                |
| PSR   | 10 JUL 07              | CHECK      |          |          |                |

# WOBBLE STICK DOUBLE POLE SINGLE POLE

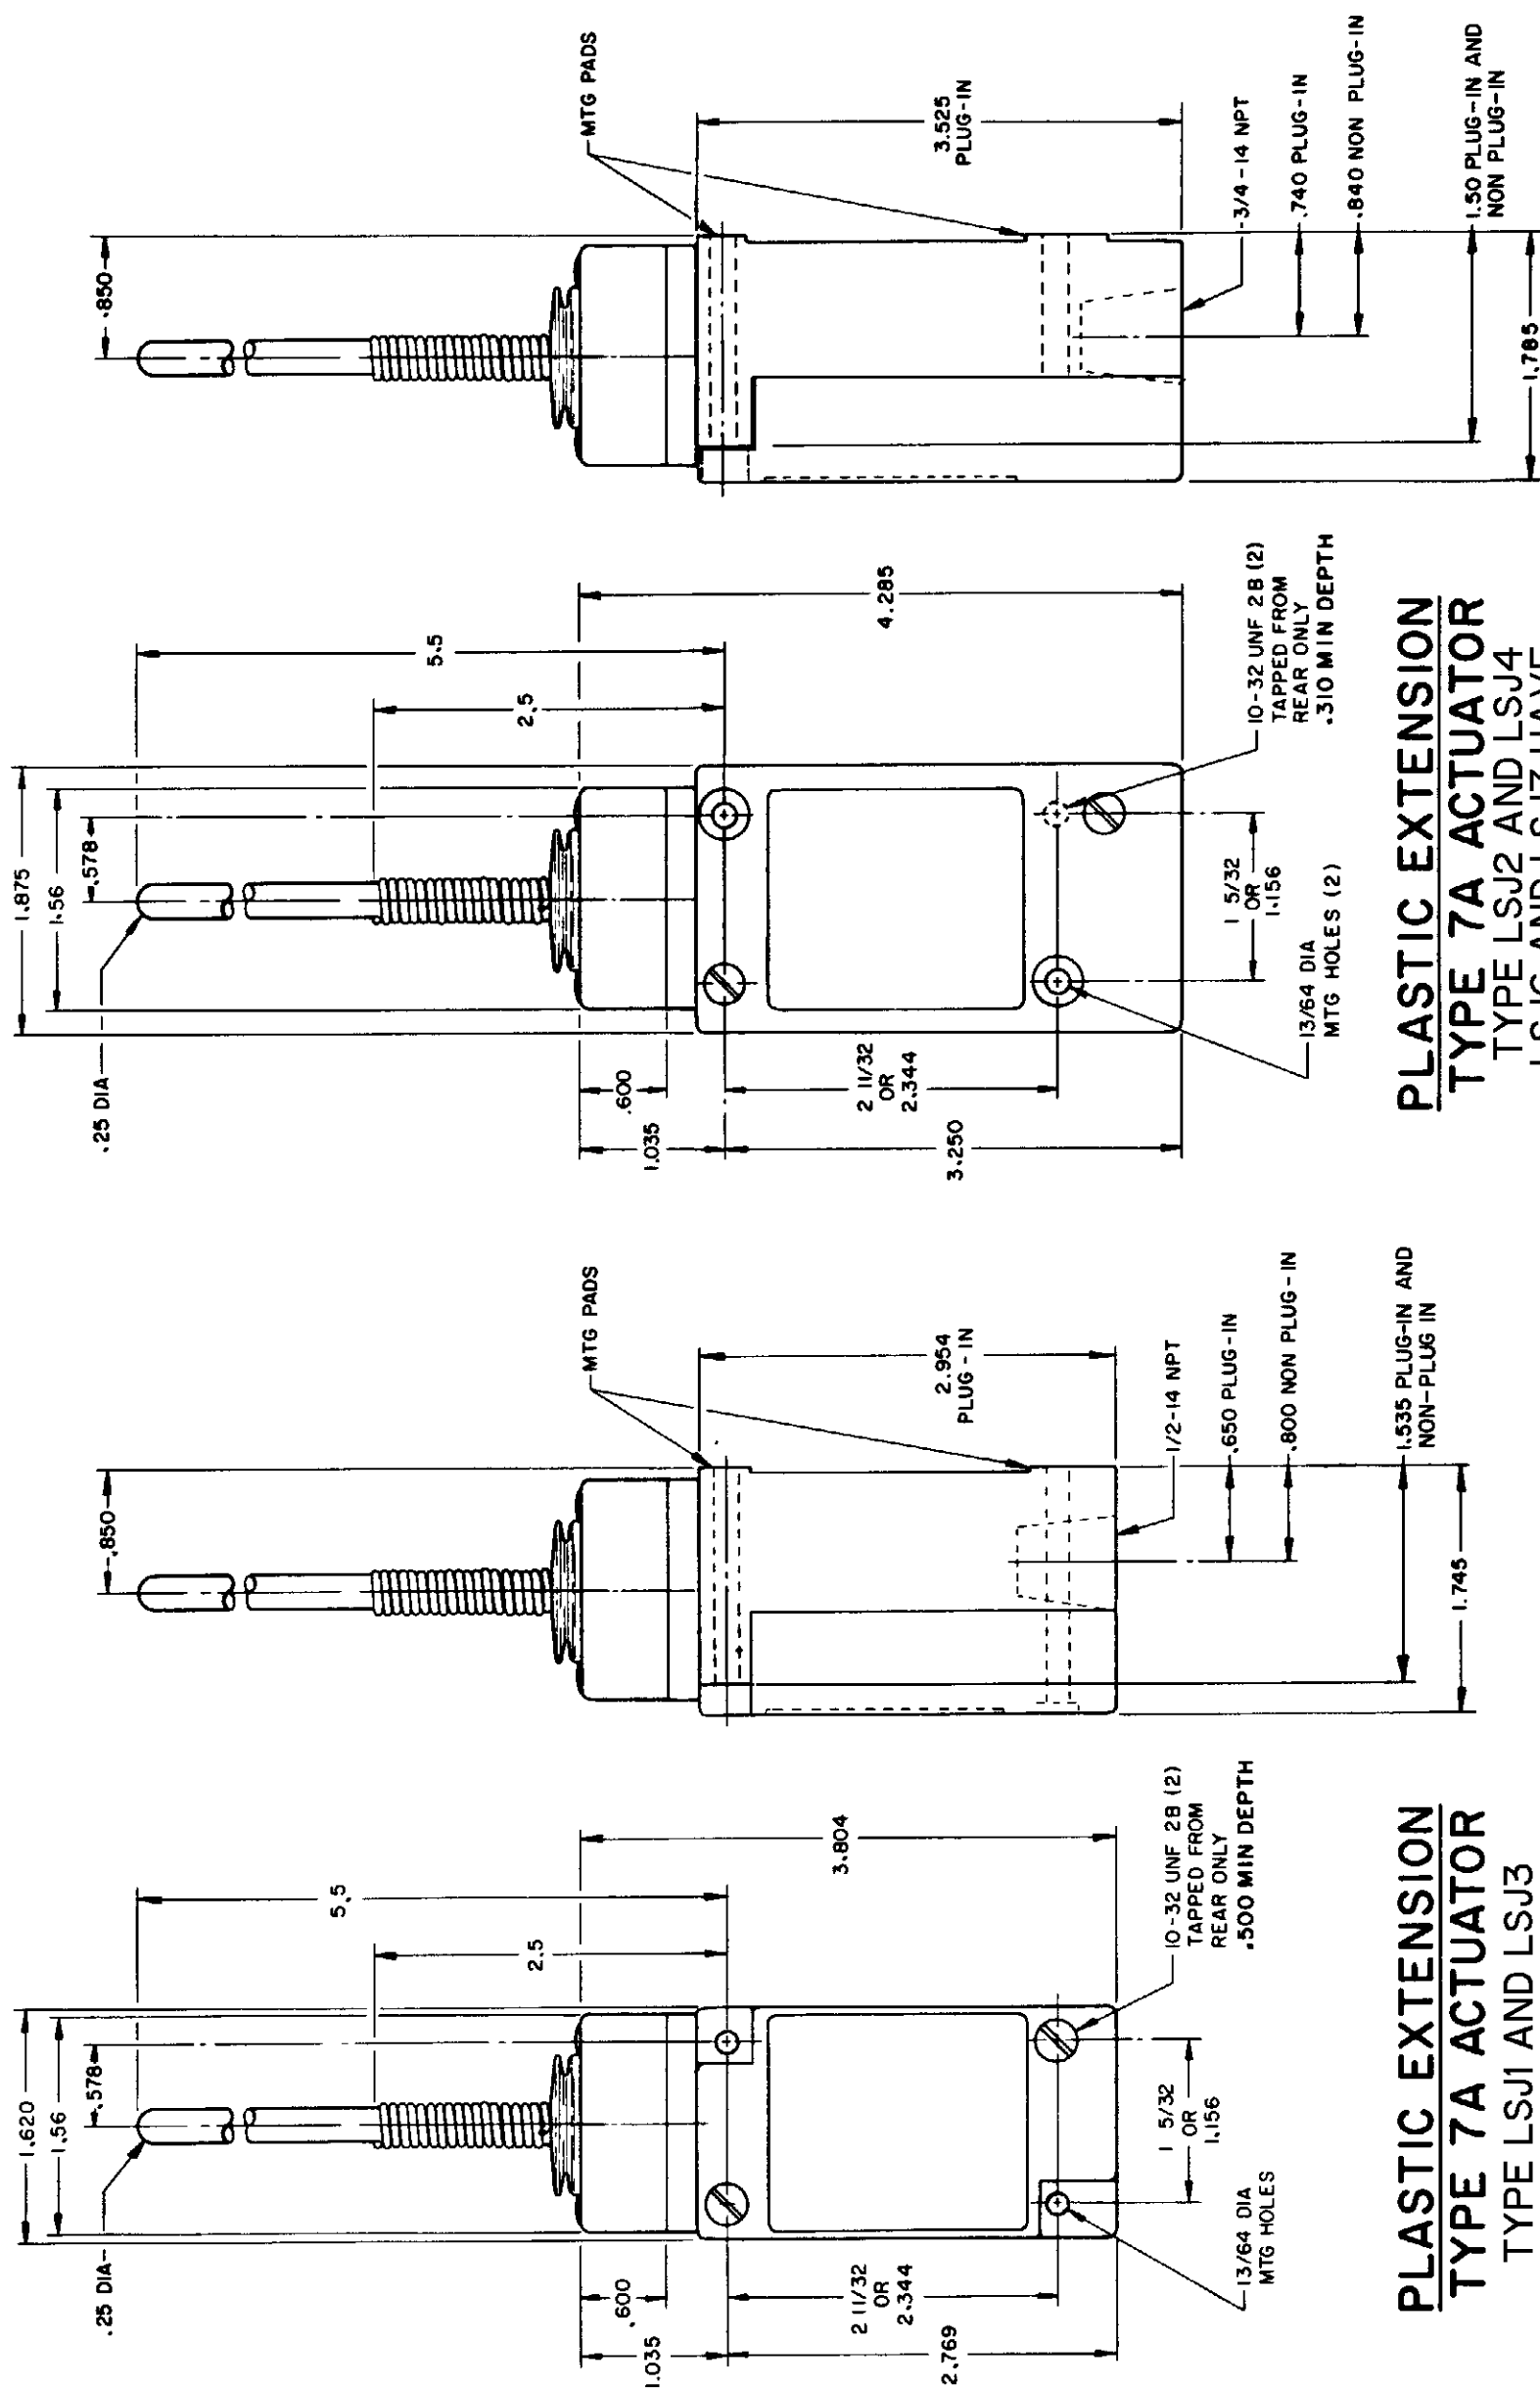

**PLASTIC EXTENSION  
TYPE 7A ACTUATOR**  
TYPE LSJ1 AND LSJ3

**PLASTIC EXTENSION  
TYPE 7A ACTUATOR**  
TYPE LSJ2 AND LSJ4  
LSJ6 AND LSJ7 HAVE  
1/2 - 14 NPT CONDUIT HOLE

**MICRO SWITCH**  
a Honeywell Division


FED MFG CODE 91929

SWITCH - ENCLOSED


CATALOG LISTING

**LSA-LSW SERIES**  
CHART 1


**REPLACEMENT ACTUATOR  
LSZ-4009**

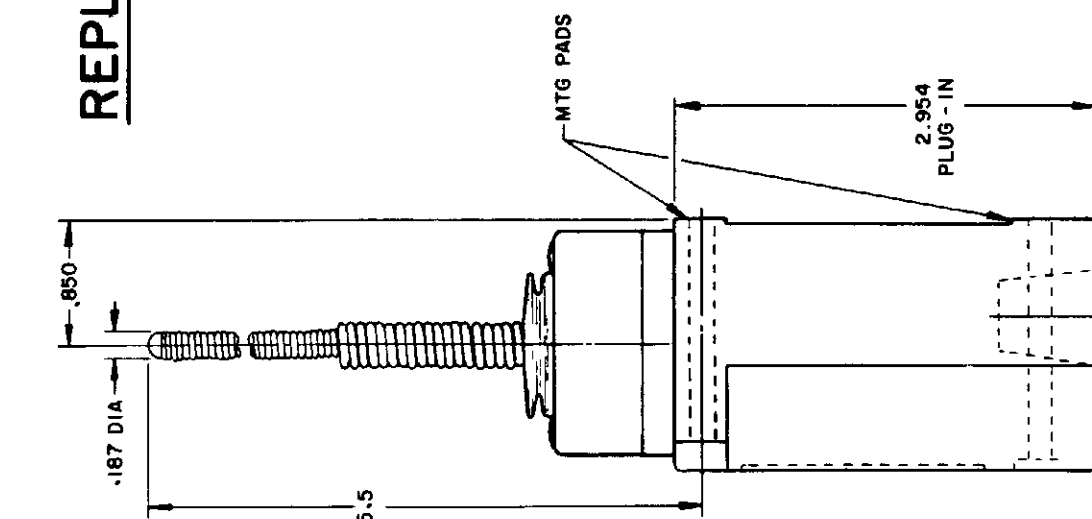


**CABLE EXTENSION  
TYPE 7N ACTUATOR**

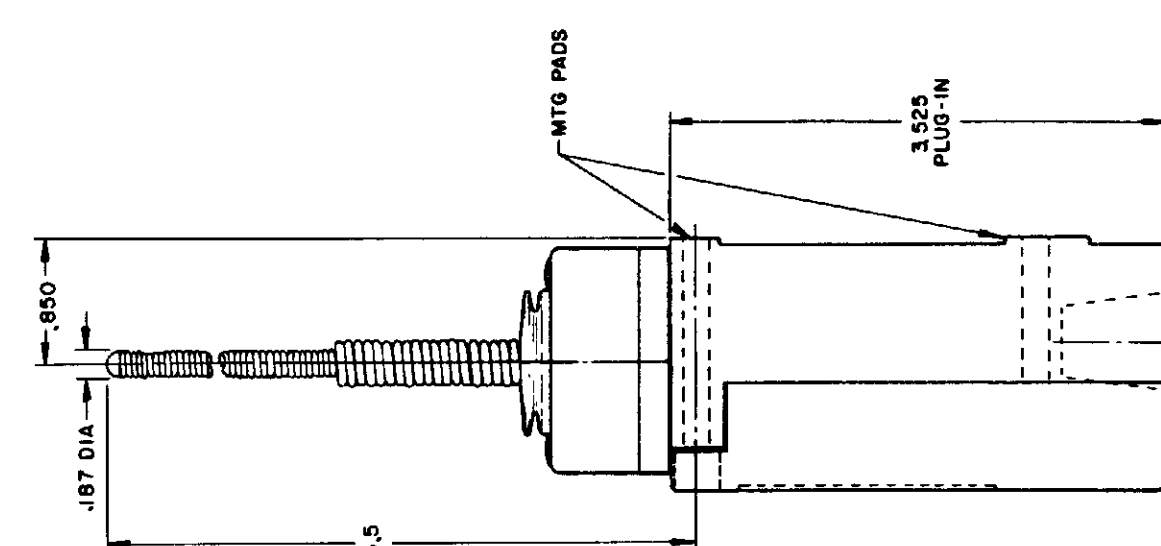

**CABLE EXTENSION  
TYPE 7N ACTUATOR**

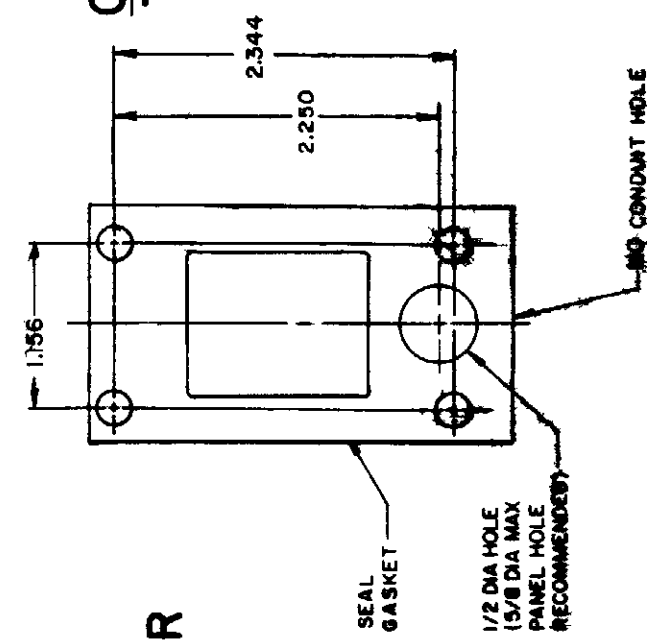


**SINGLE POLE PLUG-IN ONLY  
WITH INDICATOR LAMP**

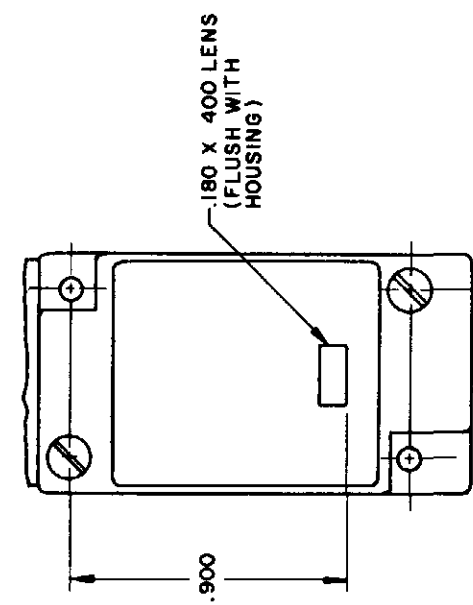

**120 LAMP VOLTAGE TYPE LSJ5  
240 LAMP VOLTAGE TYPE LSJ8  
24 LED VOLTAGE TYPE LSJ9**


**REPLACEMENT ACTUATOR  
LSZ-4011**

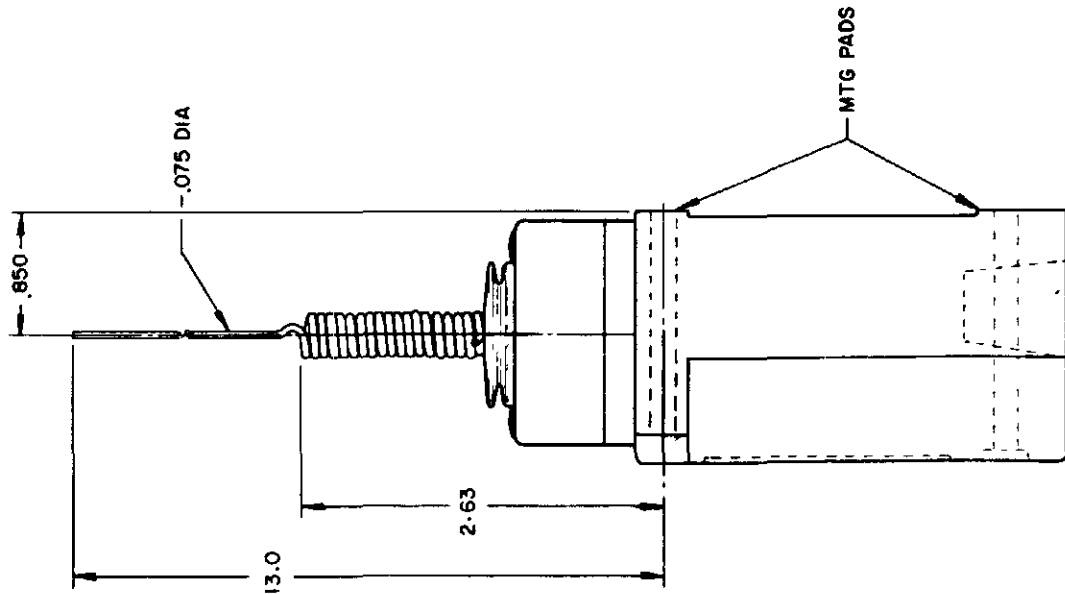

WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ1 and LSJ3

REPLACEMENT ACTUATOR - LSZ 4010

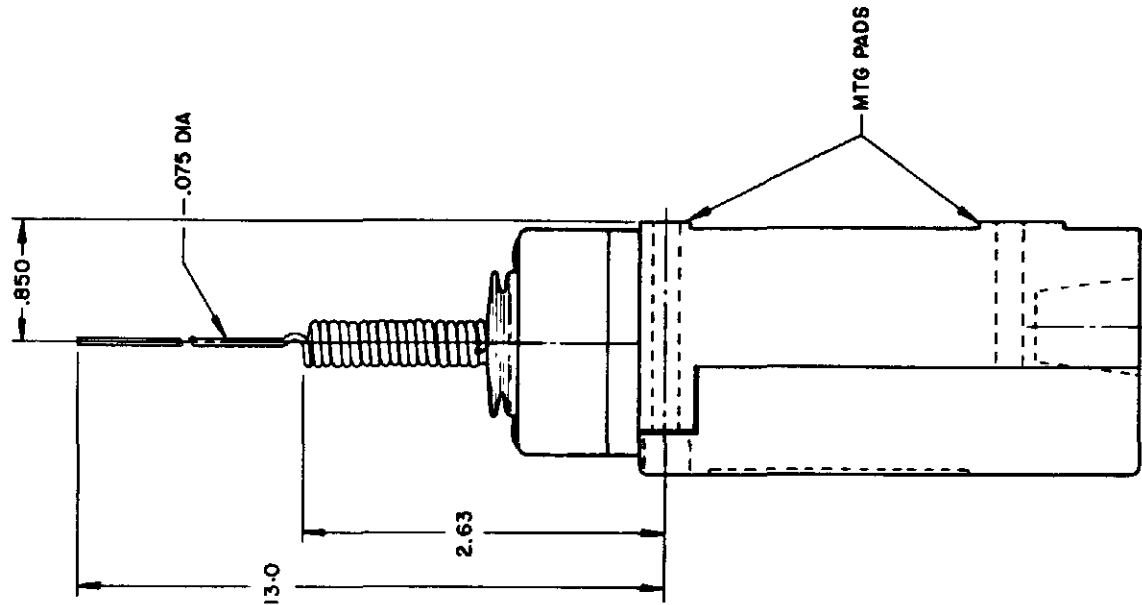


WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ2 and LSJ4


LSJ6 and LSJ7 have 1/2 - 14 NPT CONDUIT HOLE

SINGLE POLE PLUG-IN ONLY  
WITH INDICATOR LAMP

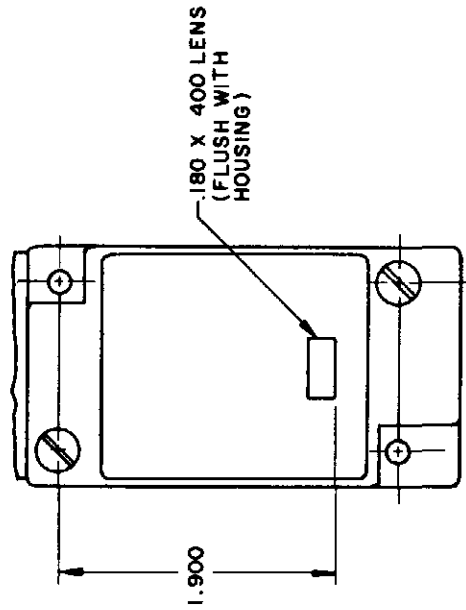


120 LAMP VOLTAGE TYPE LSJ5  
240 LAMP VOLTAGE TYPE LSJ8

SINGLE POLE

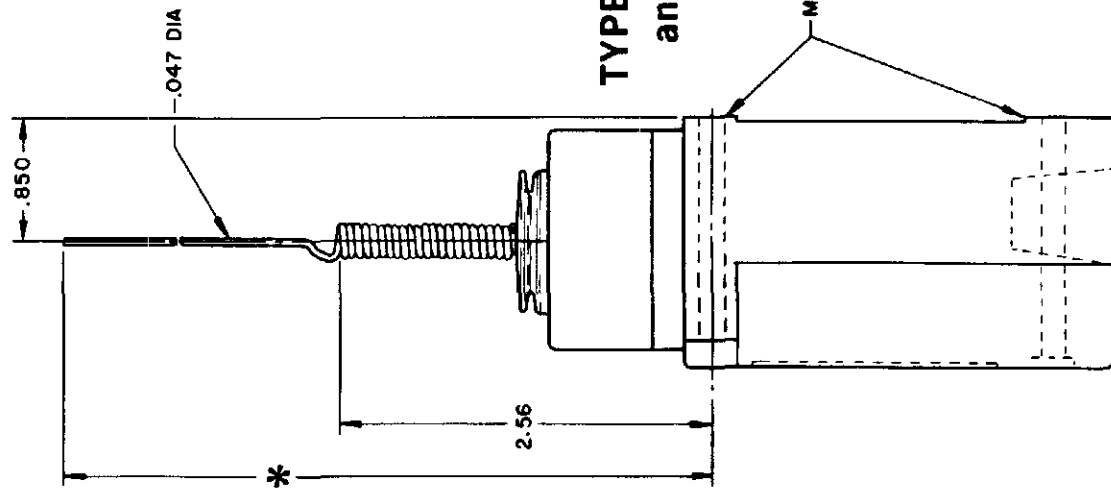


TYPE LSK1  
and LSK3

SINGLE POLE PLUG-IN ONLY  
WITH INDICATOR LAMP

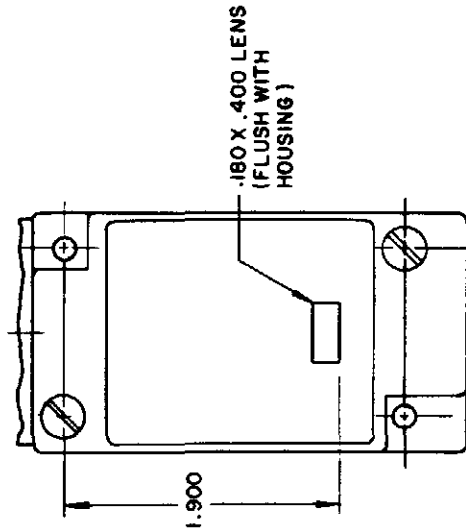

120 LAMP VOLTAGE  
TYPE LSK5 - CAT WHISKER TYPE LSB5 - TOP ROTARY  
240 LAMP VOLTAGE  
TYPE LSK8 - CAT WHISKER TYPE LSB8 - TOP ROTARY

DOUBLE POLE

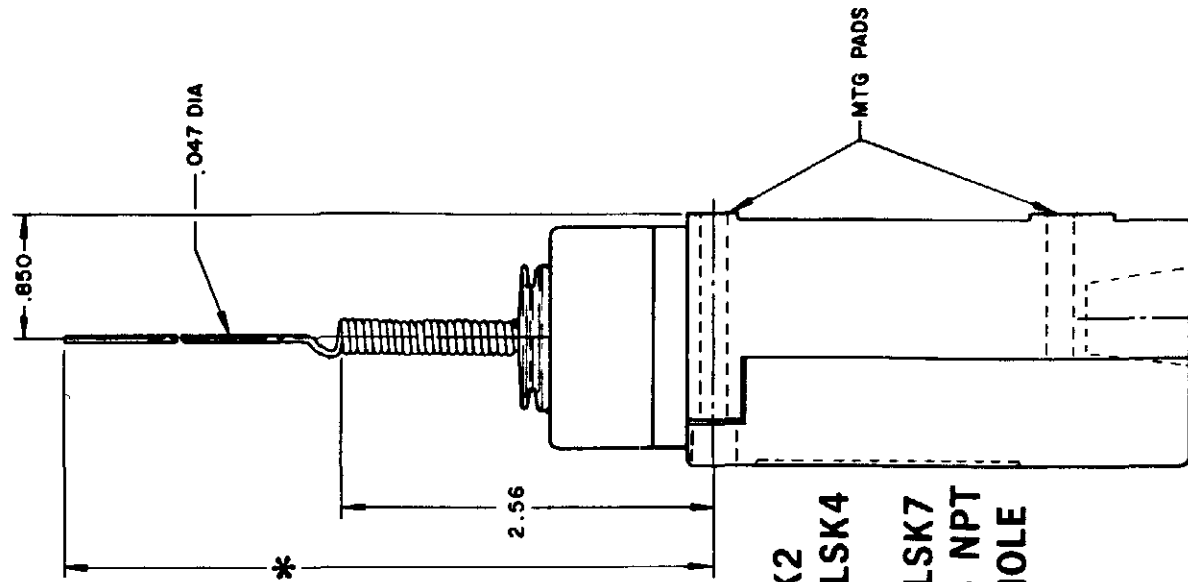

TYPE LSK2  
and LSK4  
LSK6 and LSK7  
have 1/2 - 14 NPT  
CONDUIT HOLE

\*WIRE EXTENSION REPLACEMENT ACTUATOR  
TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012  
TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013  
TYPE 8C COIL ACTUATOR 5.5 IN.-LSZ 4014  
ACTUATOR 9.5 IN. - LSZ4036

WIRE EXTENSION  
\*TYPE 8A ACTUATOR 5.5 IN.  
TYPE 8B ACTUATOR 7.5 IN.  
TYPE 8C ACTUATOR 5.5 IN.  
TYPE 8D ROD ACTUATOR 5.5 IN.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

**MICRO SWITCH**  
a Honeywell Division  
FED MFG CODE 91929

SWITCH - ENCLOSED


CATALOG LISTING  
**LSA-LSW SERIES**  
CHART 1

| PRETRAVEL (APPROX) IN. RADIUS | CAT. WHISKER |            | WOBBLE STICK |      |
|-------------------------------|--------------|------------|--------------|------|
|                               | 5/16" COIL   | 5/16" WIRE | 7/16" ROD    | WIRE |
|                               | 2            | 2          | 1.0          | 4.0  |
| OPERATING FORCE-OZ (MAX)      | 7.0          | 5.0        | 3.0          | 7.0  |
|                               |              |            | 10.0         | 5.0  |

# CONVERSION BASES


**SINGLE POLE  
(SIDE ROTARY)  
LSZ 4003**

**DOUBLE POLE  
(SIDE ROTARY)  
LSZ4004**

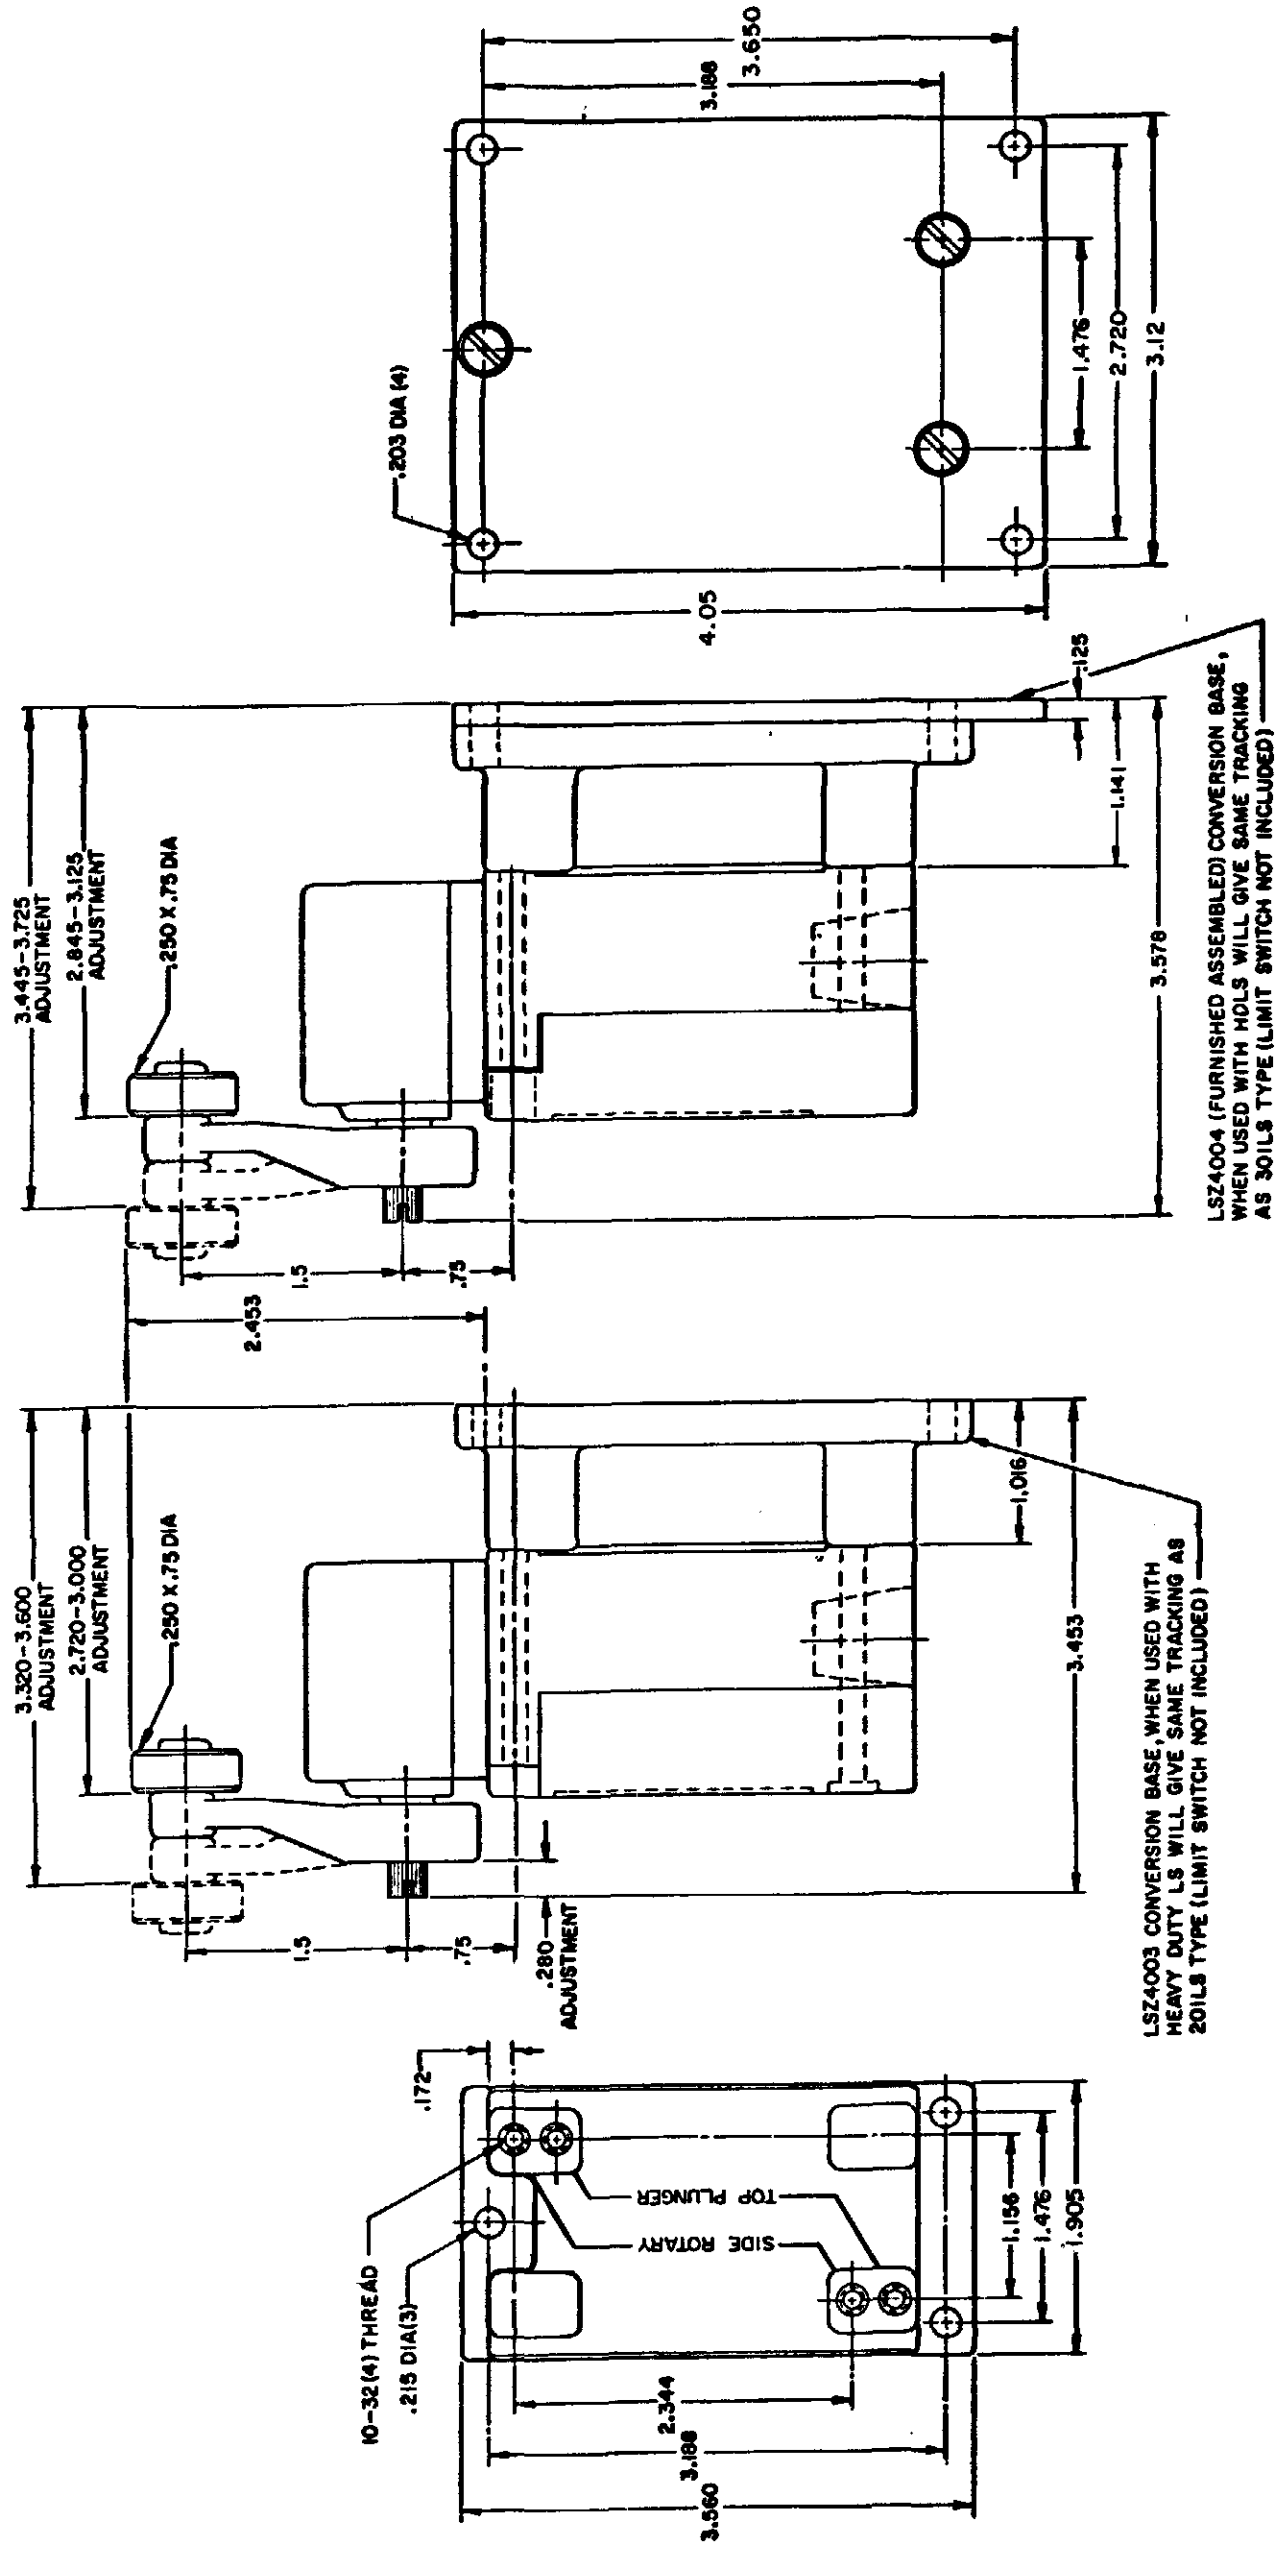

NOTE  
SEE OTHER PAGES OF LSA-LSW  
(M) DRAWING FOR DIMENSION OF LIMITS

# SINGLE POLE TOP PLUNGER

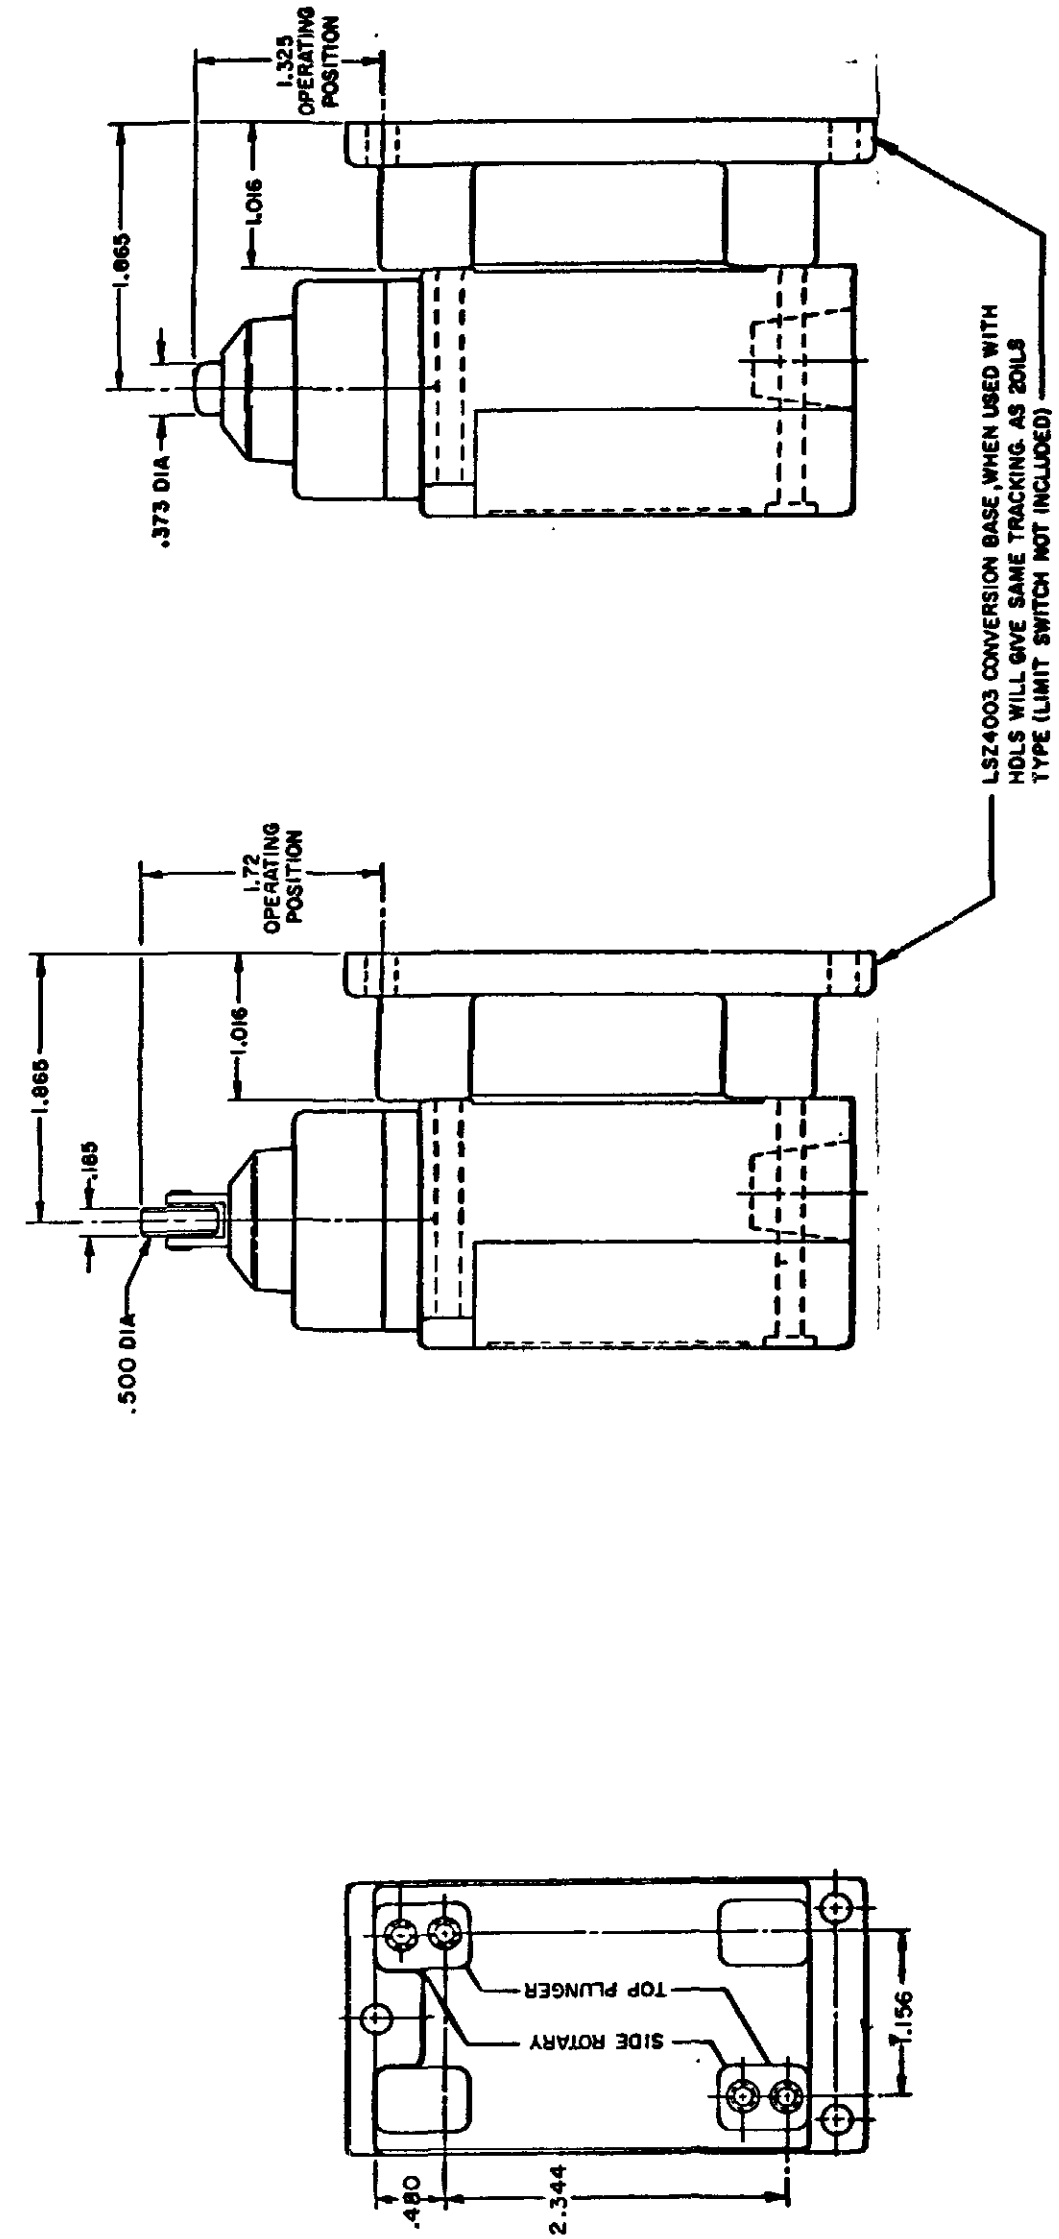

NOTE  
SEE OTHER PAGES OF LSA-LSW  
(M) DRAWING FOR DIMENSION OF  
LIMIT SWITCH

CATALOG LISTING  
M LSA-LSW SERIES CHART 1  
PAGE 10 OF 10  
ISSUE 12  
PSR 10JUL07  
CHECK 11AUG04  
AK 11JUL94  
JAF 11JAN93  
JSM 18FEB03  
K 0006871  
KR 11AUG04  
MAM 15 JUN 94  
RASTER  
DRAWN

REVISIONS  
L 0031956  
BS 10JUL07  
B 201004  
CSL 10 AUG 00  
C 201748  
CSL 17 NOV 00  
D 202198  
CSL 23 JAN 01  
E 204871  
GLW FEB 02  
F 206581  
GLH 14 OCT 02  
G 206783  
CSL 31 OCT 02  
H 207179  
GLH 14 JAN 03  
J 207474  
TSM 18FEB03  
K 0006871  
KR 11AUG04

RELEASE NO CO-78498  
REPLACES LSA-LSW SERIES

| HEAD TYPE | CELLULUBE                                     | DETERGENT | 5 STAR | ASTM #1 | ASTM #2 | ASTM #3 | ASTM #4 | HOUGHTON SAFE 271 | HOUGHTON SAFE 620 | HOUGHTON SAFE 1010 | 1055 | MINERAL OIL | PETR. OIL CRUDE | SILICON GR & OIL | SUNSAFE | BEER | STODDARD SOLV. | CHLORINATED SOLVENTS | CITRIC ACID | DI-ESTER SYN. LUBRICANTS | OZONE | HYDRAUL | PROGUARD | PETRO. BASE HYDRAULIC OIL | LARD OIL | SILICATE ESTERS |  |  |
|-----------|-----------------------------------------------|-----------|--------|---------|---------|---------|---------|-------------------|-------------------|--------------------|------|-------------|-----------------|------------------|---------|------|----------------|----------------------|-------------|--------------------------|-------|---------|----------|---------------------------|----------|-----------------|--|--|
| LSA       | 4                                             | 1         | 1      | 1       | 1       | 1       | 2       | 1                 | 4                 | 1                  | 1    | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |  |  |
| LSB       | 4                                             | 1         | 1      | 1       | 1       | 1       | 2       | 1                 | 4                 | 1                  | 1    | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |  |  |
| LSC       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                  | 2    | 1           | 2               | 1                | 2       | 4    | 1              | 4                    | 3           | 4                        | 4     | 2       | 2        | 2                         |          |                 |  |  |
| LSD       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                  | 2    | 1           | 2               | 1                | 2       | 4    | 1              | 4                    | 3           | 4                        | 4     | 2       | 2        | 2                         |          |                 |  |  |
| LSE       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                  | 2    | 1           | 2               | 1                | 2       | 4    | 1              | 4                    | 3           | 4                        | 4     | 2       | 2        | 2                         |          |                 |  |  |
| LSF       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                  | 2    | 1           | 2               | 1                | 2       | 4    | 1              | 4                    | 2           | 4                        | 4     | 2       | 2        | 2                         |          |                 |  |  |
| LSG       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                  | 2    | 1           | 2               | 1                | 2       | 4    | 1              | 4                    | 3           | 4                        | 4     | 2       | 2        | 2                         |          |                 |  |  |
| LSH       | 4                                             | 1         | 1      | 1       | 1       | 1       | 2       | 1                 | 4                 | 1                  | 1    | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |  |  |
| LSJ       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                  | 2    | 1           | 2               | 1                | 2       | 4    | 1              | 4                    | 3           | 4                        | 4     | 2       | 2        | 2                         |          |                 |  |  |
| LSK       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                  | 2    | 1           | 2               | 1                | 2       | 4    | 1              | 4                    | 3           | 4                        | 4     | 2       | 2        | 2                         |          |                 |  |  |
| LSL       | 4                                             | 1         | 1      | 1       | 1       | 1       | 2       | 1                 | 4                 | 1                  | 1    | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |  |  |
| LSM       | 4                                             | 1         | 1      | 1       | 1       | 1       | 2       | 1                 | 4                 | 1                  | 1    | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |  |  |
| LSN       | 4                                             | 1         | 1      | 1       | 1       | 1       | 2       | 1                 | 4                 | 1                  | 1    | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |  |  |
| LSP       | 4                                             | 1         | 1      | 1       | 1       | 1       | 2       | 1                 | 4                 | 1                  | 1    | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |  |  |
| LSR       | 4                                             | 1         | 1      | 1       | 1       | 1       | 2       | 1                 | 4                 | 1                  | 1    | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |  |  |
| LSV       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                  | 2    | 1           | 2               | 1                | 2       | 4    | 1              | 4                    | 3           | 4                        | 4     | 2       | 2        | 2                         |          |                 |  |  |
| LSW       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                  | 2    | 1           | 2               | 1                | 2       | 4    | 1              | 4                    | 2           | 4                        | 4     | 2       | 2        | 2                         |          |                 |  |  |
| LST       | UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY |           |        |         |         |         |         |                   |                   |                    |      |             |                 |                  |         |      |                |                      |             |                          |       |         |          |                           |          |                 |  |  |
| LSS       | UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY |           |        |         |         |         |         |                   |                   |                    |      |             |                 |                  |         |      |                |                      |             |                          |       |         |          |                           |          |                 |  |  |

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

| TEMPERATURE LIMITATIONS FOR STANDARD DEVICES |           |            |
|----------------------------------------------|-----------|------------|
| TYPES                                        | LOW LIMIT | HIGH LIMIT |
| LSA                                          | +10°F     | +250°F     |
| LSB                                          | +30°F     | +250°F     |
| LSC                                          | +10°F     | +200°F     |
| LSD                                          | +10°F     | +200°F     |
| LSE                                          | +10°F     | +200°F     |
| LSF                                          | +10°F     | +200°F     |
| LSG                                          | +30°F     | +200°F     |
| LSH                                          | +30°F     | +250°F     |
| LSJ                                          | +10°F     | +200°F     |
| LSK                                          | +10°F     | +200°F     |
| LSL                                          | +10°F     | +250°F     |
| LSM                                          | +30°F     | +250°F     |
| LSN                                          | +30°F     | +250°F     |
| LSP                                          | +10°F     | +250°F     |
| LSR                                          | +30°F     | +250°F     |
| LSV                                          | +10°F     | +200°F     |
| LSW                                          | +10°F     | +200°F     |
| LST                                          | +30 F     | +170°F     |
| LSS                                          | +30°F     | +170°F     |



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331