



CATALOG LISTING		M LSA-LSW SERIES CHART 1	
ISSUE	NO	PAGE 1	OF 10
12	12119694	PSR	12119694
12	12119694	CHECK	12119694
12	12119694	RELEASE	NO 78498
12	12119694	REPLACES	LSA-LSW SERIES

RASTER		REVIEWS	
NO	DATE	NO	DATE
A	10/03/96	B	05/04/97
B	05/04/97	C	10/04/97
C	10/04/97	D	02/17/98
D	02/17/98	E	02/19/98
E	02/19/98	F	05/06/98
F	05/06/98	G	06/07/98
G	06/07/98	H	07/17/98
H	07/17/98	I	08/11/98
I	08/11/98	J	07/24/98
J	07/24/98	K	08/08/98
K	08/08/98	L	08/11/98
L	08/11/98	M	08/11/98
M	08/11/98	N	08/11/98
N	08/11/98	O	08/11/98
O	08/11/98	P	08/11/98
P	08/11/98	Q	08/11/98
Q	08/11/98	R	08/11/98
R	08/11/98	S	08/11/98
S	08/11/98	T	08/11/98
T	08/11/98	U	08/11/98
U	08/11/98	V	08/11/98
V	08/11/98	W	08/11/98
W	08/11/98	X	08/11/98
X	08/11/98	Y	08/11/98
Y	08/11/98	Z	08/11/98
Z	08/11/98	AA	08/11/98
AA	08/11/98	AB	08/11/98
AB	08/11/98	AC	08/11/98
AC	08/11/98	AD	08/11/98
AD	08/11/98	AE	08/11/98
AE	08/11/98	AF	08/11/98
AF	08/11/98	AG	08/11/98
AG	08/11/98	AH	08/11/98
AH	08/11/98	AI	08/11/98
AI	08/11/98	AJ	08/11/98
AJ	08/11/98	AK	08/11/98
AK	08/11/98	AL	08/11/98
AL	08/11/98	AM	08/11/98
AM	08/11/98	AN	08/11/98
AN	08/11/98	AO	08/11/98
AO	08/11/98	AP	08/11/98
AP	08/11/98	AQ	08/11/98
AQ	08/11/98	AR	08/11/98
AR	08/11/98	AS	08/11/98
AS	08/11/98	AT	08/11/98
AT	08/11/98	AU	08/11/98
AU	08/11/98	AV	08/11/98
AV	08/11/98	AW	08/11/98
AW	08/11/98	AX	08/11/98
AX	08/11/98	AY	08/11/98
AY	08/11/98	AZ	08/11/98
AZ	08/11/98	BA	08/11/98
BA	08/11/98	BB	08/11/98
BB	08/11/98	BC	08/11/98
BC	08/11/98	BD	08/11/98
BD	08/11/98	BE	08/11/98
BE	08/11/98	BF	08/11/98
BF	08/11/98	BG	08/11/98
BG	08/11/98	BH	08/11/98
BH	08/11/98	BI	08/11/98
BI	08/11/98	BJ	08/11/98
BJ	08/11/98	BK	08/11/98
BK	08/11/98	BL	08/11/98
BL	08/11/98	BM	08/11/98
BM	08/11/98	BN	08/11/98
BN	08/11/98	BO	08/11/98
BO	08/11/98	BP	08/11/98
BP	08/11/98	BQ	08/11/98
BQ	08/11/98	BR	08/11/98
BR	08/11/98	BS	08/11/98
BS	08/11/98	BT	08/11/98
BT	08/11/98	BU	08/11/98
BU	08/11/98	BV	08/11/98
BV	08/11/98	BW	08/11/98
BW	08/11/98	BX	08/11/98
BX	08/11/98	BY	08/11/98
BY	08/11/98	BZ	08/11/98


SIDE ROTARY CAM TRACKING

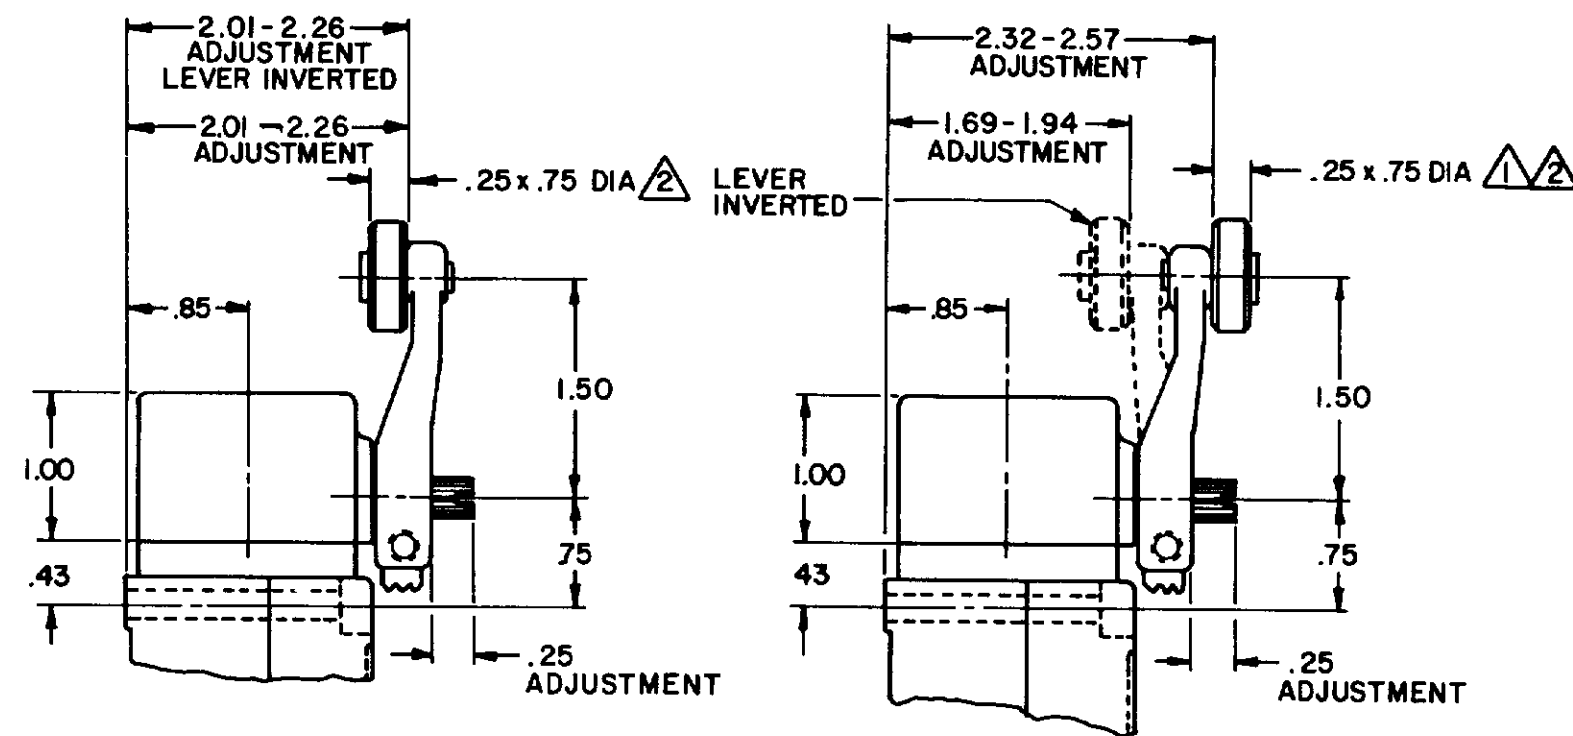


LSZ51 TYPE LEVERS

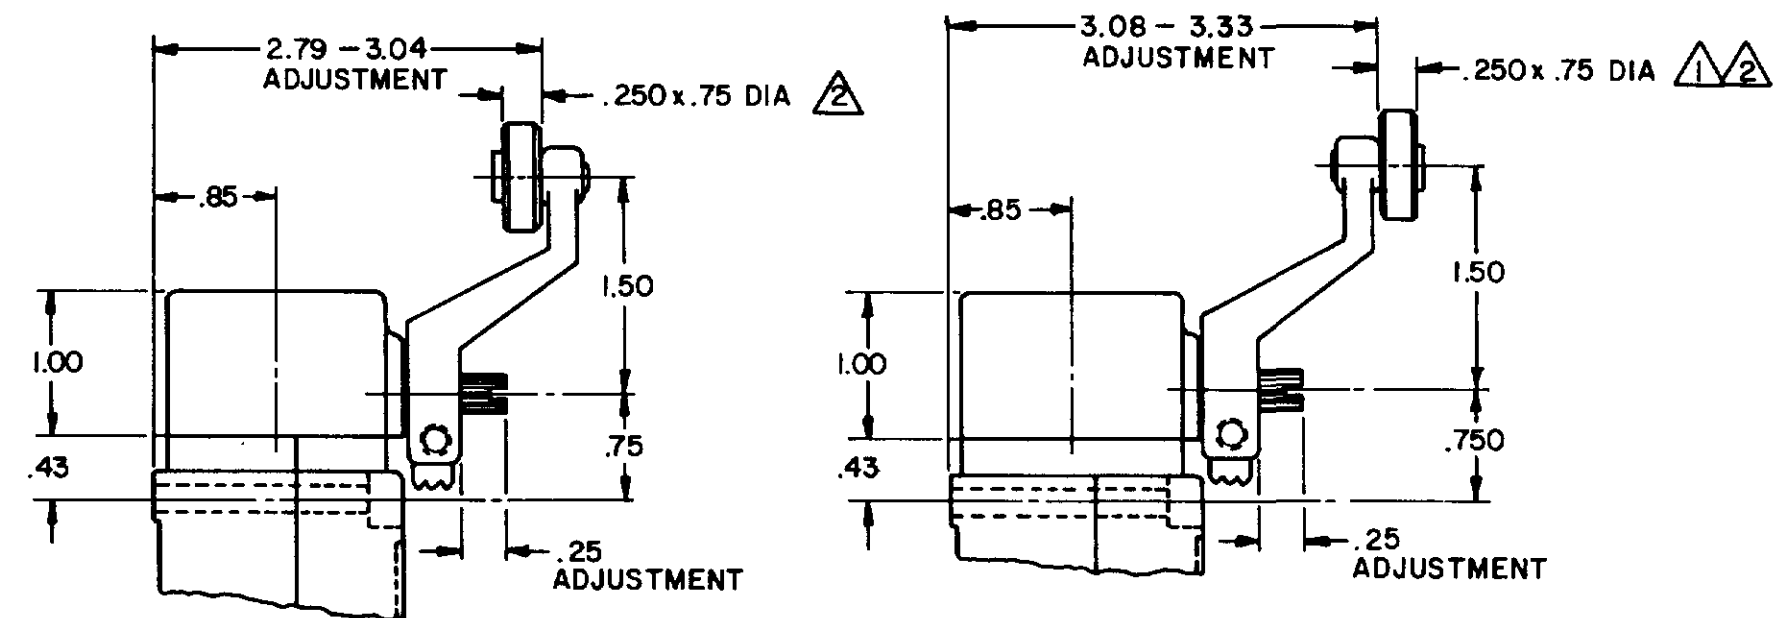


LSZ55 TYPE LEVERS

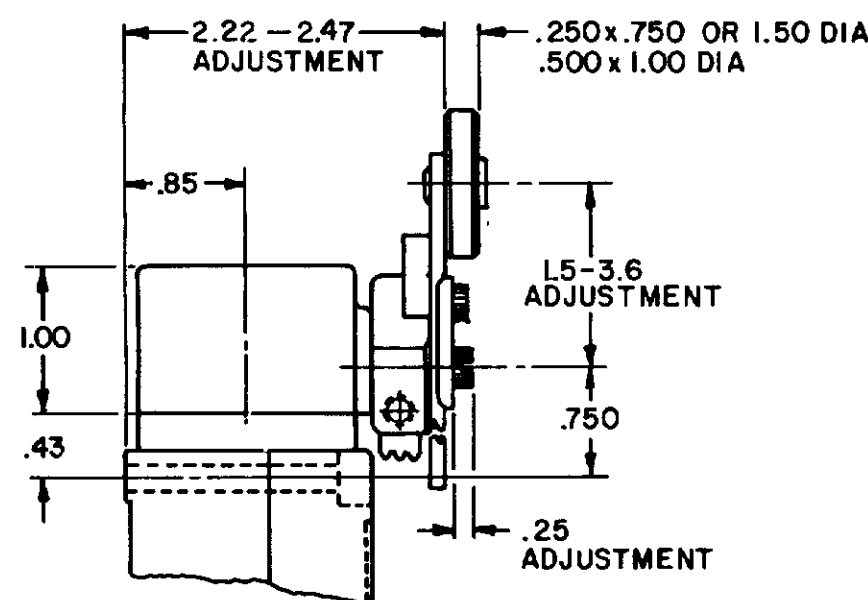


LSZ52 TYPE LEVER

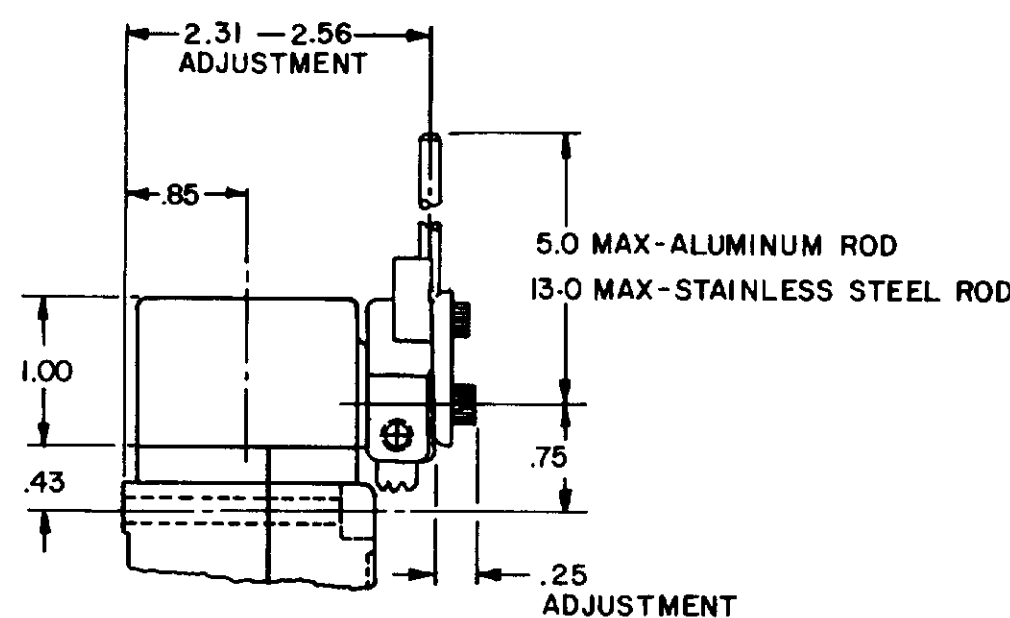

LSZ54 TYPE LEVER

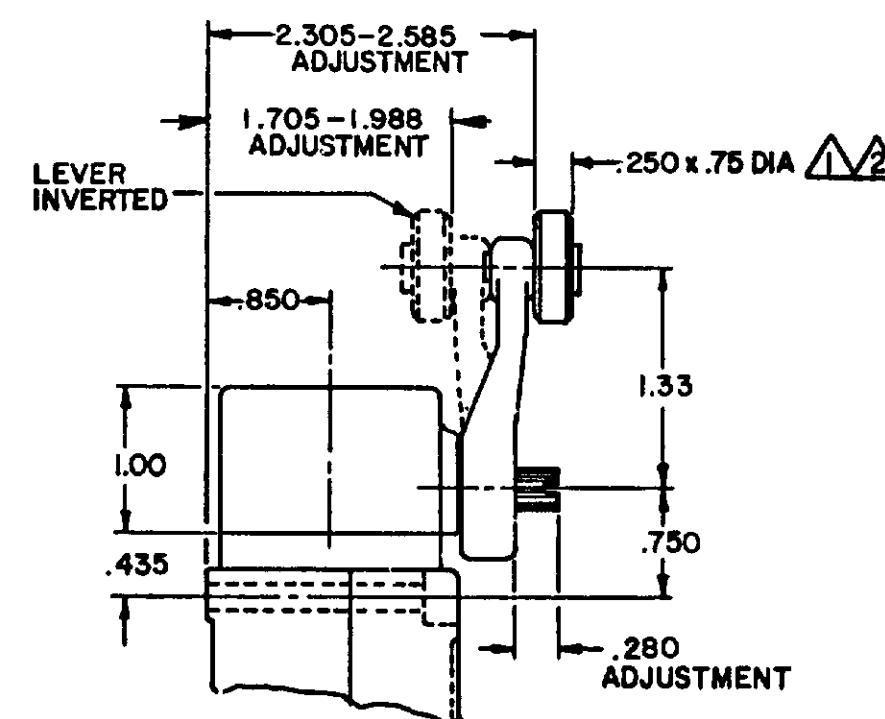

OPEN MOUNTED ROLLER

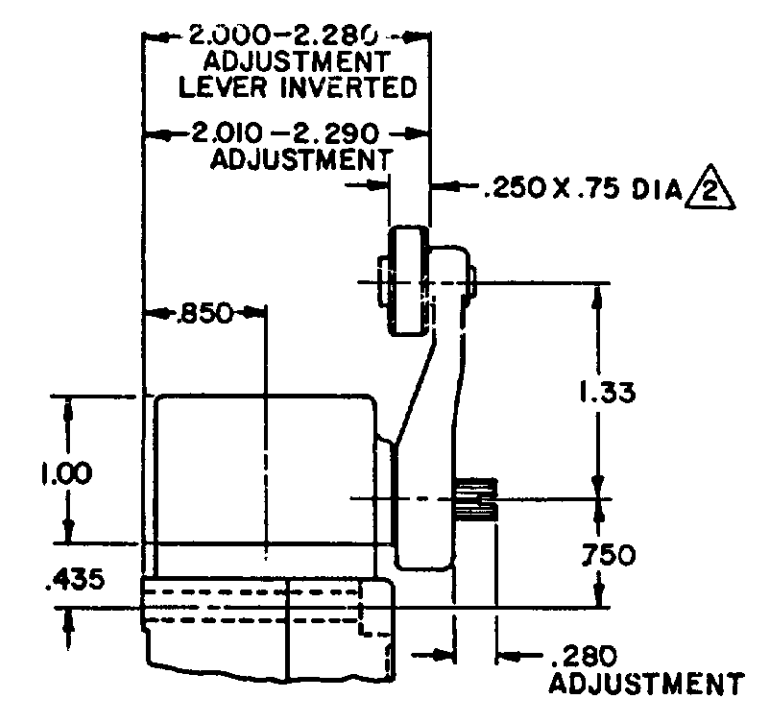

CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

NOTES

- 1 ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT LEVER CANNOT BE INVERTED
- 2 FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO "M" DRAWING
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 "M" DRAWING

CATALOG LISTING
LSA-LSW SERIES CHART 1
PAGE 2 OF 10
REPLACES LSA-LSW SERIES
10JUL07 RELEASE NO. CO-78498
PSR
CHECK
11AUG04
AK
11JUL94
JAF
15JUN94
MAM
DRAWN
MASTER


REV	DATE	BY	CHKD	DESCRIPTION
1	0031956			
2	10JUL07	BS		
3	201004	B		
4	10AUG00	C		
5	201748	C		
6	17NOV00	C		
7	202198	D		
8	202198	D		
9	204871	E		
10	206581	F		
11	206763	G		
12	207178	H		
13	207474	J		
14	207474	J		
15	207474	J		
16	207474	J		
17	207474	J		
18	207474	J		
19	207474	J		
20	207474	J		

THIRD ANGLE PROJECTION			
SCALE NONE			
DO NOT SCALE PRINT			
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
ONE PLACE	(0)	±.030	
TWO PLACES	(.00)	±.015	
THREE PLACES	(.000)	±.005	
ANGLES		±	
WEIGHT			

TOP ROTARY

SINGLE POLE

DOUBLE POLE

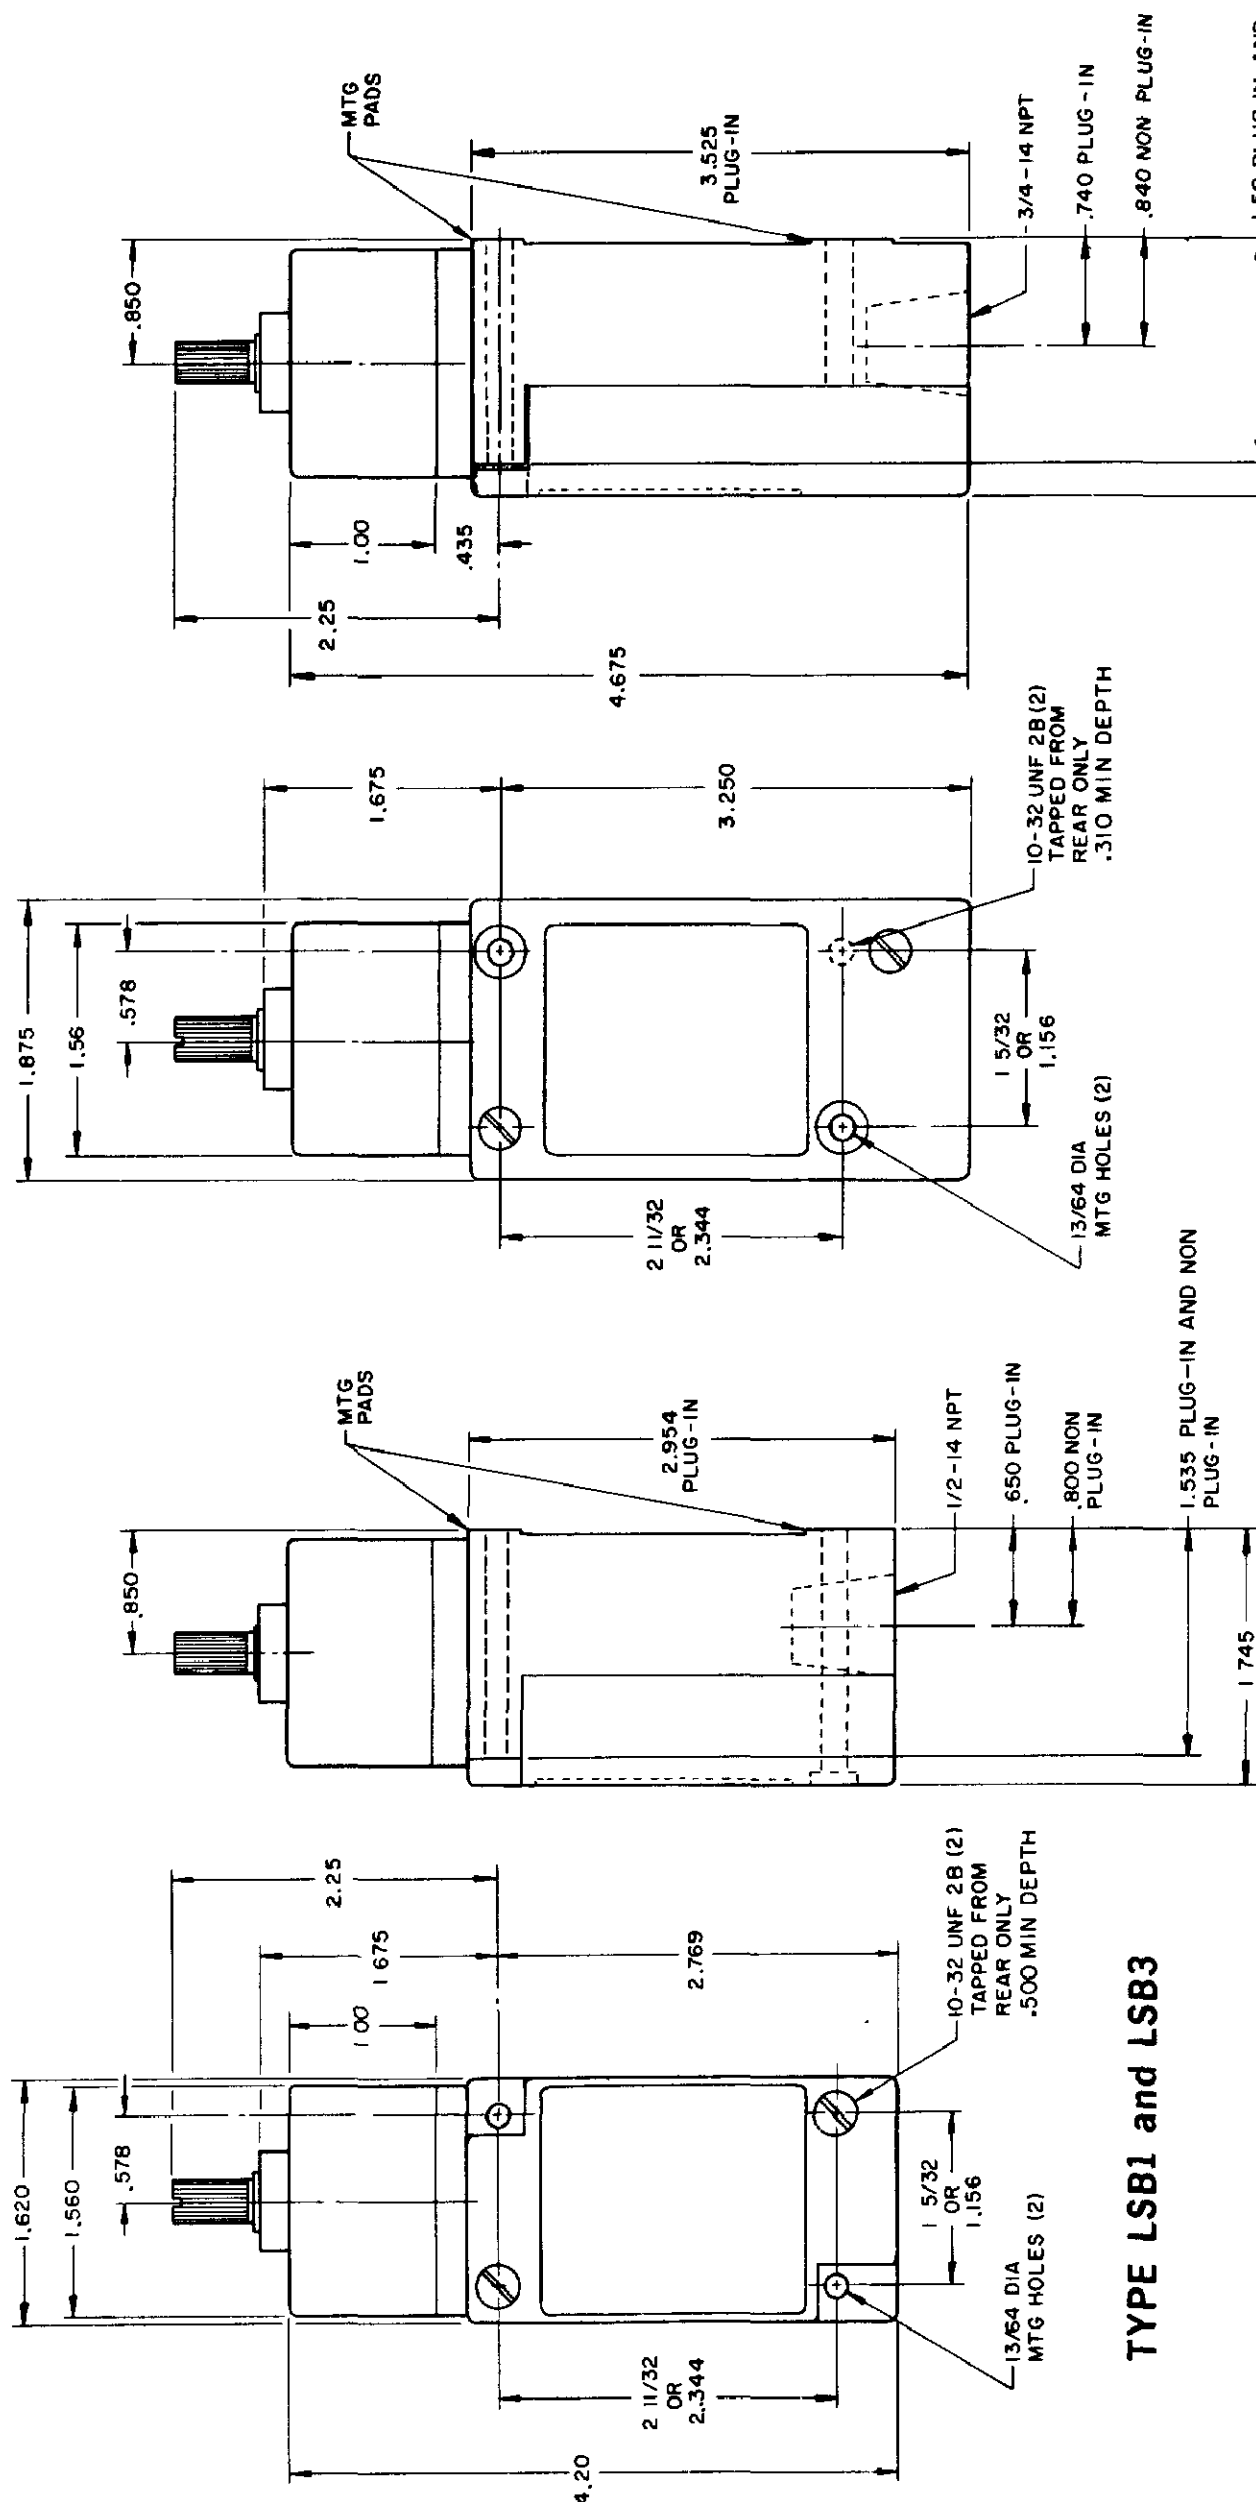

TYPE LSB1 and LSB3

TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2 - 14 NPT
CONDUIT HOLE

	SINGLE POLE	DOUBLE POLE
PRETRAVEL MAX	25°	25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

A.C. VOLTAGE	AMPS AT 35 POWER FACTOR			
	SINGLF POLE		DOUBLE POLE	
	MAKE	BREAK	MAKE	BREAK
120	60	6	30	3
240	30	3	15	1.5
480	15	1.5	7.5	75
600	12	1.2	6	6

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE		RESISTIVE
120	0.25	0.80	
240	0.15	0.40	

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT

VOLTAGE		01 AMP MIN
5 AC OR DC MIN		
600 AC	720 VA	30 WATT
240 DC		


DIRECT ACTING (ALSO RATED AT A.C. 10
AMP CONT.)

D. C. VOLTAGE	MAKE AND BREAK AMPS		RESISTIVE
	INDUCTIVE		
30	4.2		4.2
120	1.1		1.1
240	.55		.55

WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)

DOUBLE POLE


SINGLE POLE

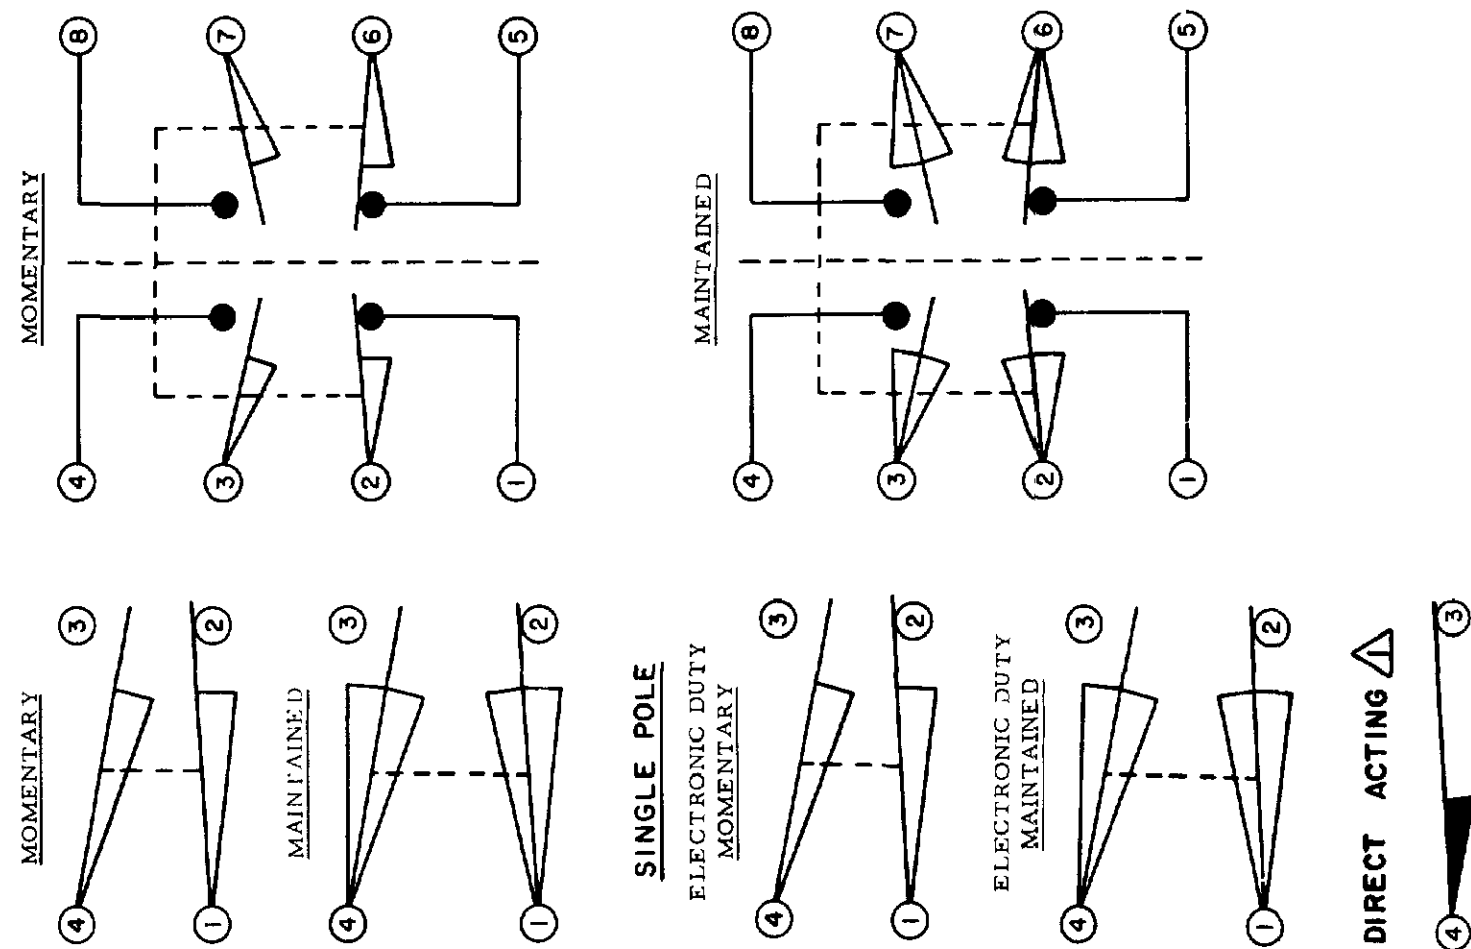

NOTES
Δ DIFFERENTIAL TRAVEL ON ALL OPERATING
CHARACTERISTICS NOT APPLICABLE

SINGLE POLE


DOUBLE POLE




TYPE LSD2 and LSD4

***(LSD6 and LSD7**

have 1/2 - 14 NPT CONDUIT HOLE)



**TYPE LSC2
and LSC4**



SINGLE POLE AND DOUBLE POLE

TYPE LSA THROUGH LSW SERIES

**TYPE LSV2
and LSV4**

PAGE 4 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING



LSA-LSW SERIES

CHART 1

SCALE NONE

NO-MON-SCALE-PRINT

SINGLE POLE DOUBLE POLE

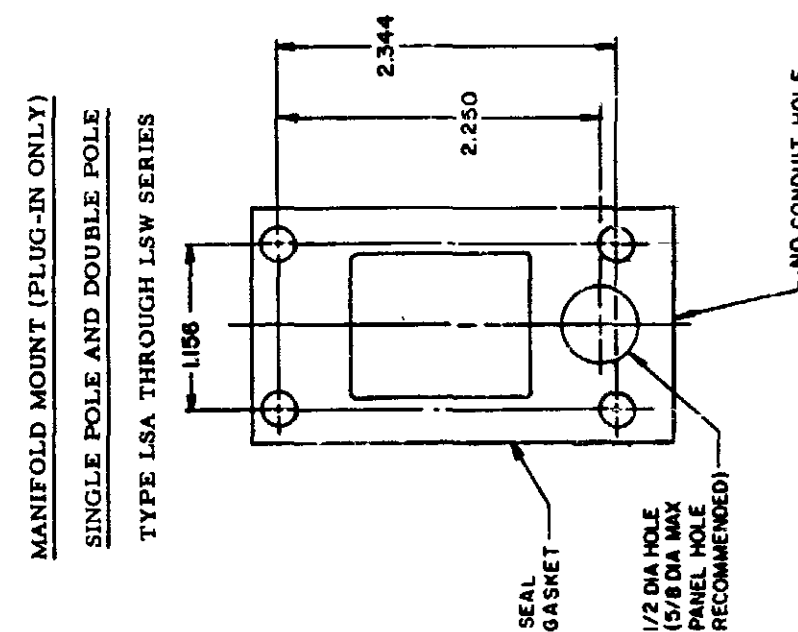

FED MFG CODE 91929


CATALOG LISTING

LSA-LSW SERIES

CHART 1

SCALE NONE

DO NOT SCALE PRINT

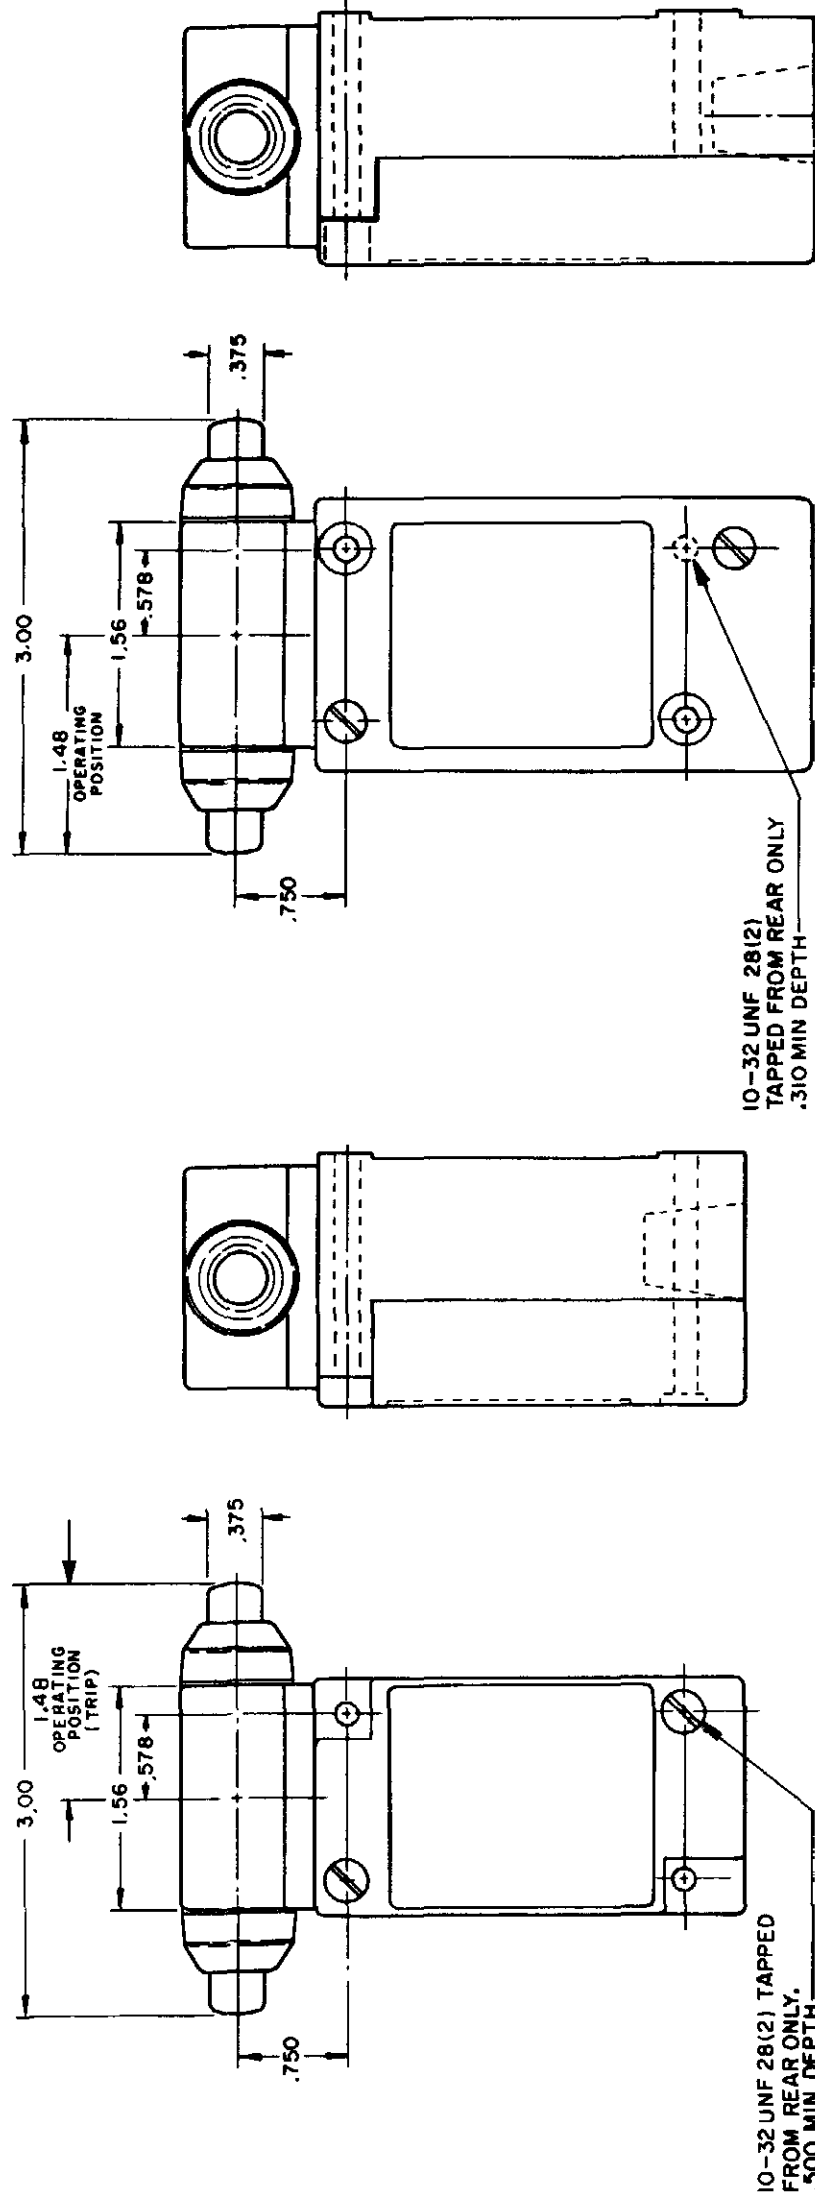

TYPE LSG1 and LSG3

TYPE LSG2 and LSG4

INITIAL POSITION —
(FREE POSITION) } PRETRAVEL
OPERATING POINT } DIFFERENTIAL TRAVEL
FULL TRAVEL — } OVERTRAVEL

TOP PLUNGER TYPES

OPERATING POINT GIVEN
IN RELATION TO TOP
MOUNTING HOLE

CHARACTERISTICS	LSC PLUNGER	LSD ROLLER PLUNGER	LSV ADJ PLUNGER	SEQUENCE BASIC	
				LSC	LSV
PRETRAVEL (MAX)	.070	.070	.070	1ST STEP .070	
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE DOUBLE POLE .015	SINGLE POLE DOUBLE POLE .020	SINGLE POLE DOUBLE POLE .015	2ND STEP .016 MIN ADD'L	
OVERTRAVEL (MIN)	.190	.190	.190	.015 EACH STEP	
OPERATING FORCE (MAX)	4 LBS	4 LBS	4 LBS	.170	
OPERATING POINT	1.805 ± .030	2.200 ± .040	2.085 MIN	1ST STEP	
FULL OVERTRAVEL FORCE (MAX)	7 LBS	7 LBS	7 LBS	1.815±.030 2.210±.040 2.095 MIN / 2.345 MAX	

SIDE PLUNGER TYPES


OPERATING POINT GIVEN IN
RELATION TO CENTER OF HEAD

CHARACTERISTICS	LSE PLUNGER	LSF ROLLER PLUNGER	LSW ADJ PLUNGER	SEQUENCE BASIC	
				LSE	LSW
PRETRAVEL (MAX)	.100	.100	.170	1ST STEP .100	
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.090	2ND STEP .020 MIN ADD'L	
OVERTRAVEL (MIN)	.190	.190	.080	.025 EACH STEP	
OPERATING FORCE (MAX)	6 LBS	6 LBS	10 LBS	.170	
OPERATING POINT	1.300 ± .030	1.735 ± .040	ADJUSTABLE FROM 1.615 MIN 1.865 MAX	1ST STEP	
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	10 LBS	1.310±.030 1.745±.040 1.625 MIN / 1.875 MAX	

WOBBLE STICK

SINGLE POLE

DOUBLE POLE

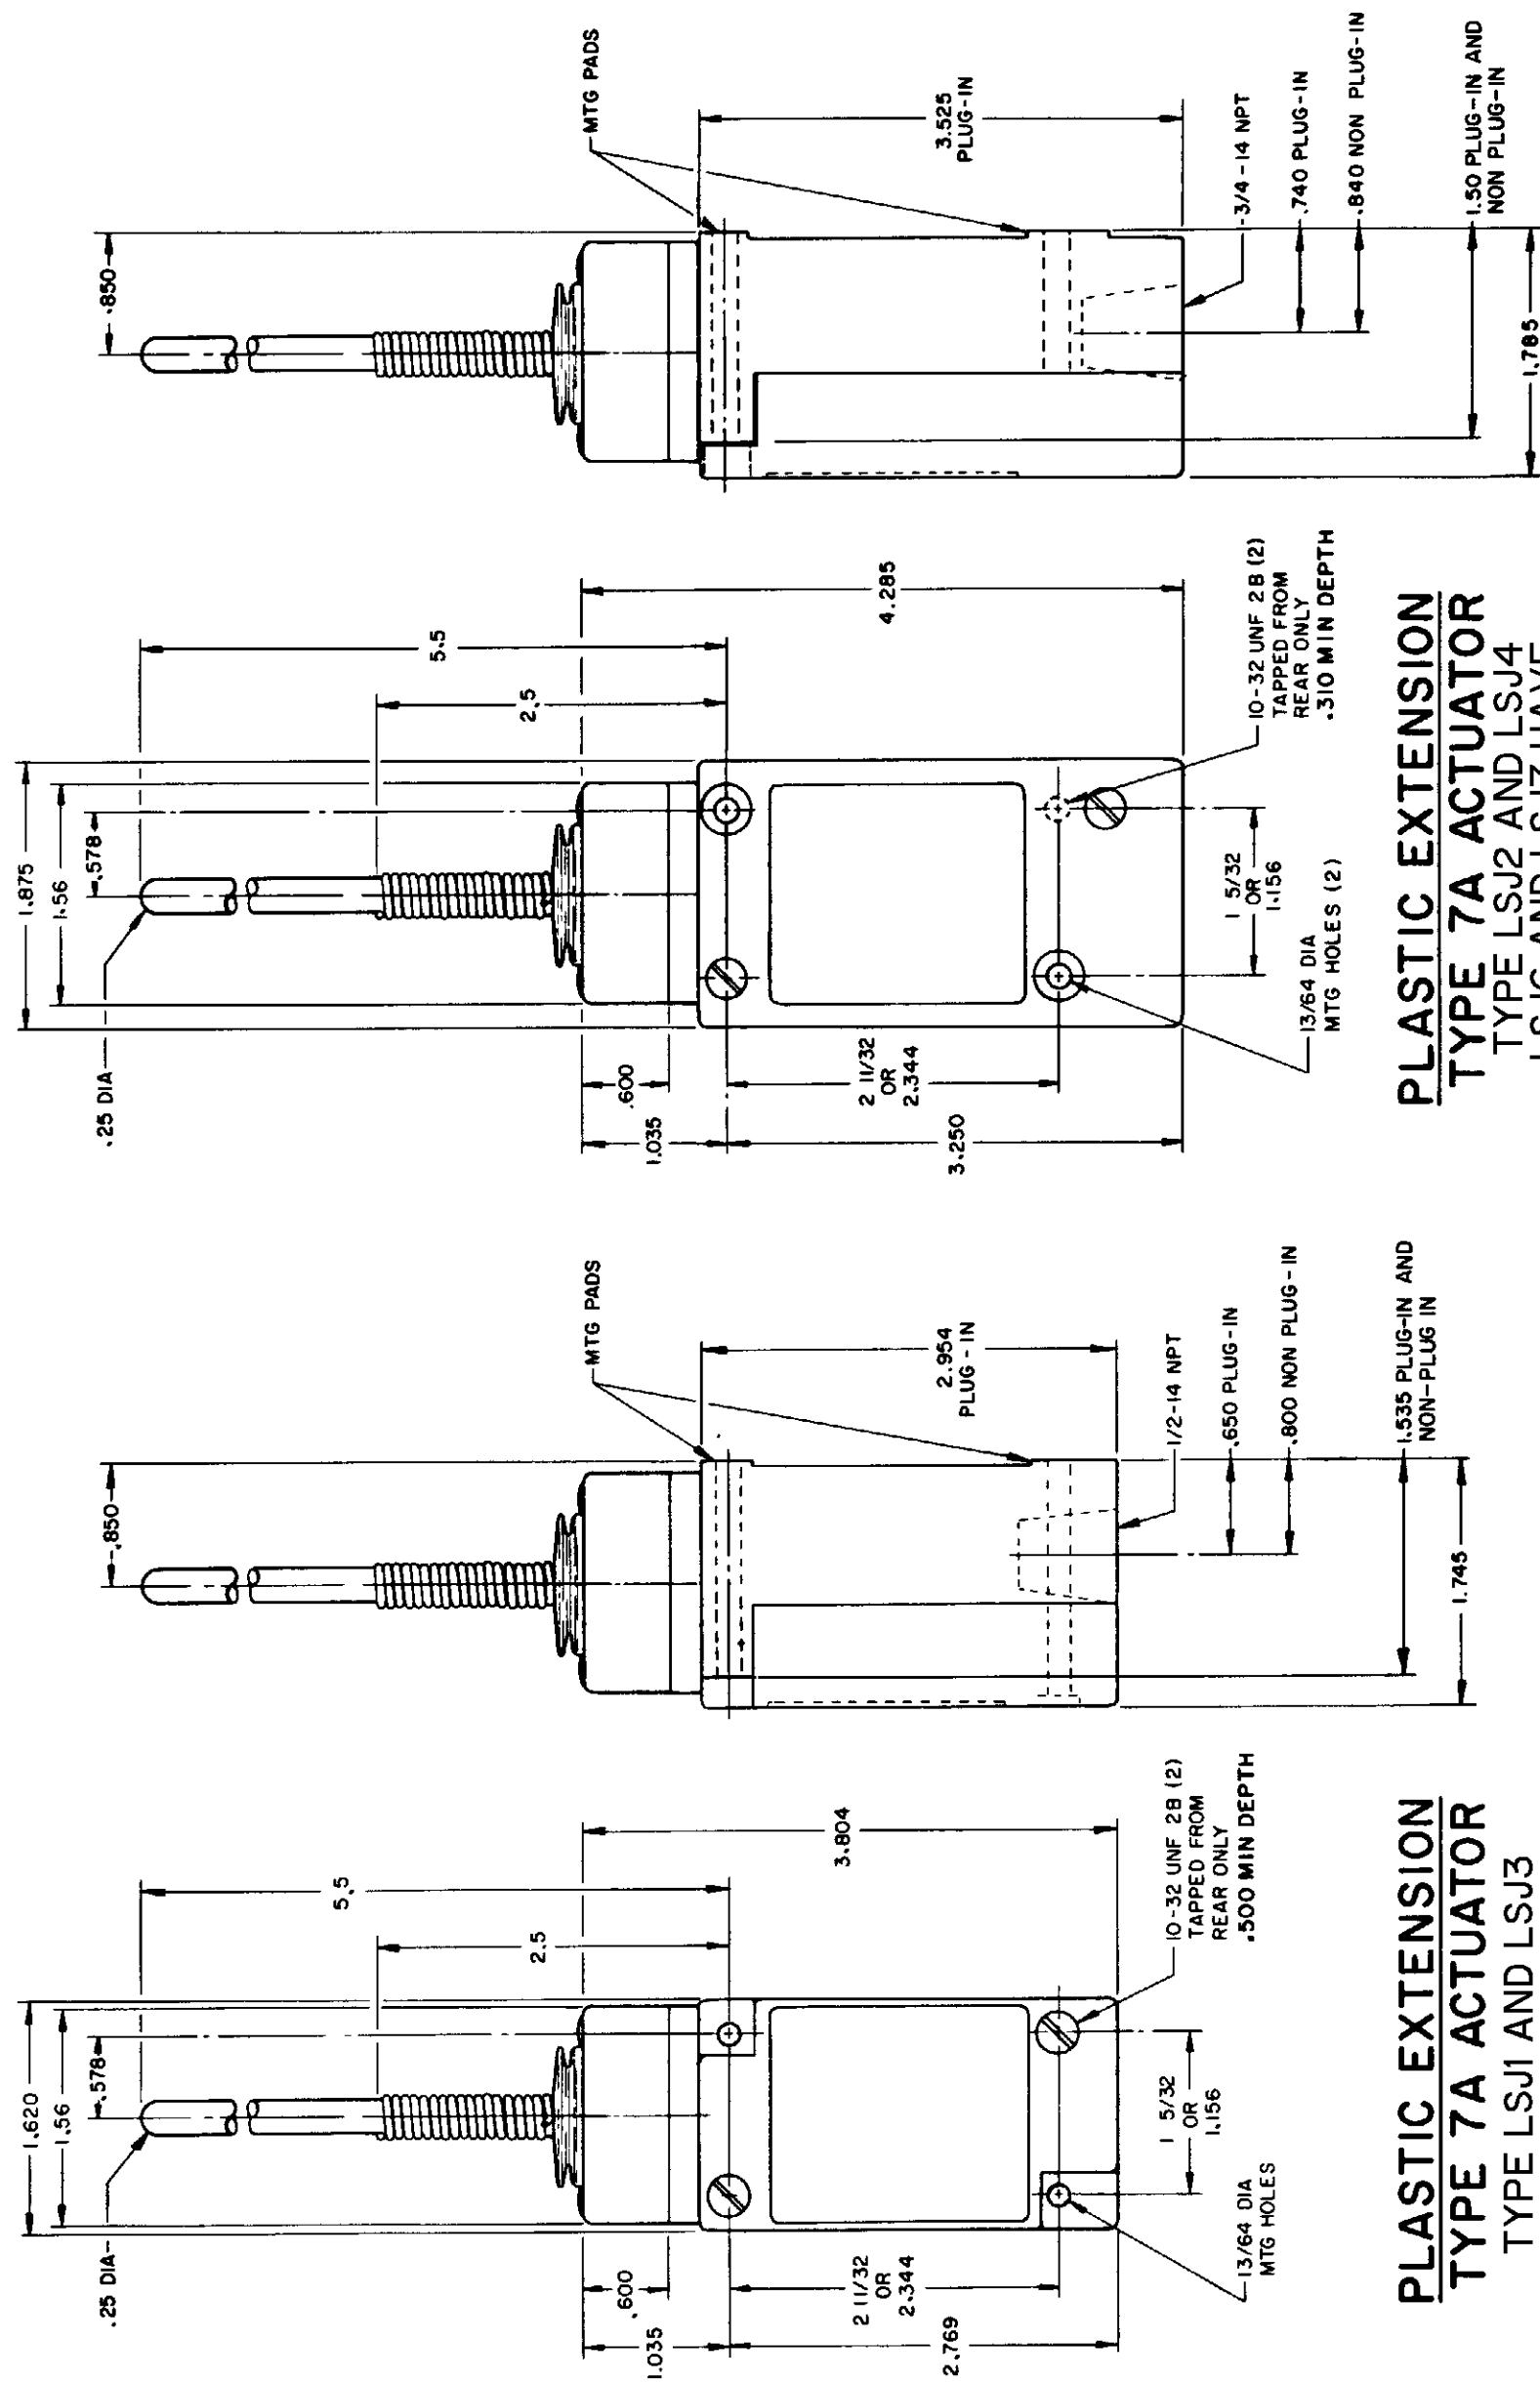

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ1 AND LSJ3

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE

MICRO SWITCH
Honeywell Division

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

SWITCH - ENCLOSED


LSA-LSW SERIES

PAGE 7 OF 10


SCALE NONE

DO NOT SCALE PRINT


REPLACEMENT ACTUATOR
LSZ-4009

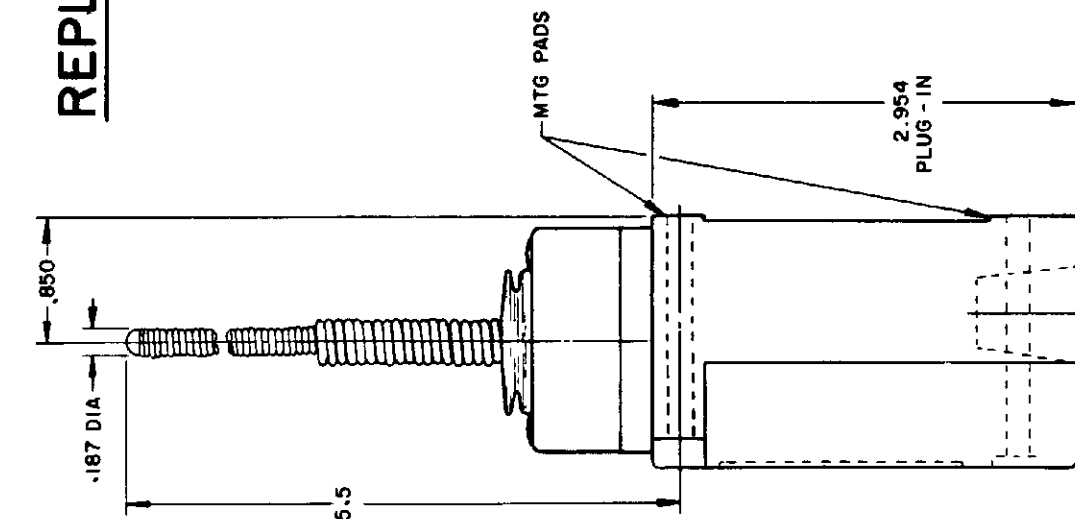

CABLE EXTENSION TYPE 7N ACTUATOR

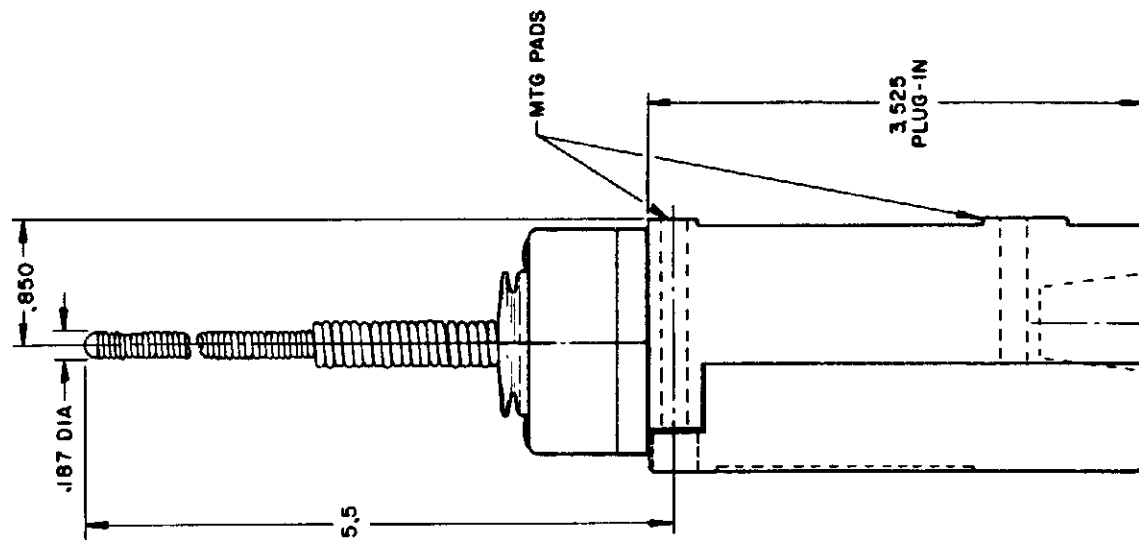

CABLE EXTENSION
TYPE 7 N ACTUATOR

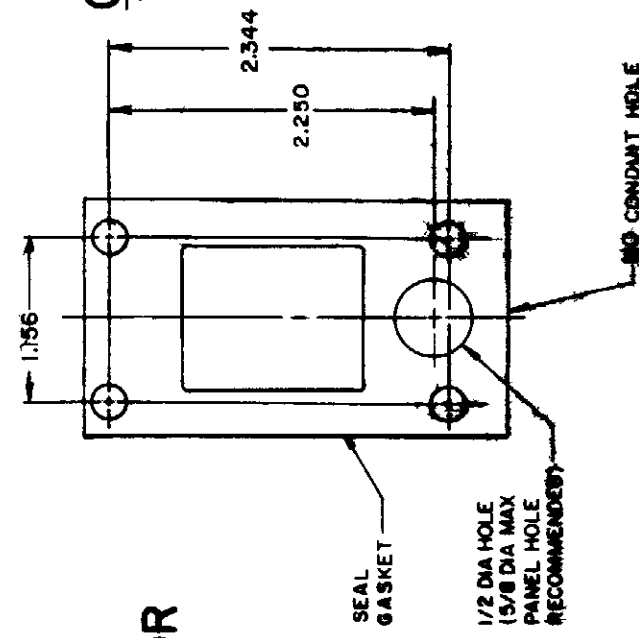


REPLACEMENT ACTUATOR
LSZ-40II

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8
24 LED VOLTAGE TYPE LSJ9

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

**.180 X 400 LENS
(FLUSH WITH
HOUSING)**

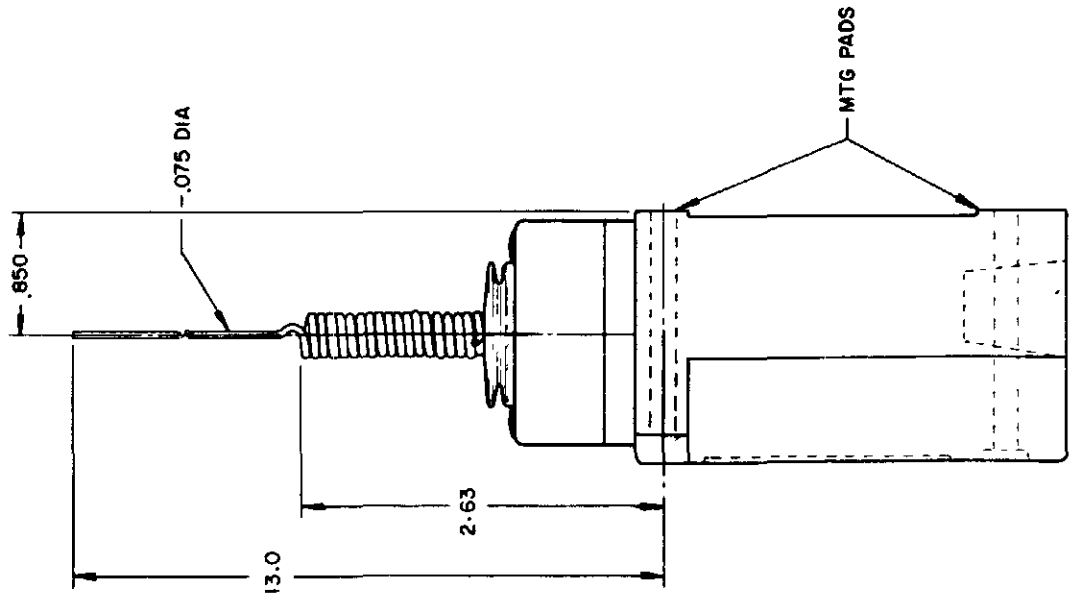


WIRE EXTENSION TYPE 7M ACTUATOR


TYPE LSJ1 and LSJ3

REPLACEMENT ACTUATOR - LSZ 4010

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

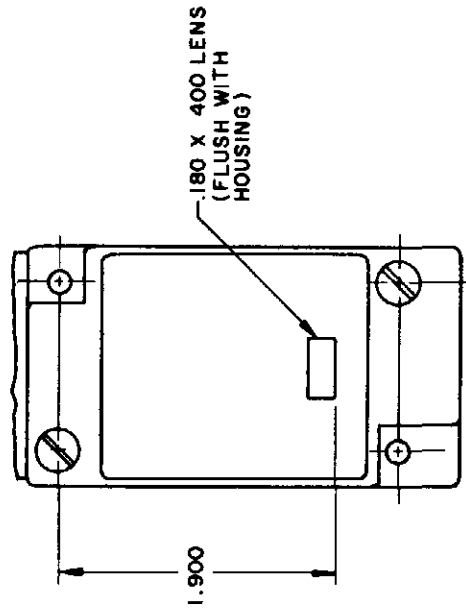

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8

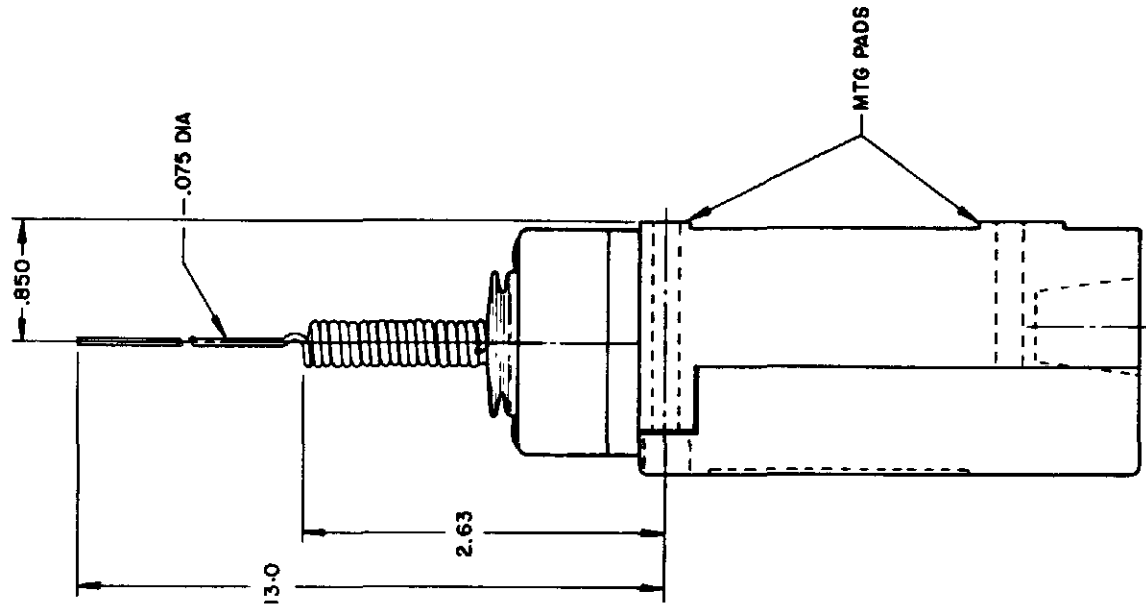


WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ2 and LSJ4

LSJ6 and LSJ7 have 1/2 - 14 NPT CONDUIT HOLE


CAT WHISKER

SINGLE POLE

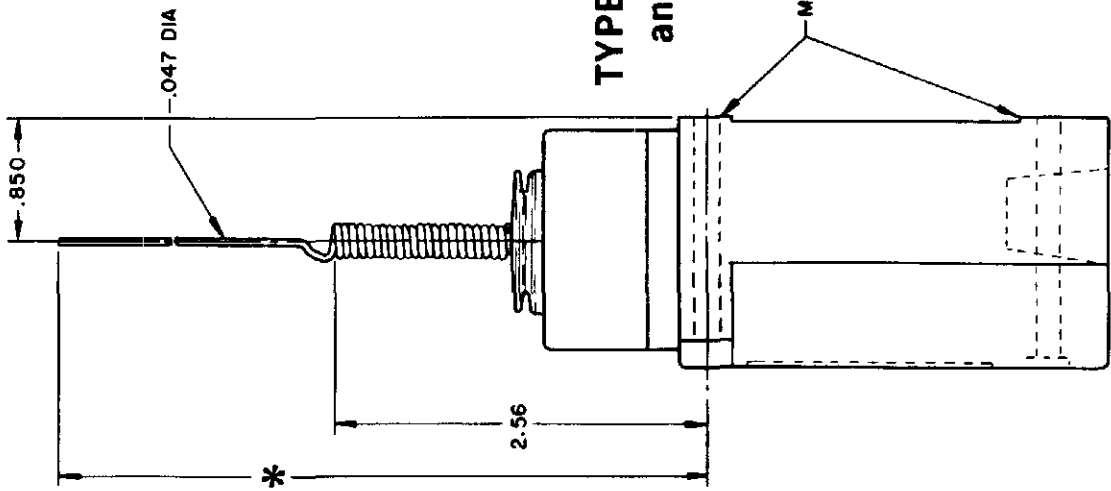


TYPE LSK1
and LSK3

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

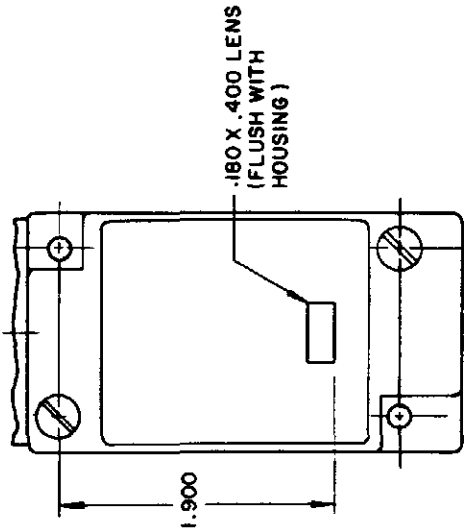

120 LAMP VOLTAGE
TYPE LSK5 - CAT WHISKER TYPE LSB5 - TOP ROTARY
240 LAMP VOLTAGE
TYPE LSK8 - CAT WHISKER TYPE LSB8 - TOP ROTARY

DOUBLE POLE

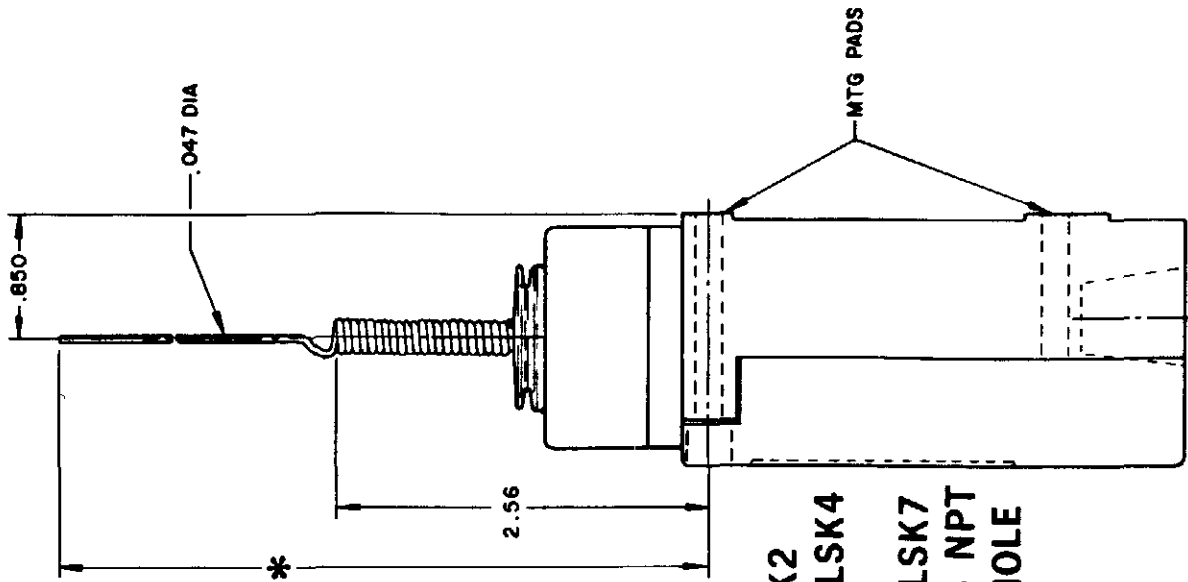

TYPE LSK2
and LSK4
LSK6 and LSK7
have 1/2 - 14 NPT
CONDUIT HOLE

* WIRE EXTENSION REPLACEMENT ACTUATOR

TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012

TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013

TYPE 8C COIL ACTUATOR 5.5 IN.-LSZ 4014
ACTUATOR 9.5 IN. - LSZ 4036

WIRE EXTENSION

* TYPE 8A ACTUATOR 5.5 IN.

TYPE 8B ACTUATOR 7.5 IN.

TYPE 8C ACTUATOR 5.5 IN.

TYPE 8D ROD ACTUATOR 5.5 IN.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1


SCALE NONE
DO NOT SCALE PRINT

PRETRAVEL (APPROX) IN. RADIUS	CAT. WHISKER		WOBBLE STICK	
	5/16" COIL	5/16" WIRE	7/16" WIRE	7/16" WIRE
	2	2	4.5	4.0
OPERATING FORCE-OZ (MAX)	7.0		10.0	5.0
	5.0		3.0	7.0

CONVERSION BASES


**SINGLE POLE
(SIDE ROTARY)
LSZ 4003**

**DOUBLE POLE
(SIDE ROTARY)
LSZ4004**

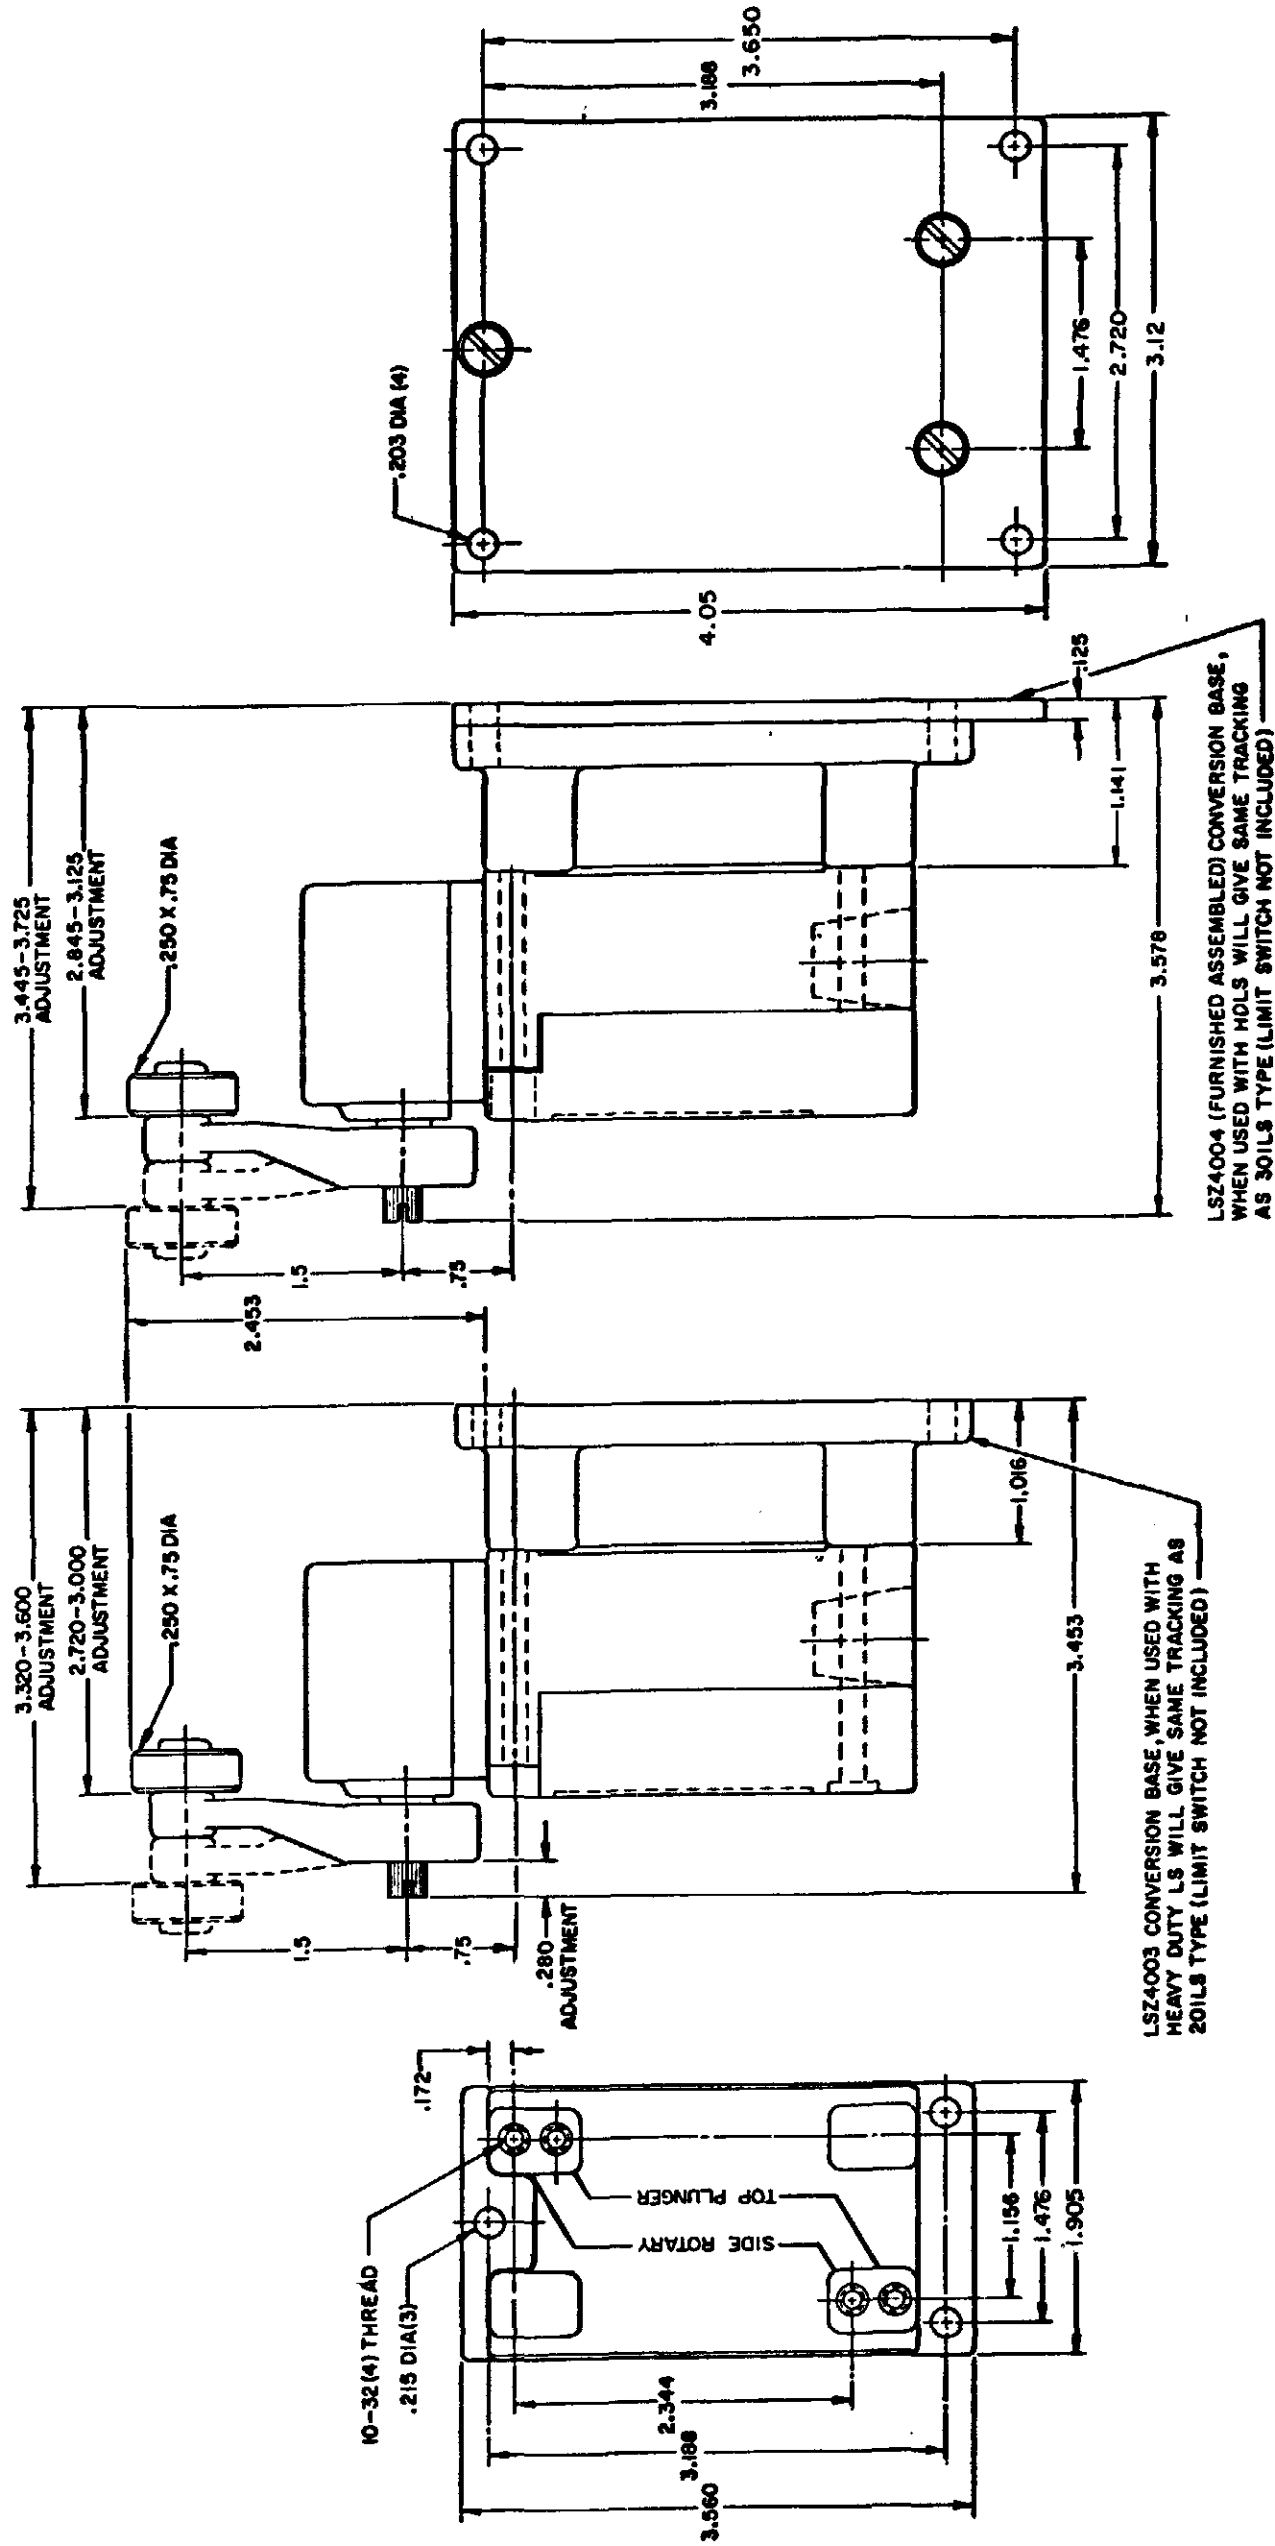

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE TOP PLUNGER

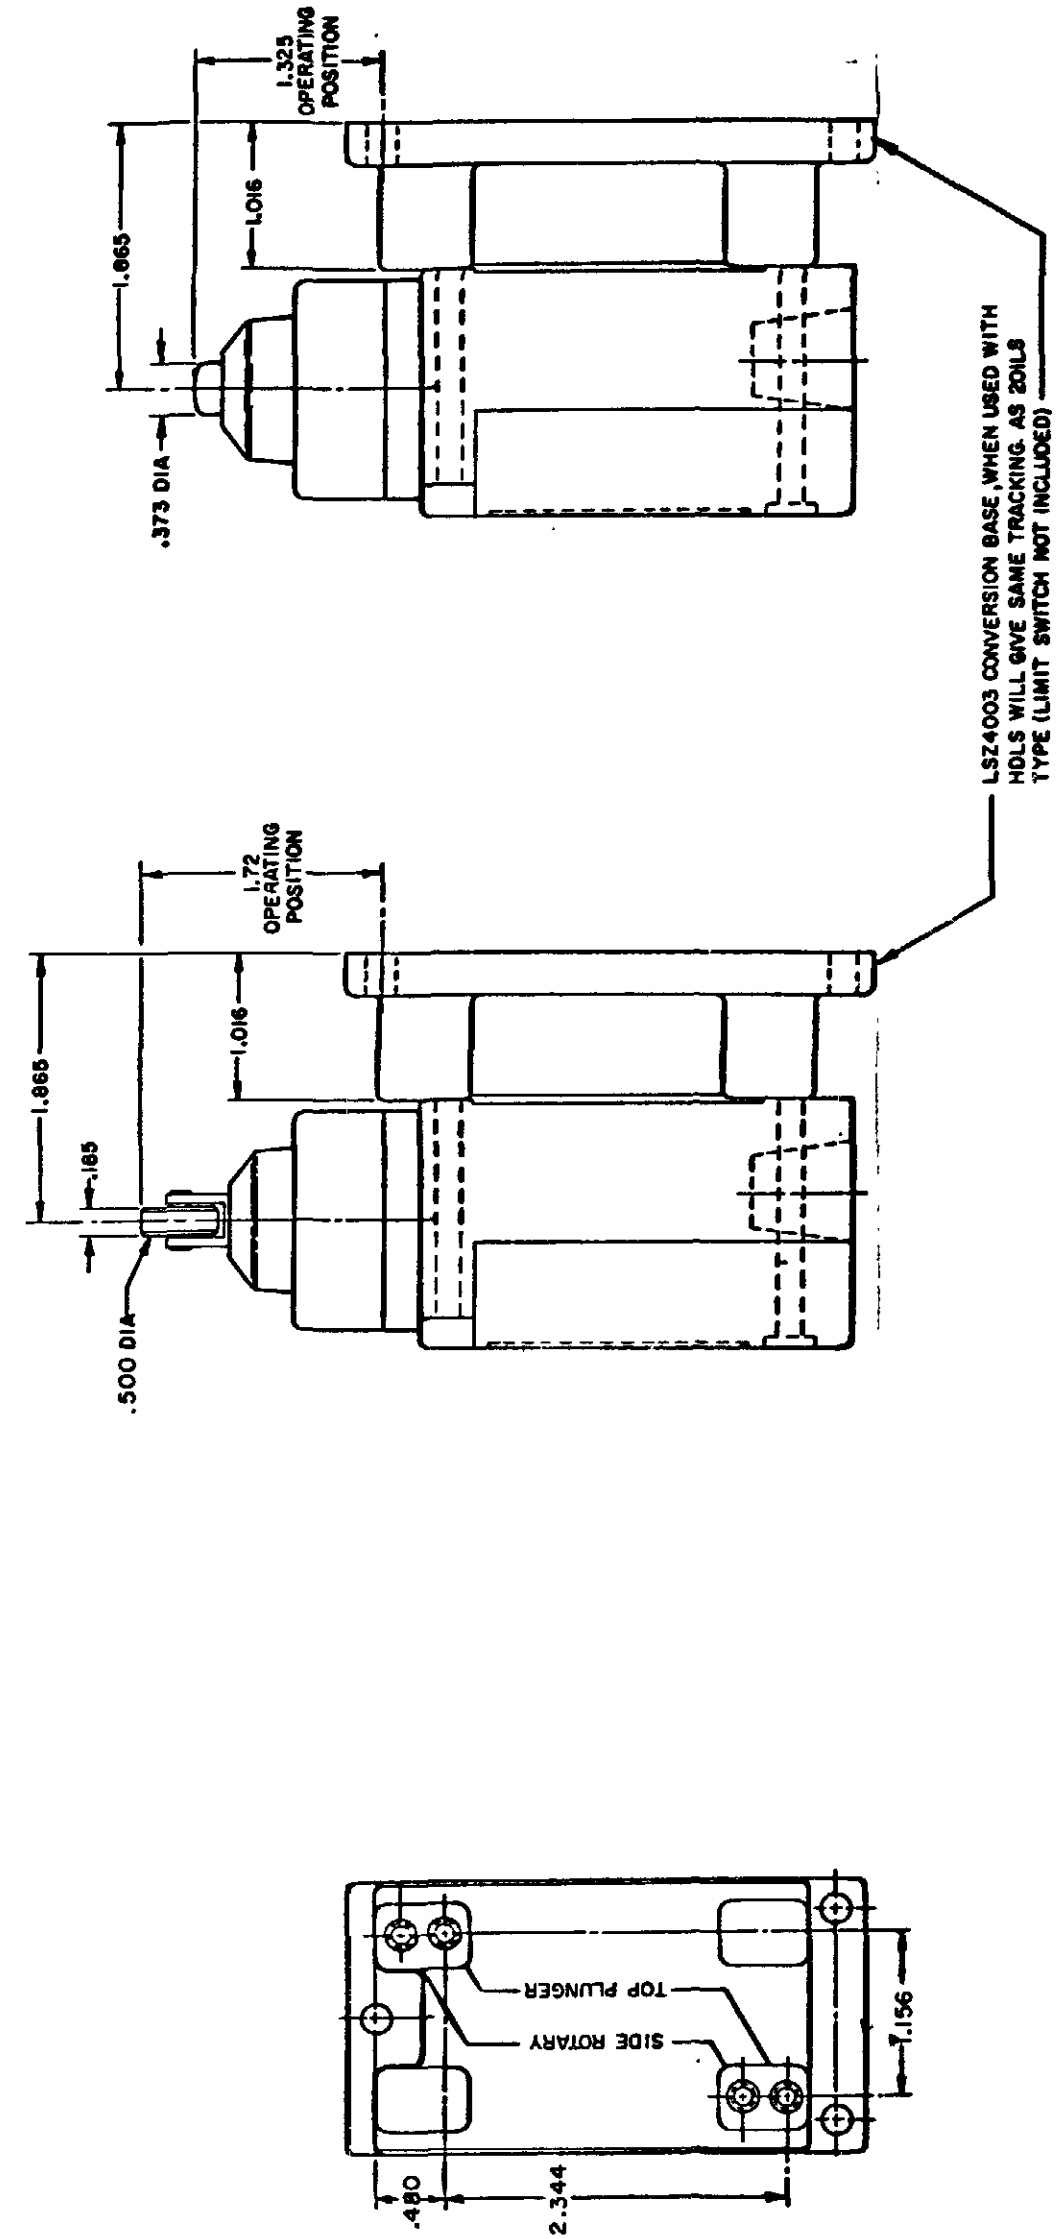

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF
LIMIT SWITCH

HEAD TYPE	CELLULOSE	DETERGENT	5 STAR	ASTM #1	ASTM #2	ASTM #3	ASTM #4	HOUGHTON SAFE 271	HOUGHTON SAFE 820	HOUGHTON SAFE 1010	MINERAL OIL	PETROL OIL	SILICON CRUDE	SUNSAFE	BEER	STODDARD SOLV.	CHLORINATED SOLVENTS	CITRIC ACID	DI-ESTER SYN. LUBRICANTS	OZONE	HYDRAUL	PROGUARD	PETROL BASE HYDRAULIC OIL	LARD OIL	SILICATE ESTERS
LSA	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSB	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSC	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSD	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSE	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSF	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	2	4	4	2	2	2		
LSG	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSH	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSJ	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSK	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSL	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSM	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSN	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSP	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSR	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSV	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSW	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	2	4	4	2	2	2		
LST	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																								
LSS	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																								

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

LSA-LSW SERIES
CHART 1



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331