



CATALOG LISTING		ISSUE		12		12		PAGE 1 OF 10		M		LSA-LSW SERIES CHART 1	
RASTER		DRAWN		REVISONS		CHECK		PSR		RELEASE NO		CO-78498 REPLACES LSA-LSW SERIES	
				L 0031966		11/01/07		11/01/07		10/01/07			
				B 201004		10/01/07		10/01/07		10/01/07			
				40 201004		10/01/07		10/01/07		10/01/07			
				C 201748		10/01/07		10/01/07		10/01/07			
				47 201004		10/01/07		10/01/07		10/01/07			
				D 202198		10/01/07		10/01/07		10/01/07			
				E 202198		10/01/07		10/01/07		10/01/07			
				F 202198		10/01/07		10/01/07		10/01/07			
				G 202198		10/01/07		10/01/07		10/01/07			
				H 202198		10/01/07		10/01/07		10/01/07			
				I 202198		10/01/07		10/01/07		10/01/07			
				J 202198		10/01/07		10/01/07		10/01/07			
				K 00006871		10/01/07		10/01/07		10/01/07			
				L 00006871		10/01/07		10/01/07		10/01/07			
				M 00006871		10/01/07		10/01/07		10/01/07			
				N 00006871		10/01/07		10/01/07		10/01/07			
				O 00006871		10/01/07		10/01/07		10/01/07			
				P 00006871		10/01/07		10/01/07		10/01/07			
				Q 00006871		10/01/07		10/01/07		10/01/07			
				R 00006871		10/01/07		10/01/07		10/01/07			
				S 00006871		10/01/07		10/01/07		10/01/07			
				T 00006871		10/01/07		10/01/07		10/01/07			
				U 00006871		10/01/07		10/01/07		10/01/07			
				V 00006871		10/01/07		10/01/07		10/01/07			
				W 00006871		10/01/07		10/01/07		10/01/07			
				X 00006871		10/01/07		10/01/07		10/01/07			
				Y 00006871		10/01/07		10/01/07		10/01/07			
				Z 00006871		10/01/07		10/01/07		10/01/07			

DOUBLE POLE

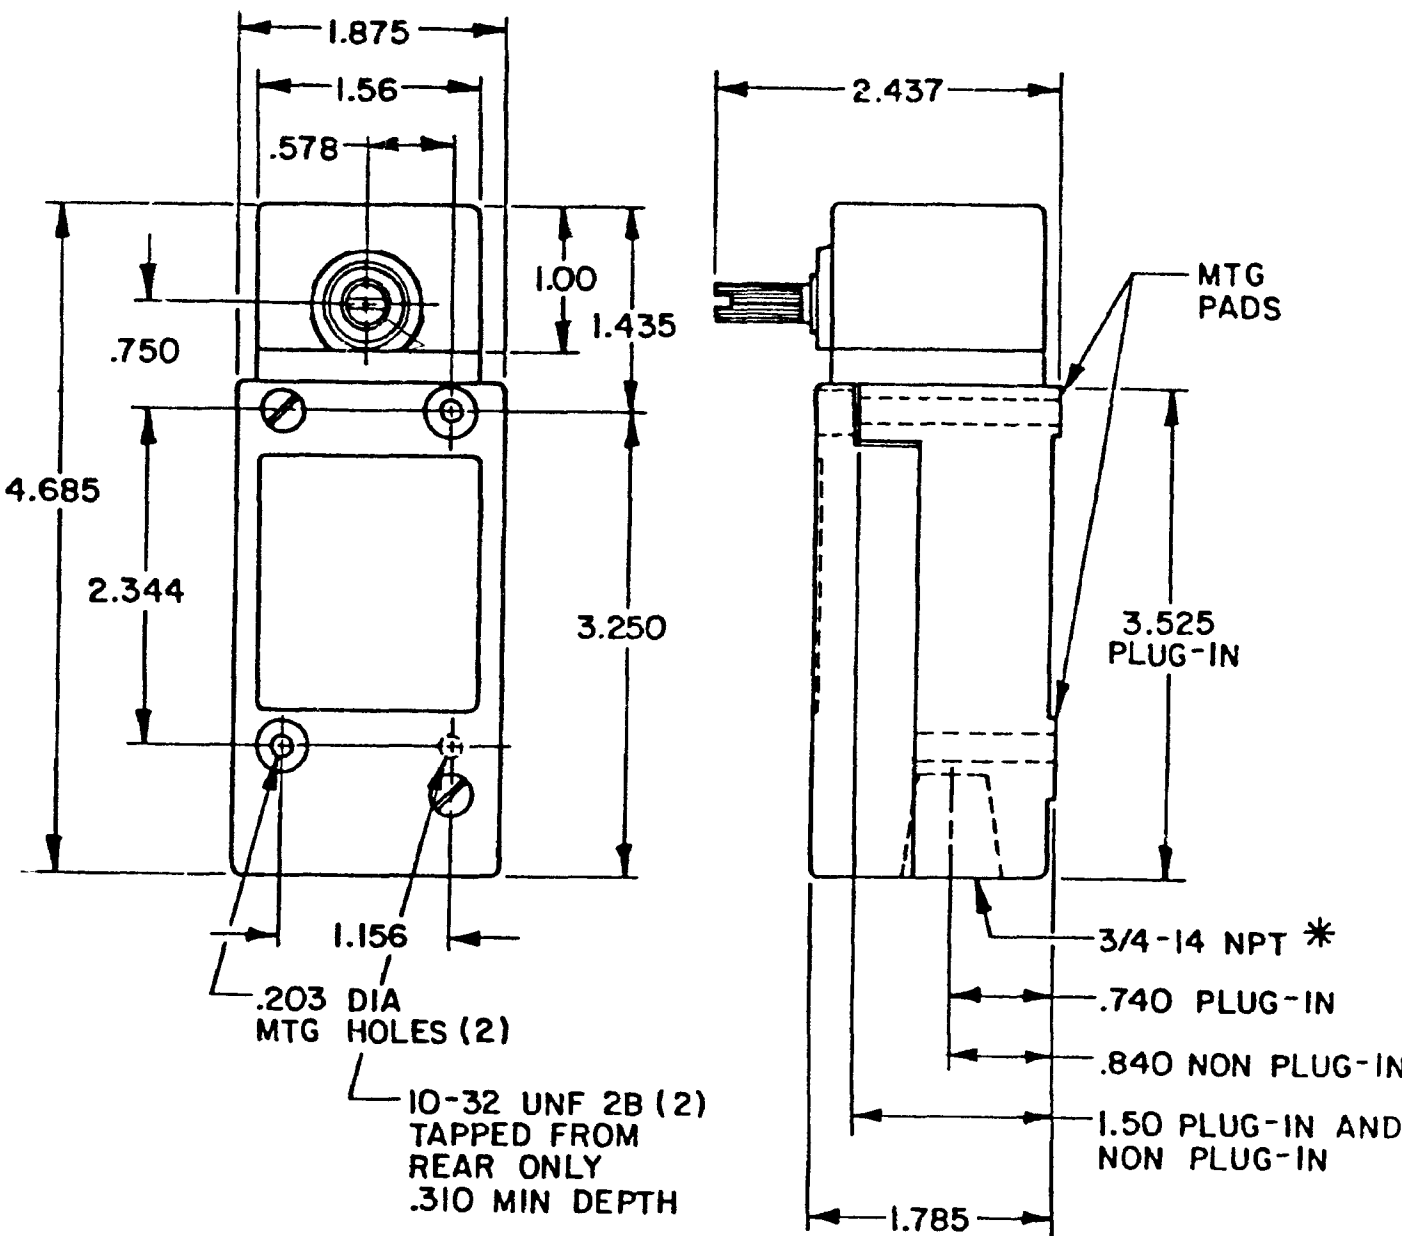


TYPE: LSA2, LSH2, LSM2, LSN2, LSP2, LSR2
LSA4, LSH4, LSM4, LSN4, LSP4, LSR4

*(LSA6, LSH6, LSM6, LSN6, LSP6, LSR6
LSA7, LSH7, LSM7, LSN7, LSP7, LSR7 HAVE
1/2-14 NPT CONDUIT HOLE)

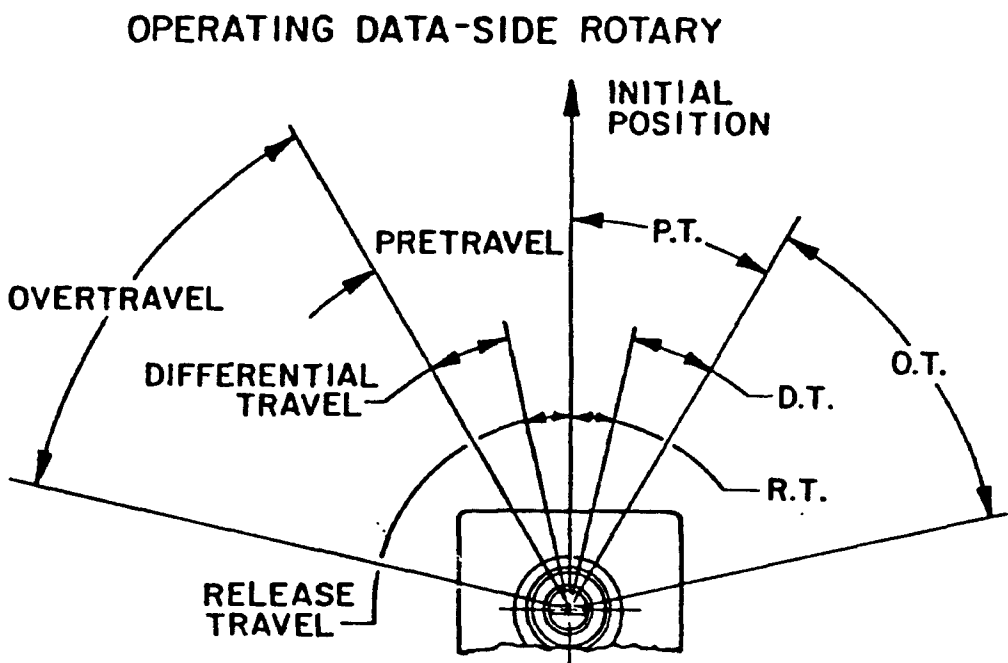


MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSA THROUGH LSW SERIES

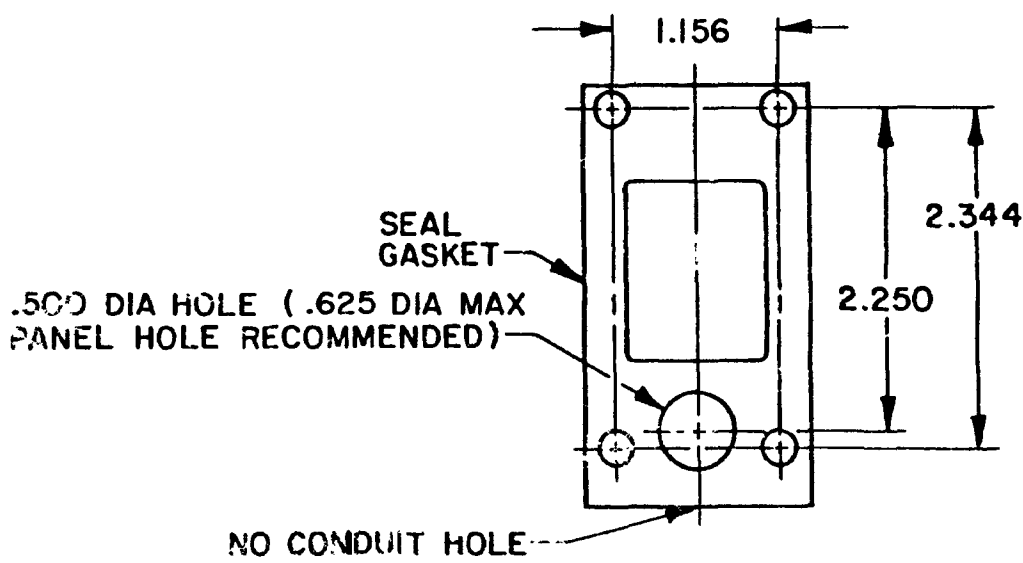


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
MICRO SWITCH A Honeywell Division FED. MFG. CODE 91929	SWITCH - ENCLOSED	CATALOG LISTING
		LSA-LSW SERIES CHART 1

THIRD ANGLE PROJECTION				
				
SCALE	NONE			
DO NOT SCALE PRINT				
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				
ONE PLACE	(.0)	$\pm .030$		
TWO PLACES	(.00)	$\pm .015$		
THREE PLACES	(.000)	$\pm .005$		
ANGLES		$\pm$		


SIDE ROTARY CAM TRACKING

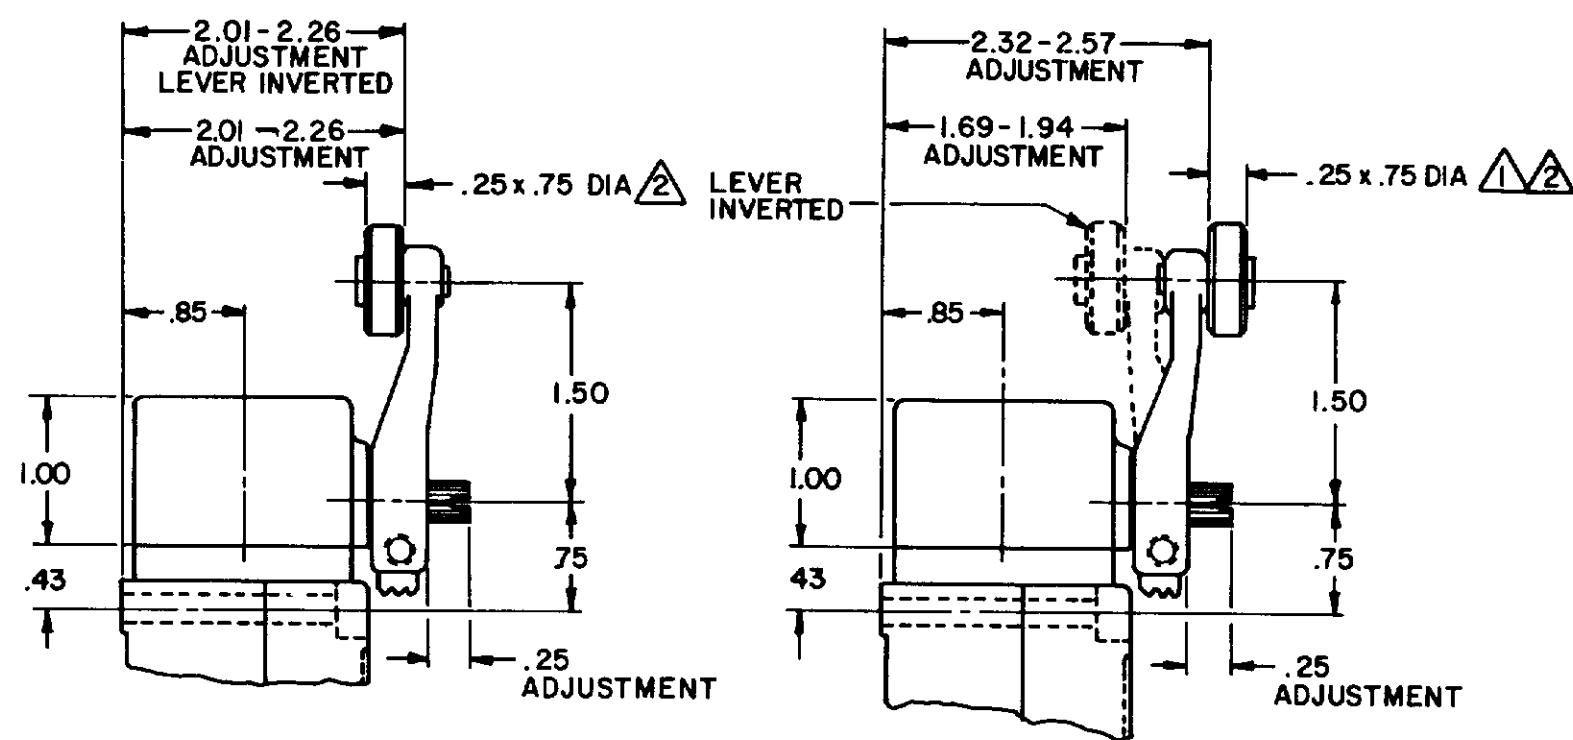


LSZ51 TYPE LEVERS

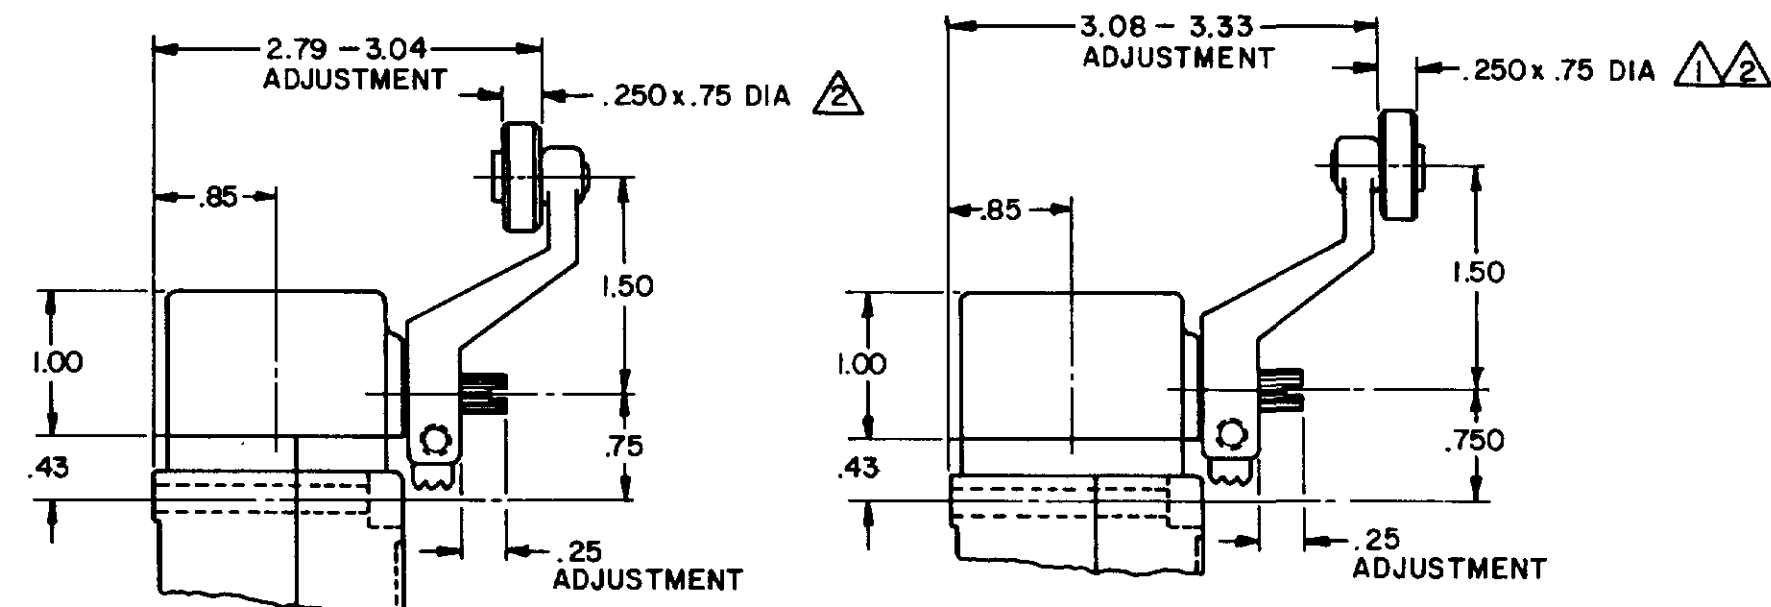


LSZ55 TYPE LEVERS

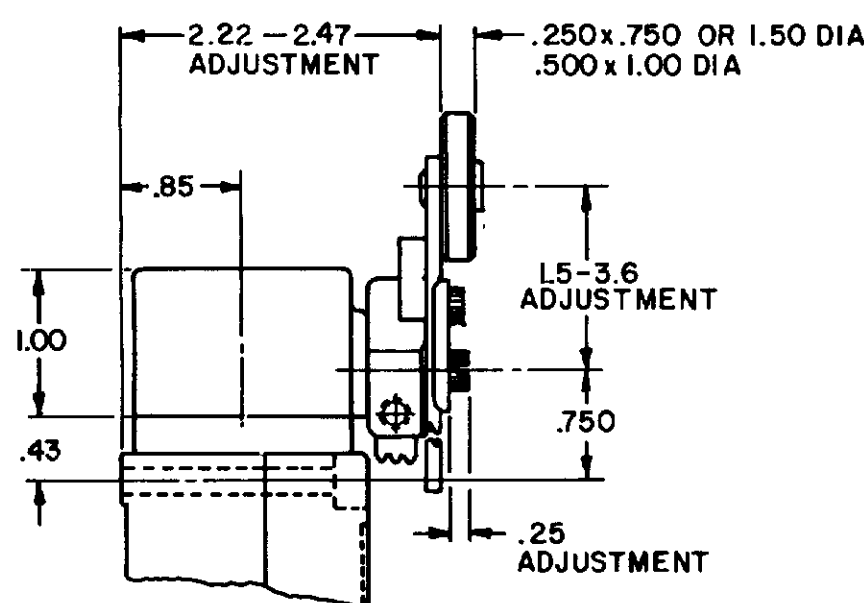


LSZ52 TYPE LEVER

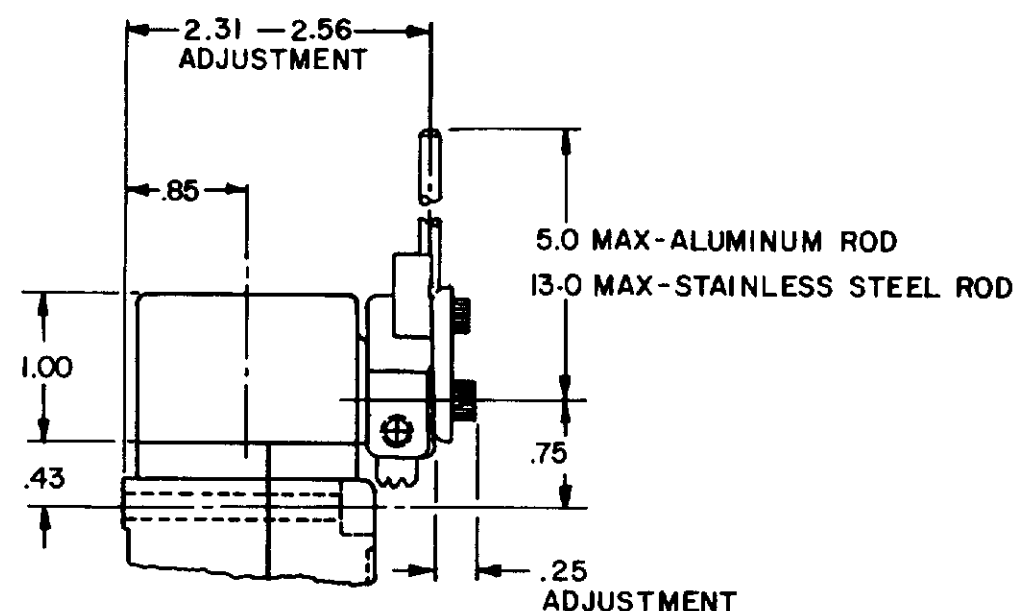

LSZ54 TYPE LEVER

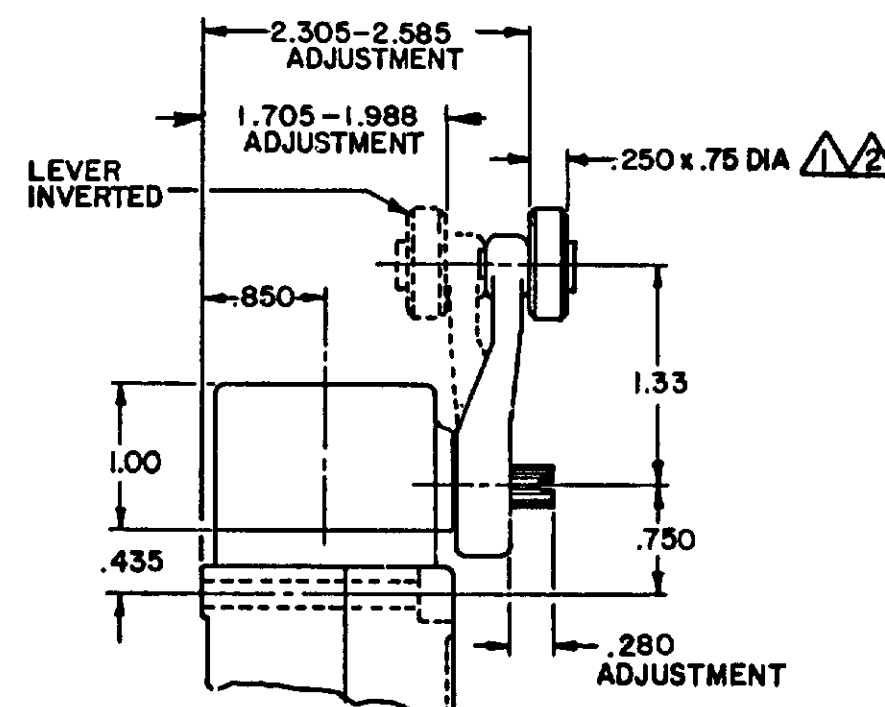

OPEN MOUNTED ROLLER

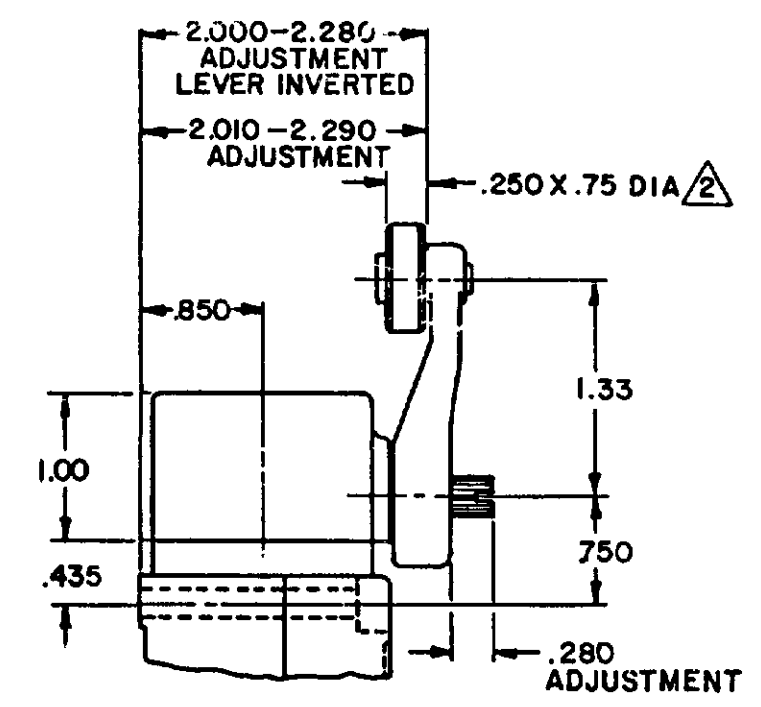

CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

- NOTES
- ① ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT LEVER CANNOT BE INVERTED
 - ② FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO "M" DRAWING
 - 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 "M" DRAWING

CATALOG LISTING
LSA-LSW SERIES CHART 1
PAGE 2 OF 10
REPLACES LSA-LSW SERIES
10JUL07 RELEASE NO. CO-78498
PSR
CHECK
11AUG04
AK
11JUL94
JAF
15JUN94
MAM
15JUN94
JAF
15JUN94
MAM

REV	DATE	BY	CHK	APP
1	0031956			
2	10JUL07	BS		
3	201004	B		
4	10AUG00	C SL		
5	201748	C		
6	17NOV00	C SL		
7	202198	D		
8	202198	D		
9	204871	E		
10	206581	F		
11	206763	G		
12	207178	H		
13	207474	J		
14	207474	J		
15	207474	J		
16	207474	J		
17	207474	J		
18	207474	J		
19	207474	J		
20	207474	J		

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1


PAGE 2 OF 10

THIRD ANGLE PROJECTION			
SCALE NONE			
DO NOT SCALE PRINT			
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
ONE PLACE	(0)	±.030	
TWO PLACES	(.00)	±.015	
THREE PLACES	(.000)	±.005	
ANGLES		±	
WEIGHT			

TOP ROTARY

SINGLE POLE

DOUBLE POLE

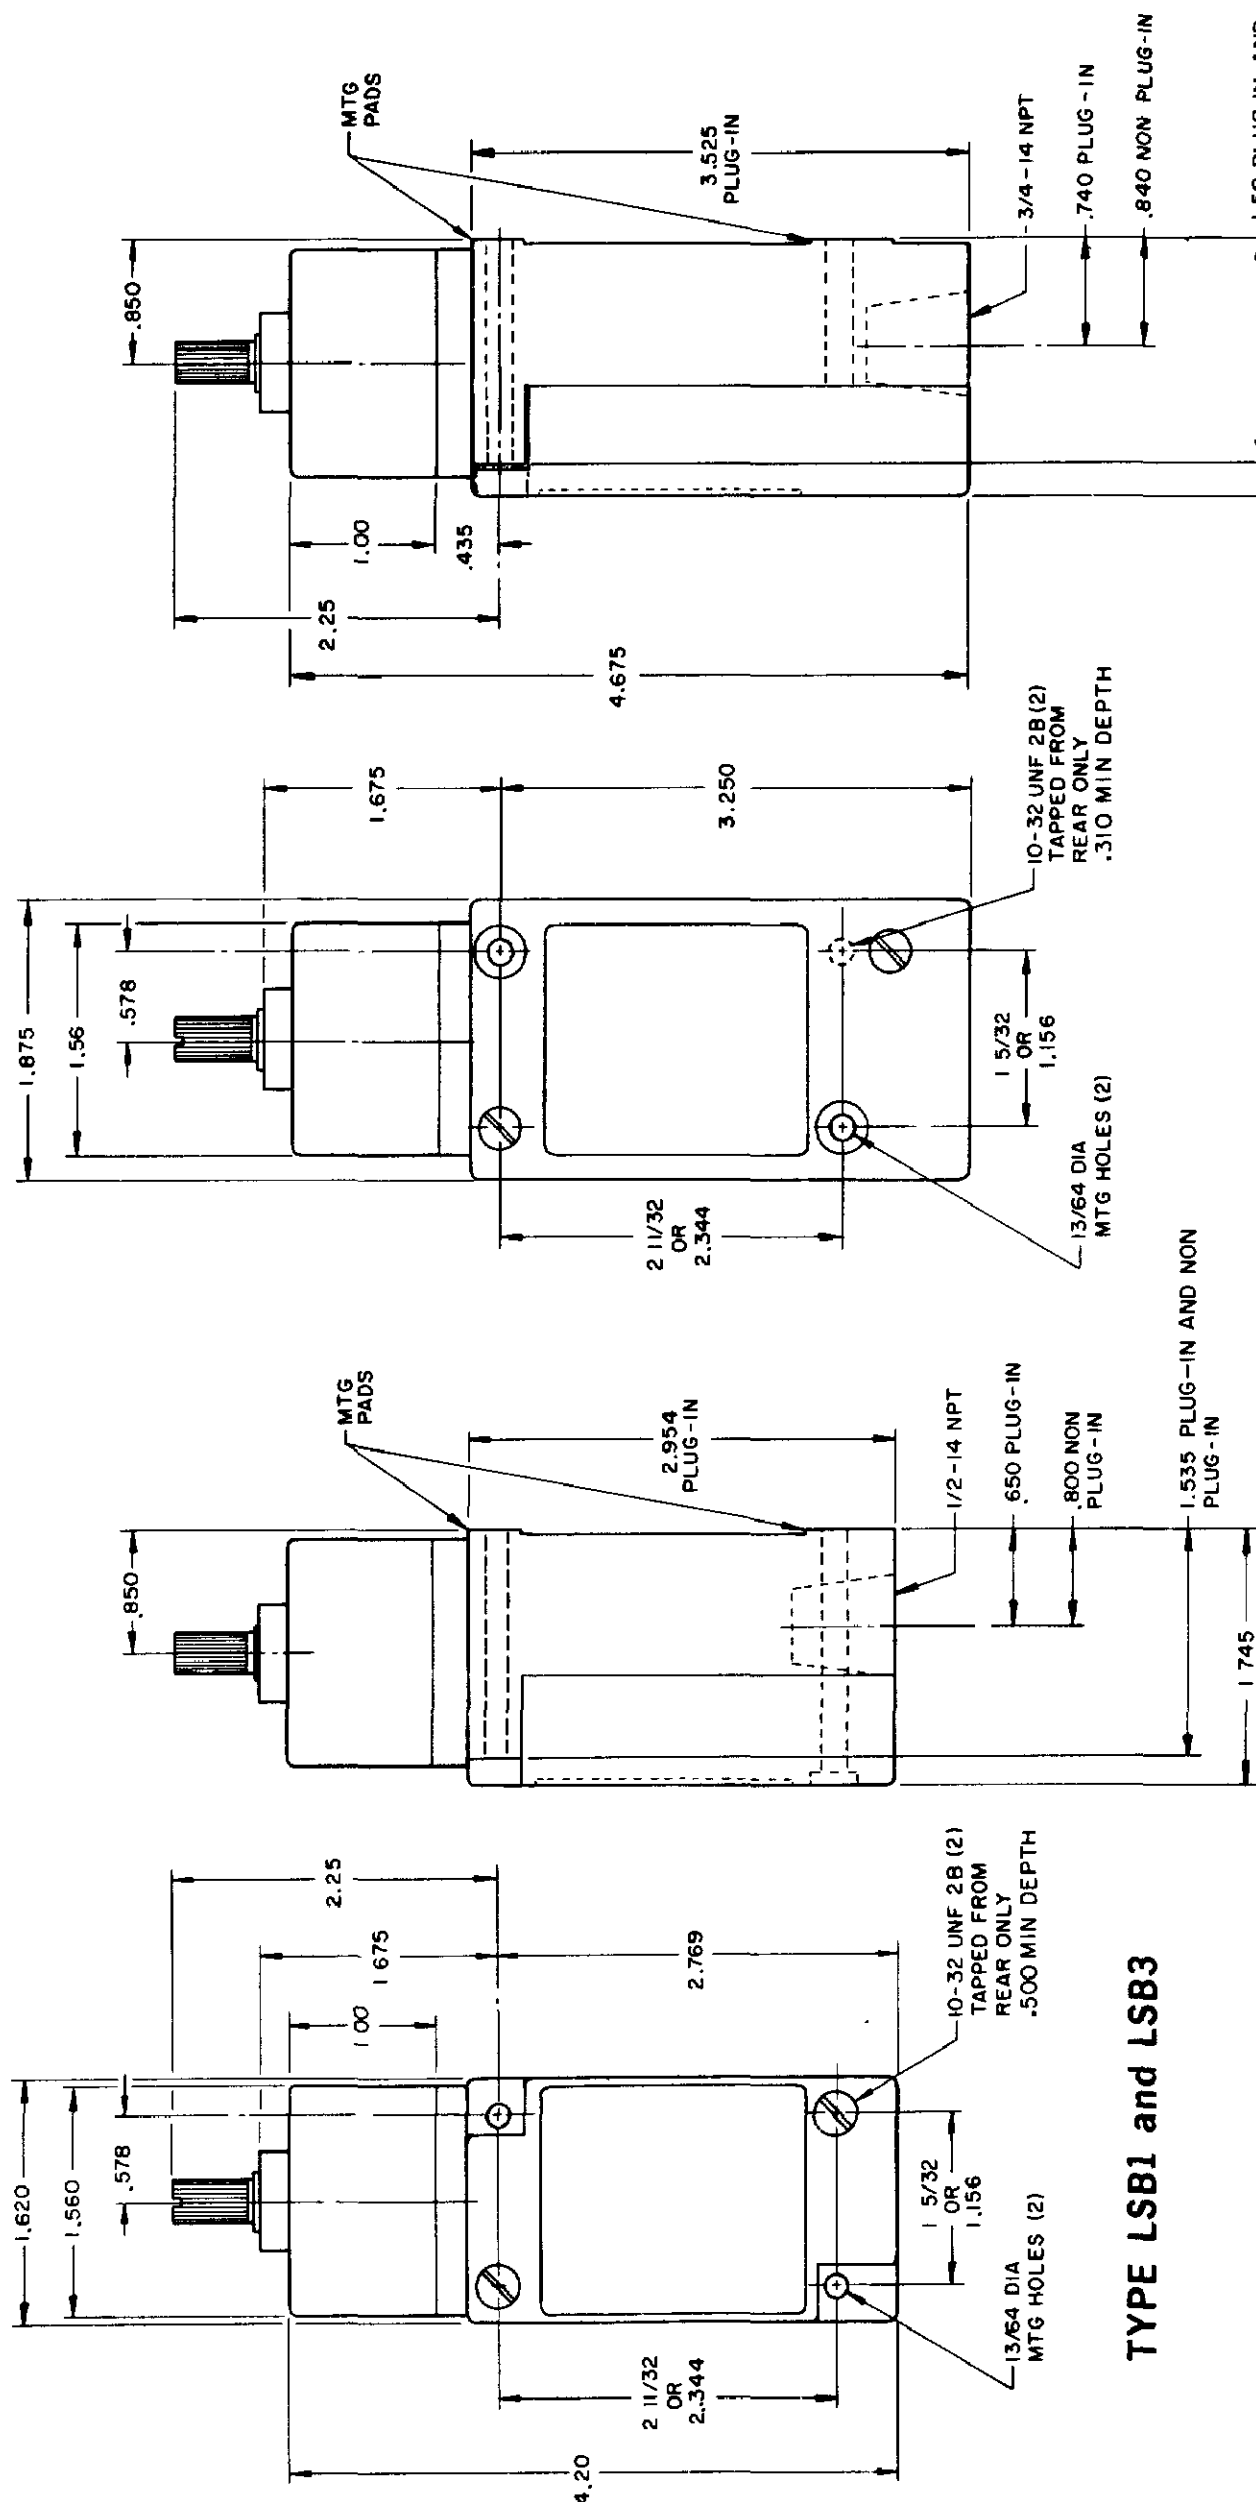

TYPE LSB1 and LSB3

TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2 - 14 NPT
CONDUIT HOLE

	SINGLE POLE	DOUBLE POLE
PRETRAVEL MAX	25°	25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

A.C. VOLTAGE	AMPS AT 35 POWER FACTOR			
	SINGLF POLE		DOUBLE POLE	
	MAKE	BREAK	MAKE	BREAK
120	60	6	30	3
240	30	3	15	1.5
480	15	1.5	7.5	7.5
600	12	1.2	6	6

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE		RESISTIVE
120	0.25	0.80	
240	0.15	0.40	

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT

VOLTAGE		30 WATT
5 AC OR DC MIN		
600 AC		
240 DC		


DIRECT ACTING (ALSO RATED AT A.C. 10
AMP CONT.)

D. C. VOLTAGE	MAKE AND BREAK AMPS		RESISTIVE
	INDUCTIVE		
30	4.2		4.2
120	1.1		1.1
240	.55		.55

WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)


DOUBLE POLE

SINGLE POLE

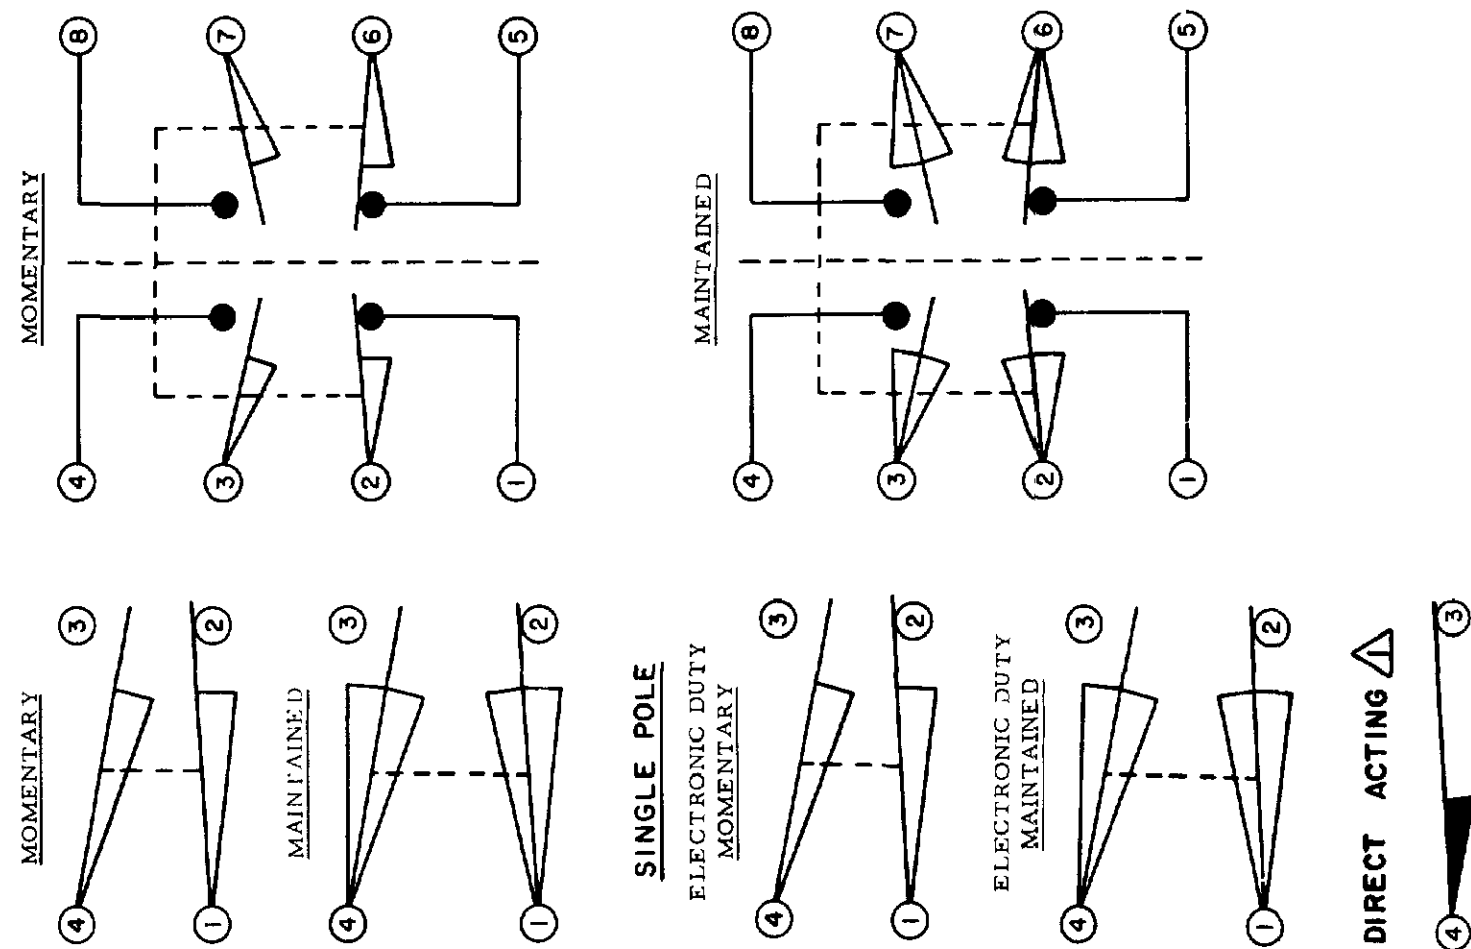


NOTES
Δ DIFFERENTIAL TRAVEL ON ALL OPERATING
CHARACTERISTICS NOT APPLICABLE

SINGLE POLE

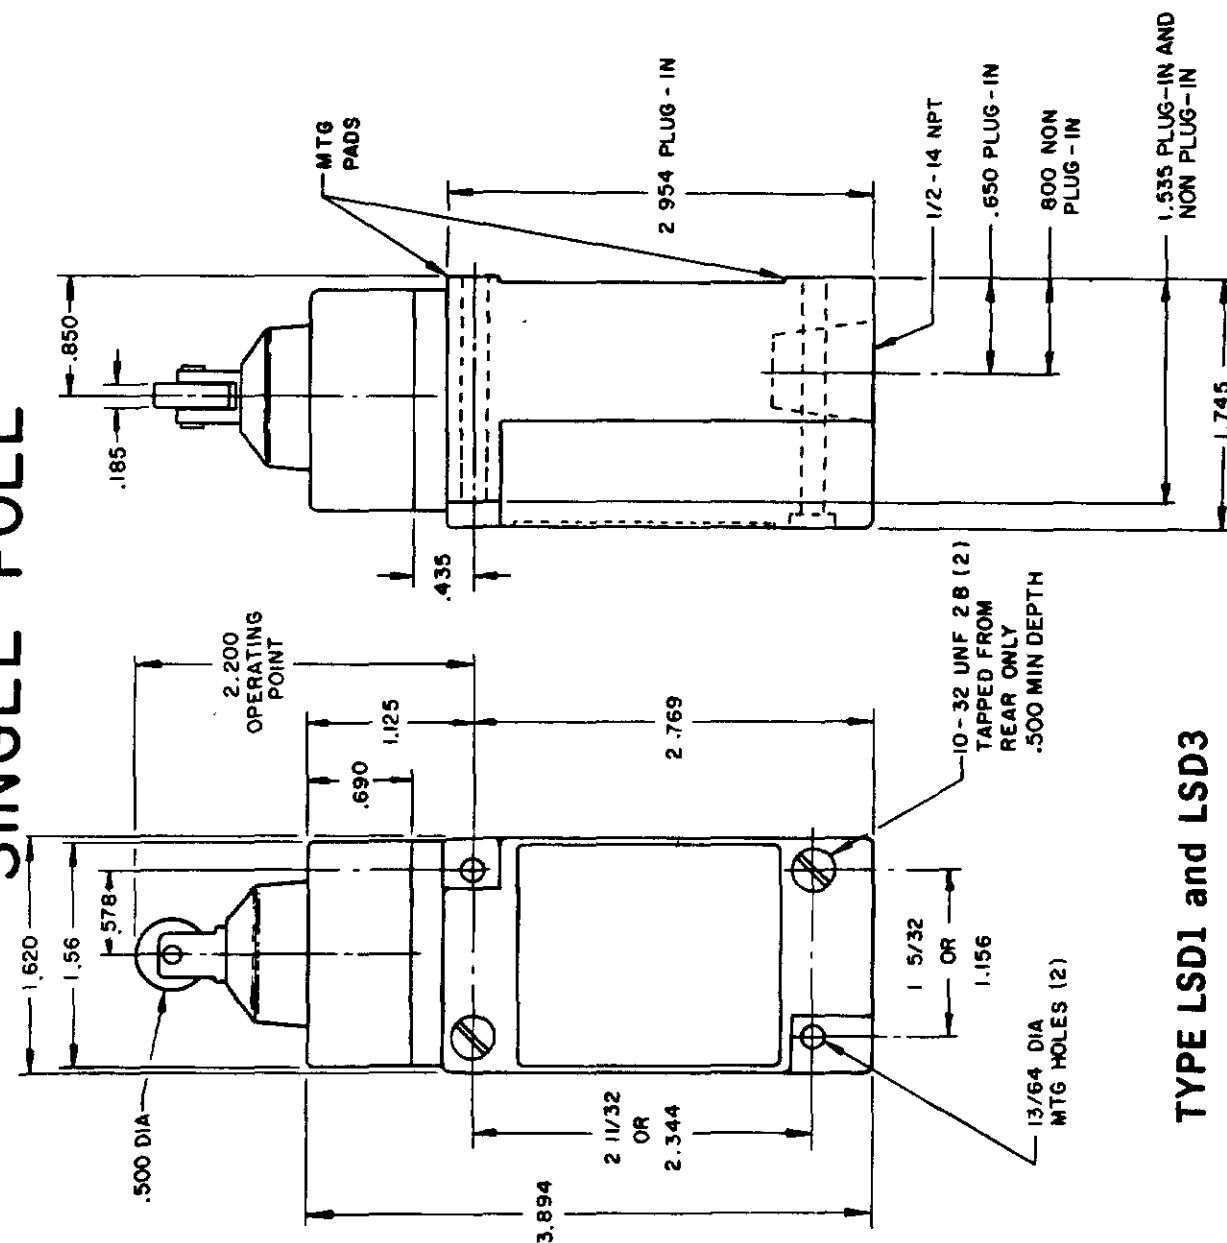


TYPE LSD1 and LSD3

DOUBLE POLE

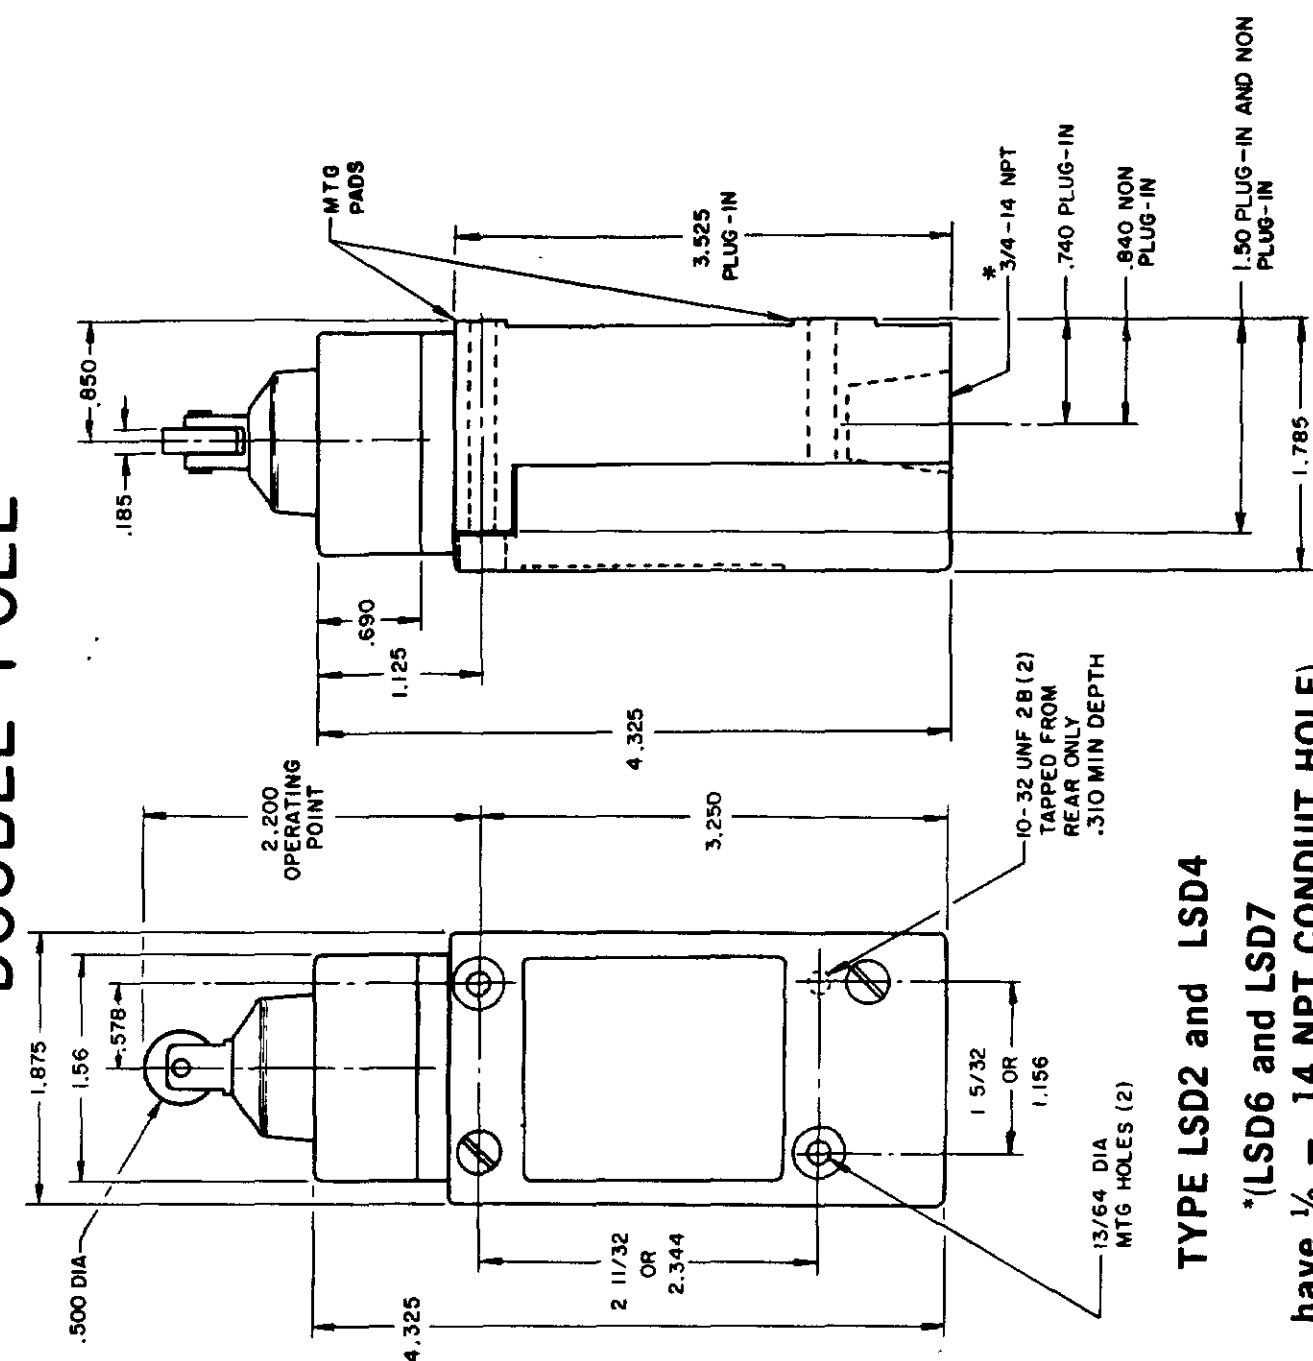


TYPE LSD2 and LSD4


*(LSD6 and LSD7 have 1/2 - 14 NPT CON

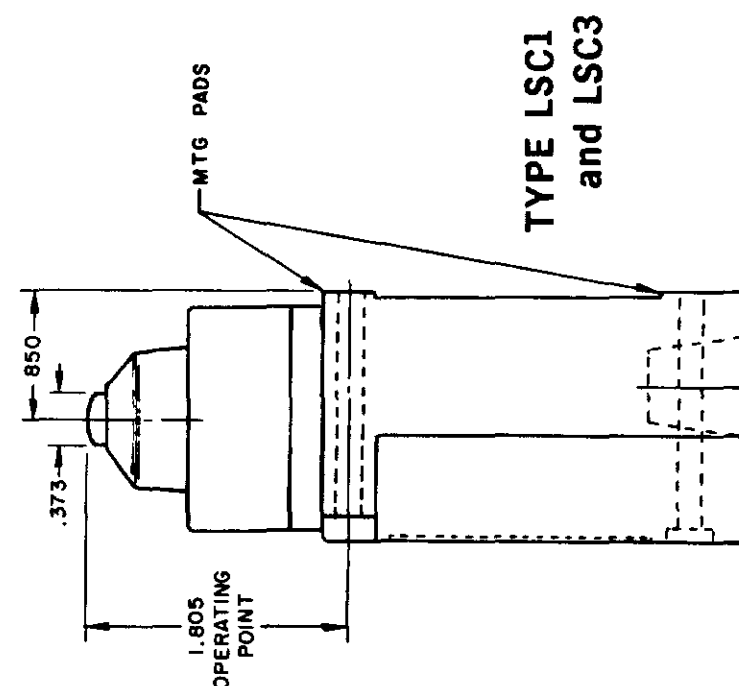

TYPE LSC1 and LSC3

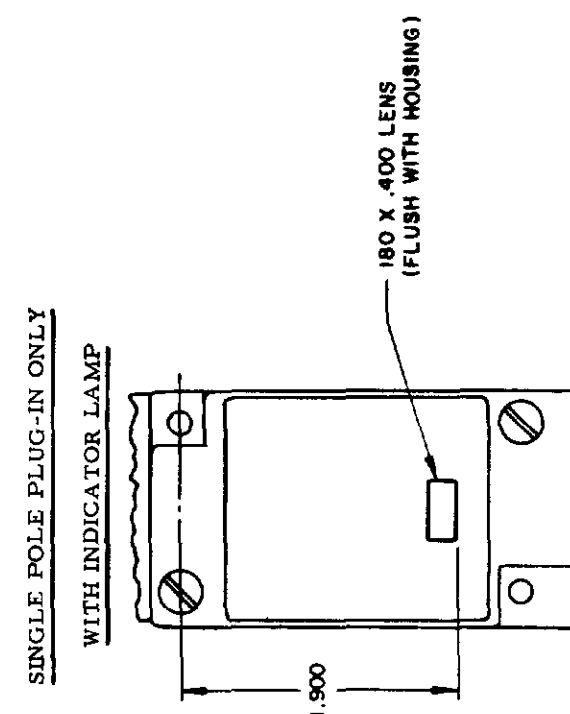


**TYPE LSC2
and LSC4**

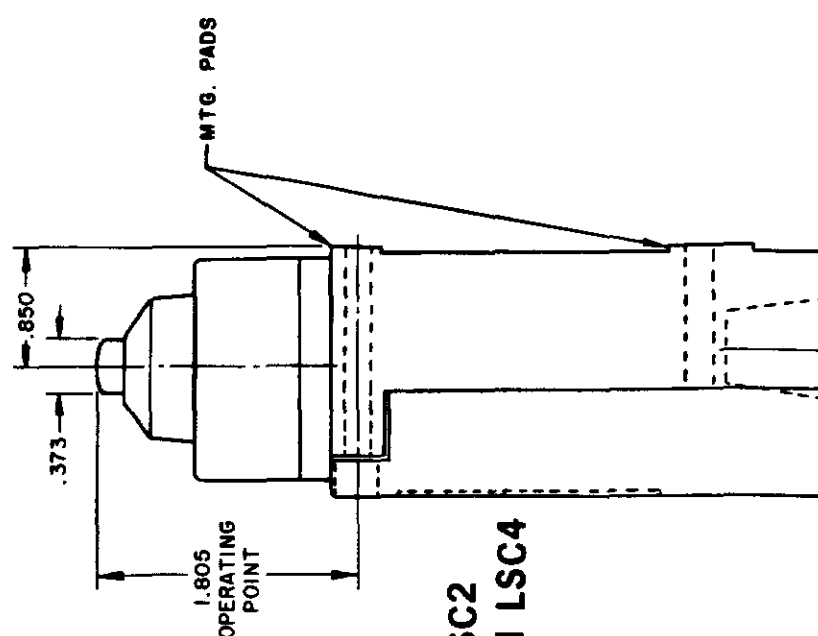


**120 LAMP VOLTAGE -
TYPE LSC5, LSD5 or LSV5**


**240 LAMP VOLTAGE .
TYPE LSC8, LSD8 or LSV8**

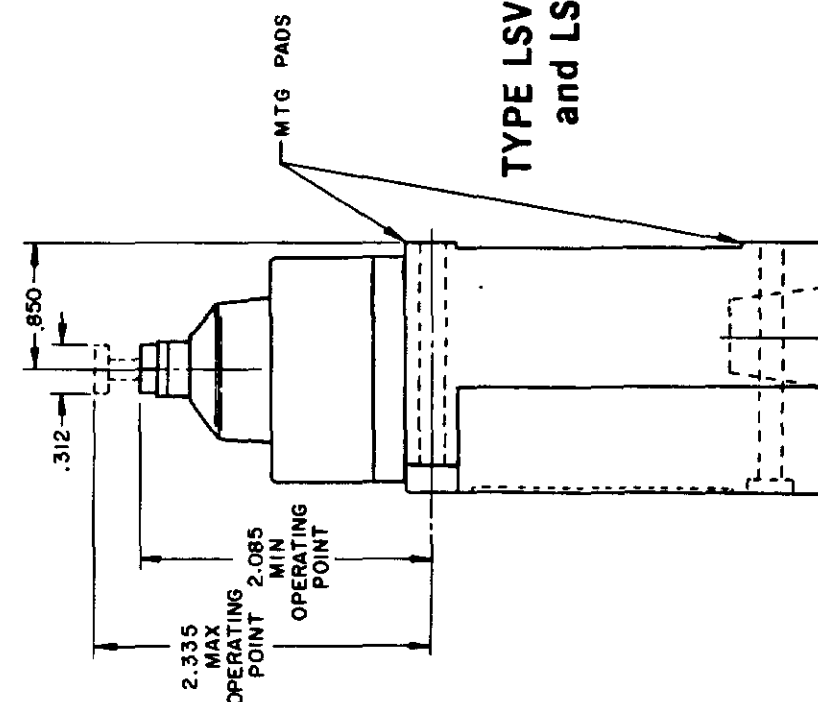

TYPE LSV1 and LSV3

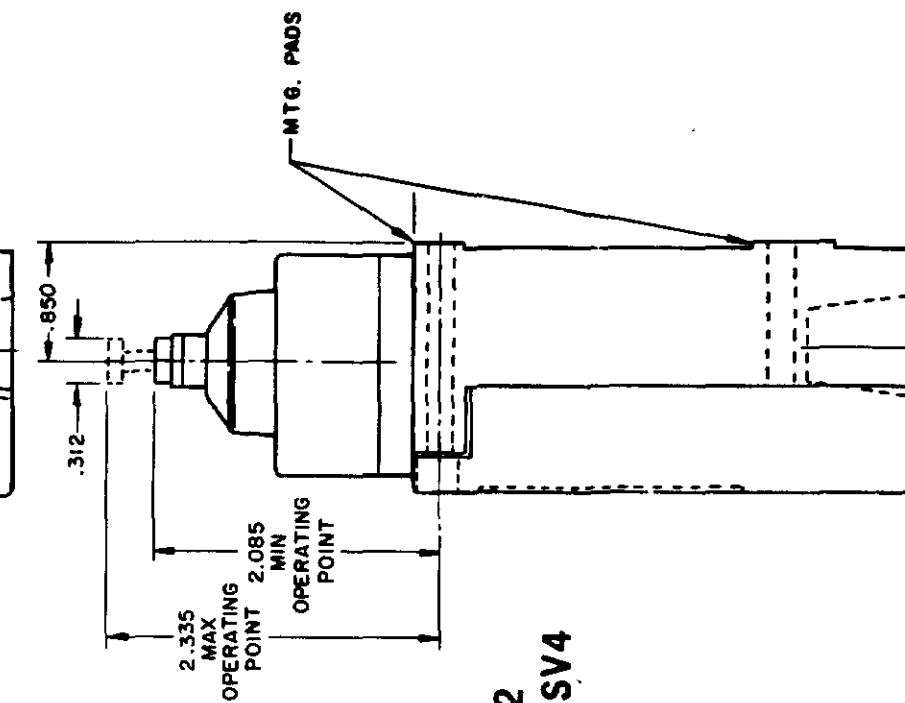

**TYPE LSV2
and LSV4**

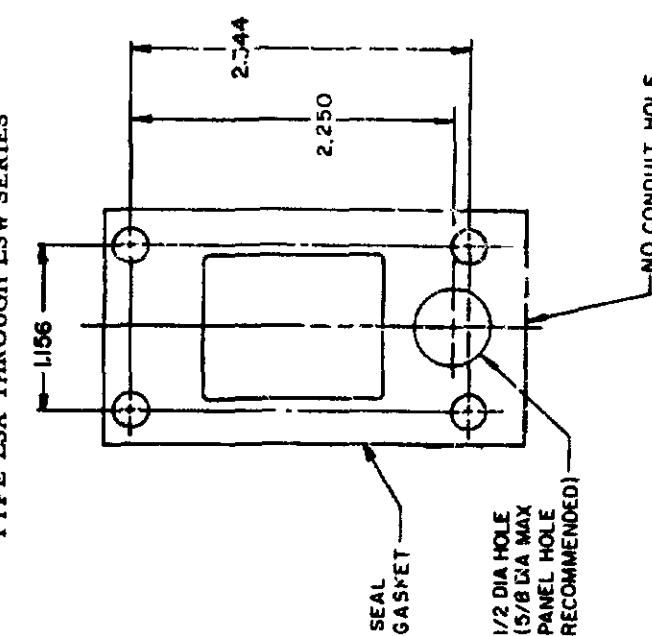

PAGE 4 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING

LSA-LSW SERIES

CHART 1

SCALE NONE

NO-NOT-SCALE-PRINT

REV	DATE	BY	CHK	APP
L	0031956			
B	10 JUL 97			
C	10 AUG 00			
D	201748			
E	17 NOV 00			
F	202198			
G	204871			
H	206581			
I	14 OCT 02			
J	206763			
K	31 OCT 02			
L	207179			
M	207474			
N	18 FEB 03			
O	0006871			
P	11 AUG 04			


ISSUE	CATALOG LISTING	REPLACES	CO-78498	LSA-LSW SERIES
12	LSA-LSW SERIES CHART 1			
12	PAGE 5 OF 10			
PSR	10JUL07			

RASTER	15 JUN 94	11 JUL 94	11 JUL 94	11 JUL 94
DRAWN				
MAM				


SIDE PLUNGER TYPE


SINGLE POLE

DOUBLE POLE

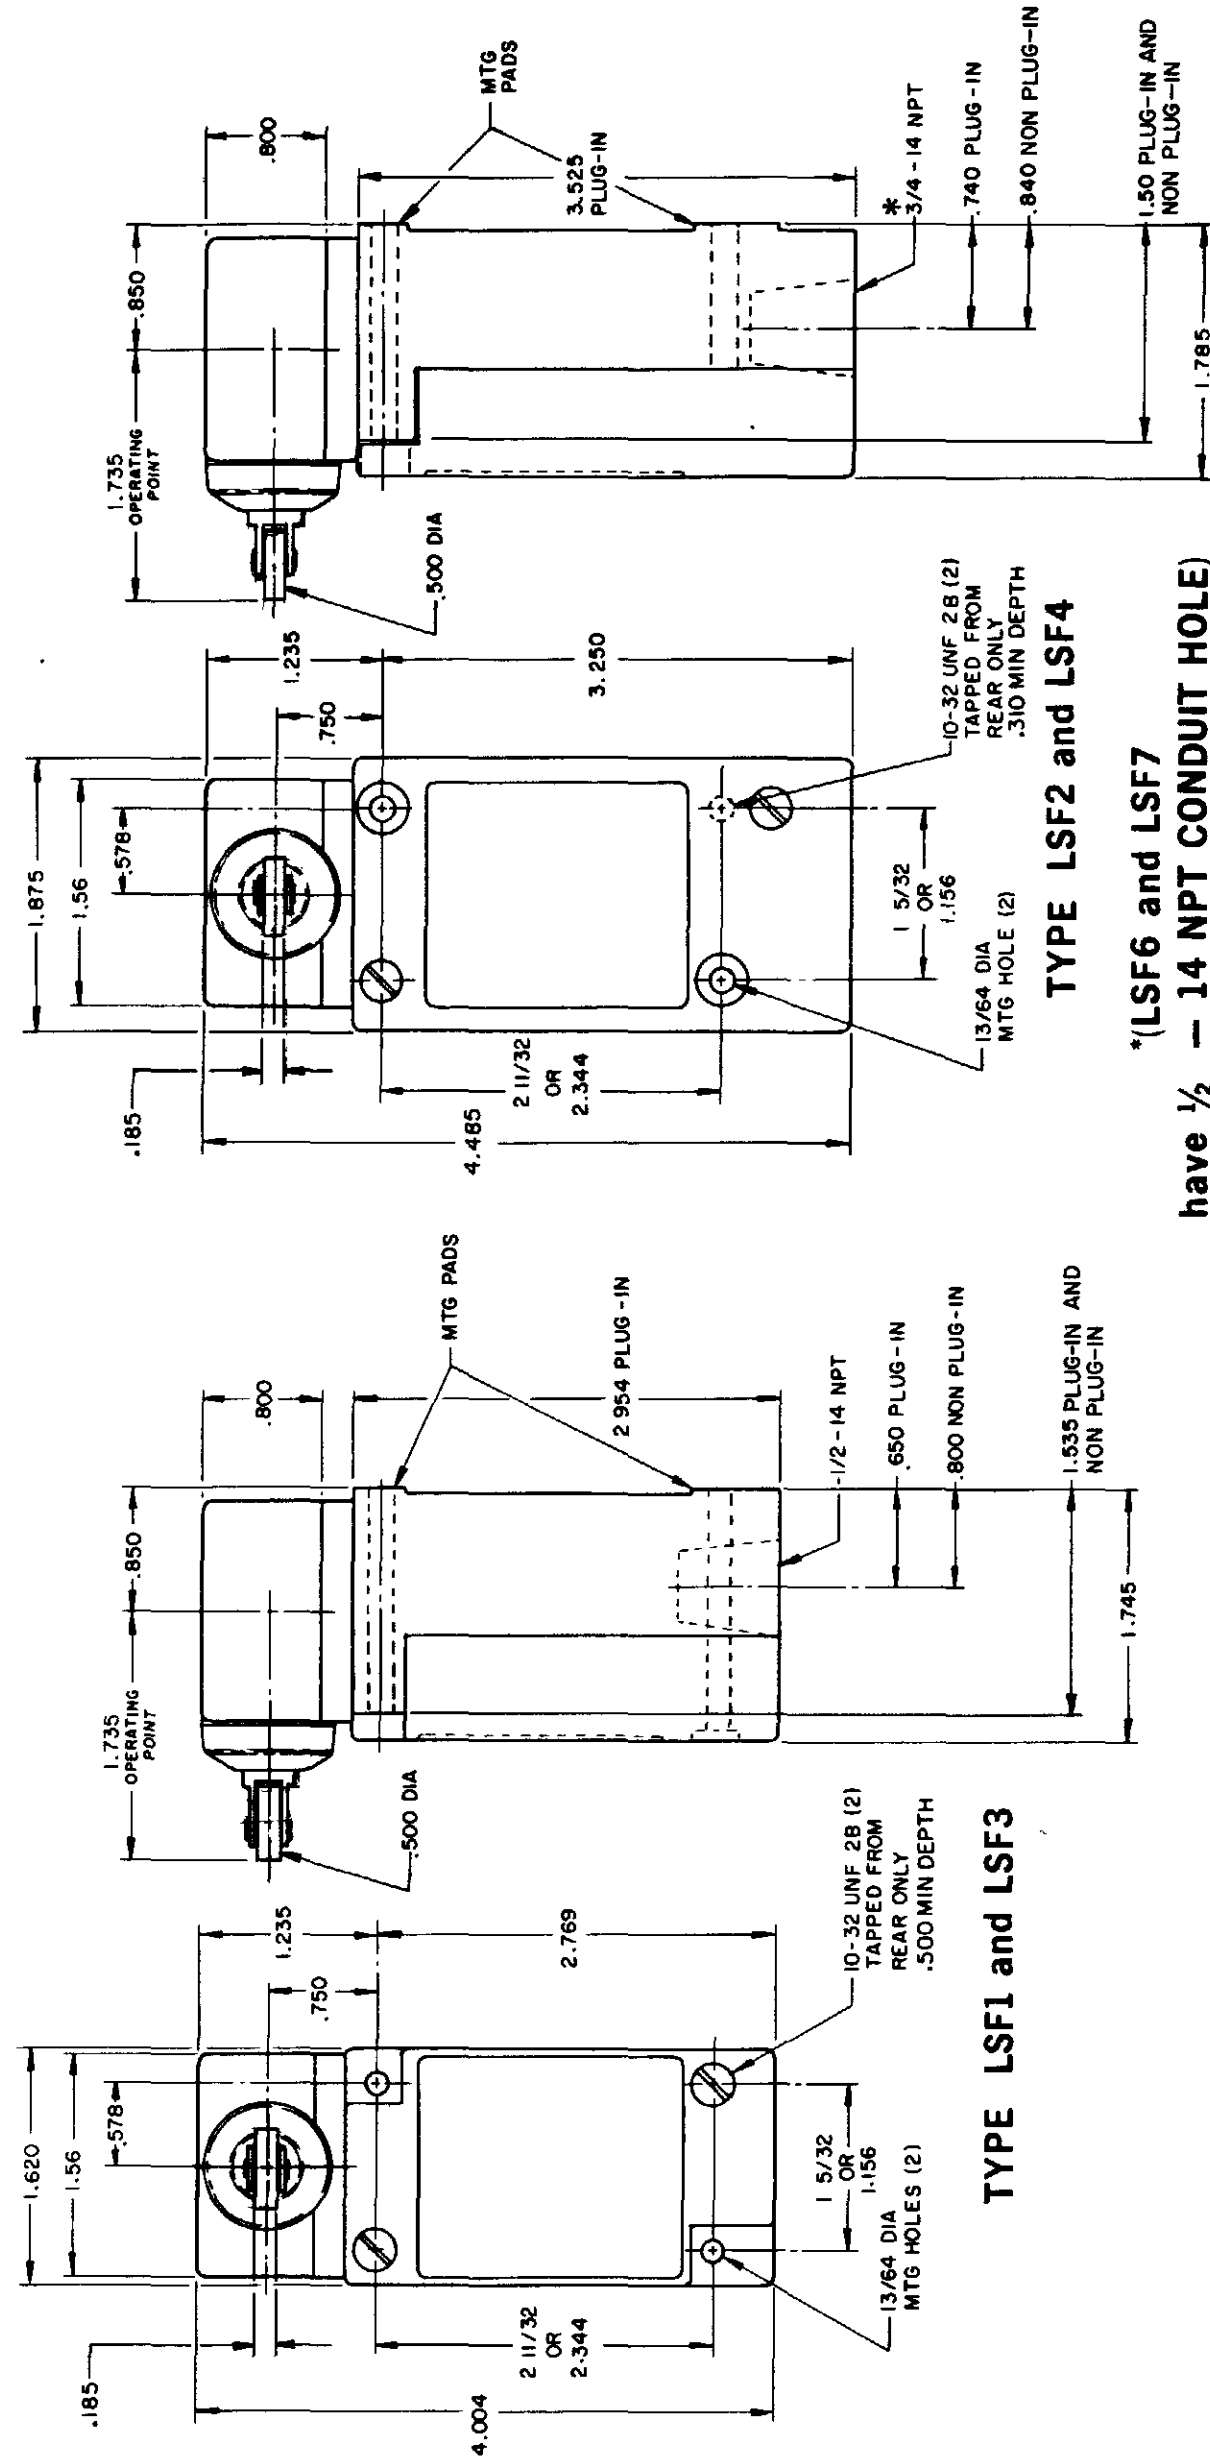

*(LSF6 and LSF7 have 1/2 - 14 NPT CONDUIT HOLE)

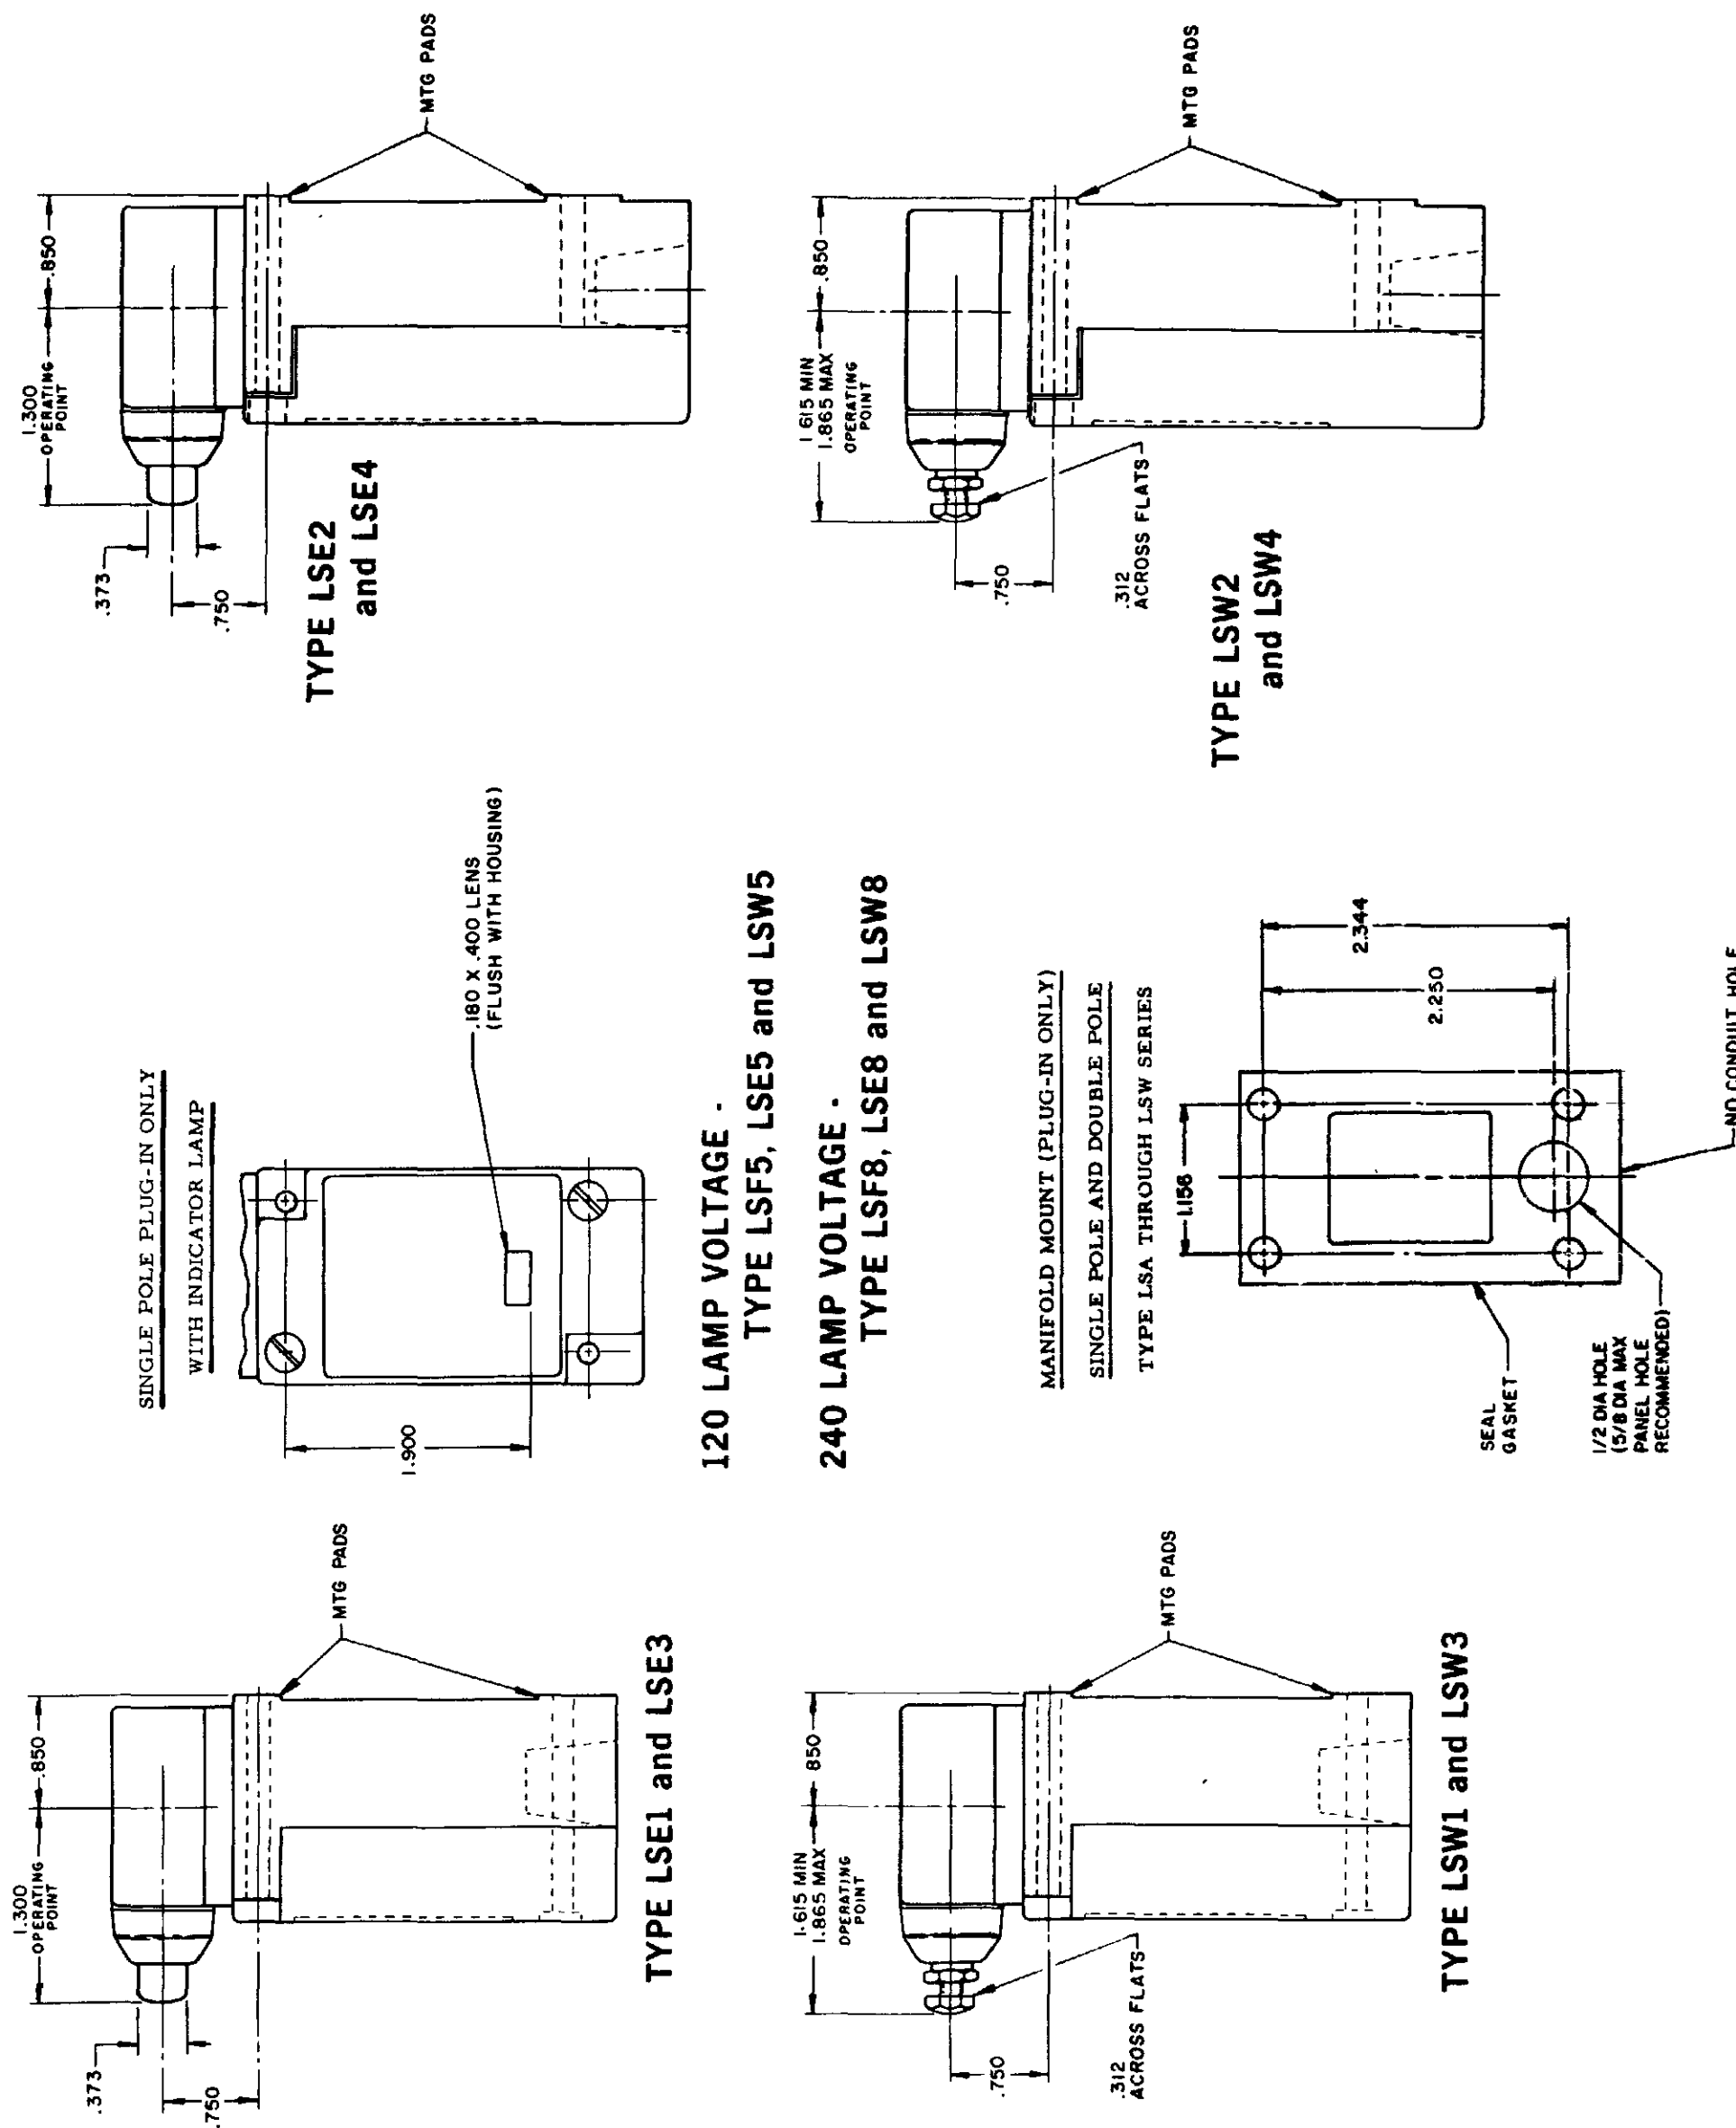

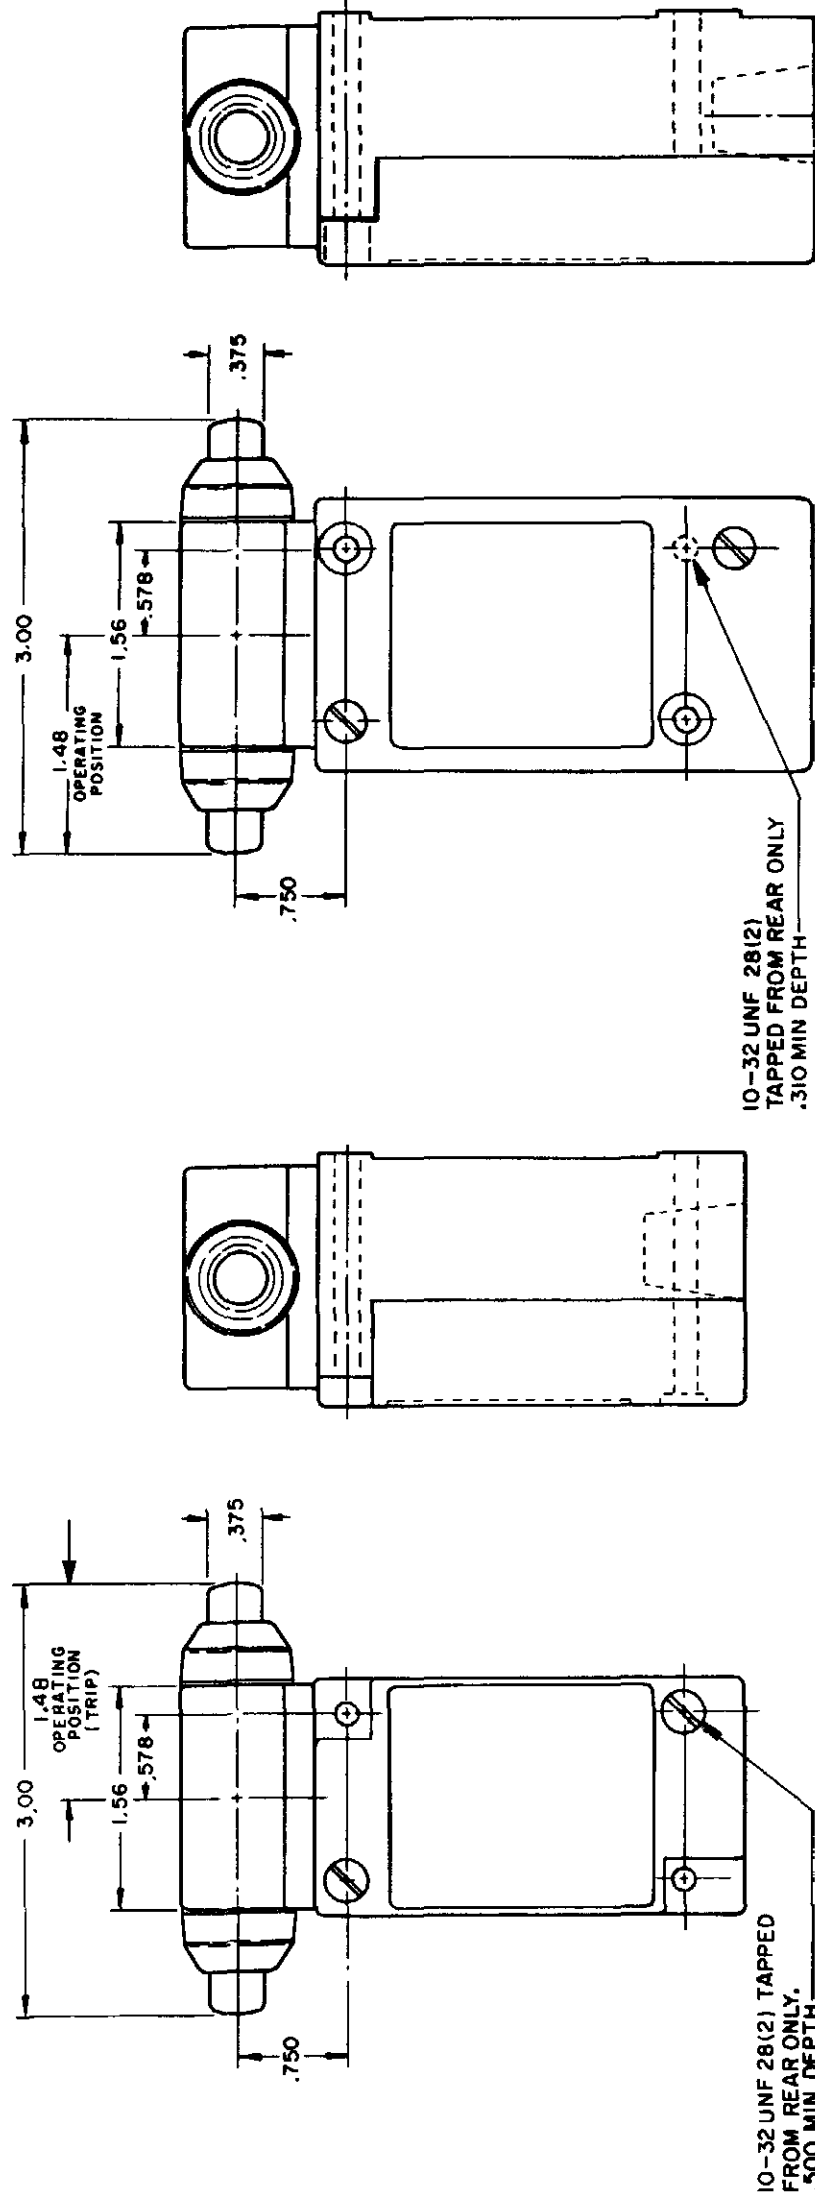

TYPE LSG2 and LSG4

TYPE LSG1 and LSG3

INITIAL POSITION —
(FREE POSITION) } PRETRAVEL
OPERATING POINT } DIFFERENTIAL TRAVEL
FULL TRAVEL — } OVERTRAVEL

TOP PLUNGER TYPES

OPERATING POINT GIVEN
IN RELATION TO TOP
MOUNTING HOLE

CHARACTERISTICS	LSC PLUNGER	LSD ROLLER PLUNGER	LSV ADJ PLUNGER	SEQUENCE BASIC		
				LSC	LSD	LSV
PRETRAVEL (MAX)	.070	.070	.070	1ST STEP .070	1ST STEP .070	1ST STEP .070
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE DOUBLE POLE .020	SINGLE POLE DOUBLE POLE .020	SINGLE POLE DOUBLE POLE .020	2ND STEP .015	2ND STEP .015	2ND STEP .015
OVERTRAVEL (MIN)	.190	.190	.190	.170	.170	.170
OPERATING FORCE (MAX)	4 LBS	4 LBS	4 LBS	4 LBS	4 LBS	4 LBS
OPERATING POINT	1.805 ± .030	2.200 ± .040	2.085 MIN	1ST STEP 1.815±.030	1ST STEP 2.210±.040	1ST STEP 2.095 MIN
FULL OVERTRAVEL FORCE (MAX)	7 LBS	7 LBS	7 LBS	7 LBS	7 LBS	7 LBS

SIDE PLUNGER TYPES

OPERATING POINT GIVEN IN
RELATION TO CENTER OF HEAD

CHARACTERISTICS	LSE PLUNGER	LSF ROLLER PLUNGER	LSW ADJ PLUNGER	SEQUENCE BASIC		
				LSE	LSF	LSW
PRETRAVEL (MAX)	.100	.100	.170	1ST STEP .100	1ST STEP .100	1ST STEP .100
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.090	2ND STEP .020	2ND STEP .020	2ND STEP .020
OVERTRAVEL (MIN)	.190	.190	.080	.170	.170	.170
OPERATING FORCE (MAX)	6 LBS	6 LBS	10 LBS	6 LBS	6 LBS	6 LBS
OPERATING POINT	1.300 ± .030	1.735 ± .040	ADJUSTABLE FROM 1.615 MIN	1ST STEP 1.310±.030	1ST STEP 1.745±.040	1ST STEP 1.625 MIN
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	10 LBS	6 LBS	6 LBS	6 LBS

REVISIONS	DATE	BY	CHKD	APPD
L 00031956	10 JUL 07	BS		
B 201004	10 AUG 00	CST		
C 201748	17 NOV 00	CST		
D 202198	23 JAN 01	CST		
E 204871	11 JUL 94	AK		
F 206581	14 OCT 02	GLH		
G 206763	31 OCT 02	CST		
H 207179	14 JAN 03	GLH		
J 207474	18 FEB 03	SP		
K 0006871	11 AUG 04	RR		


ISSUE	CATALOG LISTING	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES
12	LSA-LSW SERIES CHART 1	10JUL07			
PSR	10JUL07	CHECK			

MAST
DRAWN

MAM 15 JUN 94


WOBBLE STICK DOUBLE POLE

SINGLE POLE

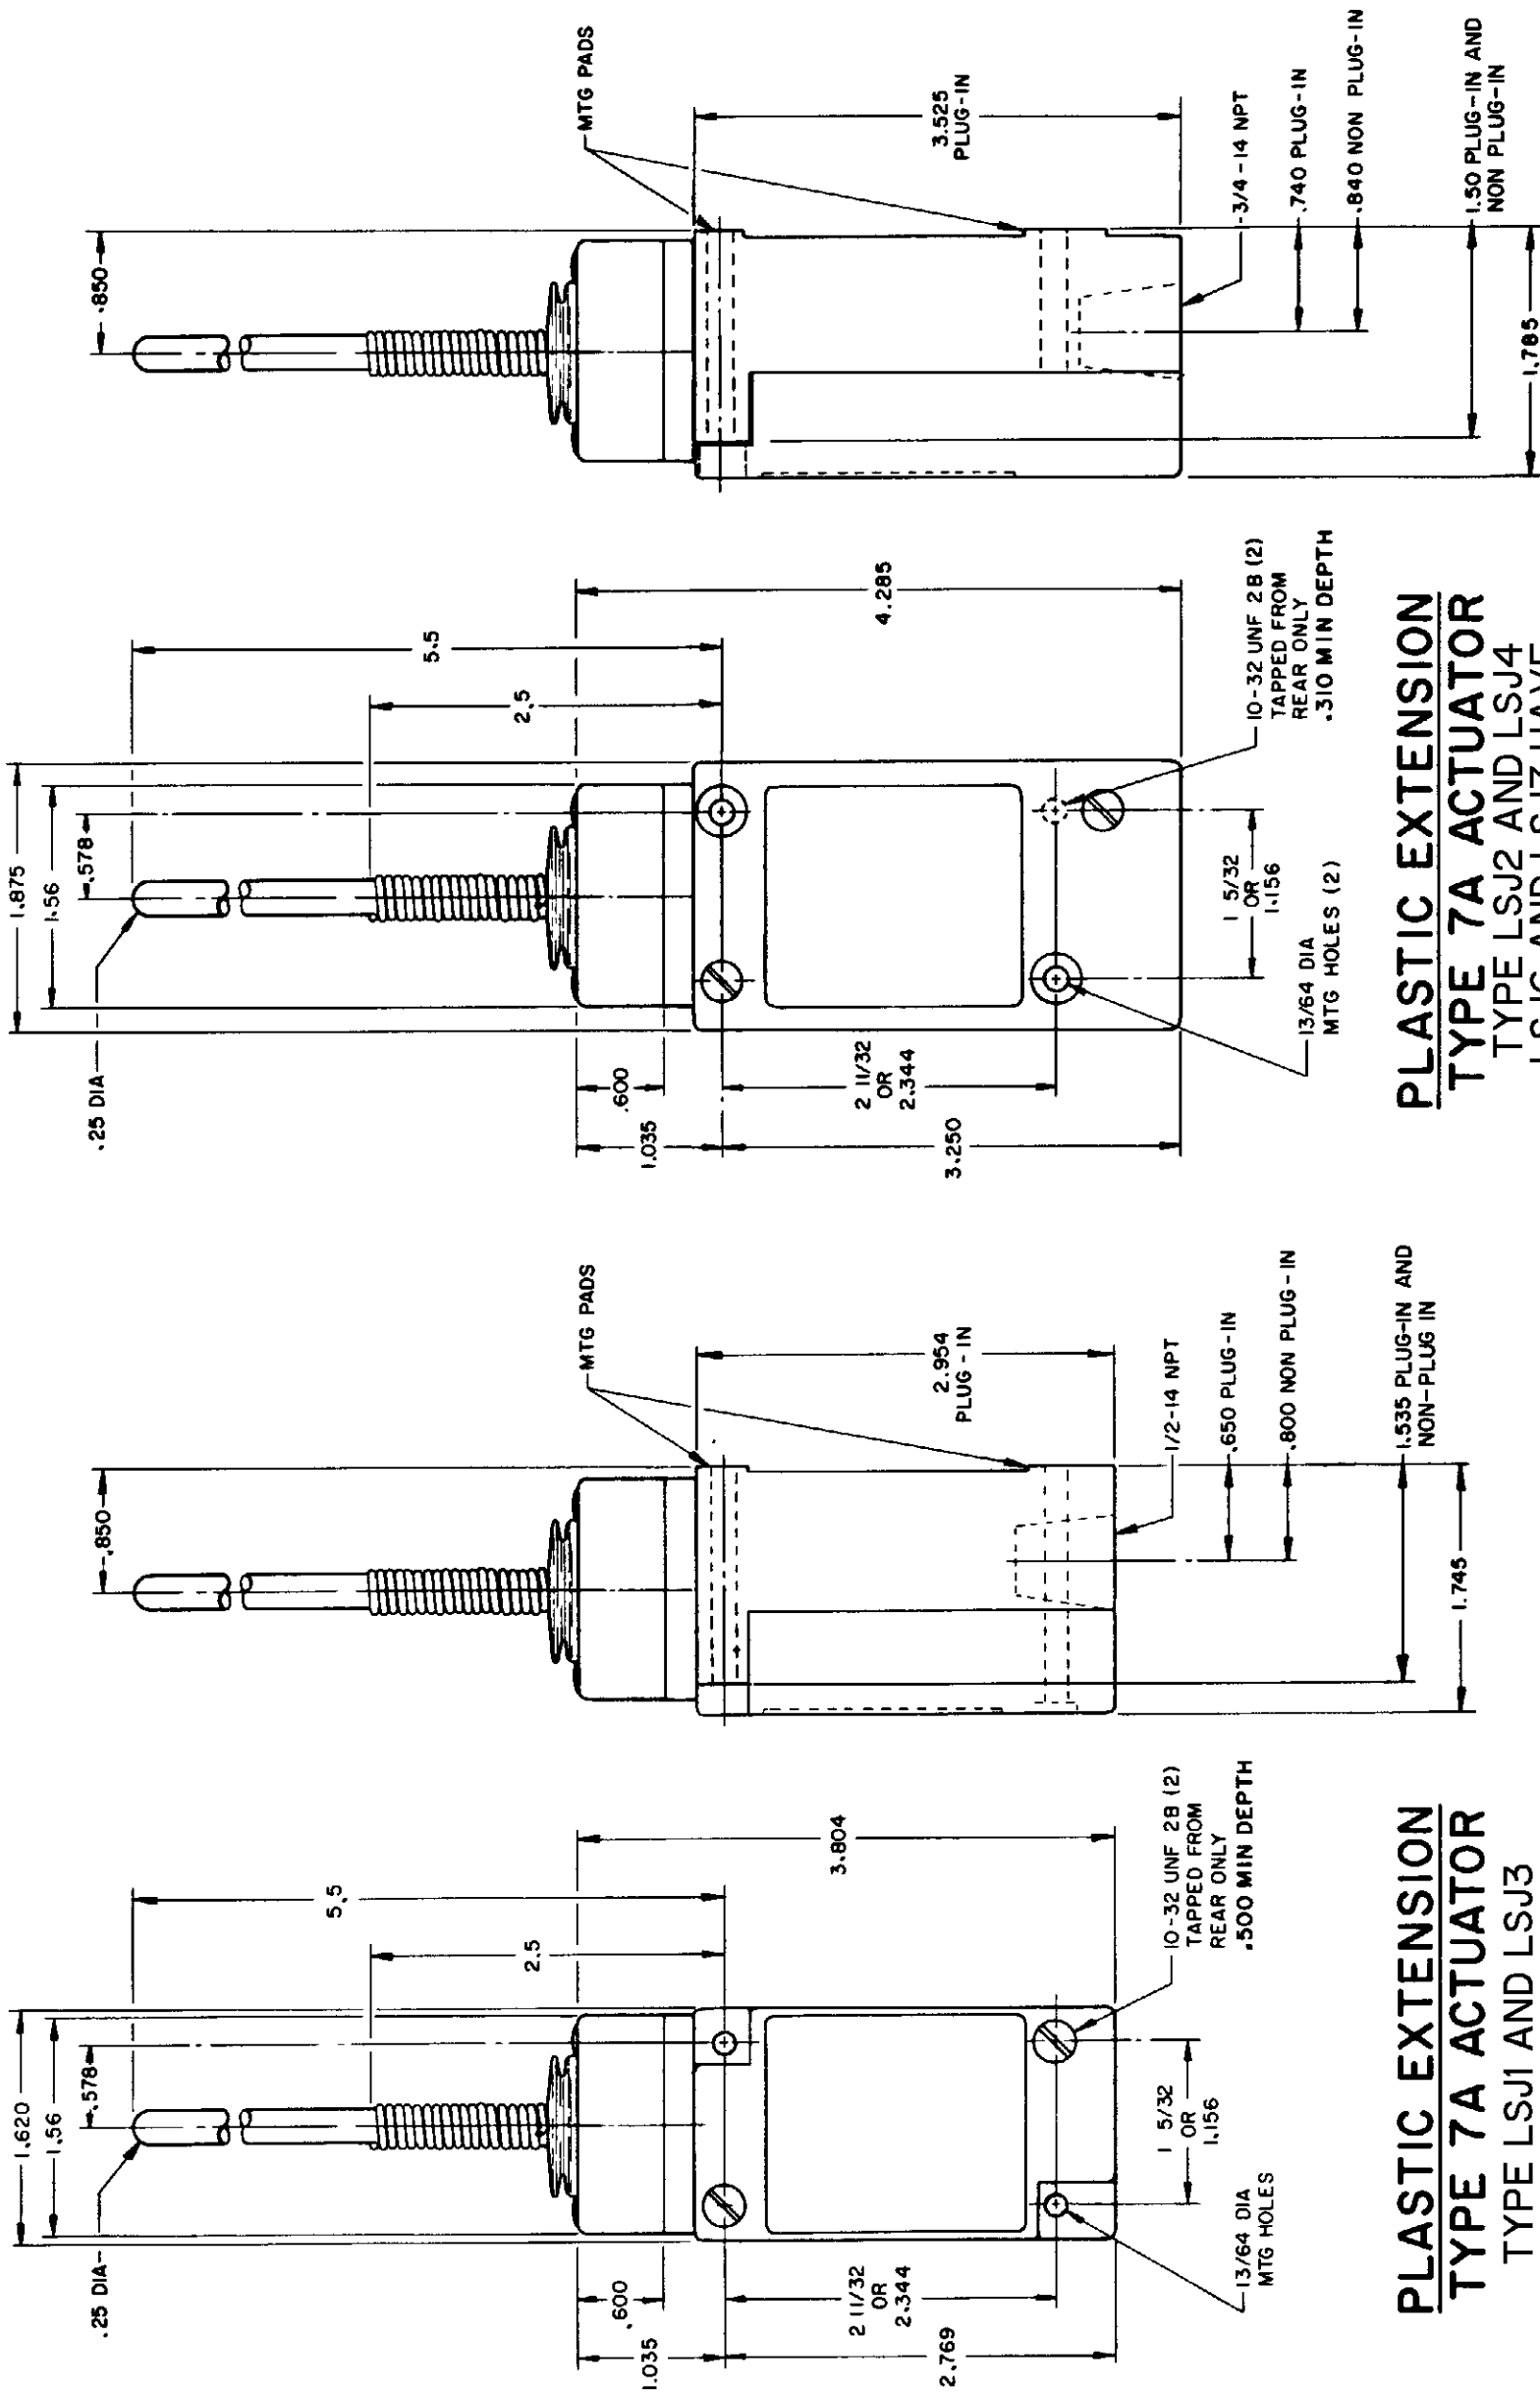


PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ1 AND LSJ3


PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE

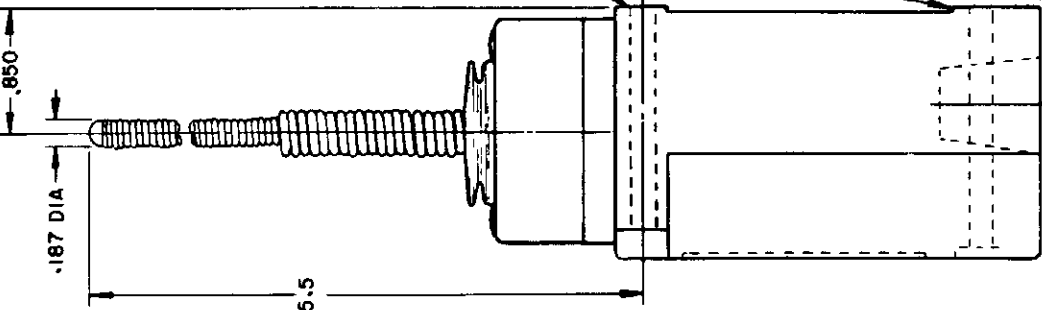

REPLACEMENT ACTUATOR
LSZ-4009

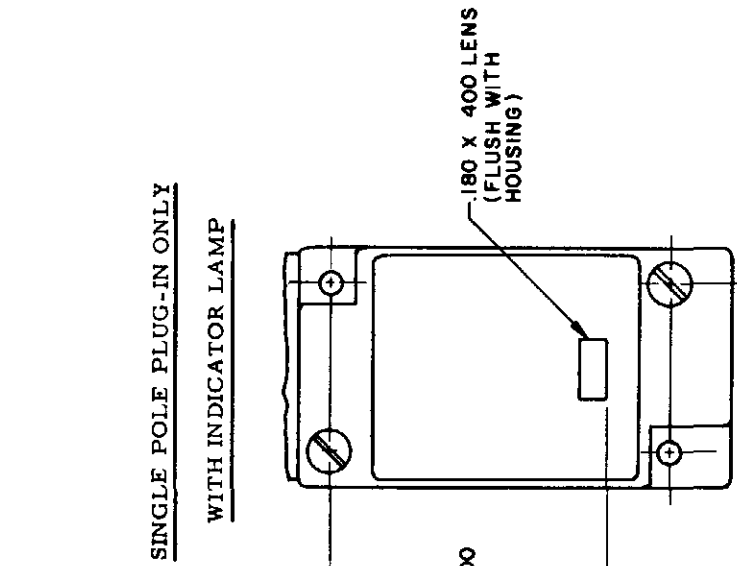

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8
24 LED VOLTAGE TYPE LSJ9

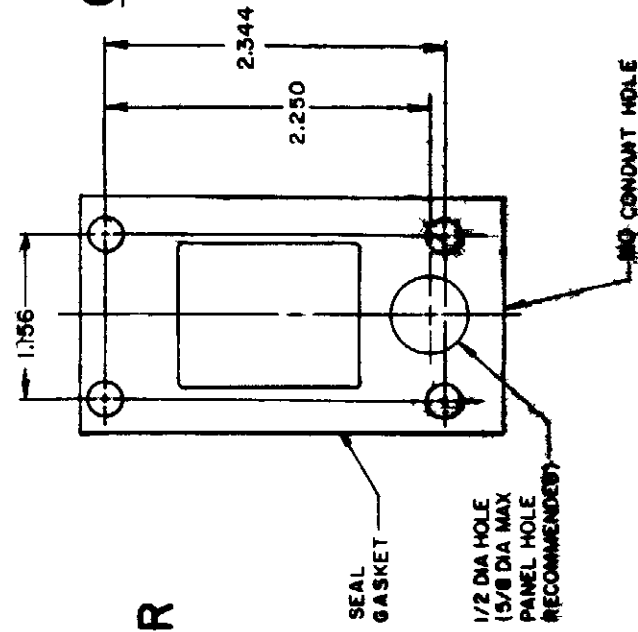

CABLE EXTENSION
TYPE 7N ACTUATOR


CABLE EXTENSION
TYPE 7N ACTUATOR

REPLACEMENT ACTUATOR
LSZ-4011

PAGE 7 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		LSA-LSW SERIES CHART 1	
FED MFG CODE 91929		SWITCH - ENCLOSED	

SCALE NONE
DO NOT SCALE PRINT

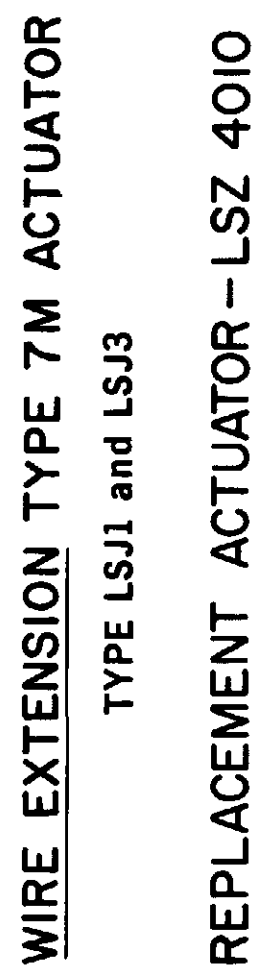

SINGLE POLE



	CAT WHISKER		WOBBLE STICK			
	5 1/2" COIL	5 1/2" WIRE	7 1/8" WIRE	ROD	CABLE	WIRE
PRETRAVEL (APPROX) IN. RADIUS	2	2	4.5	1.0	1.5	4.0
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	10.0	7.0	5.0


REV	DATE	BY	CHKD	DESCRIPTION
L	0031956			BS
B	10JUL07			201004
C	201748			201748
D	202198			202198
E	204871			204871
F	206581			206581
G	206763			206763
H	207179			207179
J	207474			207474
K	0006871			0006871

ISSUE	CATALOG LISTING	12	PSR	10JUL07	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES
M	LSA-LSW SERIES CHART 1	PAGE 9 OF 10						
MAM	15 JUN 94	CHKD	JAF	11 JUL 94	CHKD	AK	11 AUG 04	CHKD

CONVERSION BASES


SINGLE POLE
(SIDE ROTARY)
LSZ 4003

DOUBLE POLE
(SIDE ROTARY)
LSZ4004

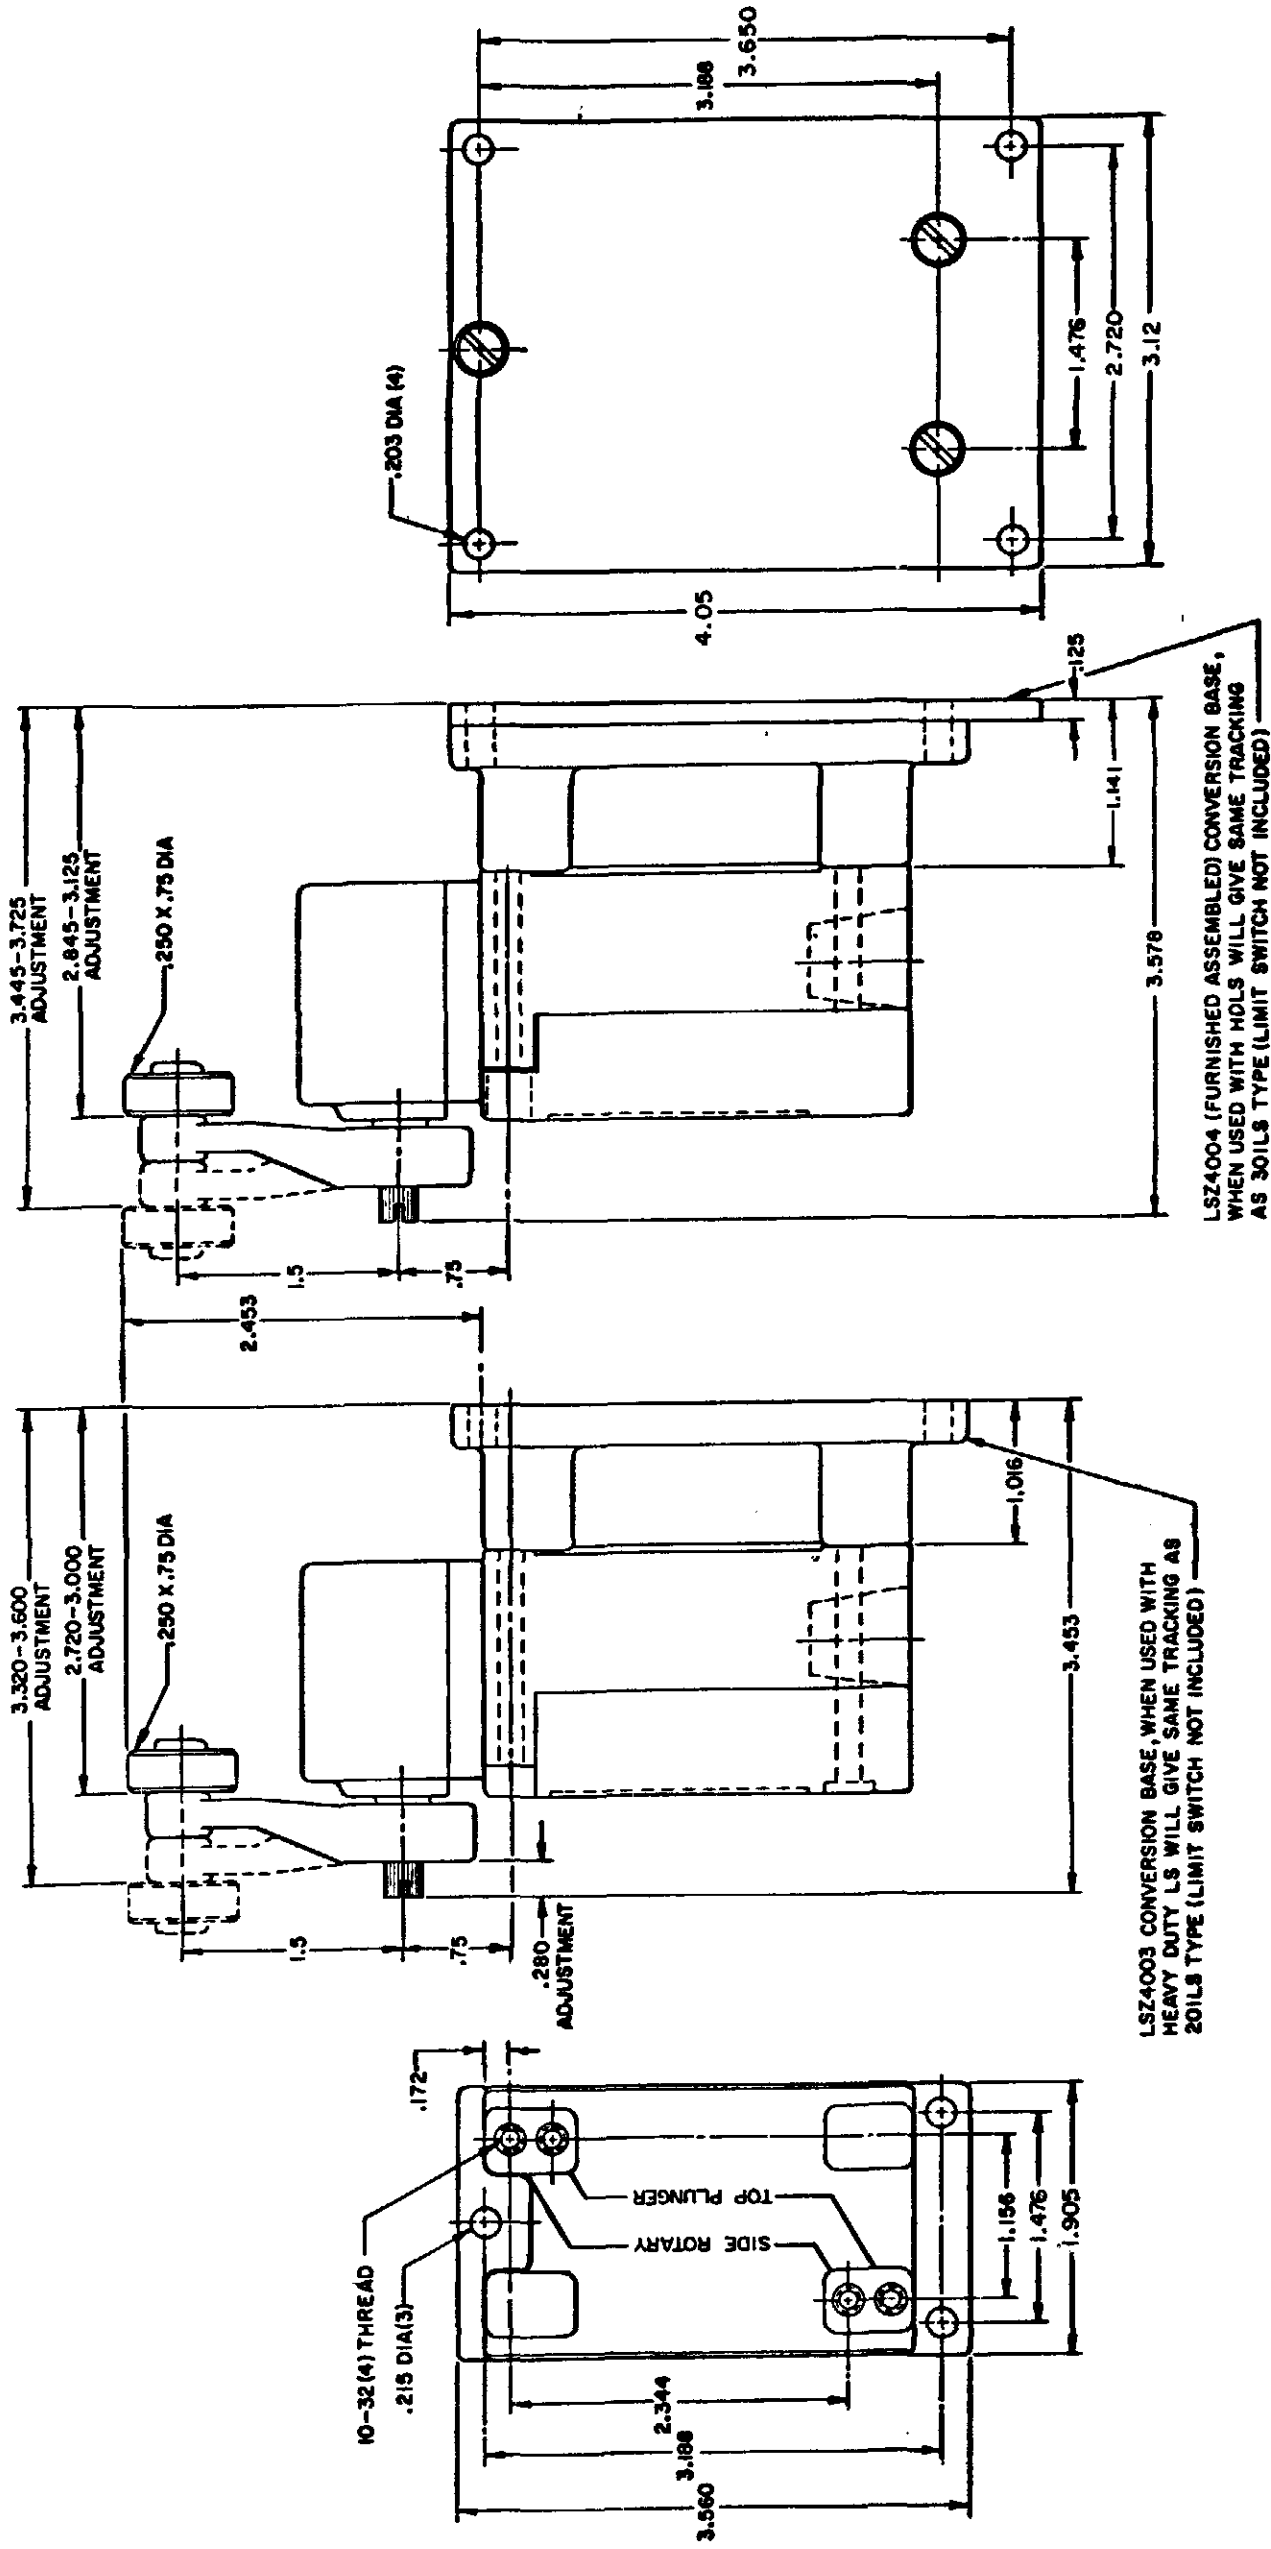

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE
TOP PLUNGER
LSZ4003

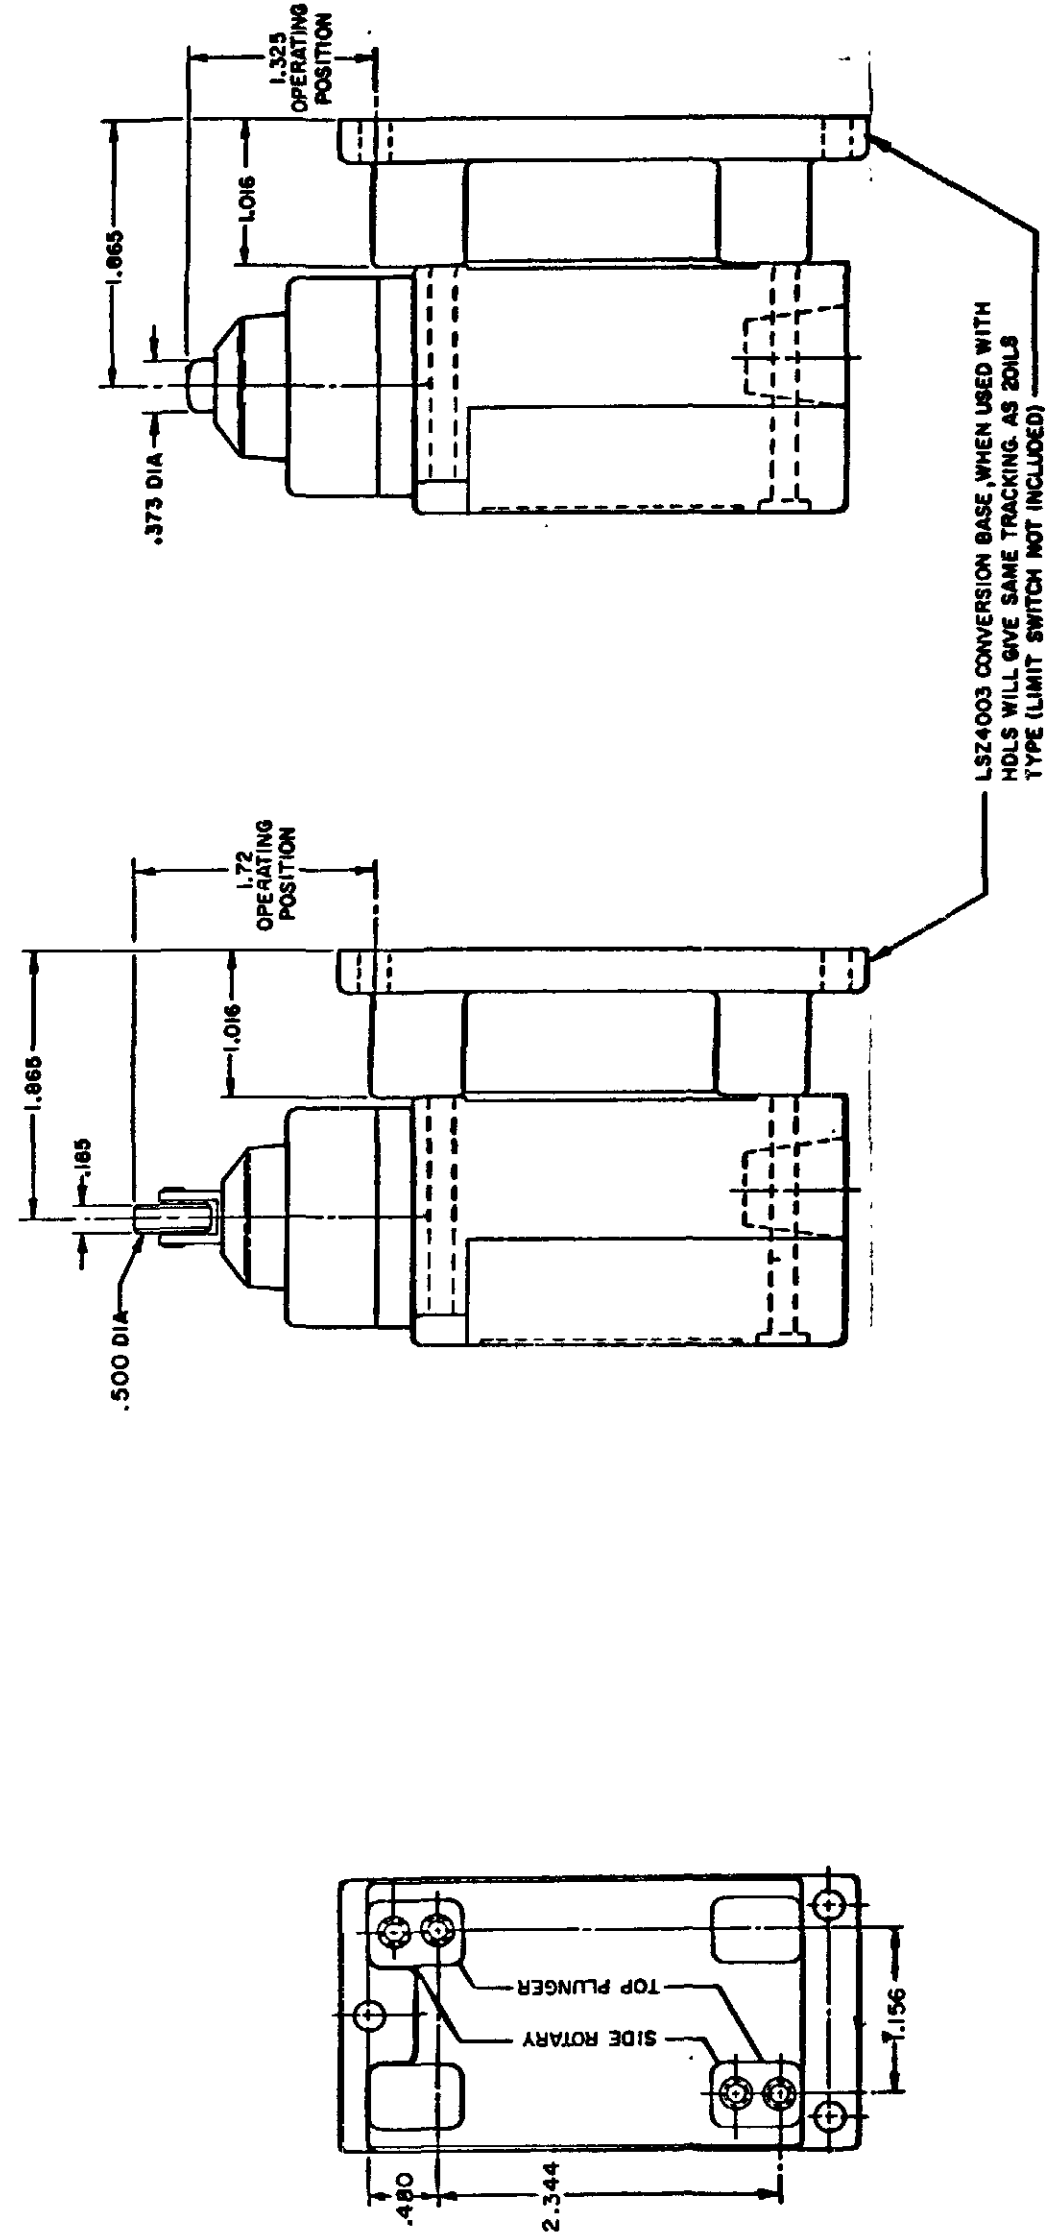

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMIT SWITCH

HEAD TYPE	CELLULOSE	DETERGENT	5 STAR	ASTM #1	ASTM #2	ASTM #3	ASTM #4	HOUGHTON SAFE 271	HOUGHTON SAFE 820	HOUGHTON SAFE 1010	MINERAL OIL	PETR. OIL CRUDE	SILICON CR & OIL	SUNSAFE	BEER	STODDARD SOLV.	CHLORINATED SOLVENTS	CITRIC ACID	DI-ESTER SYN. LUBRICANTS	OZONE	HYDRAUL	PROGUARD	PETRO. BASE HYDRAULIC OIL	LARD OIL	SILICATE ESTERS
LSA	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSB	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSC	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSD	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSE	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSF	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	2	4	4	2	2	2		
LSG	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSH	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSJ	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSK	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSL	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSM	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSN	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSP	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSR	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSV	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSW	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	2	4	4	2	2	2		
LST	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																								
LSS	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																								

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

FED. MFG. CODE 91929



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331