


CATALOG LISTING		ISSUE		12		12		PAGE 1 OF 10		M		LSA-LSW SERIES CHART 1	
RASTER		DRAWN		REVISIONS		CHECK		PSR		RELEASE NO		CO-78498 REPLACES LSA-LSW SERIES	
				1		1101107		1A10Q4					
				2		1101107		1A10Q4					
				3		1101107		1A10Q4					
				4		1101107		1A10Q4					
				5		1101107		1A10Q4					
				6		1101107		1A10Q4					
				7		1101107		1A10Q4					
				8		1101107		1A10Q4					
				9		1101107		1A10Q4					
				10		1101107		1A10Q4					
				11		1101107		1A10Q4					
				12		1101107		1A10Q4					
				13		1101107		1A10Q4					
				14		1101107		1A10Q4					
				15		1101107		1A10Q4					
				16		1101107		1A10Q4					
				17		1101107		1A10Q4					
				18		1101107		1A10Q4					
				19		1101107		1A10Q4					
				20		1101107		1A10Q4					
				21		1101107		1A10Q4					
				22		1101107		1A10Q4					
				23		1101107		1A10Q4					
				24		1101107		1A10Q4					
				25		1101107		1A10Q4					
				26		1101107		1A10Q4					
				27		1101107		1A10Q4					
				28		1101107		1A10Q4					
				29		1101107		1A10Q4					
				30		1101107		1A10Q4					
				31		1101107		1A10Q4					
				32		1101107		1A10Q4					
				33		1101107		1A10Q4					
				34		1101107		1A10Q4					
				35		1101107		1A10Q4					
				36		1101107		1A10Q4					
				37		1101107		1A10Q4					
				38		1101107		1A10Q4					
				39		1101107		1A10Q4					
				40		1101107		1A10Q4					
				41		1101107		1A10Q4					
				42		1101107		1A10Q4					
				43		1101107		1A10Q4					
				44		1101107		1A10Q4					
				45		1101107		1A10Q4					
				46		1101107		1A10Q4					
				47		1101107		1A10Q4					
				48		1101107		1A10Q4					
				49		1101107		1A10Q4					
				50		1101107		1A10Q4					
				51		1101107		1A10Q4					
				52		1101107		1A10Q4					
				53		1101107		1A10Q4					
				54		1101107		1A10Q4					
				55		1101107		1A10Q4					
				56		1101107		1A10Q4					
				57		1101107		1A10Q4					
				58		1101107		1A10Q4					
				59		1101107		1A10Q4					
				60		1101107		1A10Q4					
				61		1101107		1A10Q4					
				62		1101107		1A10Q4					
				63		1101107		1A10Q4					
				64		1101107		1A10Q4					
				65		1101107		1A10Q4					
				66		1101107		1A10Q4					
				67		1101107		1A10Q4					
				68		1101107		1A10Q4					
				69		1101107		1A10Q4					
				70		1101107		1A10Q4					
				71		1101107		1A10Q4					
				72		1101107		1A10Q4					
				73		1101107		1A10Q4					
				74		1101107		1A10Q4					
				75		1101107		1A10Q4					
				76		1101107		1A10Q4					
				77		1101107		1A10Q4					
				78		1101107		1A10Q4					
				79		1101107		1A10Q4					
				80		1101107		1A10Q4					
				81		1101107		1A10Q4					
				82		1101107		1A10Q4					
				83		1101107		1A10Q4					
				84		1101107		1A10Q4					
				85		1101107		1A10Q4					
				86		1101107		1A10Q4					
				87		1101107		1A10Q4					
				88		1101107		1A10Q4					
				89		1101107		1A10Q4					
				90		1101107		1A10Q4					
				91		1101107		1A10Q4					
				92		1101107		1A10Q4					
				93		1101107		1A10Q4					
				94		1101107		1A10Q4					
				95		1101107		1A10Q4					
				96		1101107		1A10Q4					
				97		1101107		1A10Q4					
				98		1101107		1A10Q4					
				99		1101107		1A10Q4					
				100		1101107		1A10Q4					
				101		1101107		1A10Q4					
				102		1101107		1A10Q4					
				103		1101107		1A10Q4					
				104		1101107		1A10Q4					
				105		1101107		1A10Q4					
				106		1101107		1A10Q4					
				107		1101107		1A10Q4					
				108		1101107		1A10Q4					
				109		1101107		1A10Q4					
				110		1101107		1A10Q4					
				111		1101107		1A10Q4					
				112		1101107		1A10Q4					
				113		1101107		1A10Q4					
				114		1101107		1A10Q4					
				115		1101107		1A10Q4					
				116		1101107		1A10Q4					
				117		1101107		1A10Q4					
				118		1101107		1A10Q4					
				119		1101107		1A10Q4					
				120		1101107		1A10Q4					
				121		1101107		1A10Q4					
				122		1101107		1A10Q4					
				123		1101107		1A10Q4					
				124		1101107		1A10Q4					
				125		1101107		1A10Q4					
				126		1101107		1A10Q4					
				127		1101107		1A10Q4					
				128		1101107		1A10Q4					
				129		1101107		1A10Q4					
				130		1101107		1A10Q4					
				131		1101107		1A10Q4					
				132		1101107		1A10Q4					
				133		1101107		1A10Q4					
				134		1101107		1A10Q4					
				135		1101107		1A10Q4					
				136		1101107		1A10Q4					
				137		1101107		1A10Q4					
				138		1101107		1A10Q4					
				139		1101107		1A10Q4					
				140		1101107		1A10Q4					
				141		1101107		1A10Q4					
				142		1101107		1A10Q4					
				143		1101107		1A10Q4					
				144		1101107		1A10Q4					
				145		1101107		1A10Q4					
				146		1101107		1A10Q4					
				147		1101107		1A10Q4					
				148		1101107		1A10Q4					
				149		1101107		1A10Q4					
				150		1101107		1A10Q4					
				151		1101107		1A10Q4					
				152		1101107		1A10Q4					
				153		1101107		1A10Q4					
				154		1101107		1A10Q4					
				155		1101107		1A10Q4					
				156		1101107		1A10Q4					
				157		1101107		1A10Q4					
				158		1101107		1A10Q4					
				159		1101107		1A10Q4					
				160		1101107		1A10Q4					
				161		1101107		1A10Q4					
				162		1101107		1A10Q4					
				163		1101107		1A10Q4					
				164		1101107		1A10Q4					
				165		1101107		1A10Q4					
				166		1101107		1A10Q4					
				167		1101107		1A10Q4					
				168		1101107		1A10Q4					
				169		1101107		1A10Q4					
				170		1101107		1A10Q4					
				171		1101107		1A10Q4					

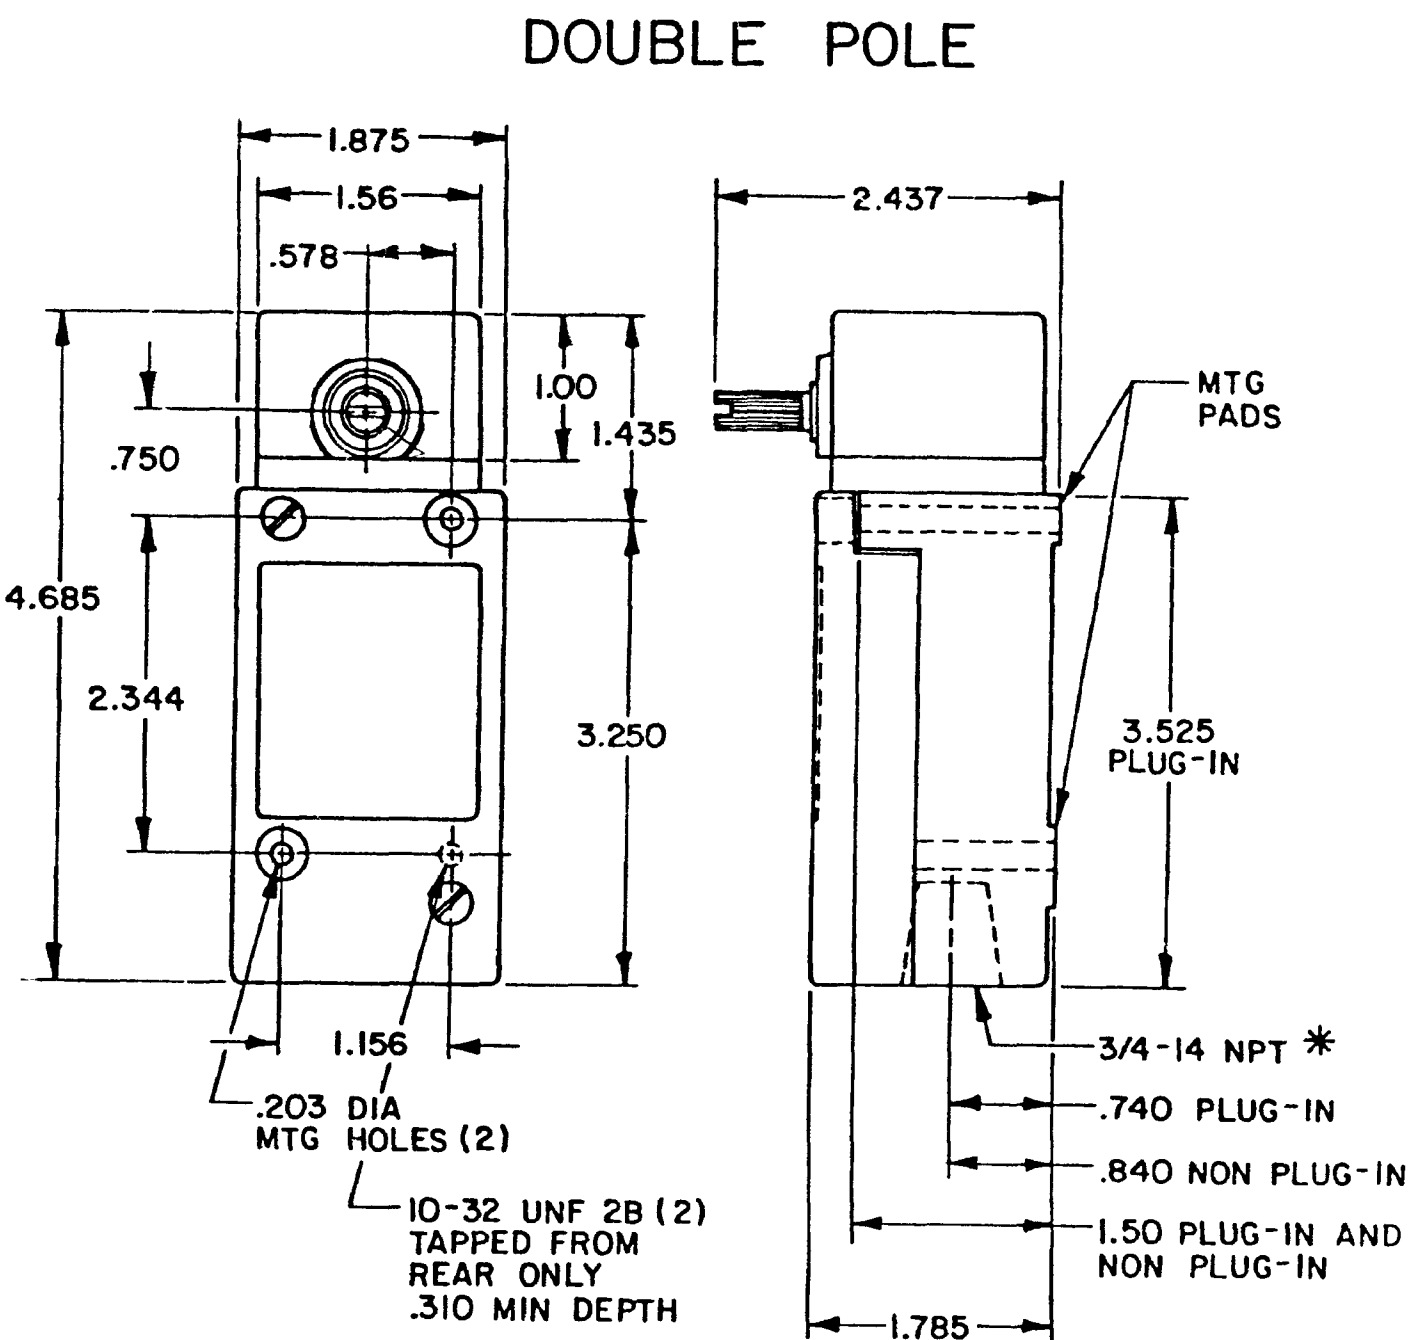


TYPE: LSA2, LSH2, LSM2, LSN2, LSP2, LSR2
LSA4, LSH4, LSM4, LSN4, LSP4, LSR4

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

1.900

.180 X .400 LENS
(FLUSH WITH HOUSING)

240 LAMP VOLTAGE -
TYPE LSA8, LSH8, LSN8, LSP8, LSR8

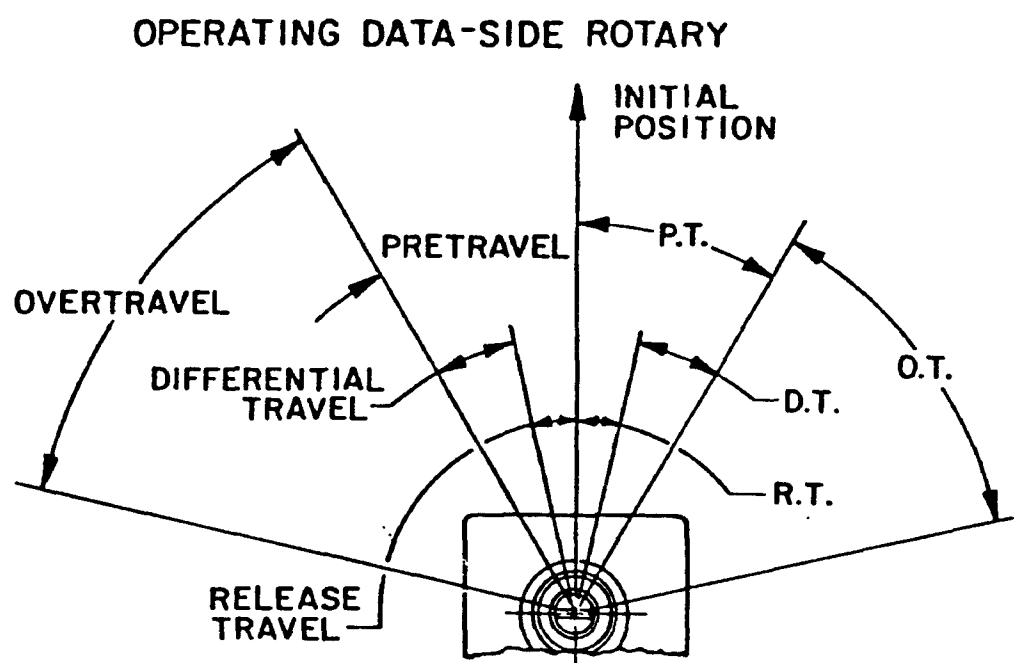

Technical drawing of a panel with dimensions and labels:

- Top width dimension: 1.156
- Right height dimension: 2.344
- Bottom height dimension: 2.250
- Labels:
 - SEAL GASKET (pointing to the top edge)
 - .500 DIA HOLE (.625 DIA MAX PANEL HOLE RECOMMENDED) (pointing to a hole in the bottom edge)
 - NO CONDUIT HOLE (pointing to a hole in the bottom edge)



THIRD ANGLE PROJECTION



SCALE NONE


DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE


ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		±

WEIGHT


SIDE ROTARY CAM TRACKING

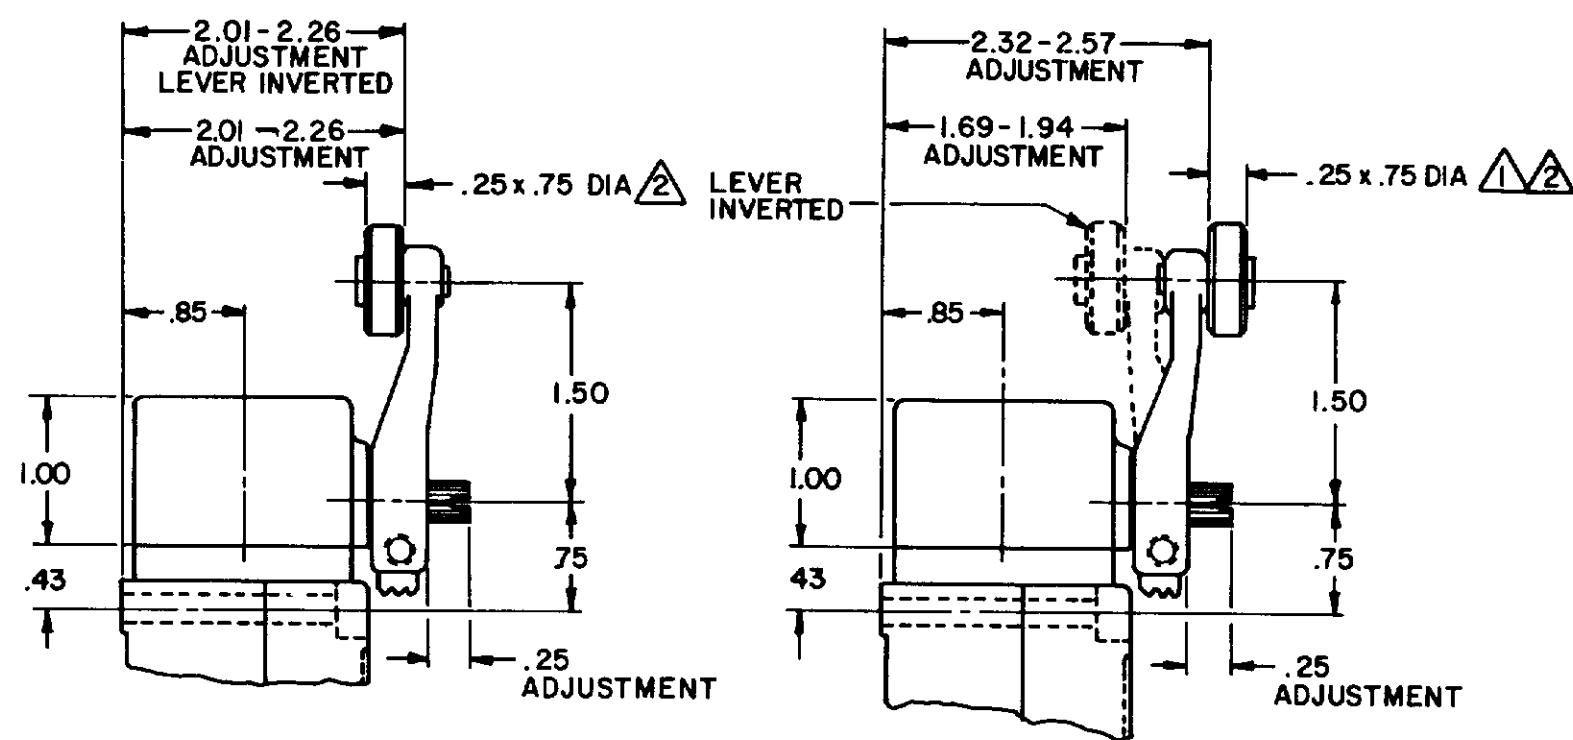


LSZ51 TYPE LEVERS

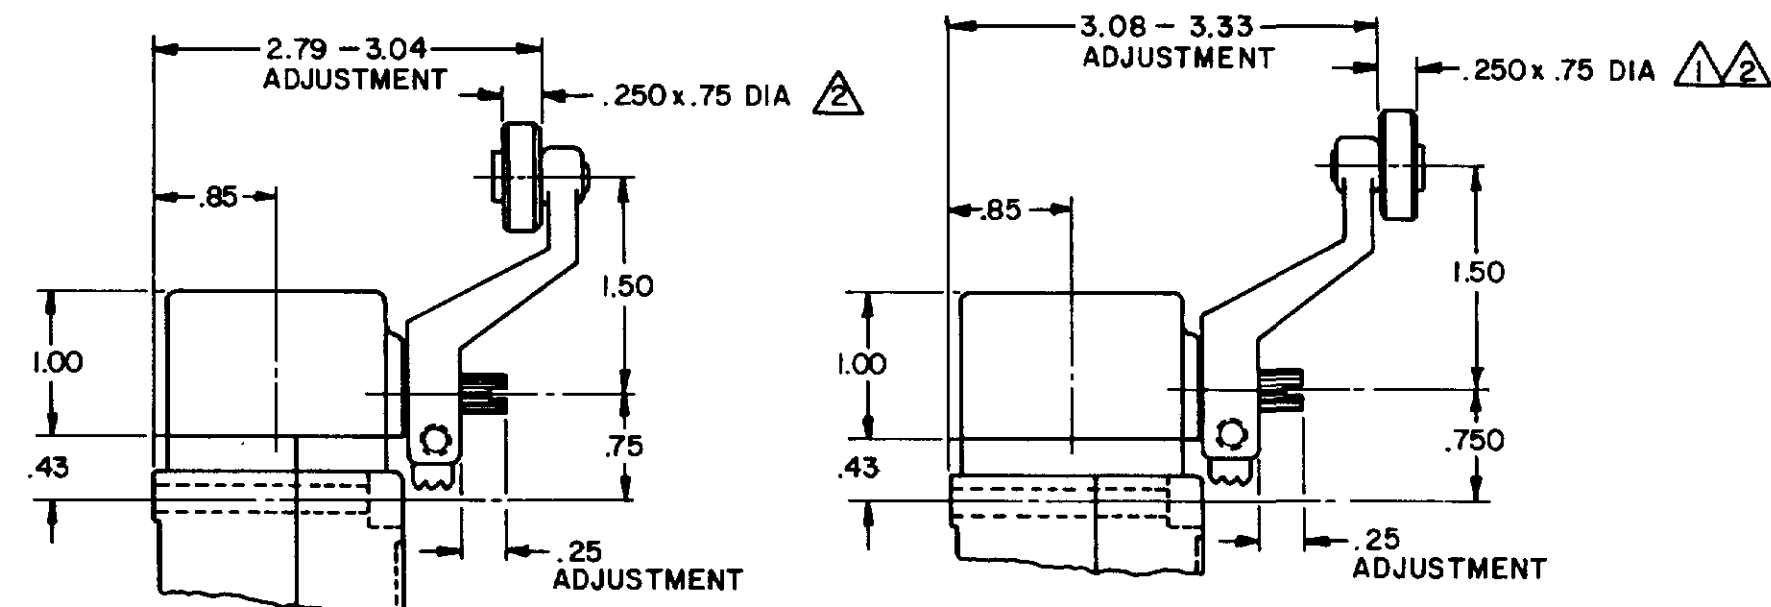


LSZ55 TYPE LEVERS

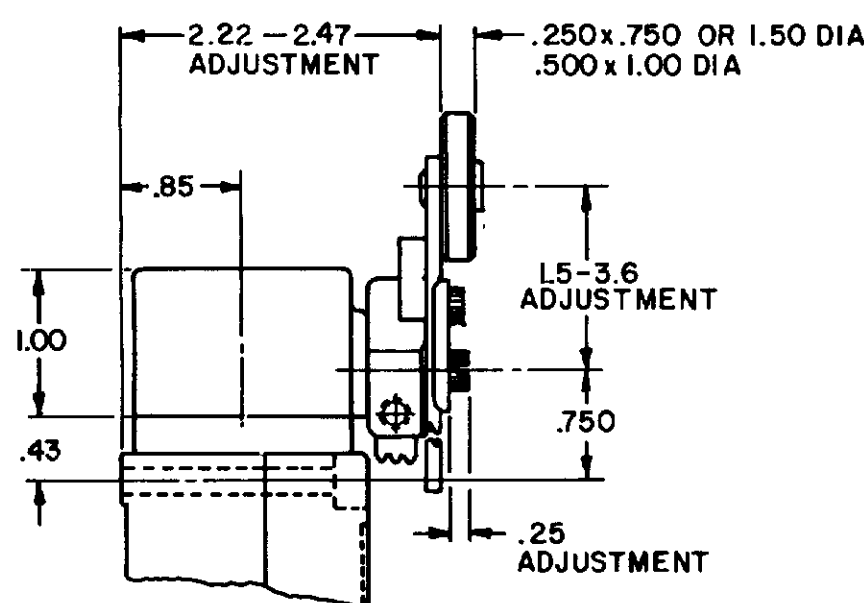


LSZ52 TYPE LEVER

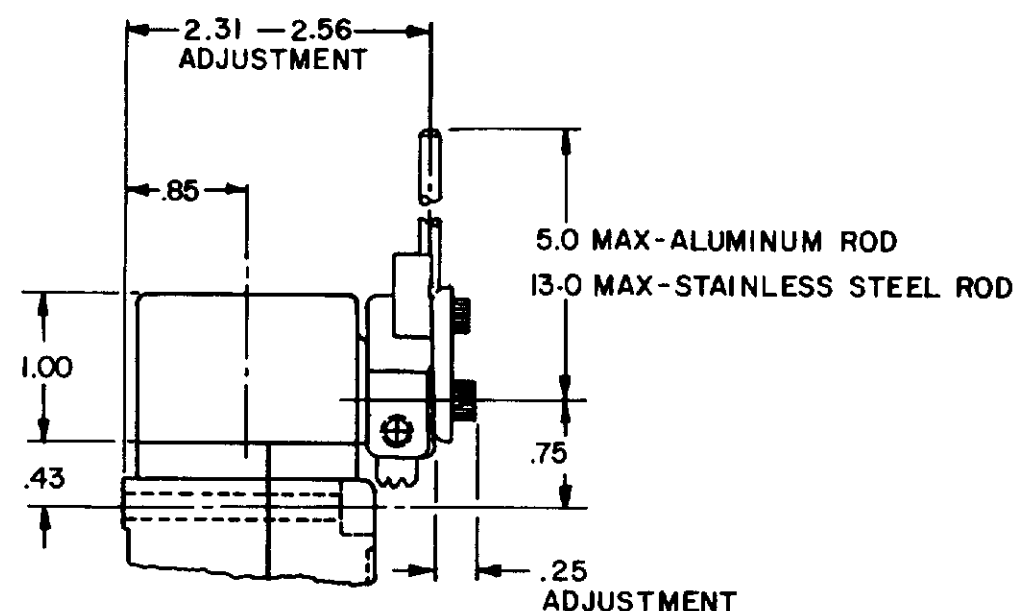

LSZ54 TYPE LEVER

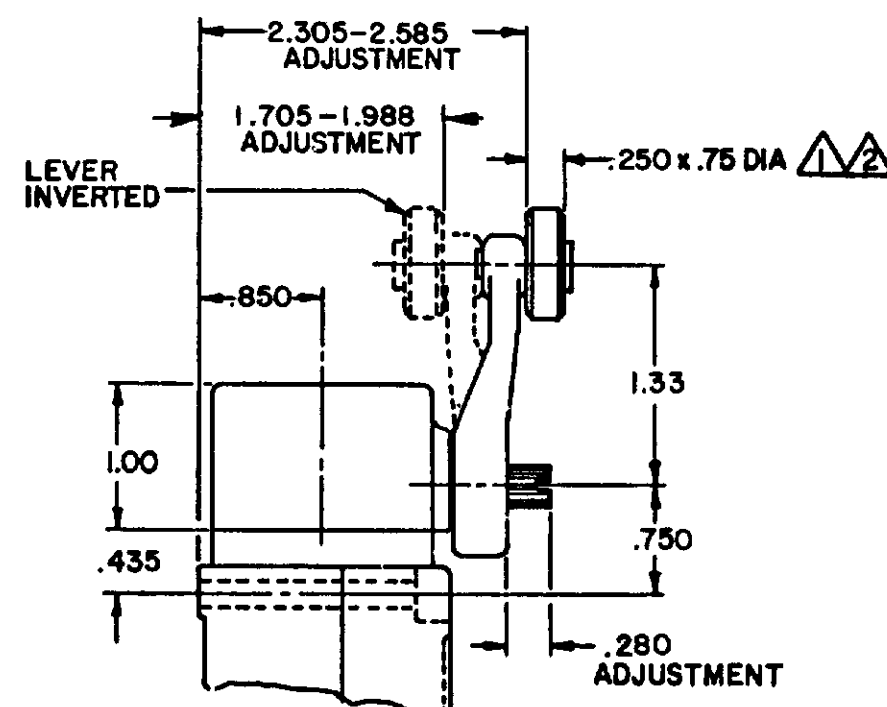

OPEN MOUNTED ROLLER

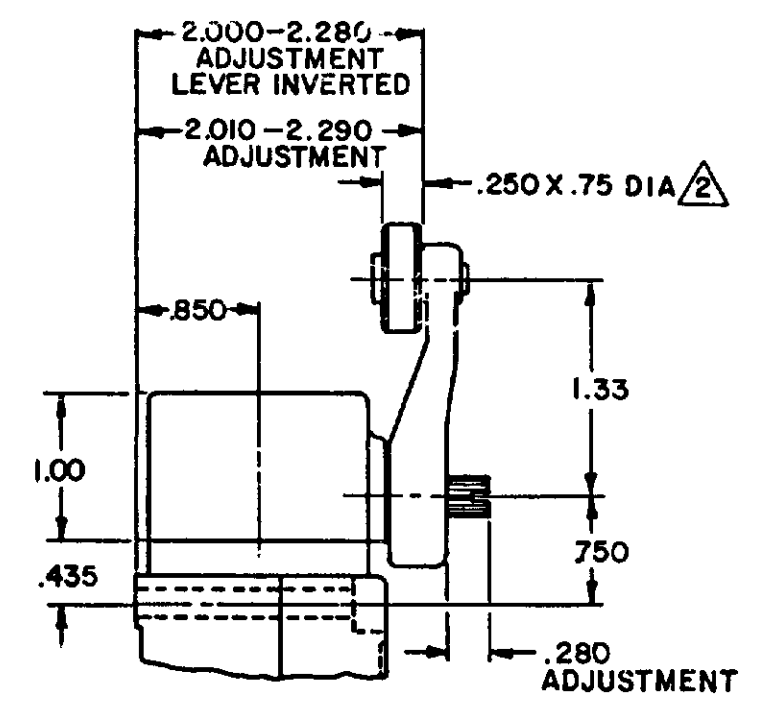

CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

- NOTES
- 1 ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT LEVER CANNOT BE INVERTED
 - 2 FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO "M" DRAWING
 - 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 "M" DRAWING

CATALOG LISTING
LSA-LSW SERIES CHART 1
PAGE 2 OF 10
REPLACES LSA-LSW SERIES
10JUL07 RELEASE NO. CO-78498
PSR
CHECK
11AUG04
AK
11JUL94
JAF
15JUN94
MAM
15JUN94
JAF
15JUN94
MAM


REV	DATE	BY	CHKD	DESCRIPTION
1	0031956			
2	10JUL07	BS		
3	201004	B		
4	10AUG00	C SL		
5	201748	C		
6	17NOV00	C SL		
7	202198	D		
8	20JAN01	E		
9	204871	F		
10	206581	F		
11	14OCT02	G		
12	206763	G		
13	31OCT02	H		
14	207178	H		
15	207474	J		
16	18FEB03	K		
17	0006871	K		

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		PAGE 2 OF 10	
MICRO SWITCH a Honeywell Division FED MFG CODE 91929		SWITCH - ENCLOSED CATALOG LISTING LSA-LSW SERIES CHART 1	
THIRD ANGLE PROJECTION SCALE NONE DO NOT SCALE PRINT UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: ONE PLACE (0) ±.030 TWO PLACES (00) ±.015 THREE PLACES (000) ±.005 ANGLES ± WEIGHT			

TOP ROTARY

SINGLE POLE

DOUBLE POLE

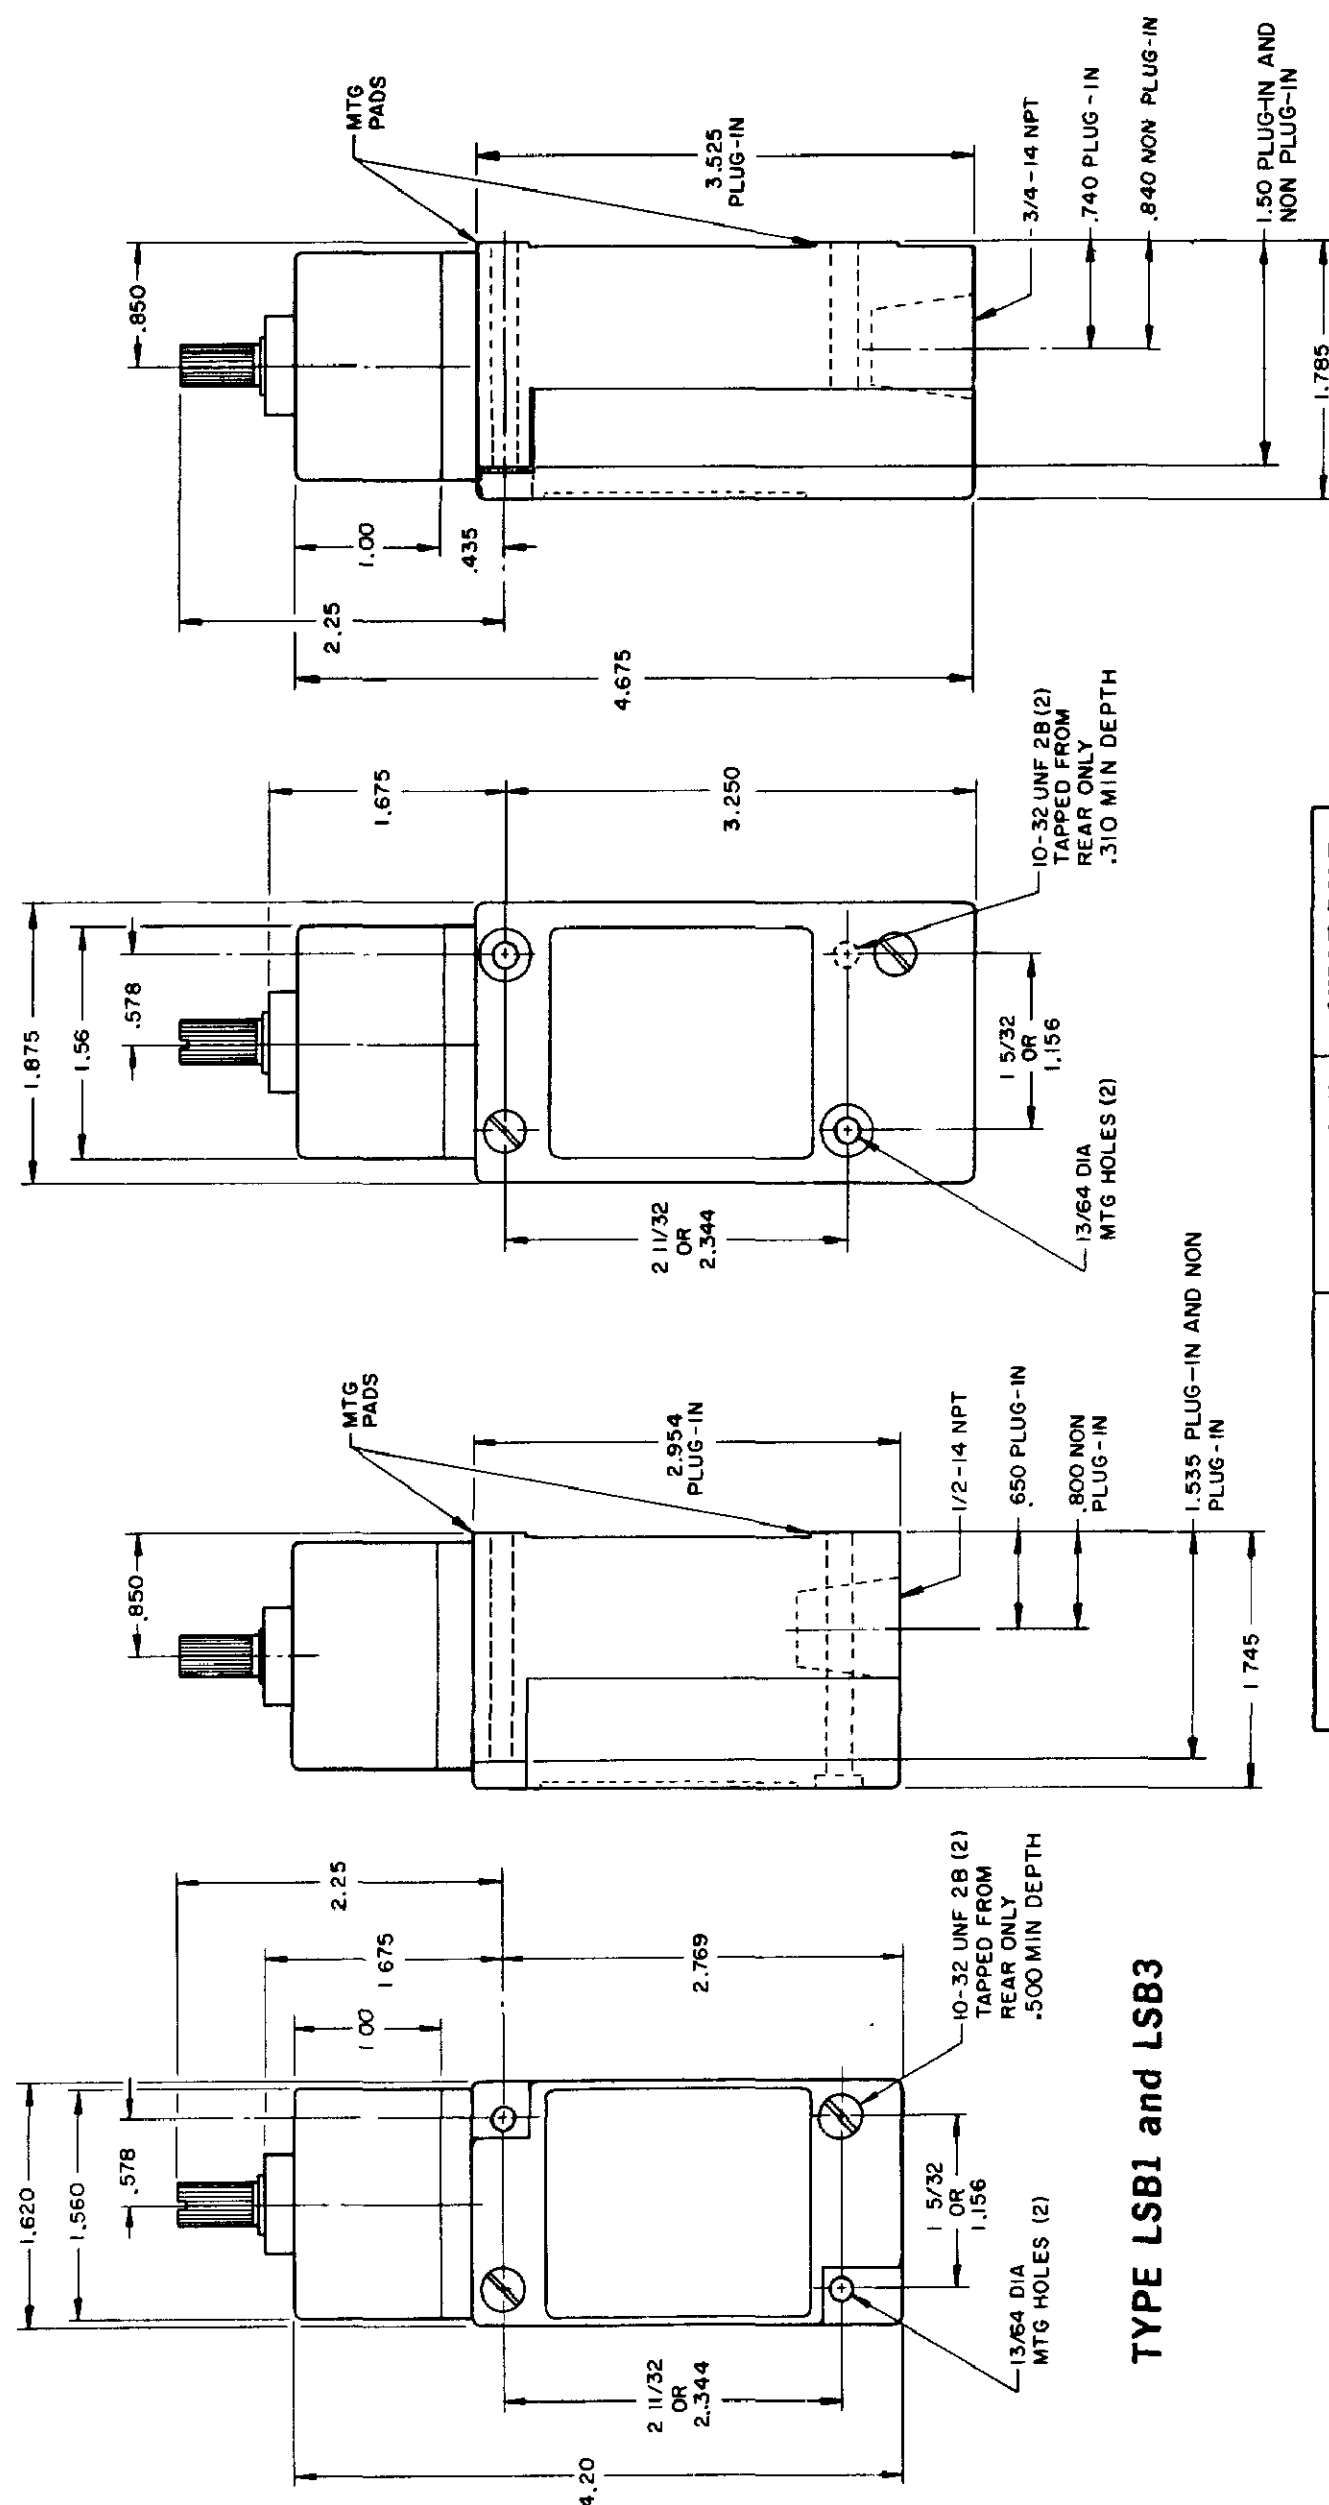

**TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2" - 14 NPT
CONDUIT HOLE**

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

10 AMP CONT.	A.C. VOLTAGE	AMPS AT 35 POWER FACTOR					
		SINGLE POLE			DOUBLE POLE		
		MAKE	BREAK		MAKE	BREAK	
	120	60	6	30	3		
	240	30	3	15	1.5		
	480	15	1.5	7.5	75		
	600	12	1.2	6	6		

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT


VOLTAGE	
5 AC OR DC MIN	01 AMP MIN
600 AC	720 VA
240 DC	30 WATT

**DIRECT ACTING (ALSO RATED AT A. C. 10
AMP CONT.)**


D. C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

**WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)**

DOUBLE POLE

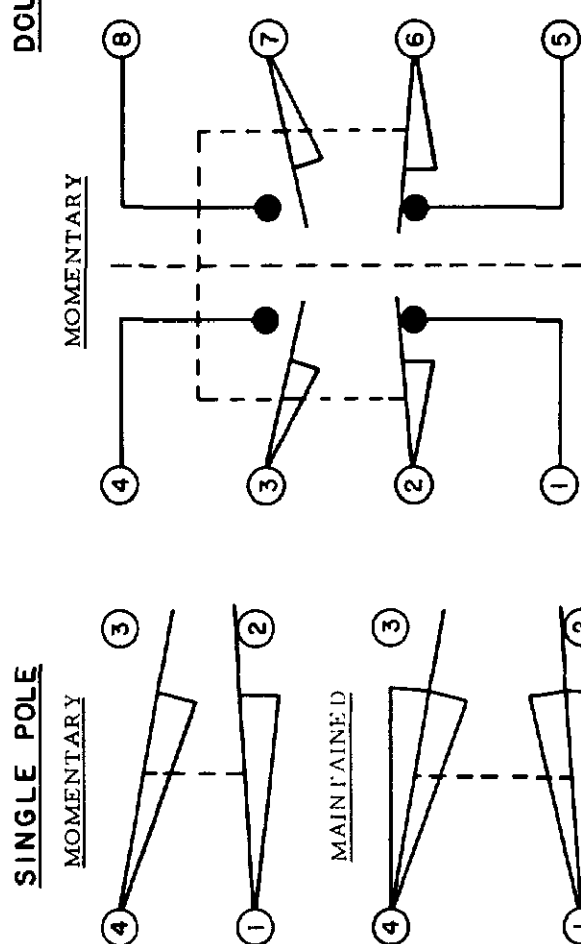


SINGLE POLE

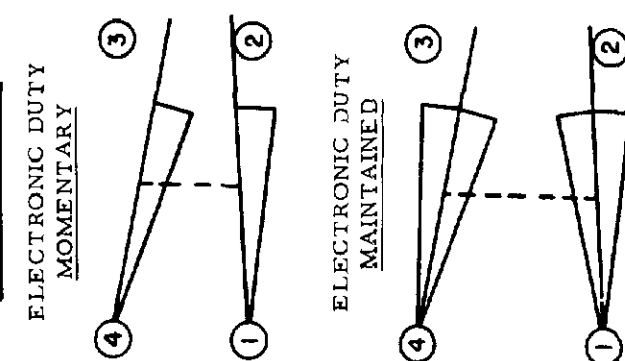


DIRECT ACTING

SINGLE POLE

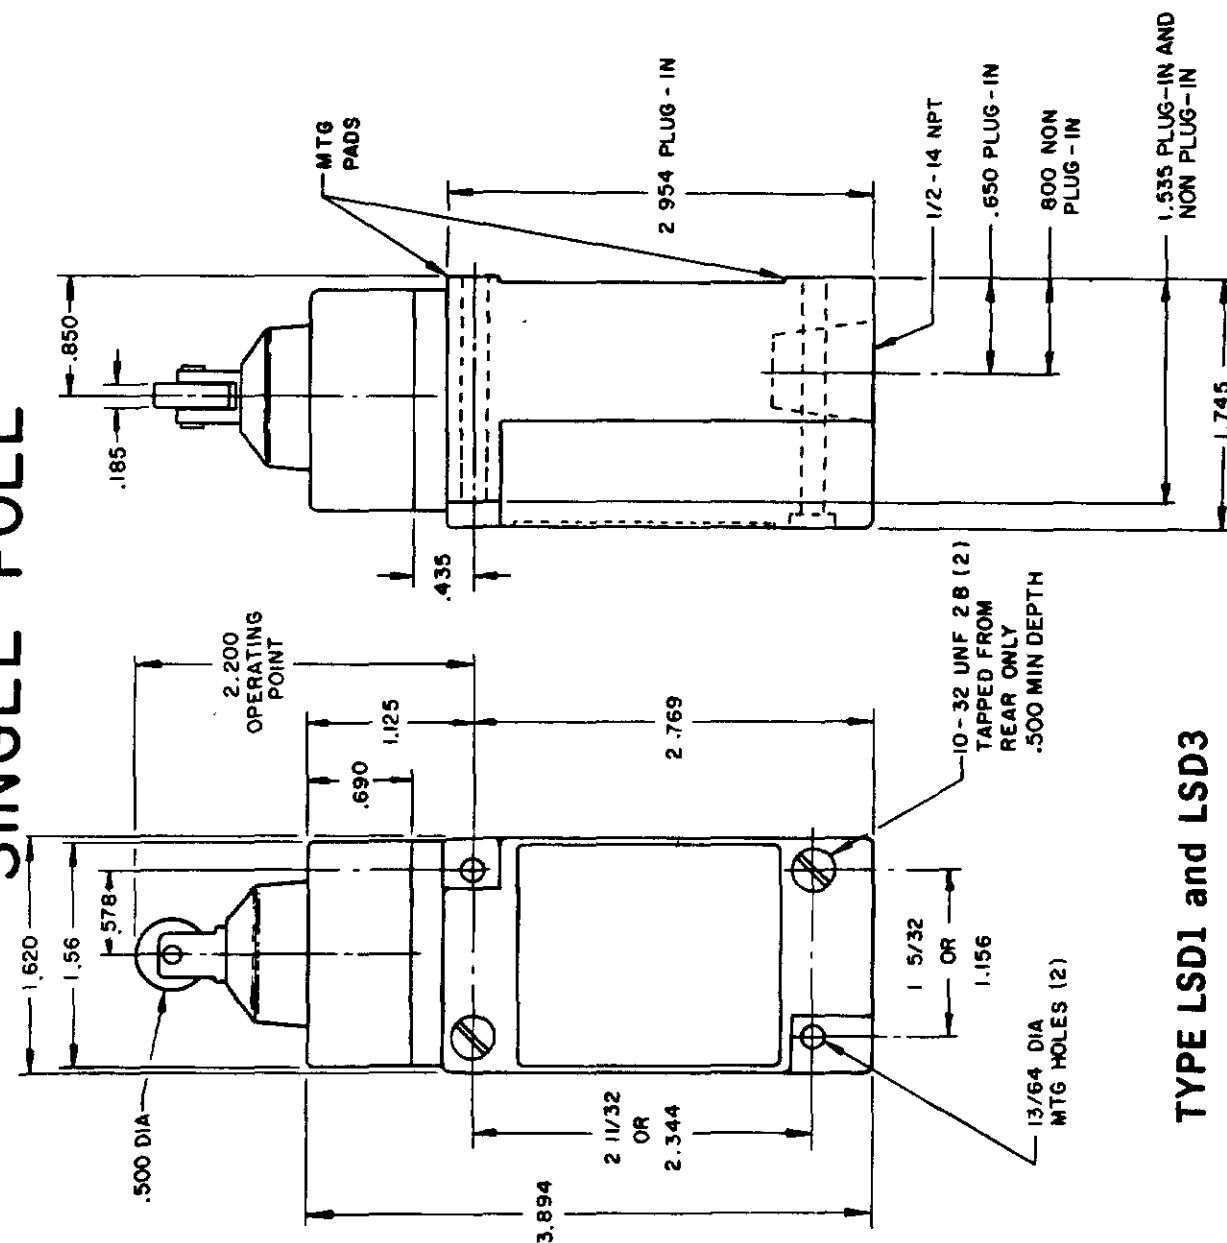


TYPE LSD1 and LSD3

DOUBLE POLE

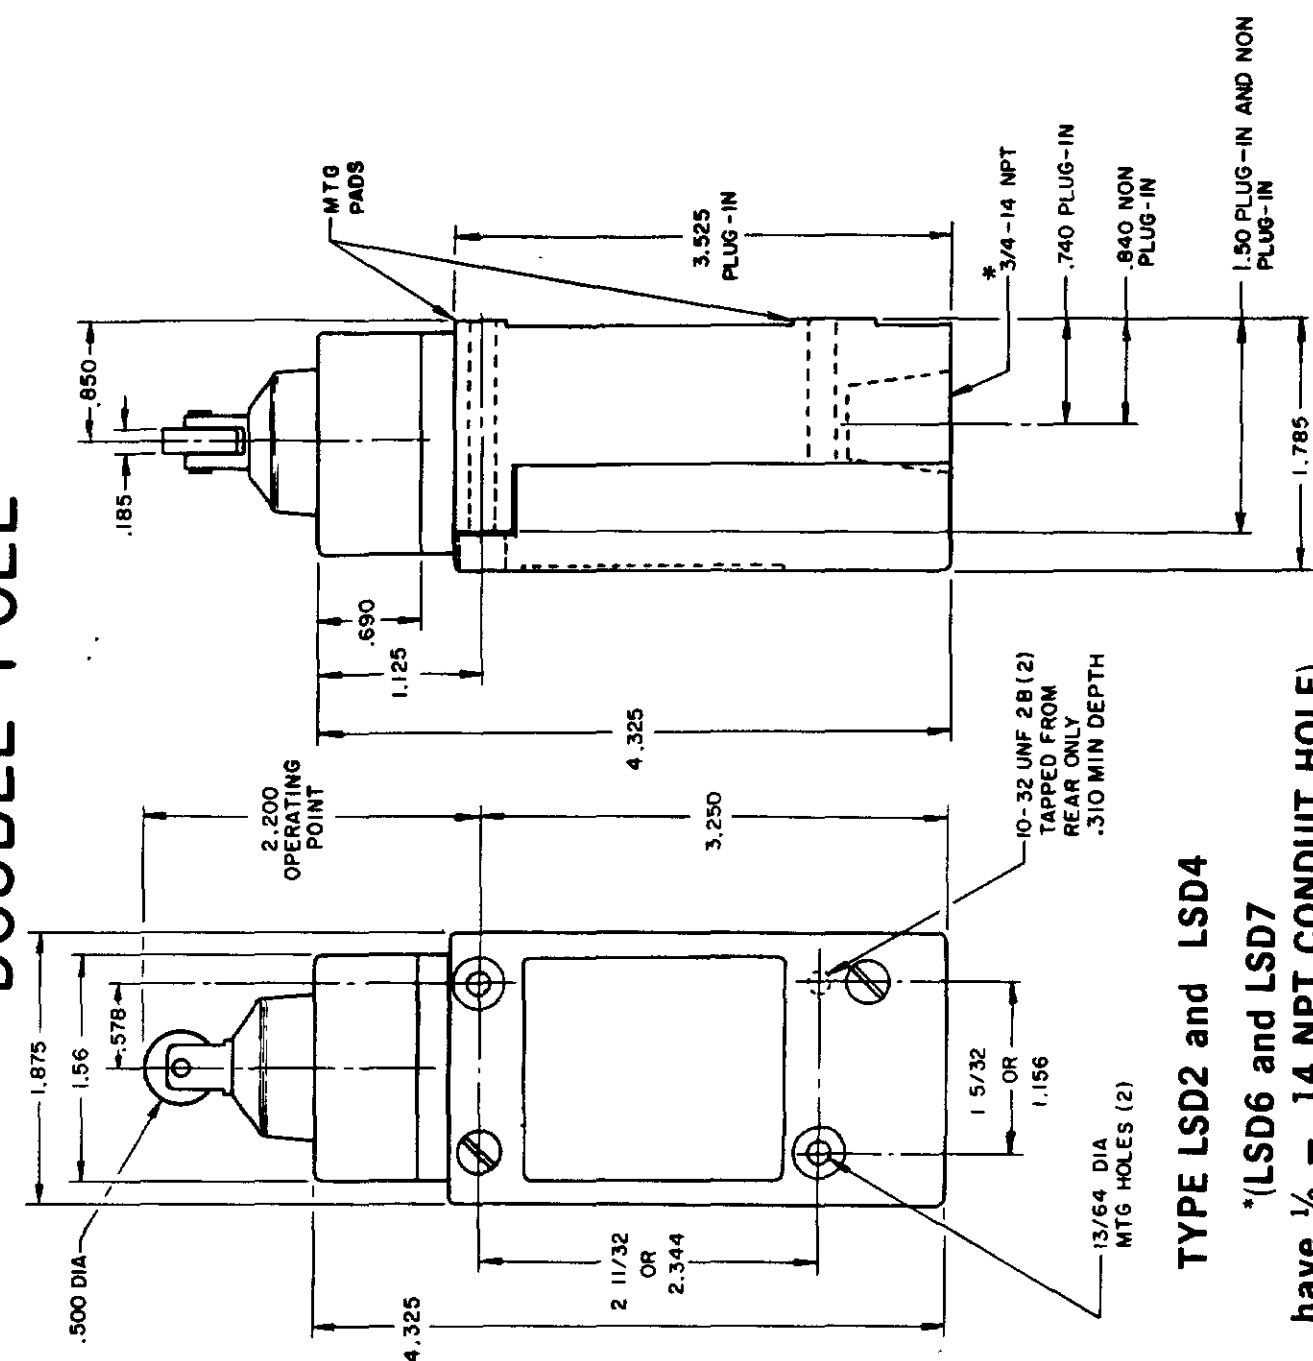


TYPE LSD2 and LSD4


*(LSD6 and LSD7 have 1/2 - 14 NPT CON

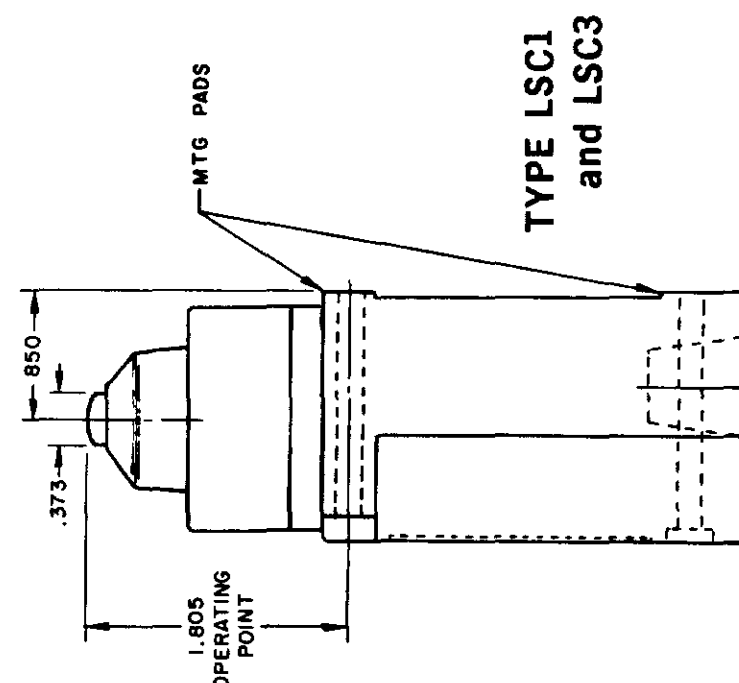


TYPE LSC1 and LSC3

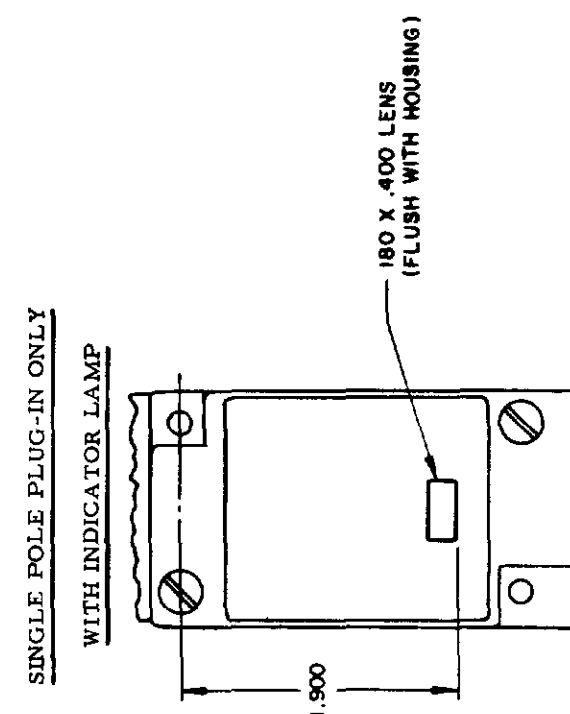



**TYPE LSC2
and LSC4**

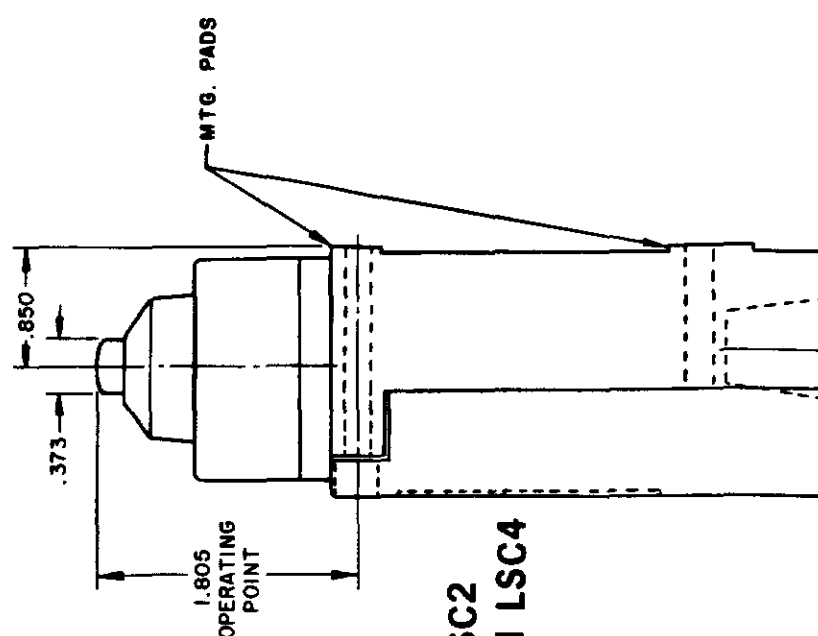

**TYPE LSV1
and LSV3**

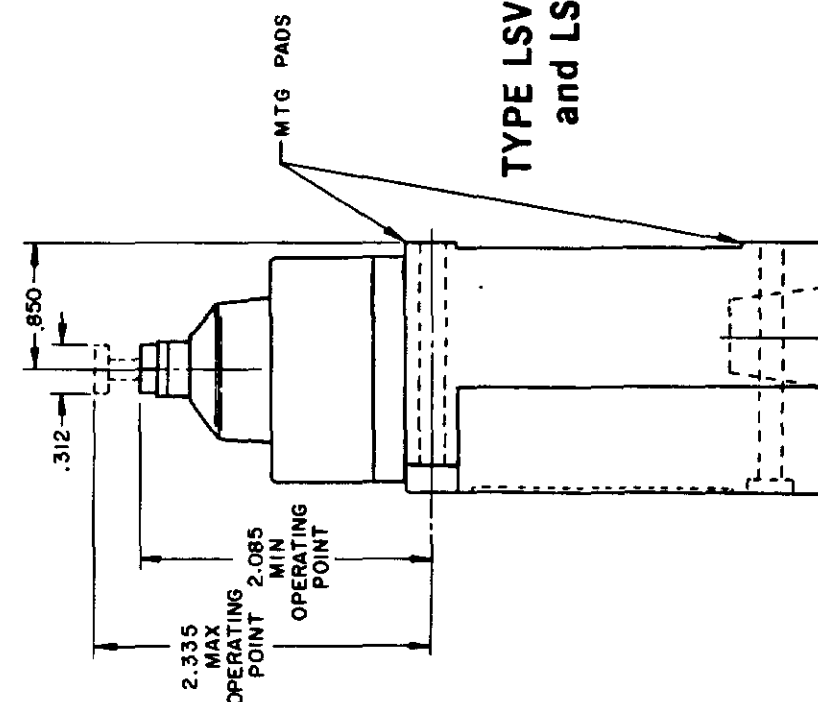

**TYPE LSV2
and LSV4**

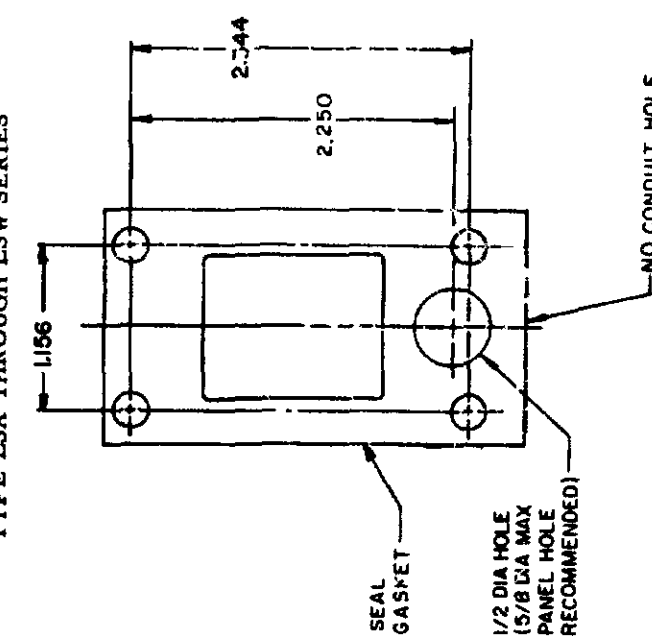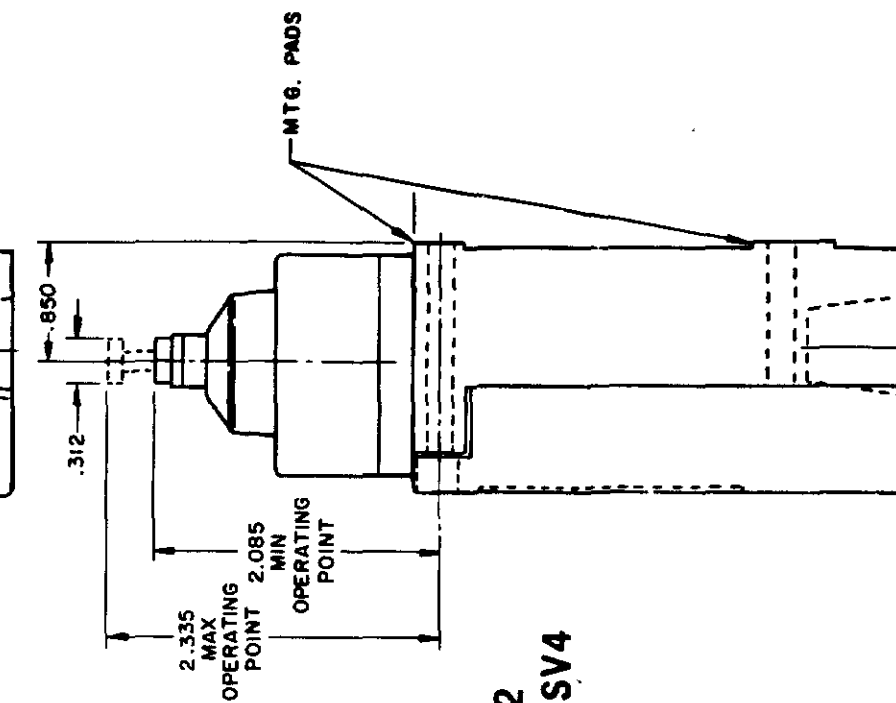

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING

LSA-LSW SERIES

CHART 1

SCALE NONE

~~DO NOT SCALE PRINT~~

REV	DATE	BY	CHK	APP
L	0031956			
B	10 JUL 97			
C	10 AUG 00			
D	201748			
E	17 NOV 00			
F	202198			
G	206581			
H	207179			
I	207474			
J	207474			
K	0006871			
L	11 AUG 04			


ISSUE	CATALOG LISTING	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES
12	LSA-LSW SERIES CHART 1	10JUL07			
PSR		CHECK			
AK	11AUG04	CHECK			
AF	11 JUL 94	CHECK			
AF	15 JUN 94	CHECK			

RASTER
DRAWN
MAM

SIDE PLUNGER TYPE

SINGLE POLE

DOUBLE POLE

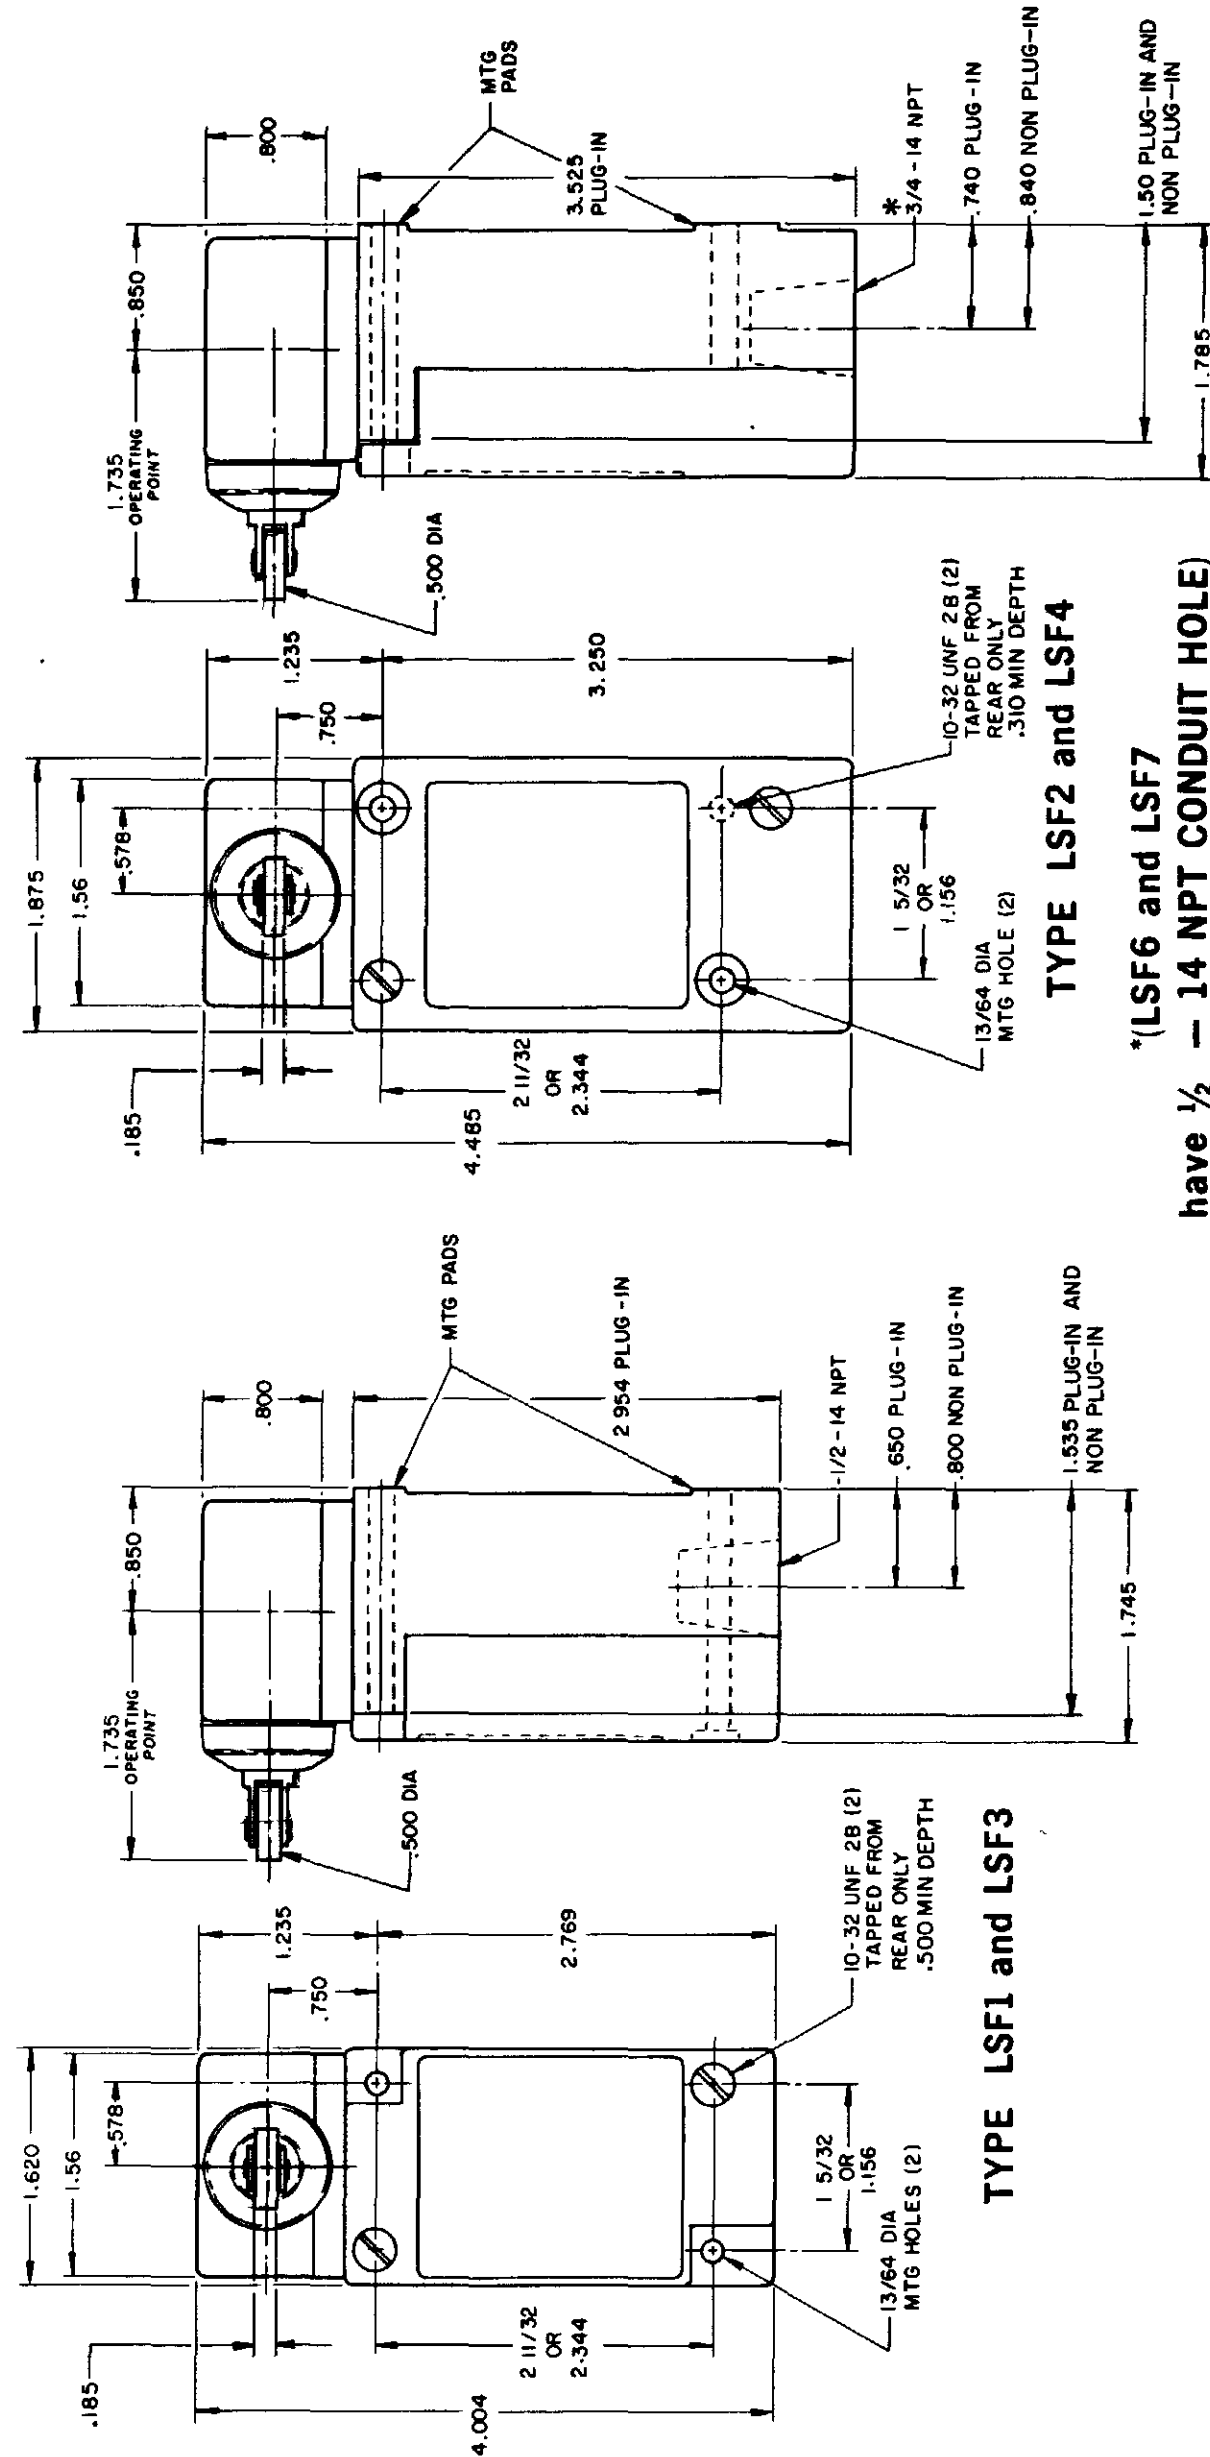


MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

PAGE 5 OF 10

SCALE NONE
DO NOT SCALE PRINT

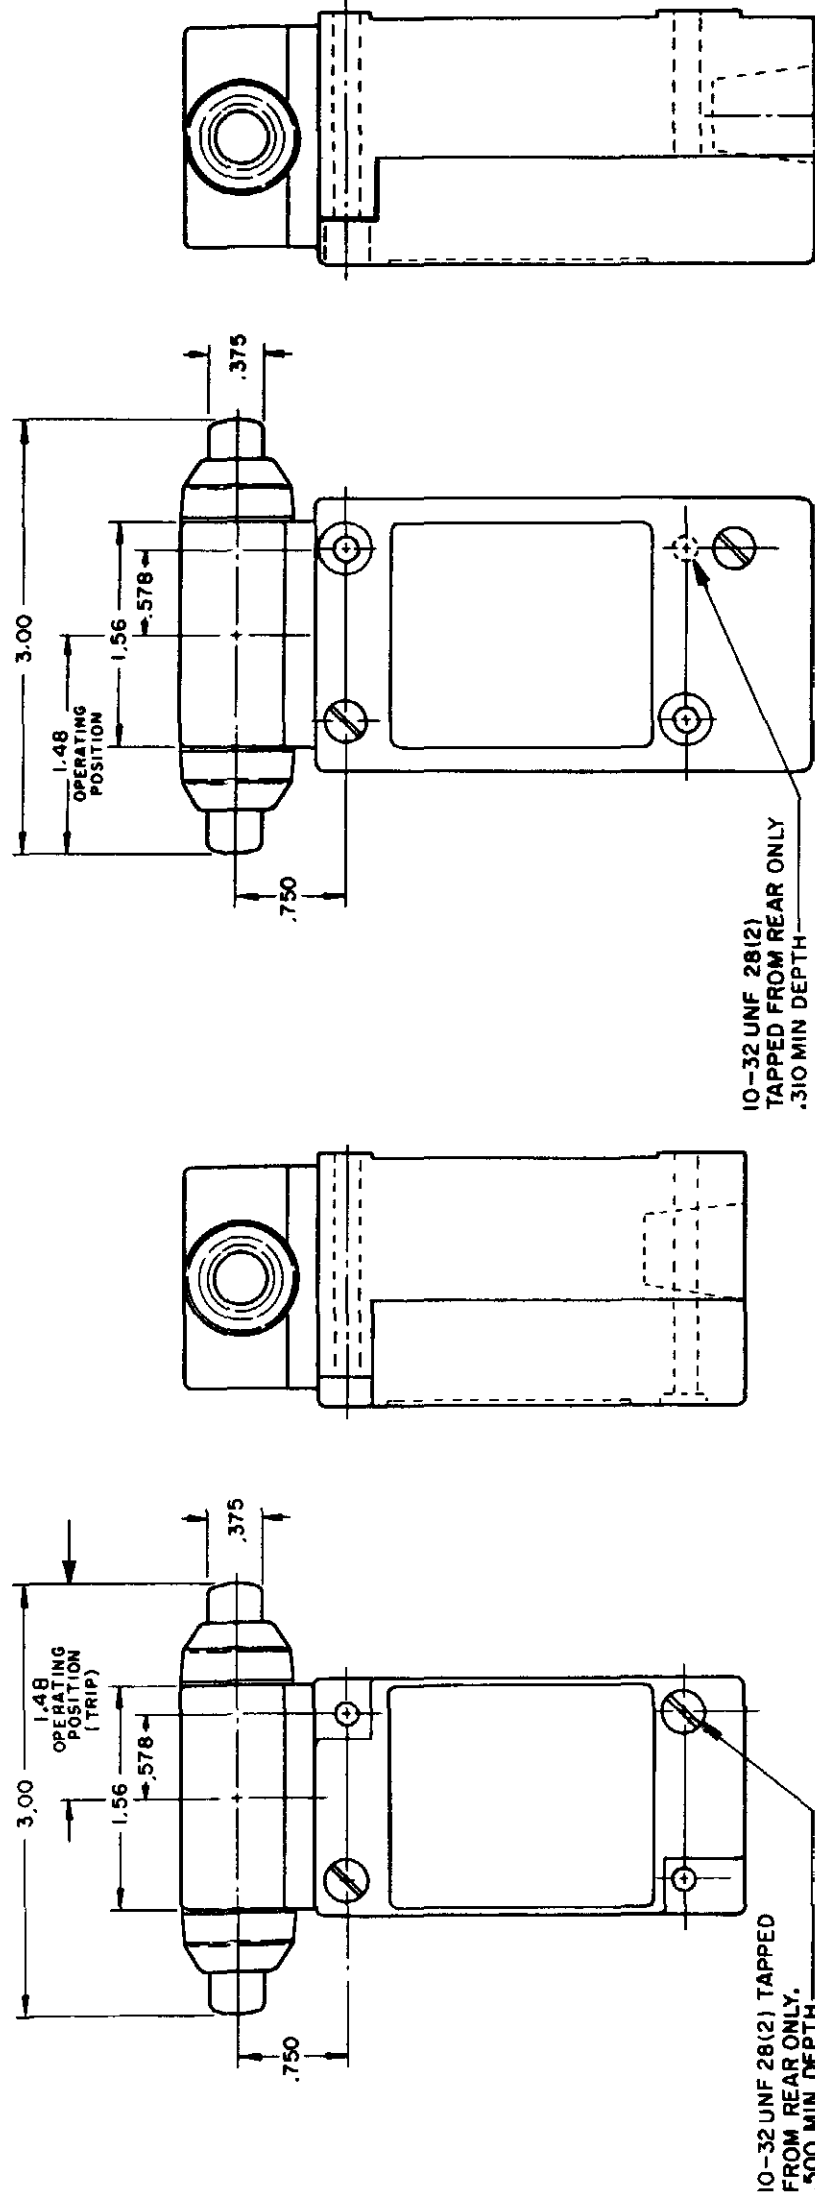

TYPE LSG1 and LSG3

TYPE LSG2 and LSG4

INITIAL POSITION —
(FREE POSITION) } PRETRAVEL
OPERATING POINT } DIFFERENTIAL TRAVEL
FULL TRAVEL — } OVERTRAVEL


TOP PLUNGER TYPES

CHARACTERISTICS	LSC PLUNGER	LSD ROLLER PLUNGER	LSV ADJ PLUNGER	SEQUENCE BASIC		
				LSC	LSD	LSV
PRETRAVEL (MAX)	.070	.070	.070	1ST STEP .070		
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE DOUBLE POLE .015	SINGLE POLE DOUBLE POLE .020	SINGLE POLE DOUBLE POLE .015	2ND STEP .016 MIN ADD'L		
OVERTRAVEL (MIN)	.190	.190	.190	.015 EACH STEP		
OPERATING FORCE (MAX)	4 LBS	4 LBS	4 LBS	.170		
OPERATING POINT	1.805 ± .030	2.200 ± .040	2.085 MIN	1ST STEP		
FULL OVERTRAVEL FORCE (MAX)	7 LBS	7 LBS	7 LBS	1.815±.030 2.210±.040 2.095 MIN / 2.345 MAX		

SIDE PLUNGER TYPES

CHARACTERISTICS	LSE PLUNGER	LSF ROLLER PLUNGER	LSW ADJ PLUNGER	SEQUENCE BASIC		
				LSE	LSF	LSW
PRETRAVEL (MAX)	.100	.100	.170	1ST STEP .100		
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.090	2ND STEP .020 MIN ADD'L		
OVERTRAVEL (MIN)	.190	.190	.080	.025 EACH STEP		
OPERATING FORCE (MAX)	6 LBS	6 LBS	10 LBS	.170		
OPERATING POINT	1.300 ± .030	1.735 ± .040	ADJUSTABLE FROM 1.615 MIN 1.865 MAX	1ST STEP		
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	10 LBS	1.310±.030 1.745±.040 1.625 MIN / 1.875 MAX		

WOBBLE STICK
SINGLE POLE
DOUBLE POLE

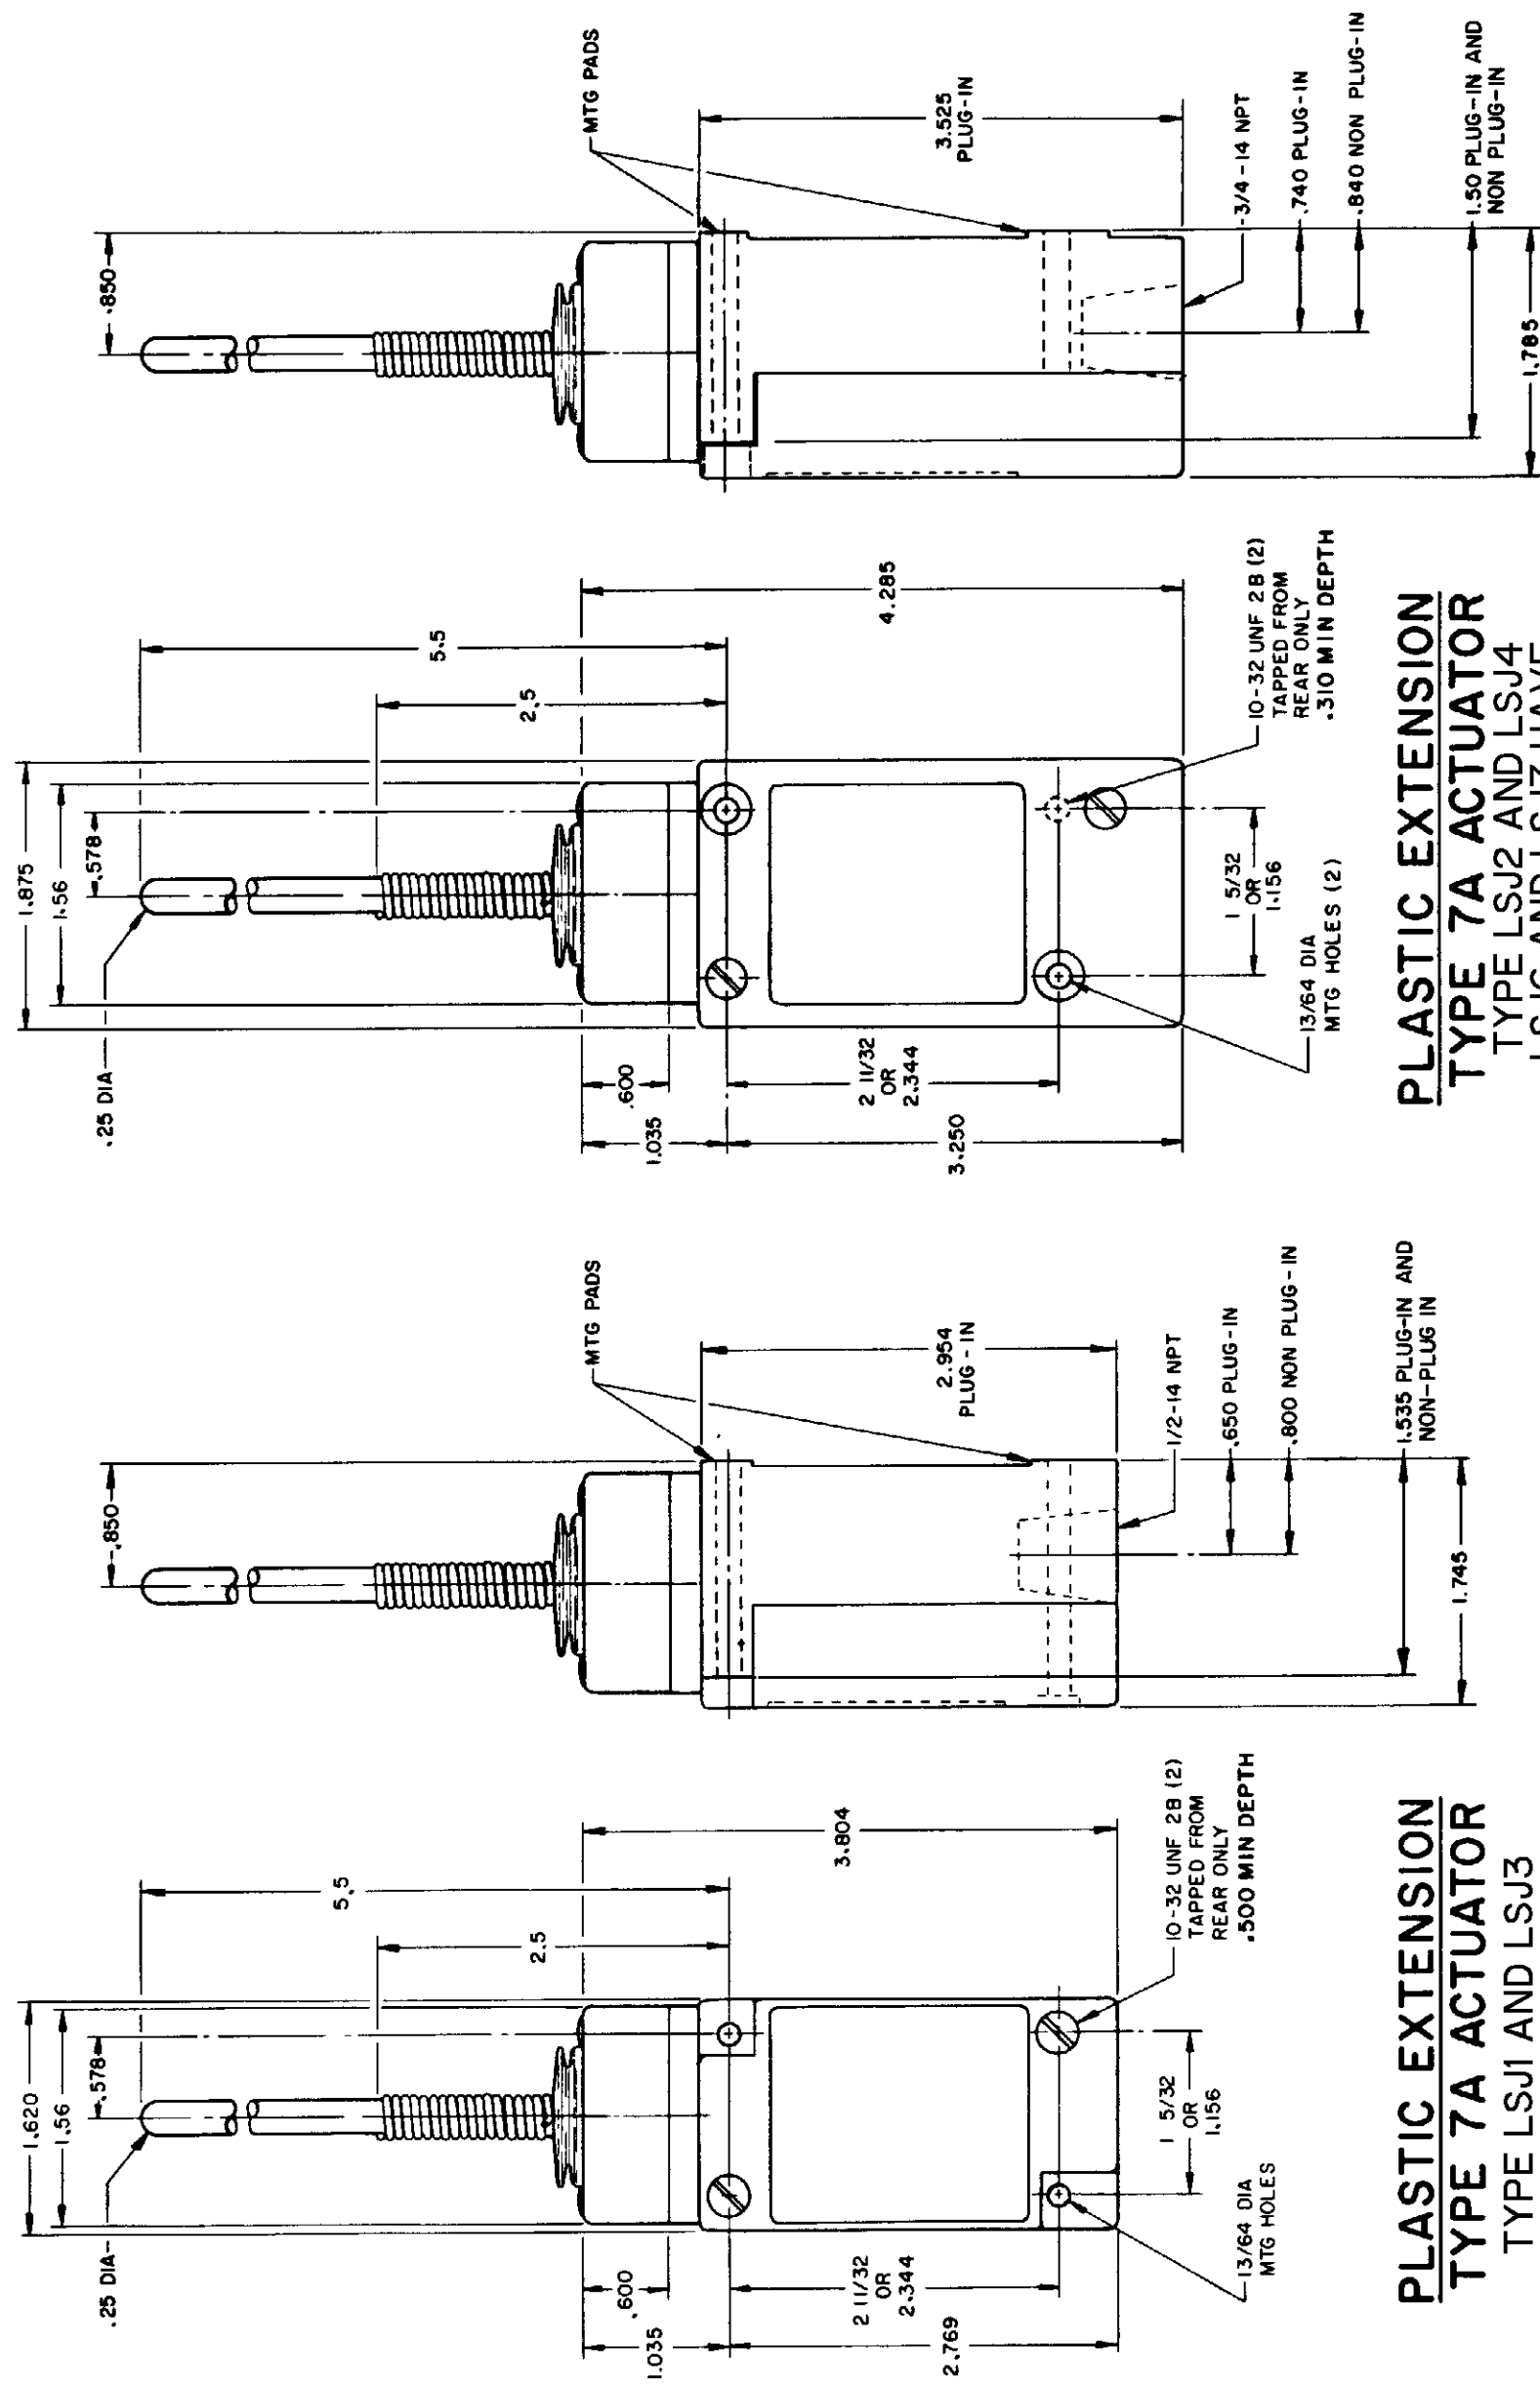

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ1 AND LSJ3

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE

MICRO SWITCH
Honeywell Division
FED MFG CODE 91929

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

SWITCH - ENCLOSED

LSA-LSW SERIES


CHART 1

CATALOG LISTING


PAGE 7 OF 10

SCALE NONE
DO NOT SCALE PRINT


REPLACEMENT ACTUATOR
LSZ-4009

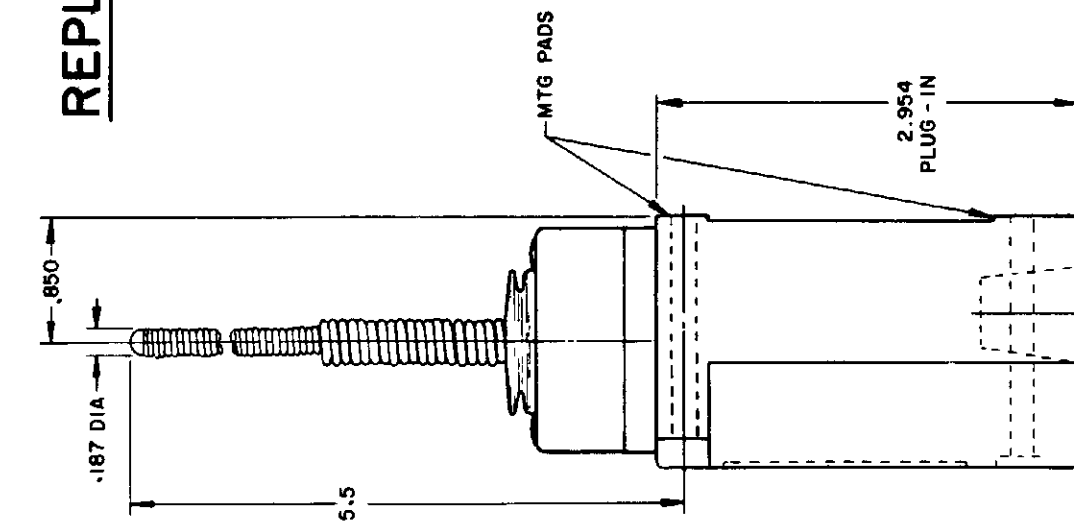

CABLE EXTENSION
TYPE 7N ACTUATOR

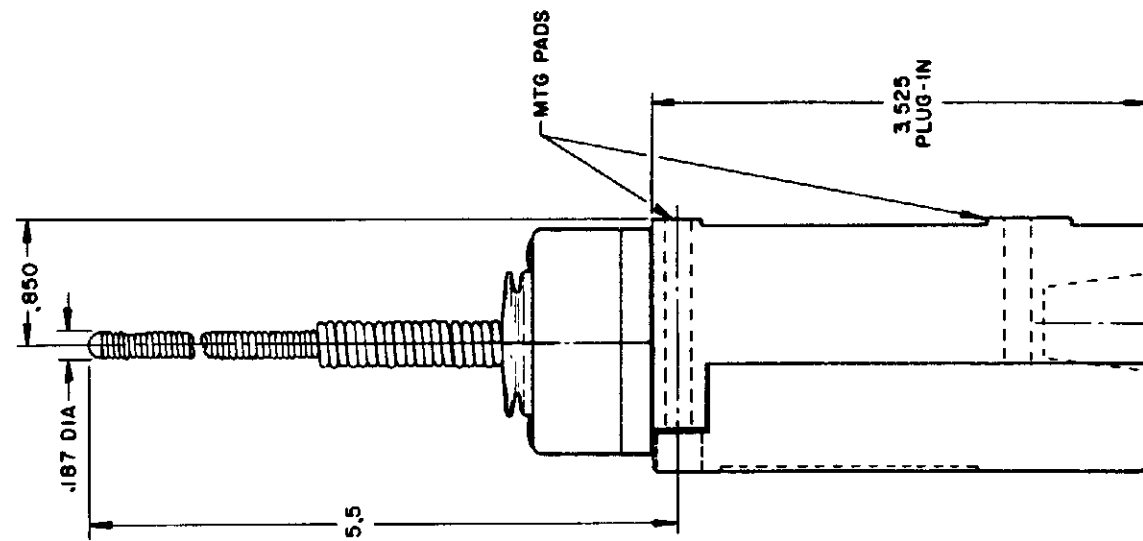

CABLE EXTENSION
TYPE 7 N ACTUATOR

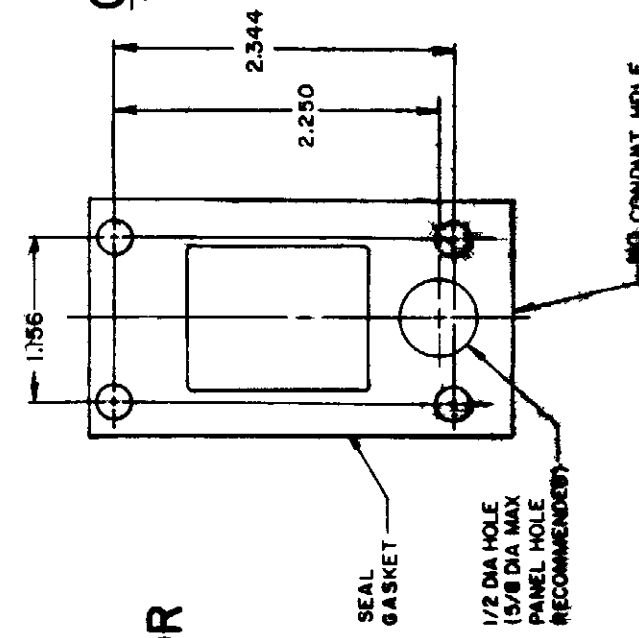


REPLACEMENT ACTUATOR
LSZ-4011

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8
24 LED VOLTAGE TYPE LSJ9

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP


**-.180 X 400 LENS
(FLUSH WITH
HOUSING)**

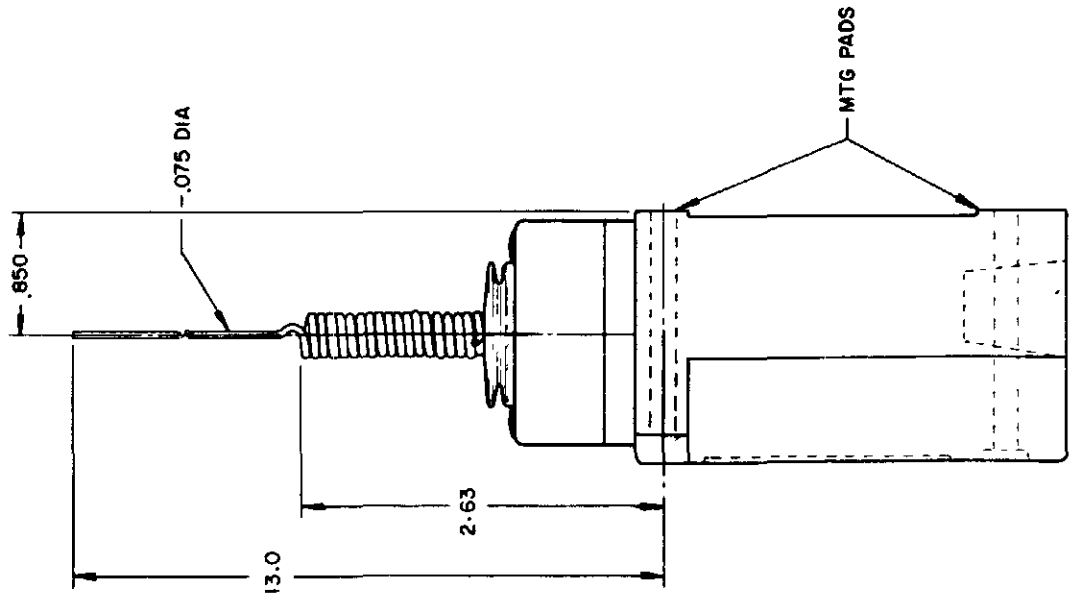

WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ1 and LSJ3

REPLACEMENT ACTUATOR - LSZ 4010

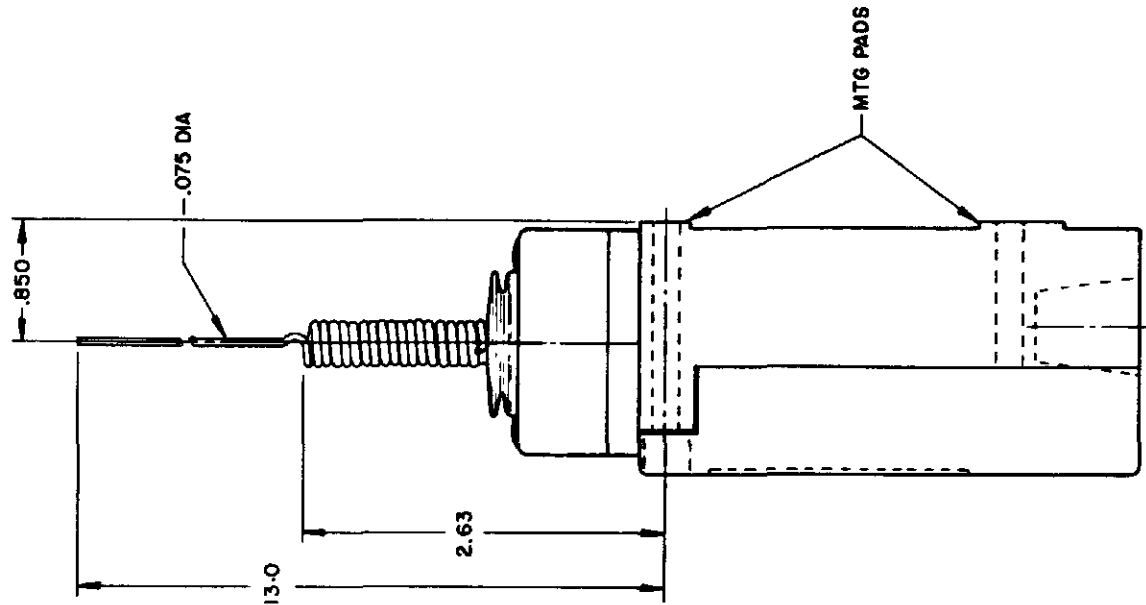


WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ2 and LSJ4

LSJ6 and LSJ7 have 1/2 - 14 NPT CONDUIT HOLE


SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

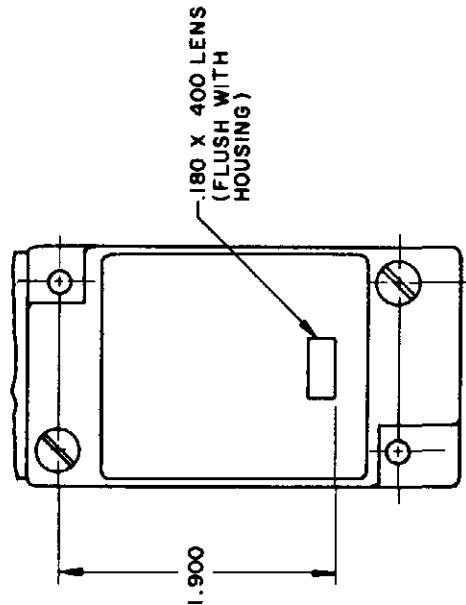

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8

CAT WHISKER

SINGLE POLE

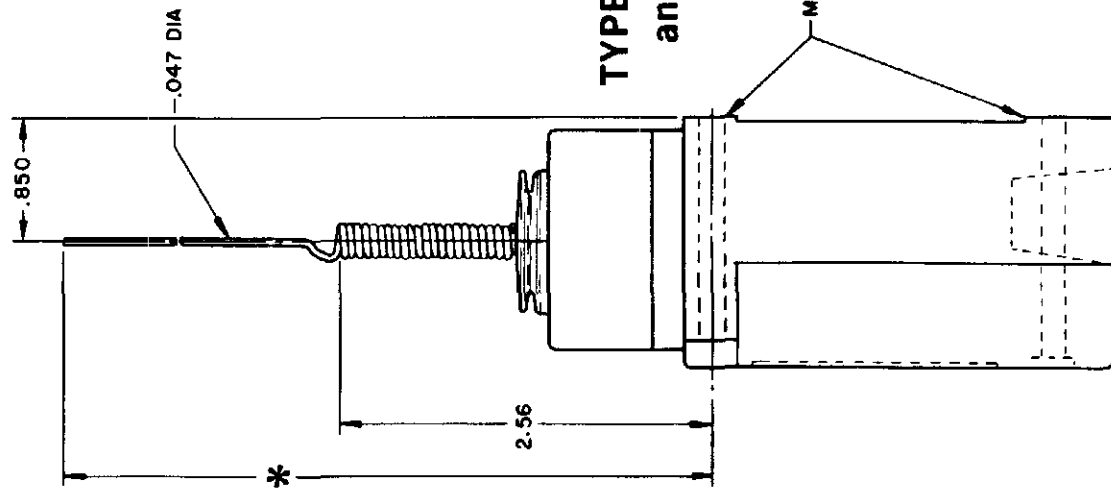


TYPE LSK1
and LSK3

120 LAMP VOLTAGE
TYPE LSK5 - CAT WHISKER TYPE LSB5 - TOP ROTARY
240 LAMP VOLTAGE
TYPE LSK8 - CAT WHISKER TYPE LSB8 - TOP ROTARY

*WIRE EXTENSION REPLACEMENT ACTUATOR
TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012
TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013
TYPE 8C COIL ACTUATOR 5.5 IN.-LSZ 4014
ACTUATOR 9.5 IN. - LSZ4036

DOUBLE POLE

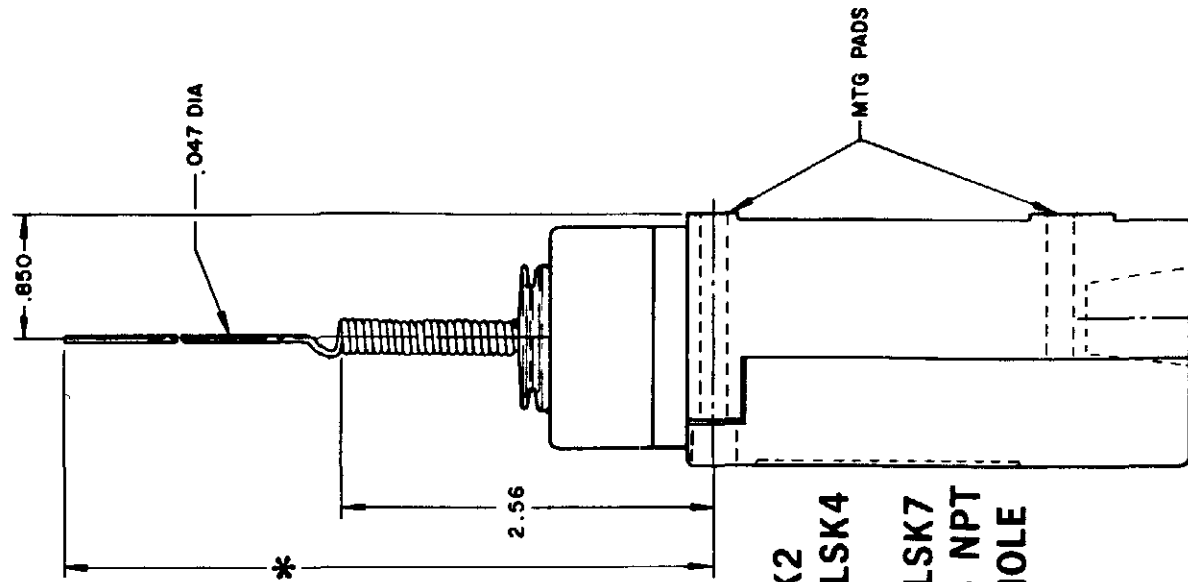

TYPE LSK2
and LSK4
LSK6 and LSK7
have 1/2 - 14 NPT
CONDUIT HOLE

*TYPE 8A ACTUATOR 5.5 IN.
TYPE 8B ACTUATOR 7.5 IN.
TYPE 8C ACTUATOR 5.5 IN.
TYPE 8D ROD ACTUATOR 5.5 IN.

WIRE EXTENSION

CAT. WHISKER	WOBBLE STICK			
	5/16" WIRE	7/16" WIRE	ROD	CABLE
PRE-TRAVEL (APPROX) IN. RADIUS	2	2	1.0	1.5
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	7.0

SCALE NONE
DO NOT SCALE PRINT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division
FED MFG CODE 91929


SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

CONVERSION BASES


SINGLE POLE (SIDE ROTARY) LSZ 4003

**DOUBLE POLE
(SIDE ROTARY)
LSZ4004**

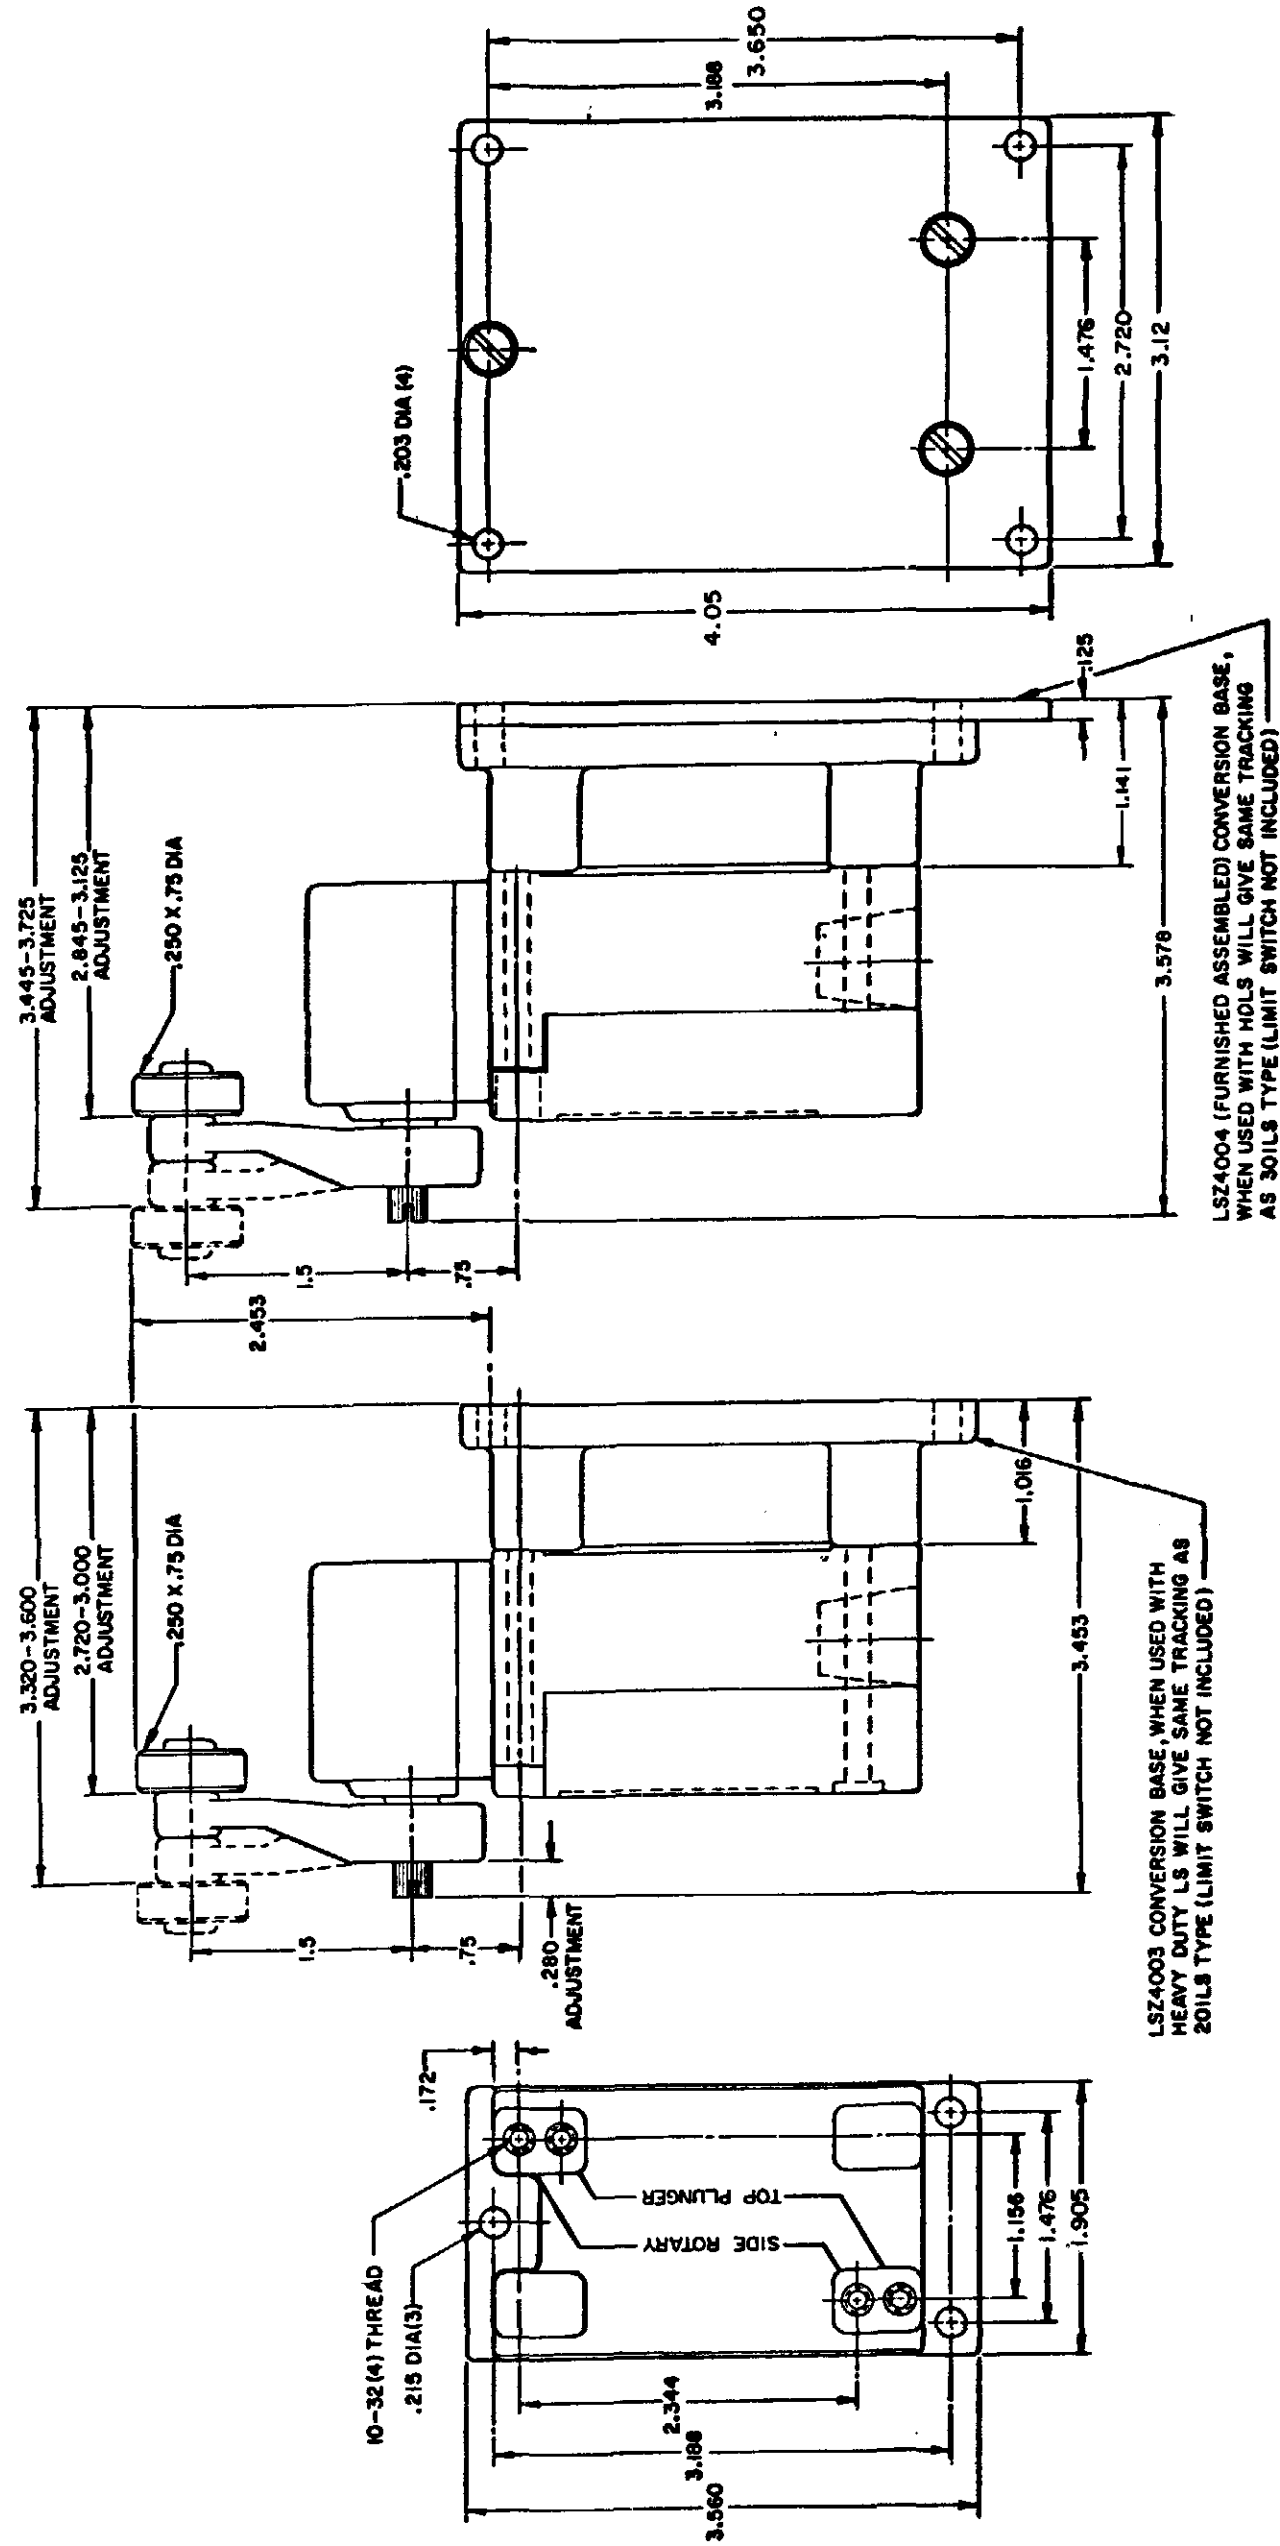

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE TOP PLUNGER LSZ4003

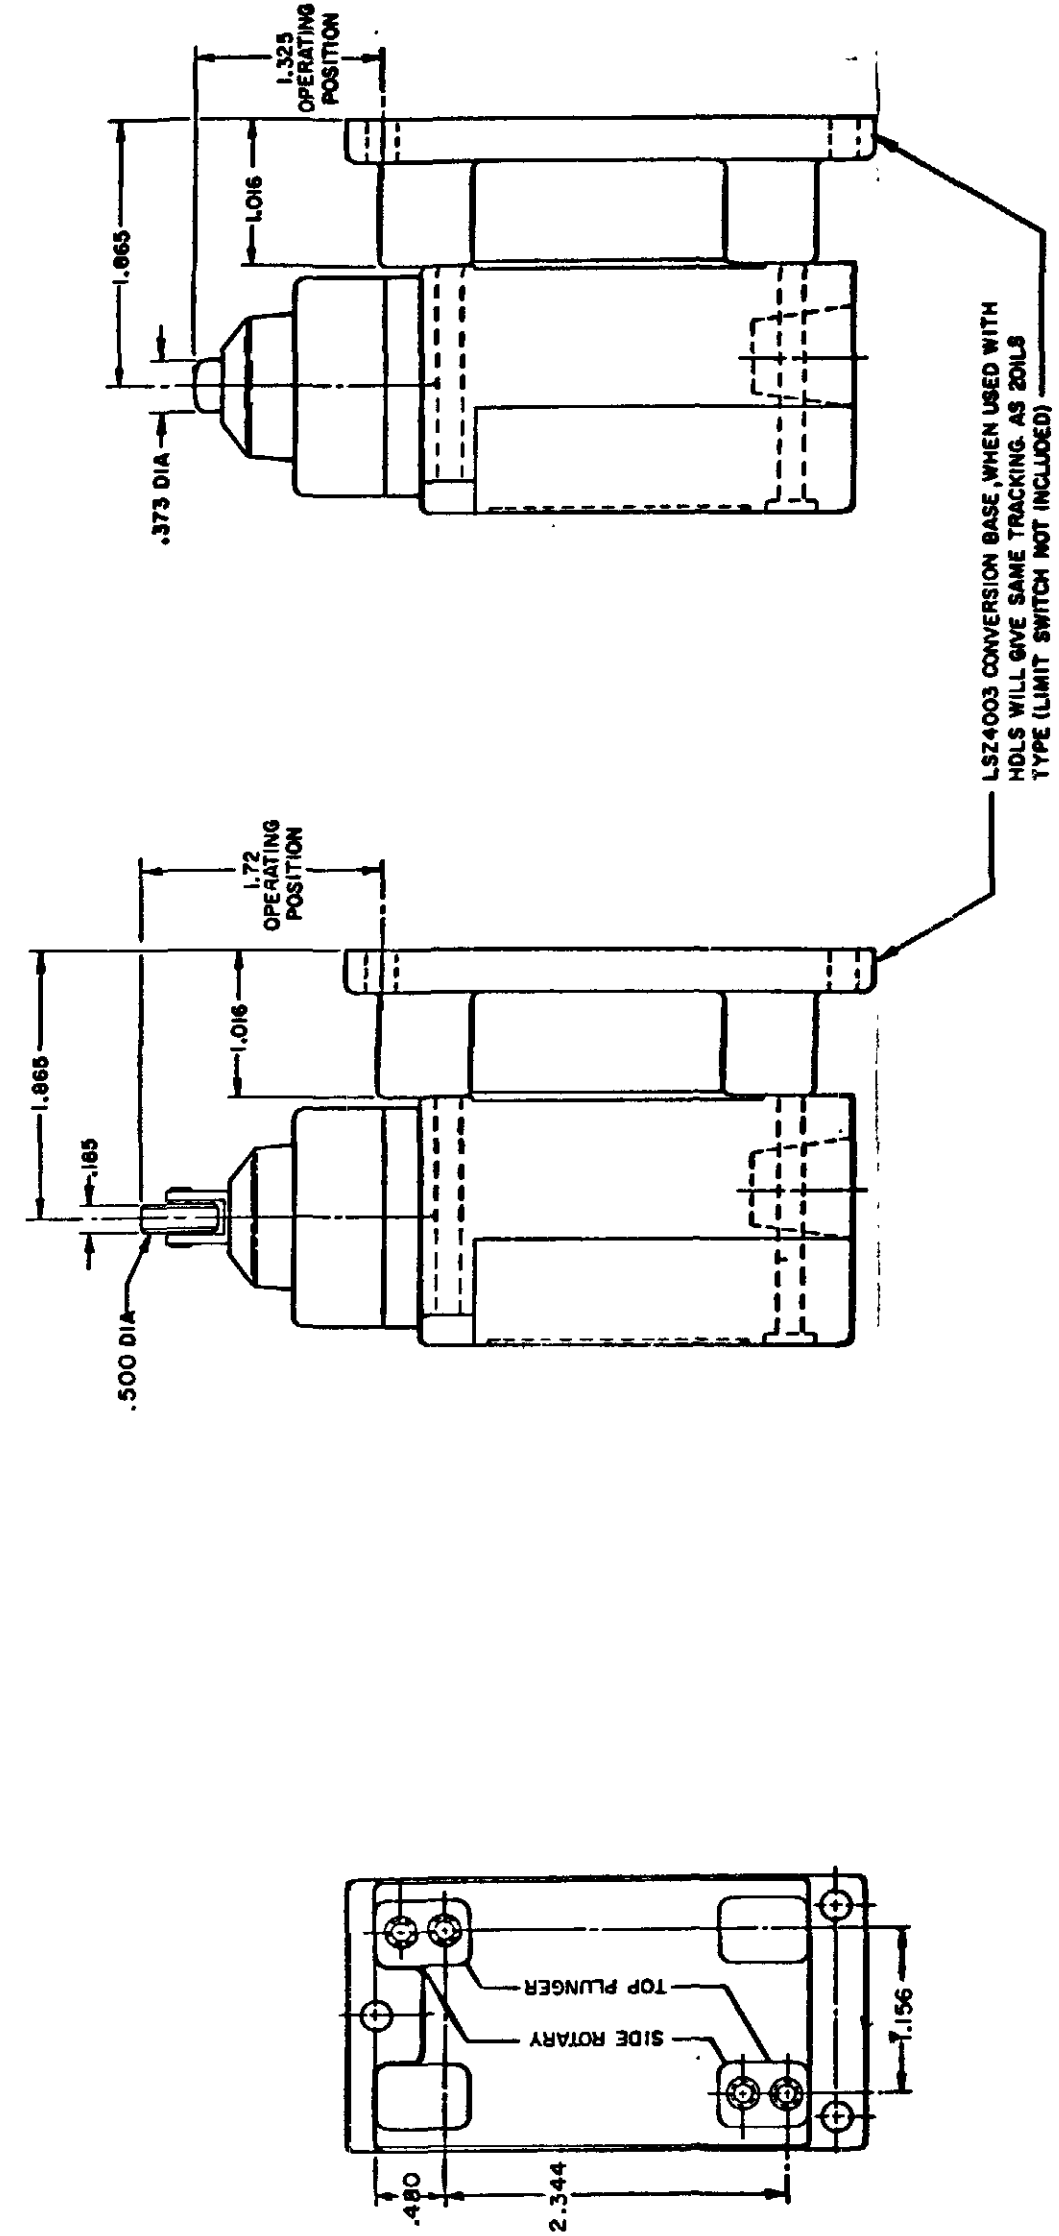

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF
LIMIT SWITCH

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331