



ISSUE		REV. (S)		CHECK		RELEASE NO		L5A-L5W SERIES	
12		12		12		12		12	
12		12		12		12		12	
L0031956		B8		B8		B8		B8	
B004027		B004027		B004027		B004027		B004027	
10 AUG 60		10 AUG 60		10 AUG 60		10 AUG 60		10 AUG 60	
C201748		C201748		C201748		C201748		C201748	
D202198		D202198		D202198		D202198		D202198	
E204871		E204871		E204871		E204871		E204871	
G1		G1		G1		G1		G1	
G206783		G206783		G206783		G206783		G206783	
H1		H1		H1		H1		H1	
H207719		H207719		H207719		H207719		H207719	
I1		I1		I1		I1		I1	
I207474		I207474		I207474		I207474		I207474	
J1		J1		J1		J1		J1	
J207474		J207474		J207474		J207474		J207474	
K		K		K		K		K	
0000887		0000887		0000887		0000887		0000887	
R		R		R		R		R	
R204004		R204004		R204004		R204004		R204004	
S		S		S		S		S	
S207474		S207474		S207474		S207474		S207474	
T		T		T		T		T	
T207474		T207474		T207474		T207474		T207474	
U		U		U		U		U	
U207474		U207474		U207474		U207474		U207474	
V		V		V		V		V	
V207474		V207474		V207474		V207474		V207474	
W		W		W		W		W	
W207474		W207474		W207474		W207474		W207474	
X		X		X		X		X	
X207474		X207474		X207474		X207474		X207474	
Y		Y		Y		Y		Y	
Y207474		Y207474		Y207474		Y207474		Y207474	
Z		Z		Z		Z		Z	
Z207474		Z207474		Z207474		Z207474		Z207474	


SIDE ROTARY CAM TRACKING

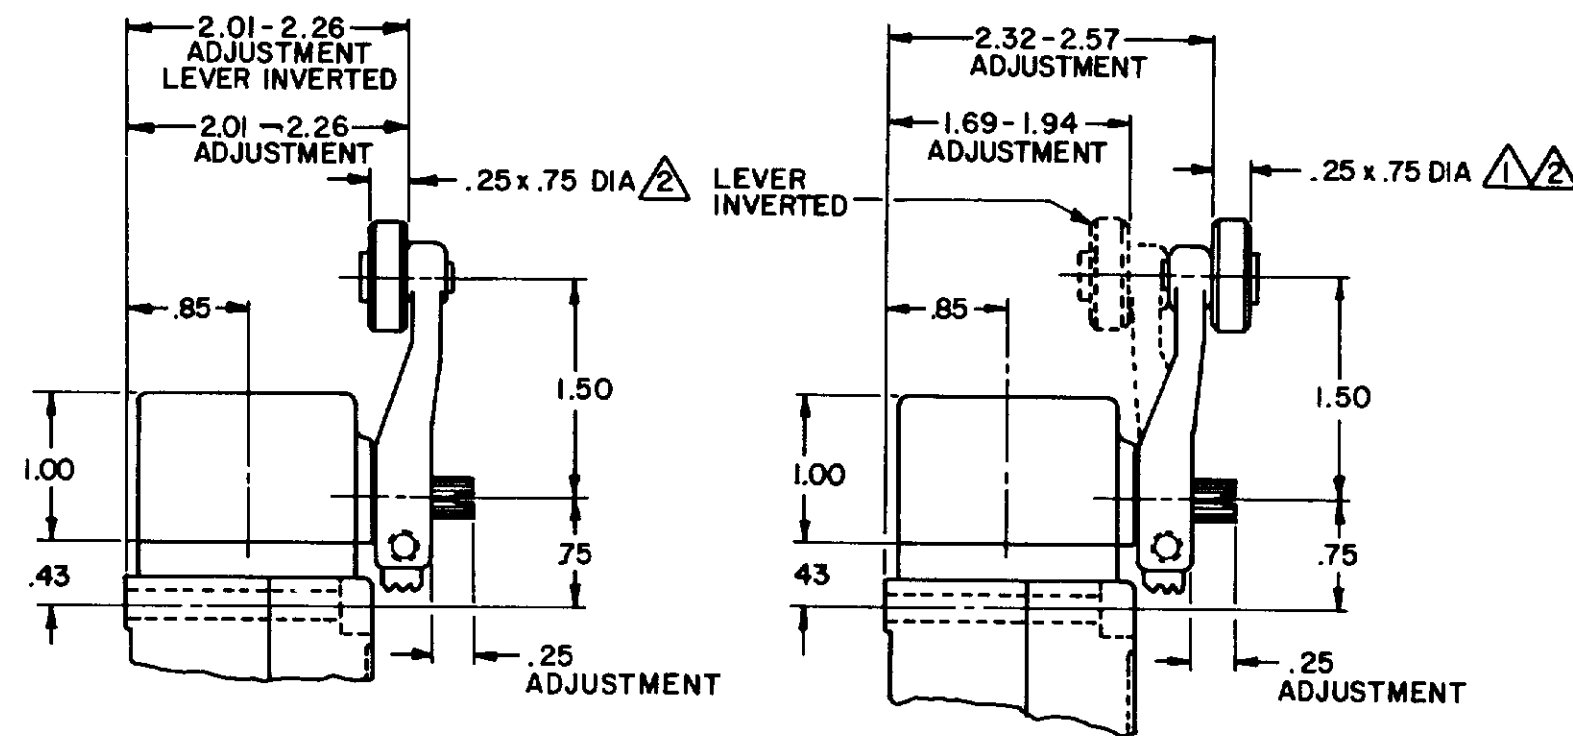


LSZ51 TYPE LEVERS

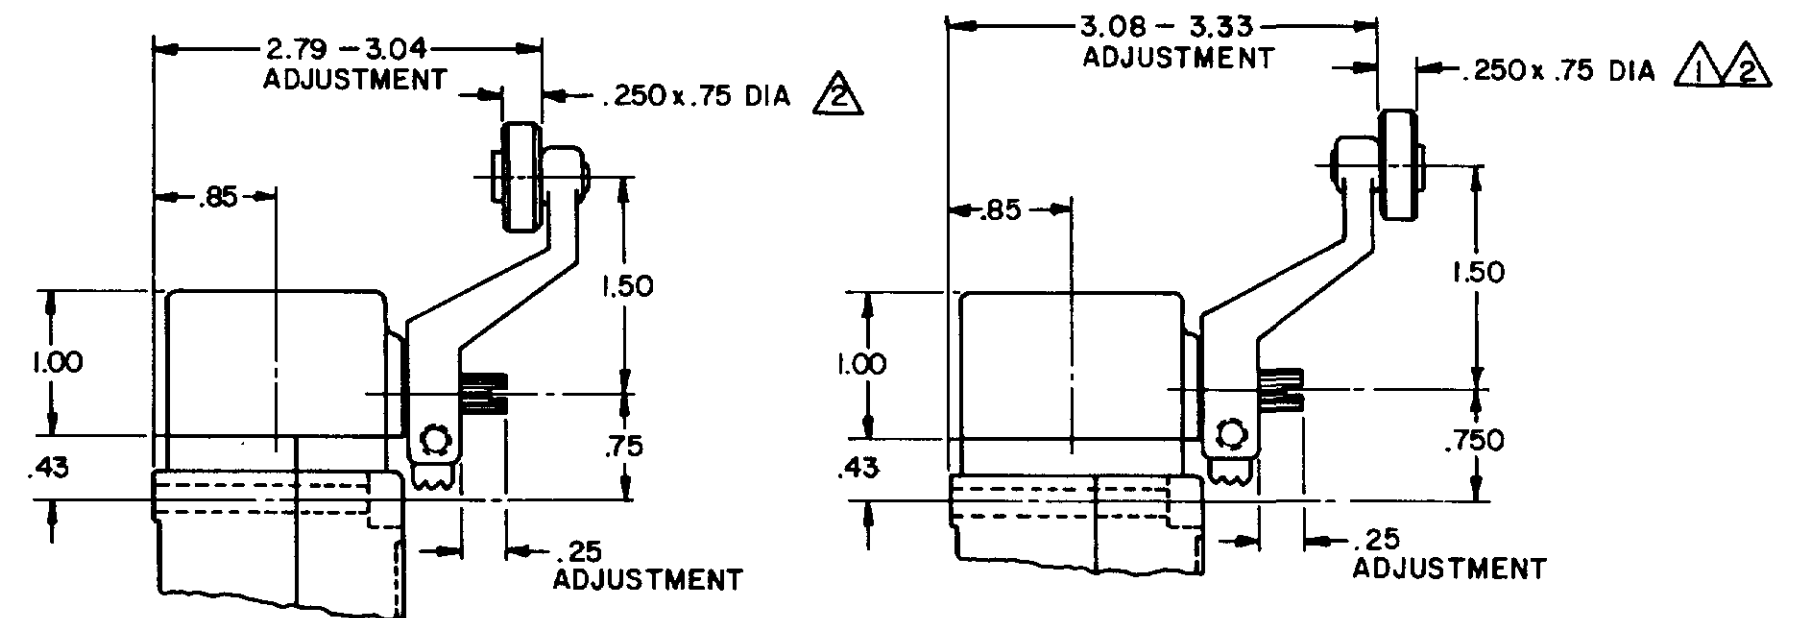


LSZ55 TYPE LEVERS

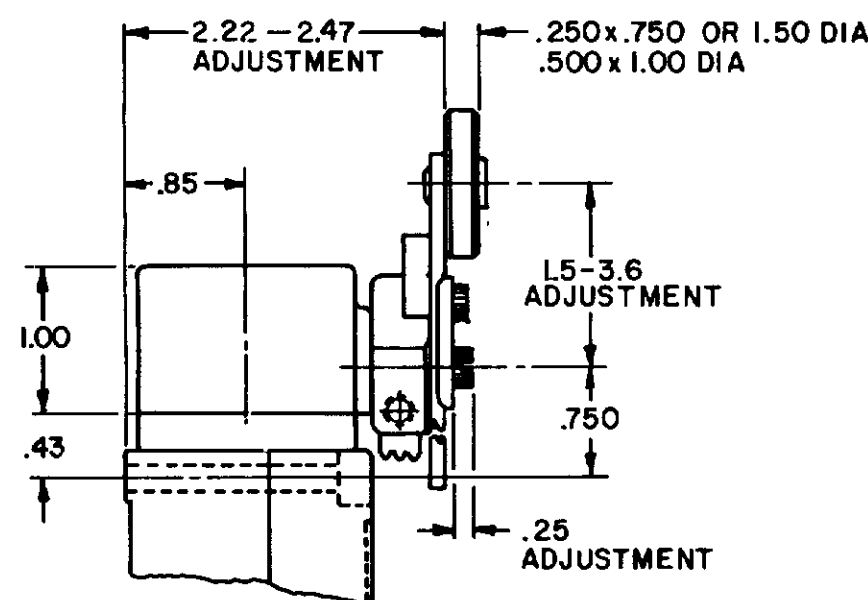


LSZ52 TYPE LEVER

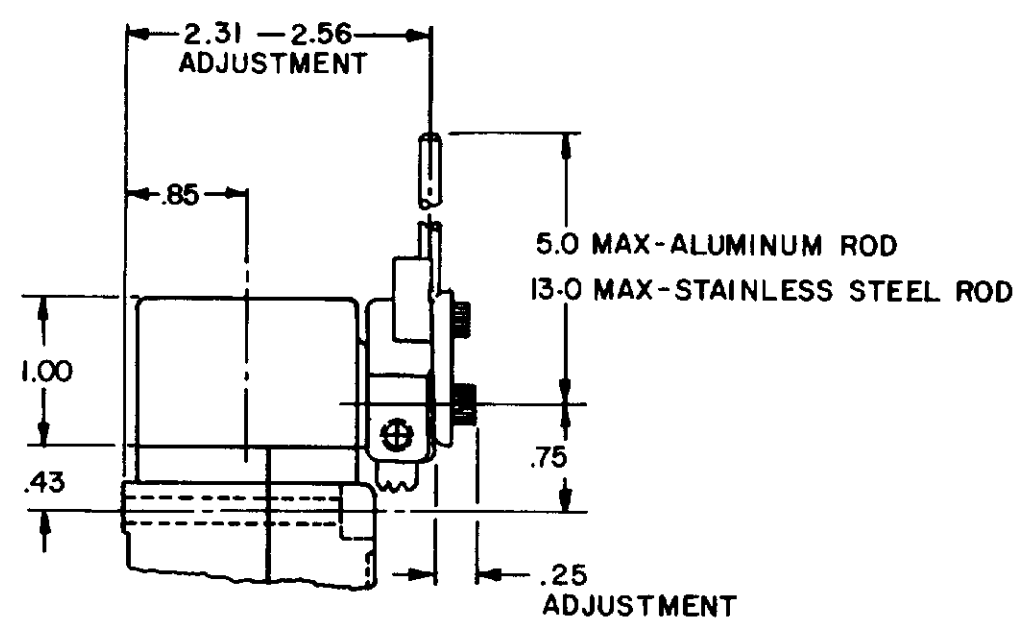

LSZ54 TYPE LEVER

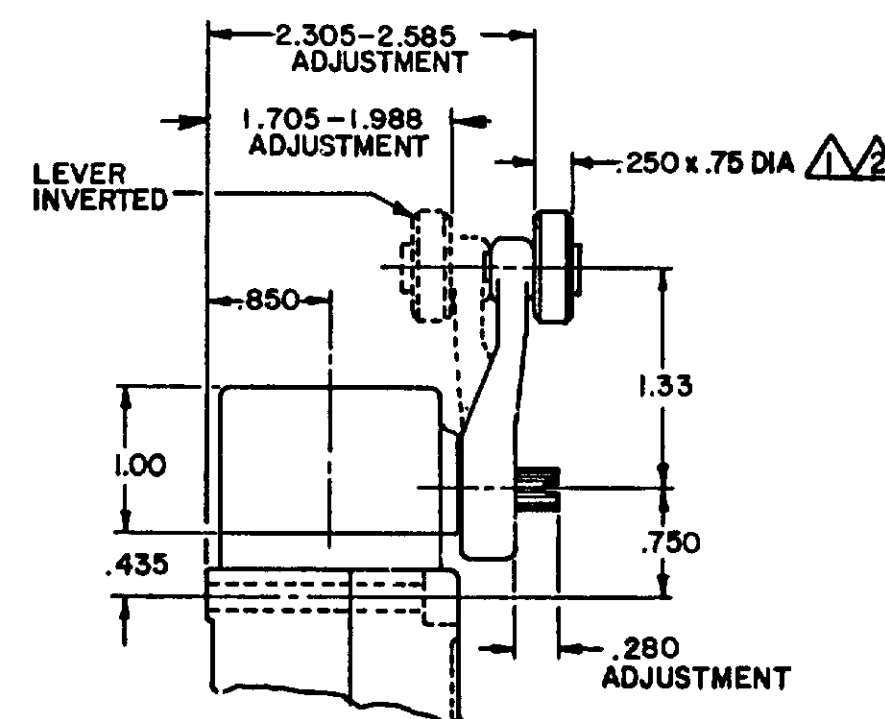

OPEN MOUNTED ROLLER

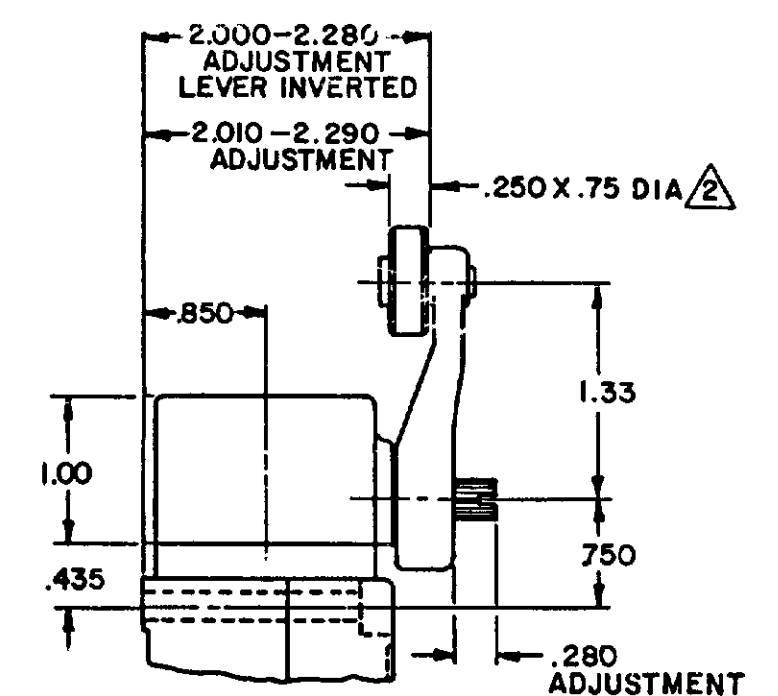

CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

NOTES

- 1 ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT LEVER CANNOT BE INVERTED
- 2 FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO "M" DRAWING
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 "M" DRAWING

CATALOG LISTING
LSA-LSW SERIES CHART 1
PAGE 2 OF 10
REPLACES LSA-LSW SERIES
10JUL07 RELEASE NO. CO-78498
PSR
CHECK
11AUG04
AK
11JUL94
JAF
15JUN94
MAM
DRAWN
MASTER


REV	DATE	BY	CHKD	REASON
1	0031956			
2	10JUL07	BS		
3	201004	B		
4	10AUG00	C SL		
5	201748	C		
6	17NOV00	C SL		
7	202198	D		
8	28JAN01	E		
9	204871	E		
10	10FEB02	F		
11	206581	F		
12	14OCT02	G		
13	206763	G		
14	31OCT02	H		
15	207178	H		
16	14JAN03	J		
17	207474	J		
18	18FEB03	K		
19	0006871	K		

THIRD ANGLE PROJECTION			
SCALE NONE			
DO NOT SCALE PRINT			
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
ONE PLACE	(0)	±.030	
TWO PLACES	(.00)	±.015	
THREE PLACES	(.000)	±.005	
ANGLES		±	
WEIGHT			

TOP ROTARY

SINGLE POLE

DOUBLE POLE

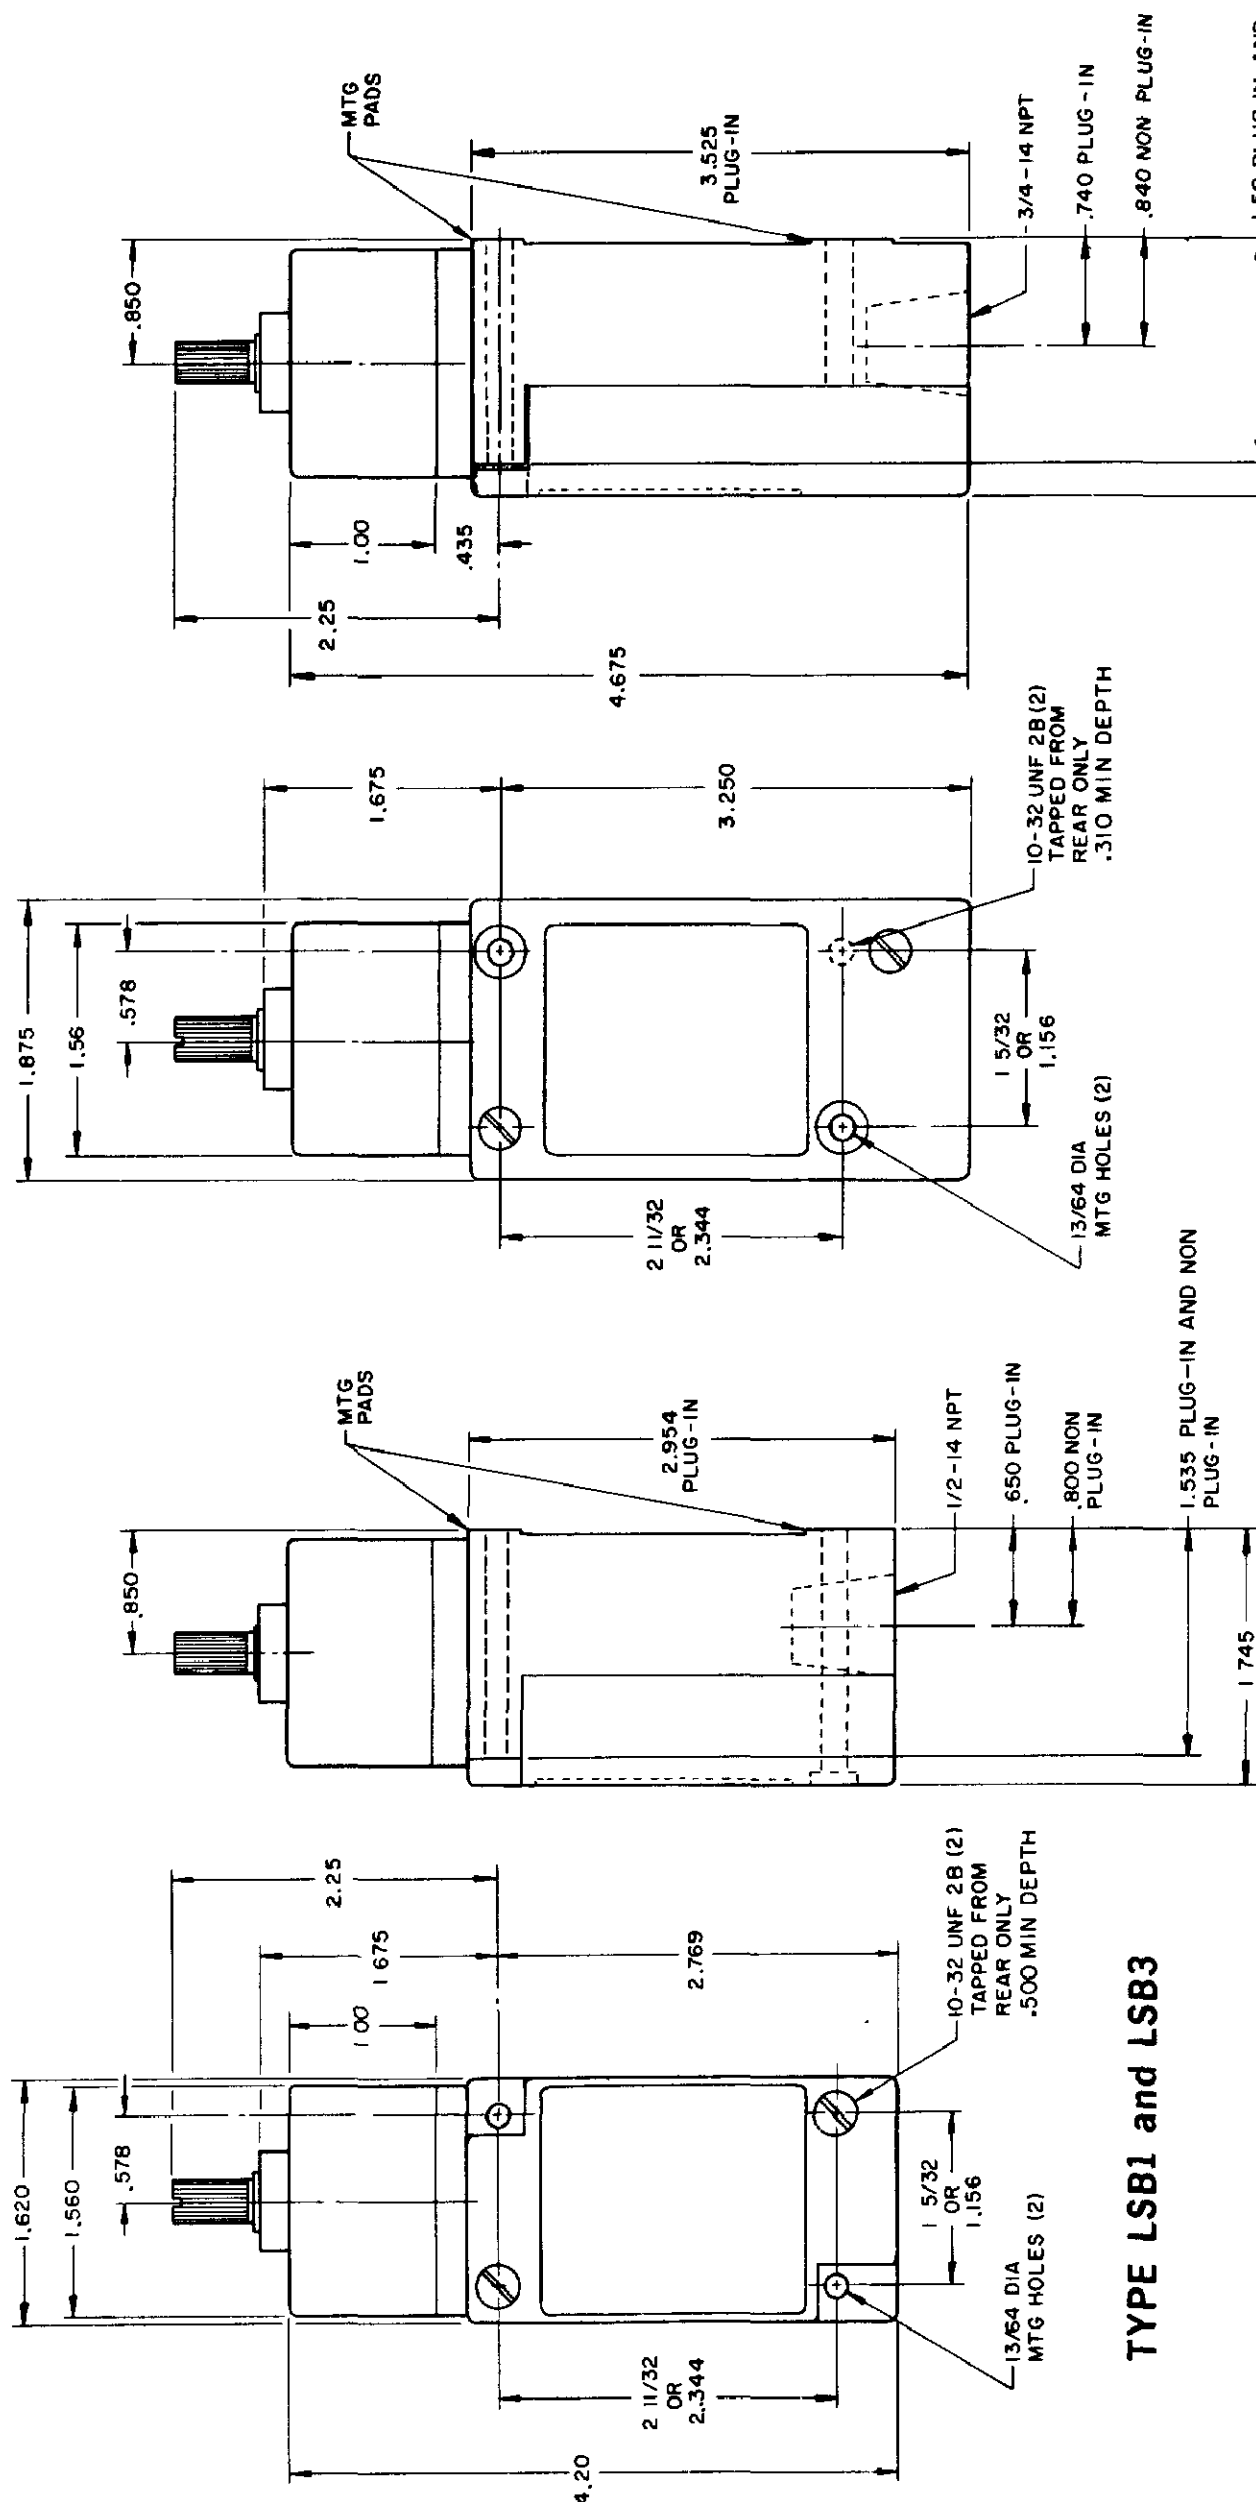

TYPE LSB1 and LSB3

TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2 - 14 NPT
CONDUIT HOLE

	SINGLE POLE	DOUBLE POLE
PRETRAVEL MAX	25°	25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

A.C. VOLTAGE	AMPS AT 35 POWER FACTOR	SINGLE POLE		DOUBLE POLE	
		MAKE	BREAK	MAKE	BREAK
120		60	6	30	3
240		30	3	15	1.5
480		15	1.5	7.5	75
600		12	1.2	6	6

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE		RESISTIVE
120	0.25	0.80	
240	0.15	0.40	

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT

VOLTAGE	MAKE AND BREAK AMPS
5 AC OR DC MIN	01 AMP MIN
600 AC	720 VA
240 DC	30 WATT


DIRECT ACTING (ALSO RATED AT A.C. 10
AMP CONT.)

D.C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)


DOUBLE POLE

SINGLE POLE

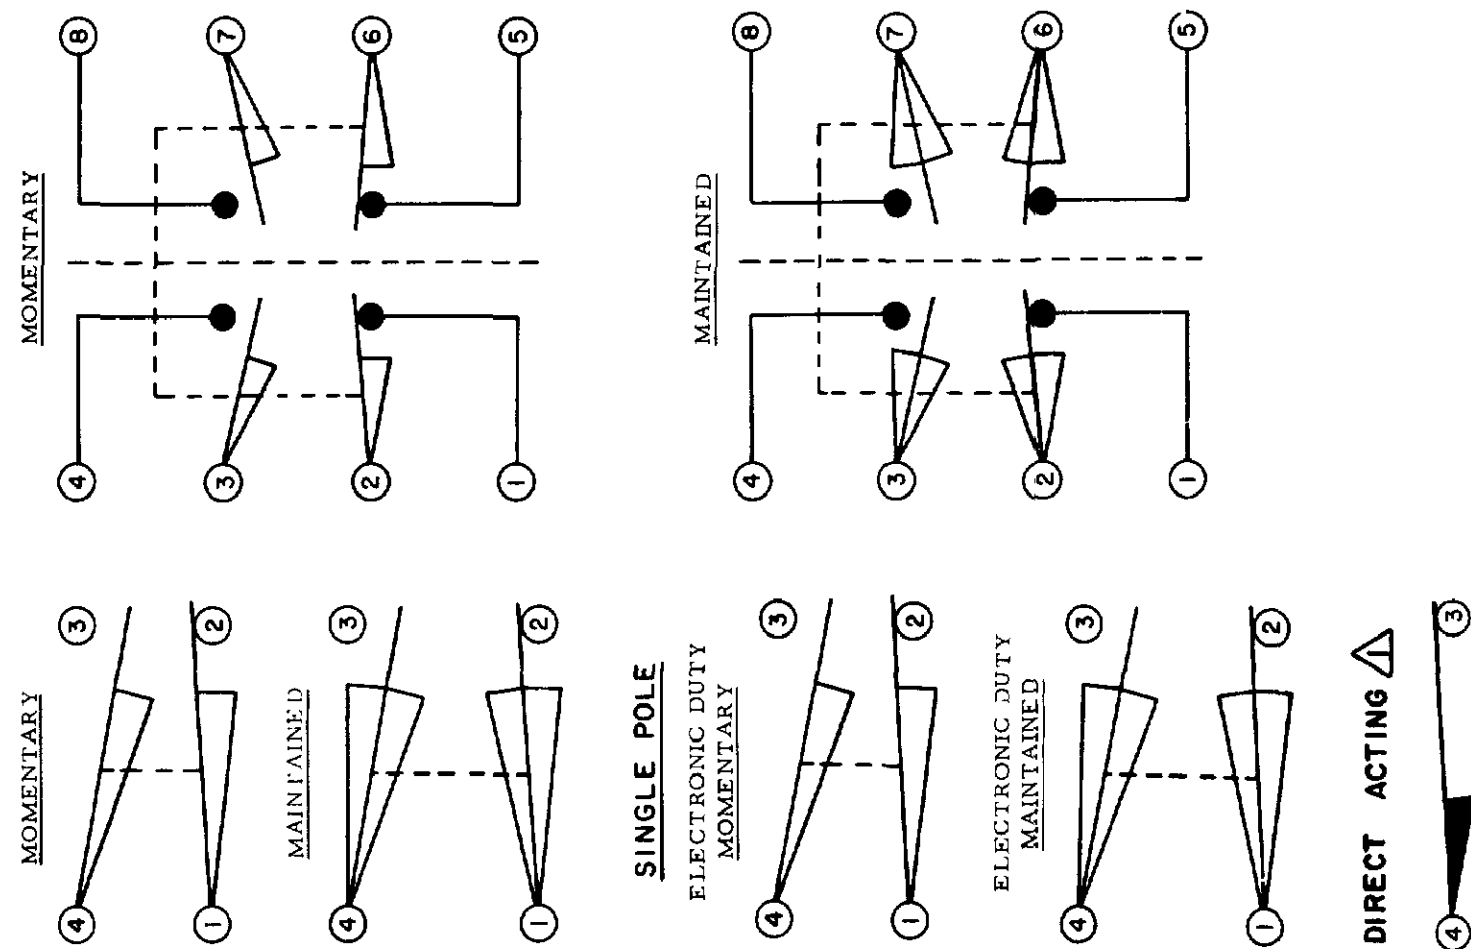

NOTES
Δ DIFFERENTIAL TRAVEL ON ALL OPERATING
CHARACTERISTICS NOT APPLICABLE

SINGLE POLE

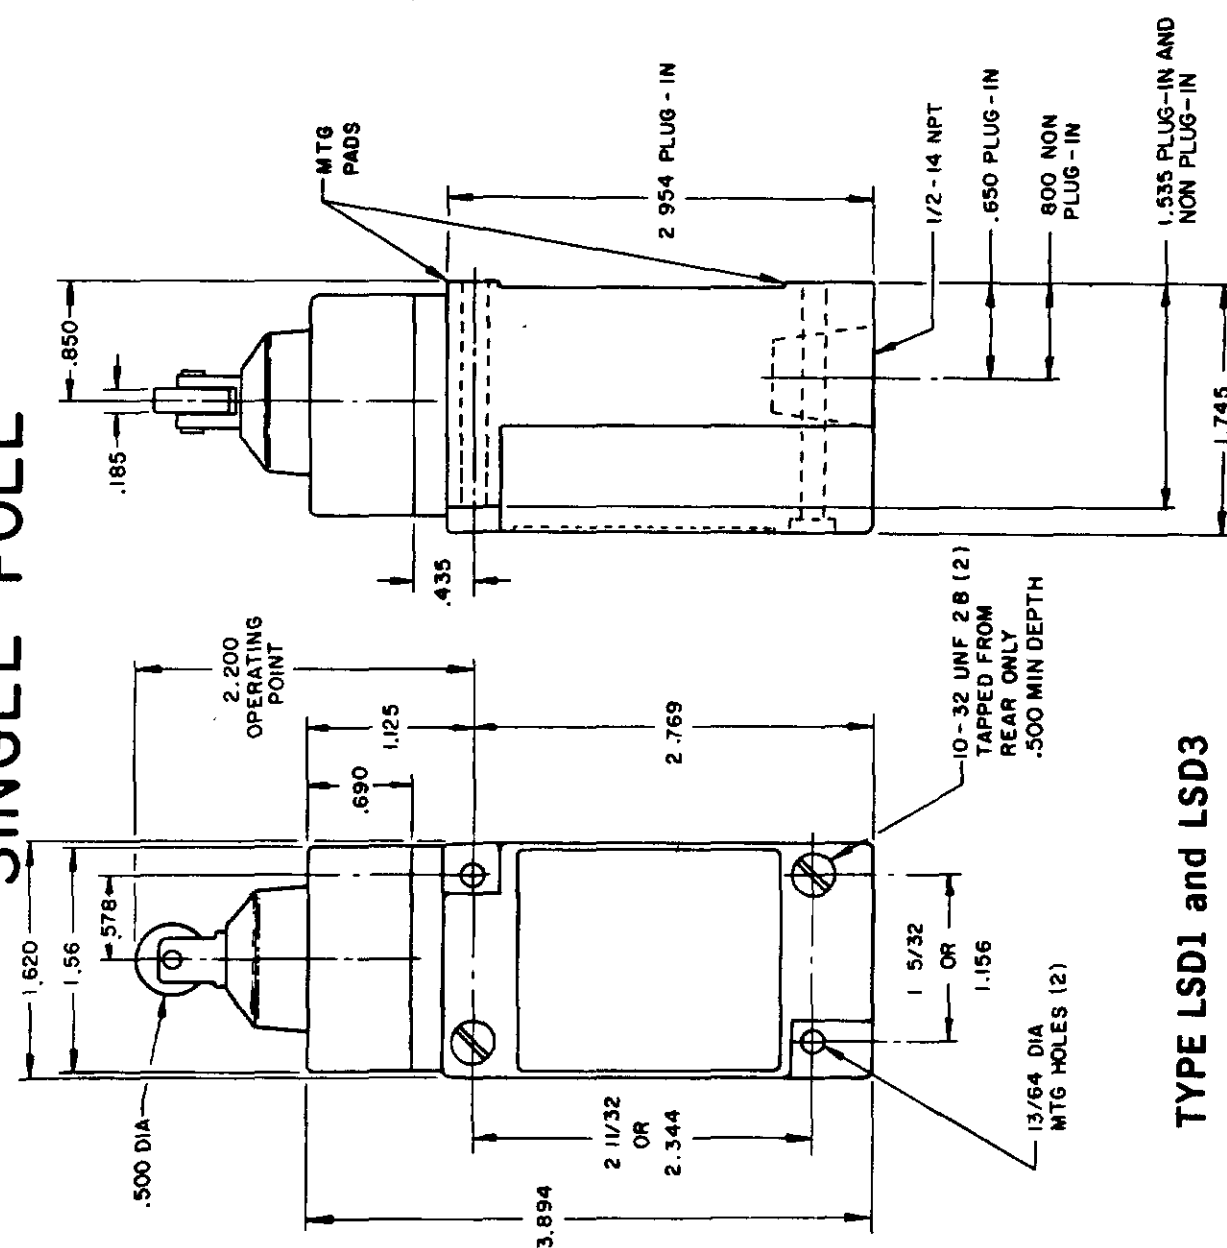


TYPE LSD1 and LSD3

DOUBLE POLE




TYPE LSD2 and LSD4


*(LSD6 and LSD7 have 1/2 - 14 NPT CON

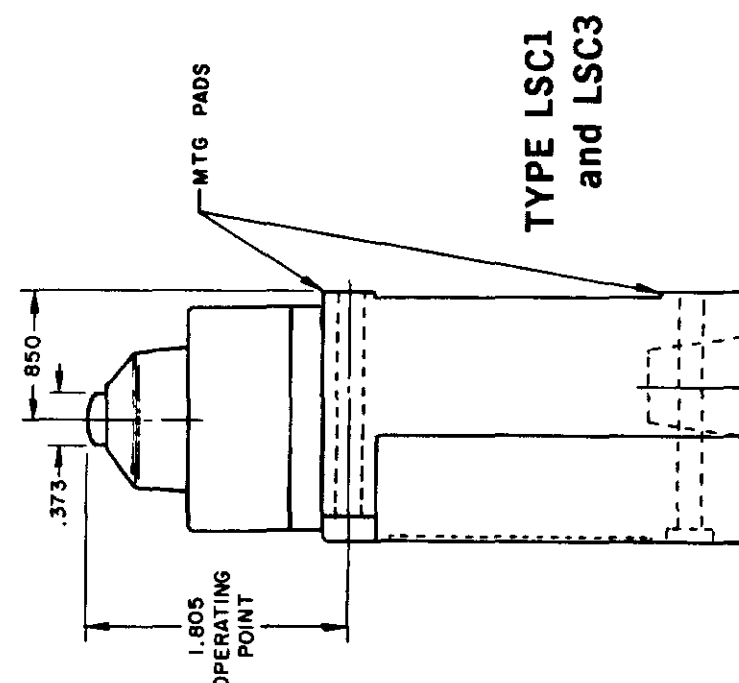

TYPE LSC1 and LSC3

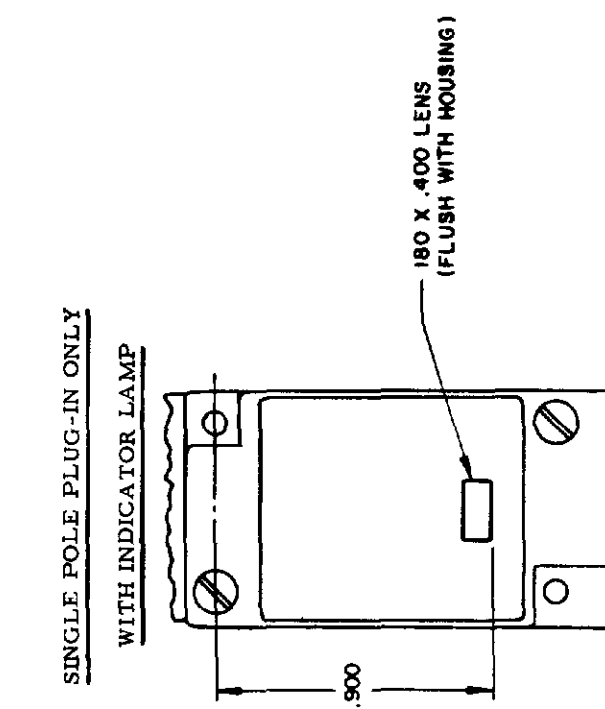


**TYPE LSC2
and LSC4**

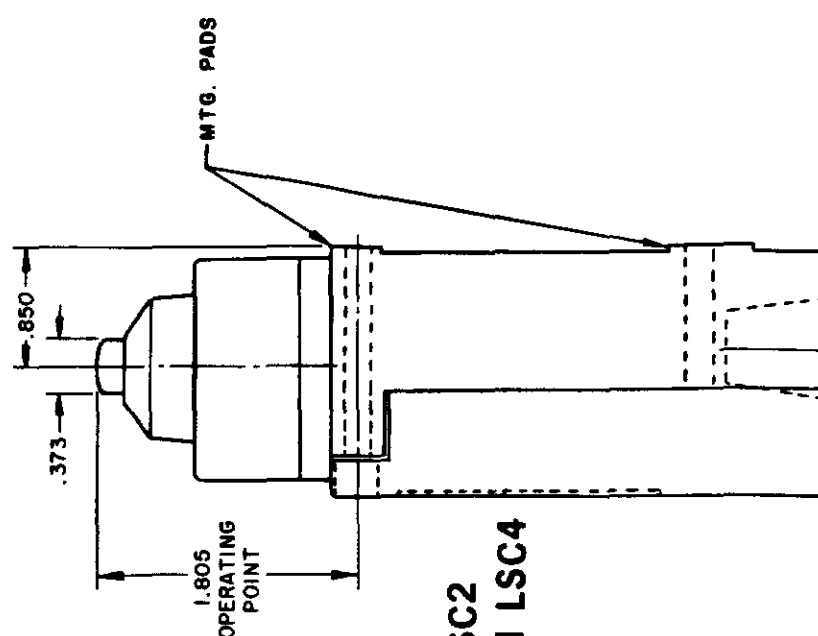


**120 LAMP VOLTAGE -
TYPE LSC5, LSD5 or LSV5**


**240 LAMP VOLTAGE .
TYPE LSC8, LSD8 or LSV8**

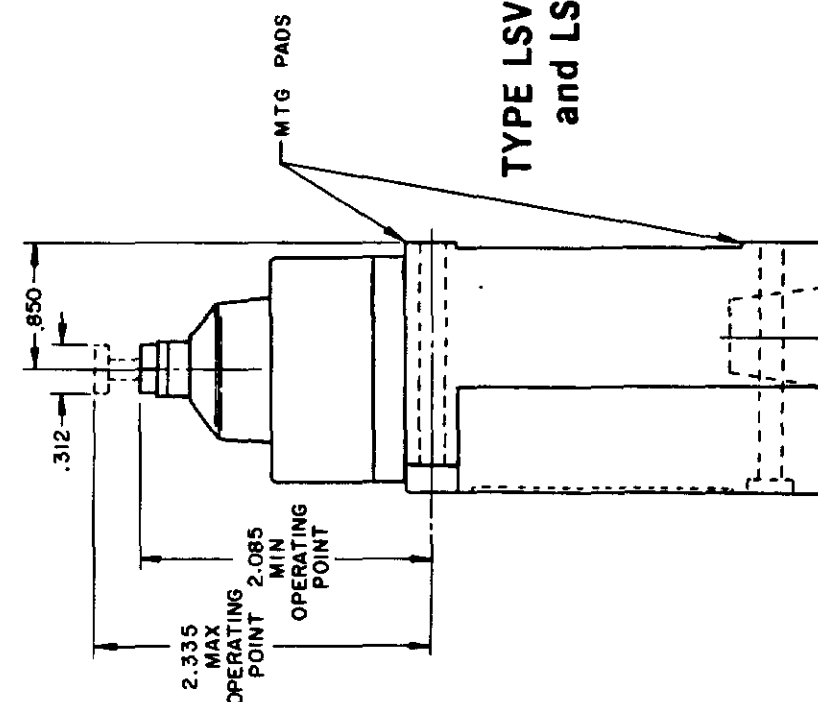

TYPE LSV1 and LSV3

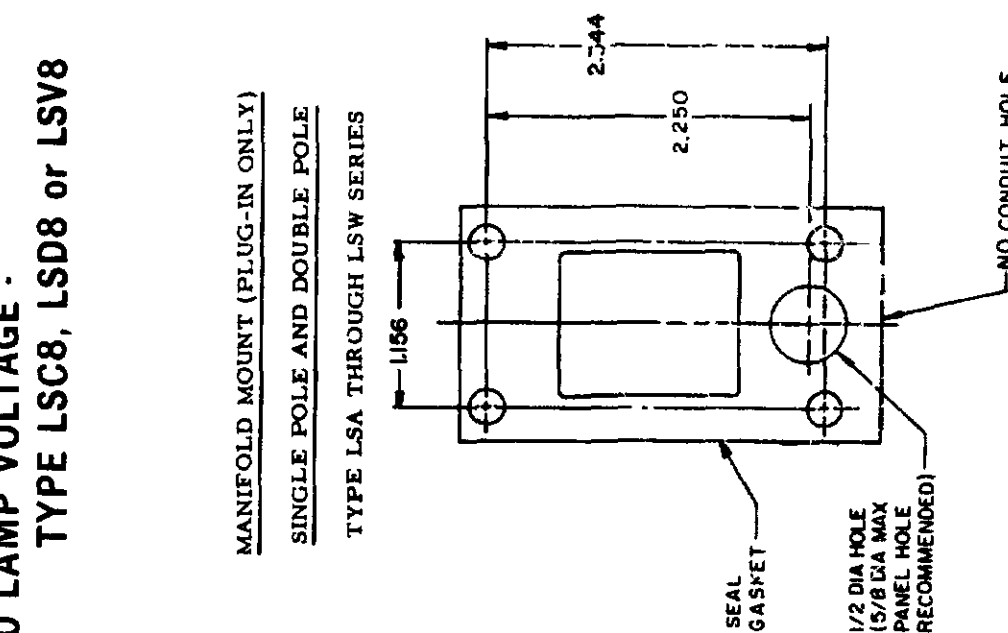

**TYPE LSV2
and LSV4**

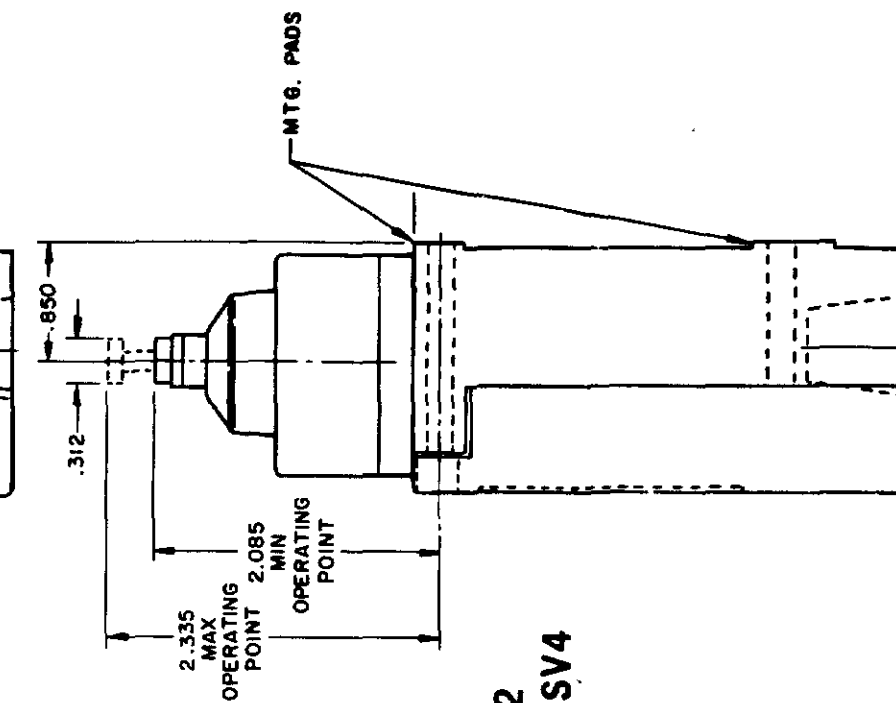

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING



LSA-LSW SERIES

PAGE 4 OF 10

SCALE NONE

DO NOT SCALE PRINT

SINGLE POLE DOUBLE POLE

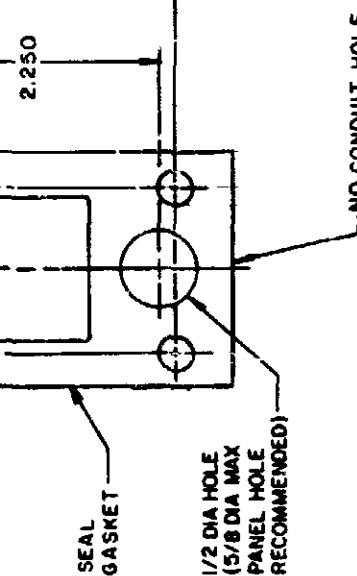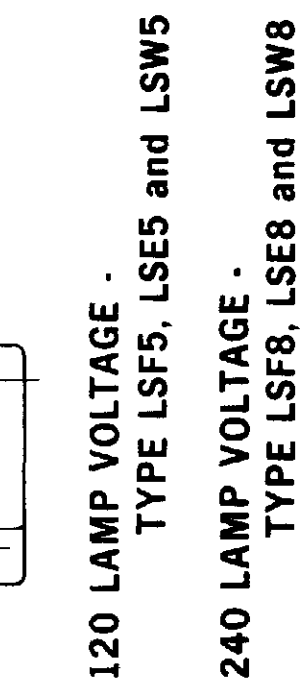

SCALE NONE

DO NOT SCALE PRINT



TYPE LSG1 and LSG3

INITIAL POSITION —
(FREE POSITION) } PRETRAVEL
DIFFERENTIAL TRAVEL
OPERATING POINT } OVERTRAVEL
FULL TRAVEL —

OPERATING POINT GIVEN
IN RELATION TO TOP
MOUNTING HOLE

SIDE	PLUNGER	TYPES
Left	1	1
Right	1	1

PAGE 6 OF 10

SWITCH - ENCLOSED

CATALOG LISTING

LSA-LSW SERIES

CHART 1

SCALE		NONE	
DO NOT SCALE PRINT			
UNLESS			
DIMENSIONS ARE NOTED			
TOLERANCES			
ONE PLACE	(.0)	±	
TWO PLACE	(.00)	±	
THREE PLACE	(.000)	±	
ANGLES		±	
WEIGHT			

REVISIONS	BS	10 JUL 07	10031956
	B	201004	
C	10 AUG 00		
	C	201748	
D	17 NOV 00		
	D	202198	
E	23 JAN 01		
	E	204871	
F	14 FEB 02		
	F	206581	
G	14 OCT 02		
	G	206763	
H	31 OCT 02		
	H	207179	
J	14 JAN 03		
	J	207474	
K	18 FEB 03		
	K	0006871	
11 AUG 04			

ISSUE	12	PSR	10 JUL 07	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES
LSA-LSW SERIES CHART 1							
PAGE 7 OF 10							


LSA-LSW SERIES CHART 1							
PAGE 7 OF 10							

MAAM 15 JUN 94
DRAWN

DOUBLE POLE

WOBBLE STICK

SINGLE POLE

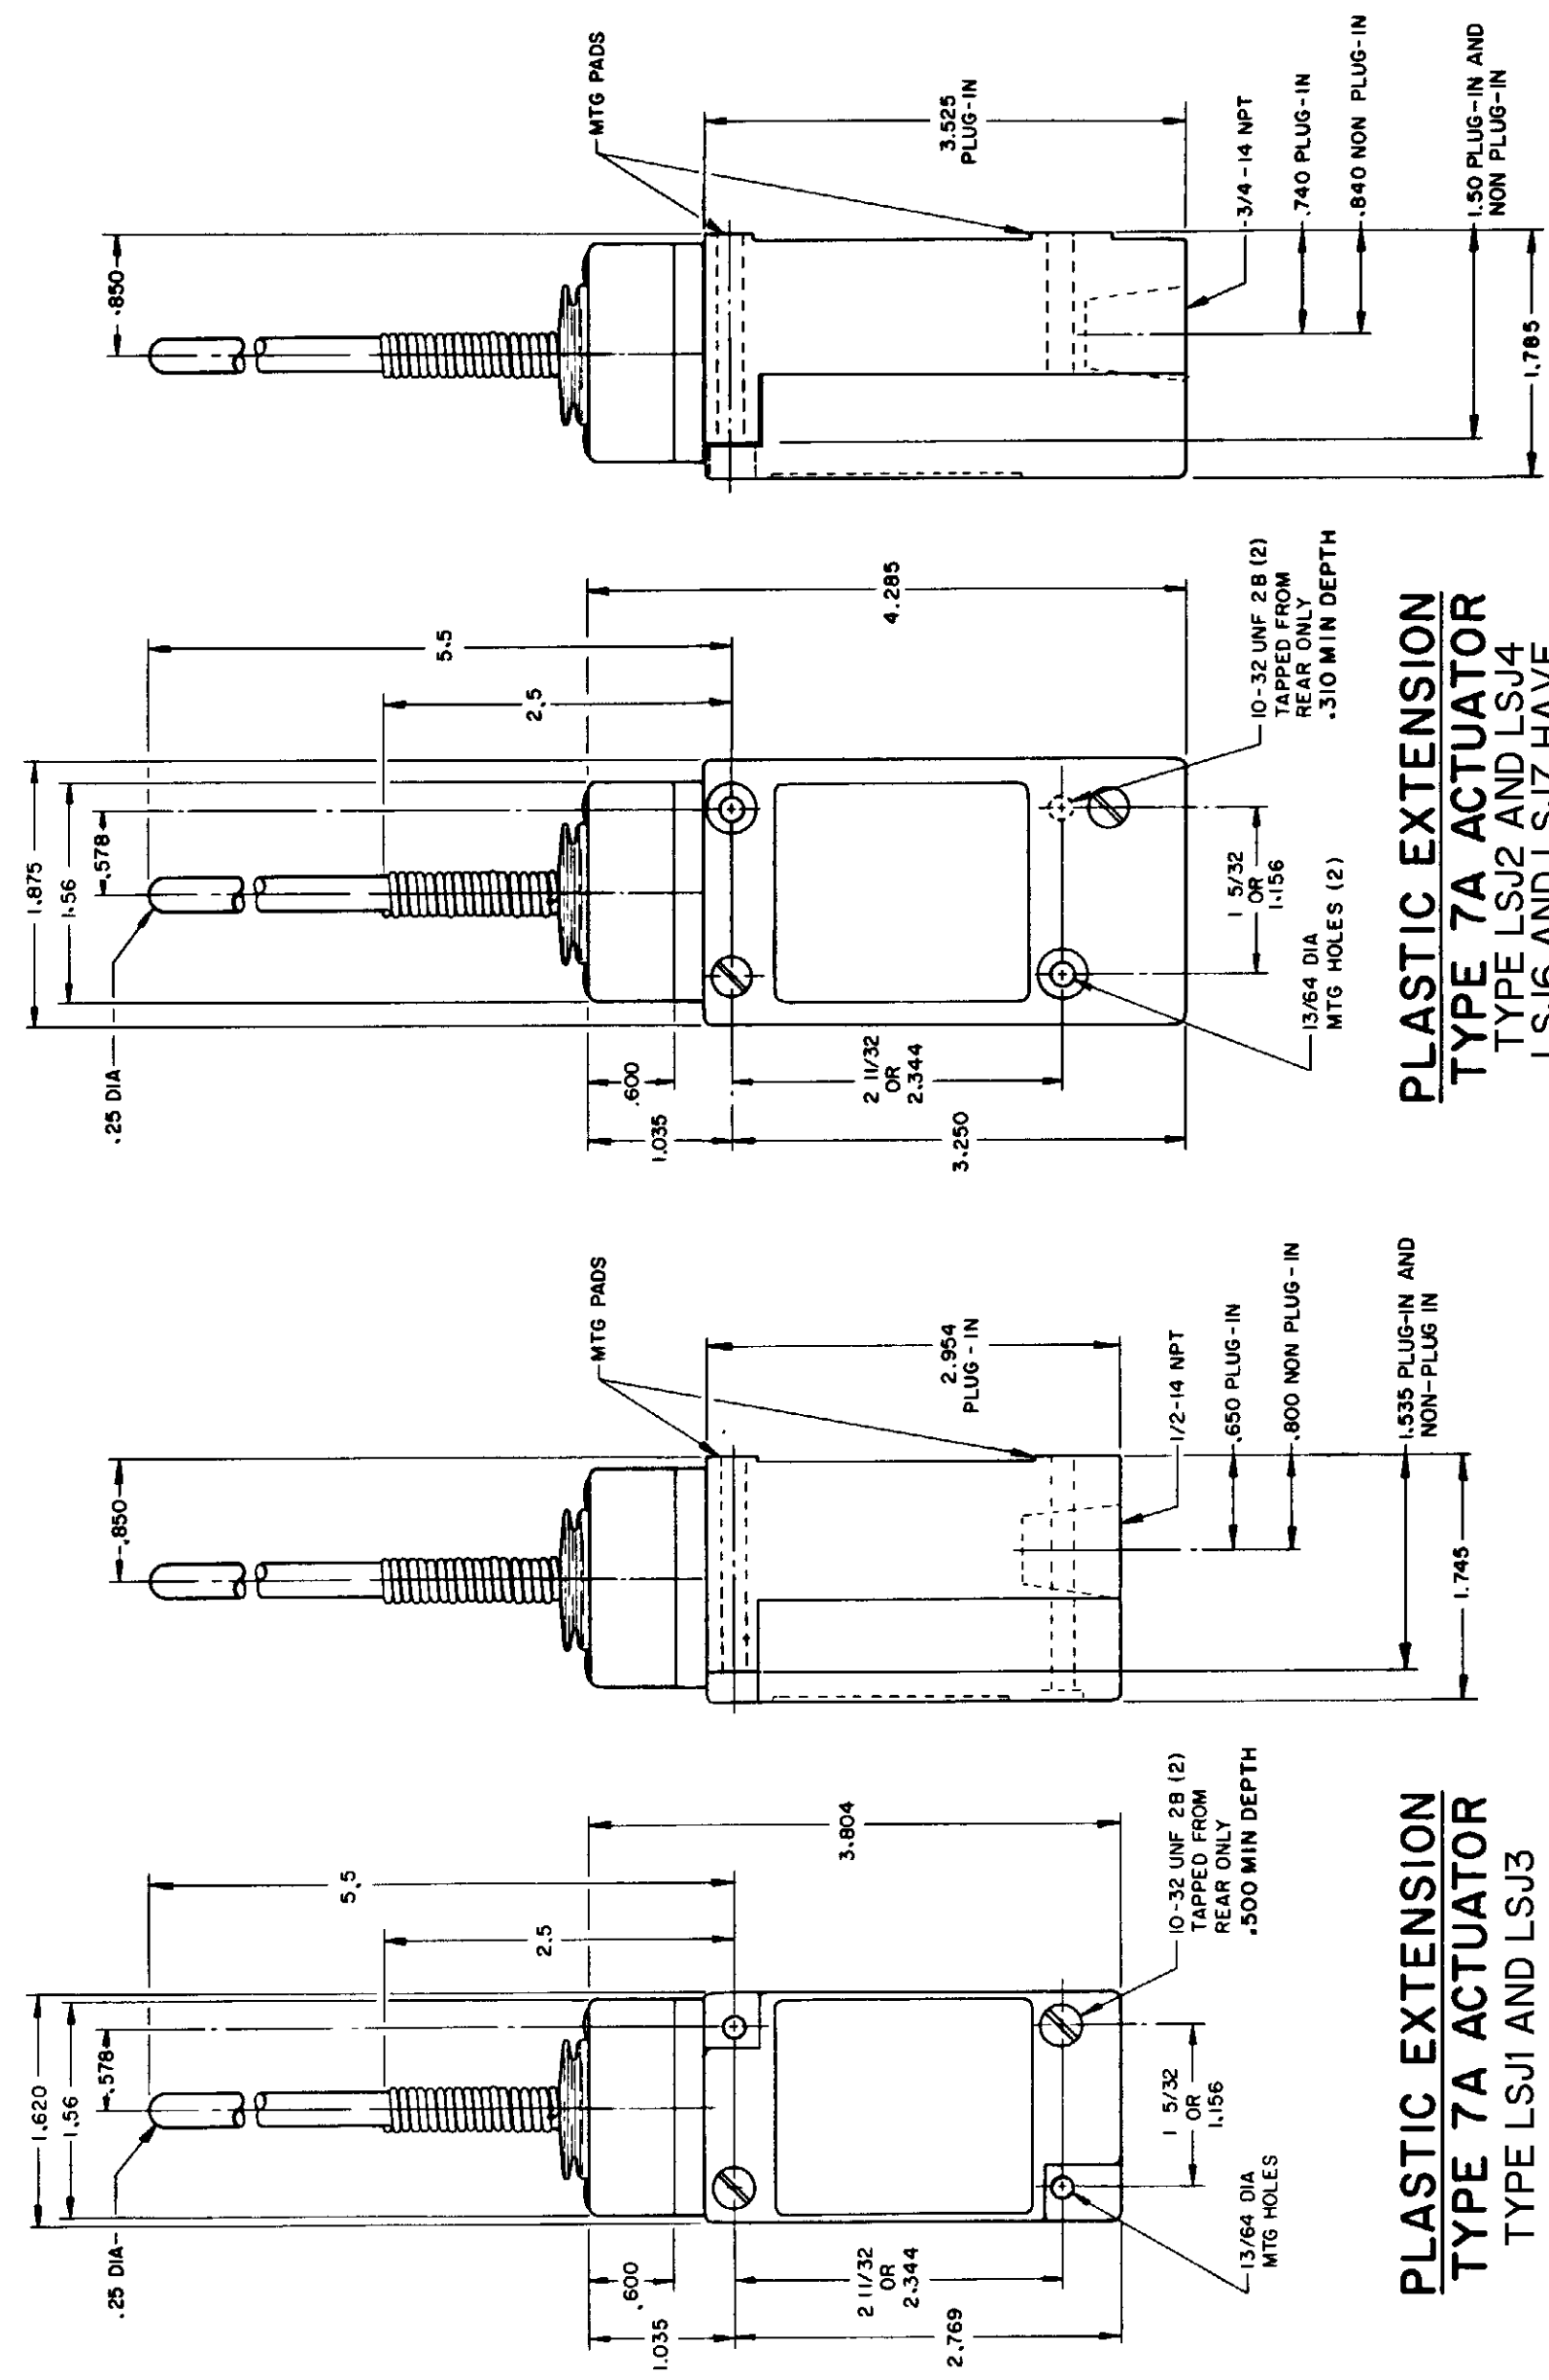

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ1 AND LSJ3

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929


SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

PAGE 7 OF 10


SCALE NONE
DO NOT SCALE PRINT

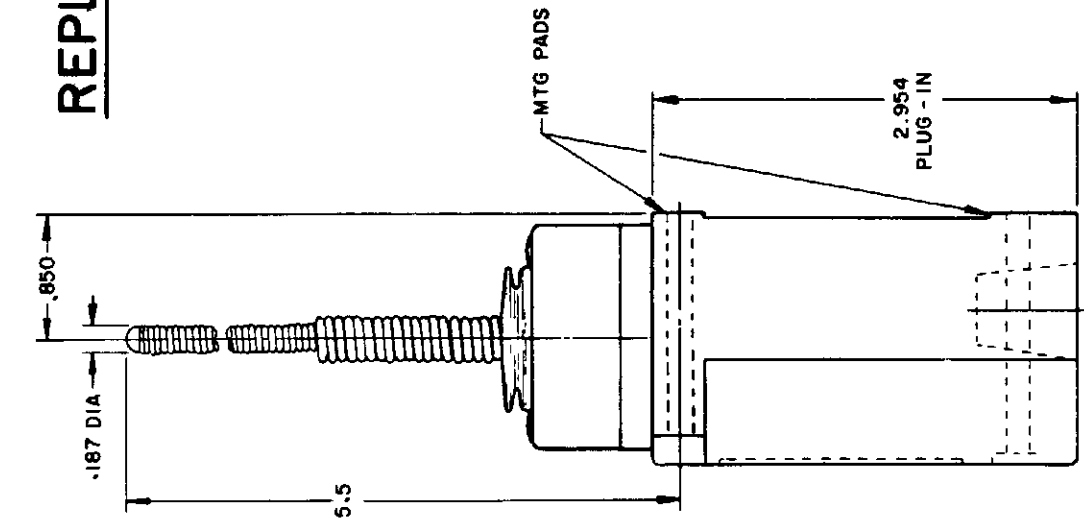


CABLE EXTENSION
TYPE 7N ACTUATOR




CABLE EXTENSION
TYPE 7N ACTUATOR

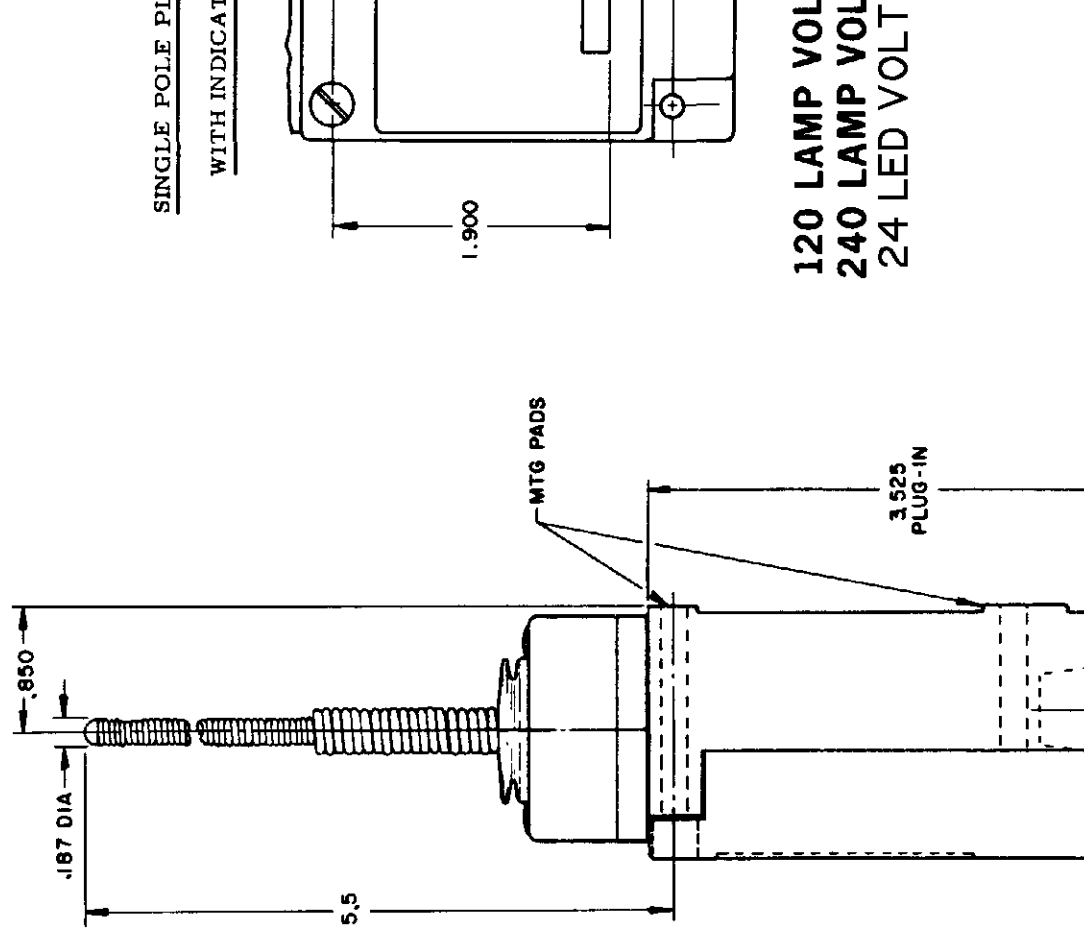


REPLACEMENT ACTUATOR
LSZ-4009

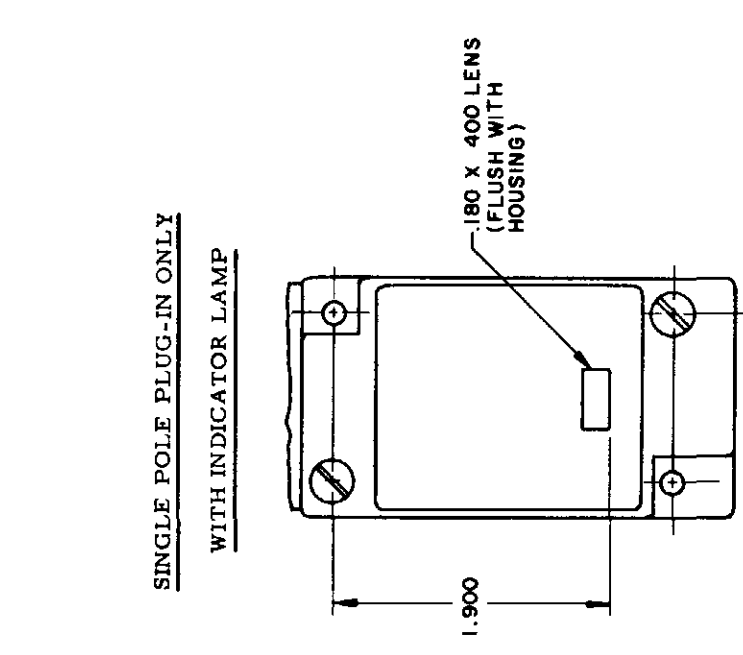

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8
24 LED VOLTAGE TYPE LSJ9

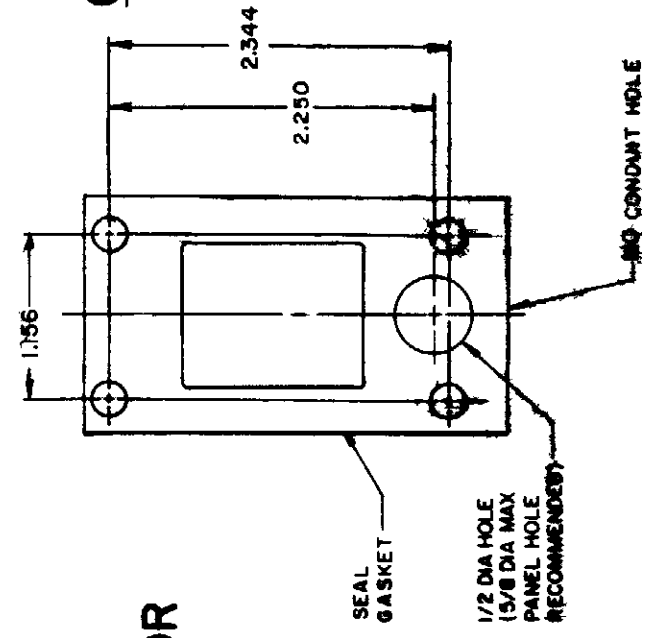


REPLACEMENT ACTUATOR
LSZ-4011

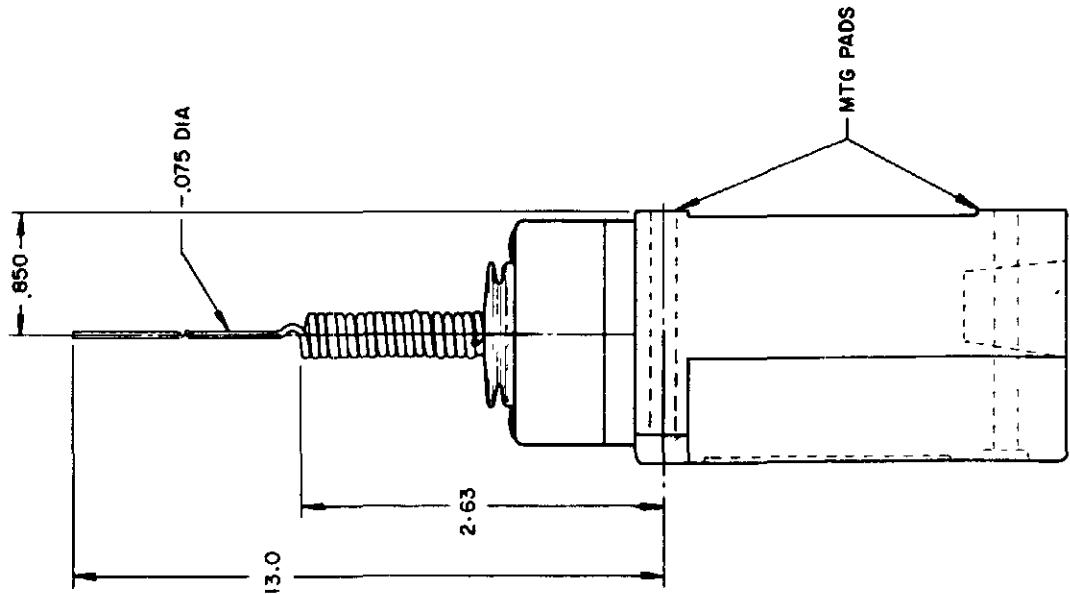

WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ1 and LSJ3

REPLACEMENT ACTUATOR - LSZ 4010

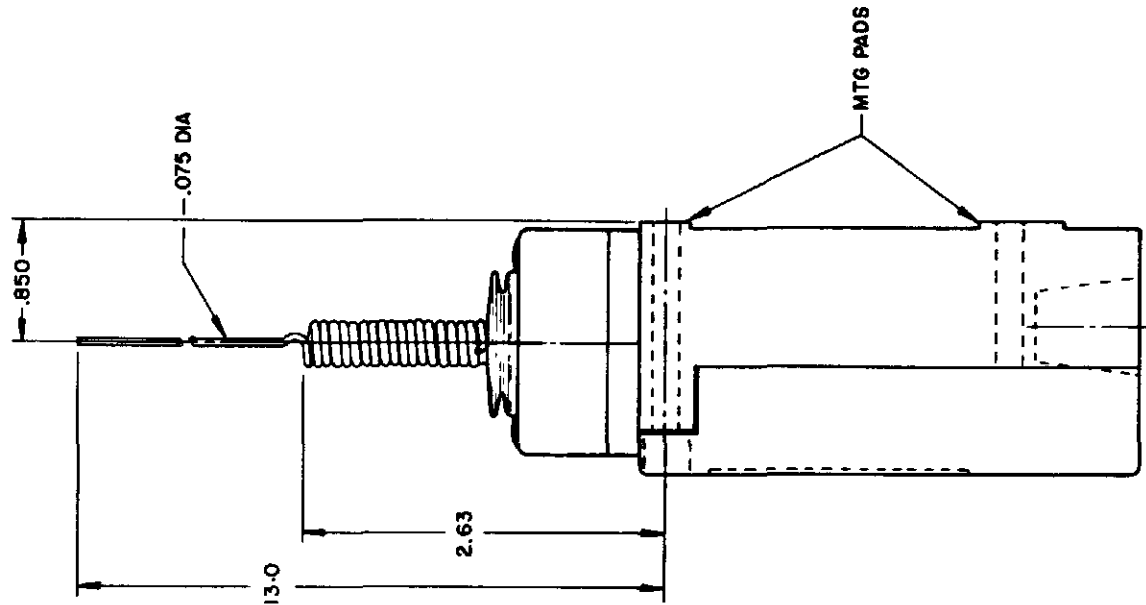


WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ2 and LSJ4

LSJ6 and LSJ7 have 1/2 - 14 NPT CONDUIT HOLE


SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

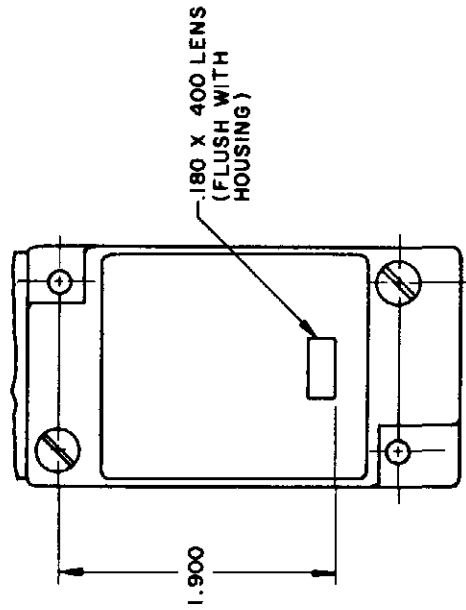

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8

CAT WHISKER

SINGLE POLE

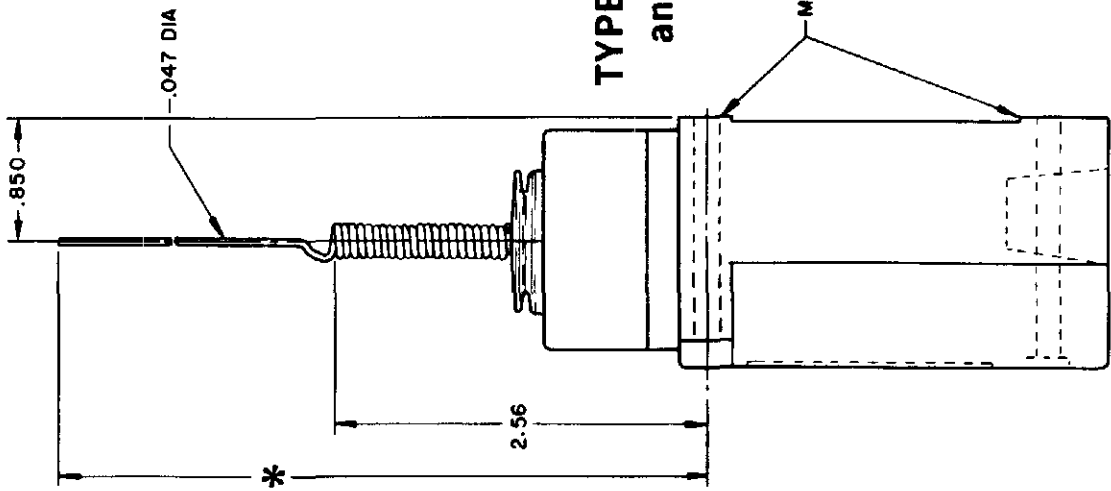


TYPE LSK1
and LSK3

120 LAMP VOLTAGE
TYPE LSK5 - CAT WHISKER TYPE LSB5 - TOP ROTARY
240 LAMP VOLTAGE
TYPE LSK8 - CAT WHISKER TYPE LSB8 - TOP ROTARY

*WIRE EXTENSION REPLACEMENT ACTUATOR
TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012
TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013
TYPE 8C COIL ACTUATOR 5.5 IN.-LSZ 4014
ACTUATOR 9.5 IN. - LSZ4036

DOUBLE POLE

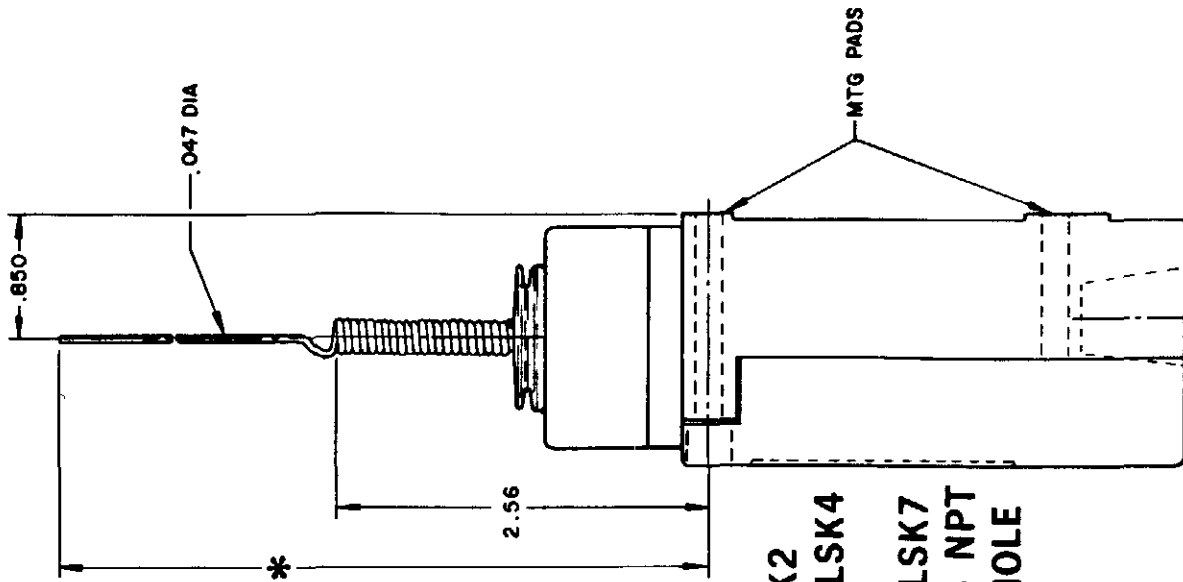

TYPE LSK2
and LSK4
LSK6 and LSK7
have 1/2 - 14 NPT
CONDUIT HOLE

WIRE EXTENSION
*TYPE 8A ACTUATOR 5.5 IN.
TYPE 8B ACTUATOR 7.5 IN.
TYPE 8C ACTUATOR 5.5 IN.
TYPE 8D ROD ACTUATOR 5.5 IN.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division
FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

PAGE 8 OF 10

SCALE NONE
DO NOT SCALE PRINT

PRETRAVEL (APPROX) IN. RADIUS	CAT. WHISKER		WOBBLE STICK	
	5/16" COIL	5/16" WIRE	7/16" WIRE	7/16" WIRE
2	2	2	1.5	4.0
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	7.0


REV	DATE	BY	CHKD	DESCRIPTION
L	0031956			BS
B	10JUL67			201004
C	201748			201748
D	202198			202198
E	204871			204871
F	206581			206581
G	206763			206763
H	207179			207179
J	207474			207474
K	0006871			0006871

ISSUE	12	PSR	10JUL07	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES
CATALOG LISTING	LSA-LSW SERIES CHART 1	PAGE 9 OF 10					
REVISIONS	11AUG04	AK	11JUL94	CHKD			
15 JUN 94	JAF	CHKD					
MAM							

CONVERSION BASES


SINGLE POLE
(SIDE ROTARY)
LSZ 4003

DOUBLE POLE
(SIDE ROTARY)
LSZ 4004

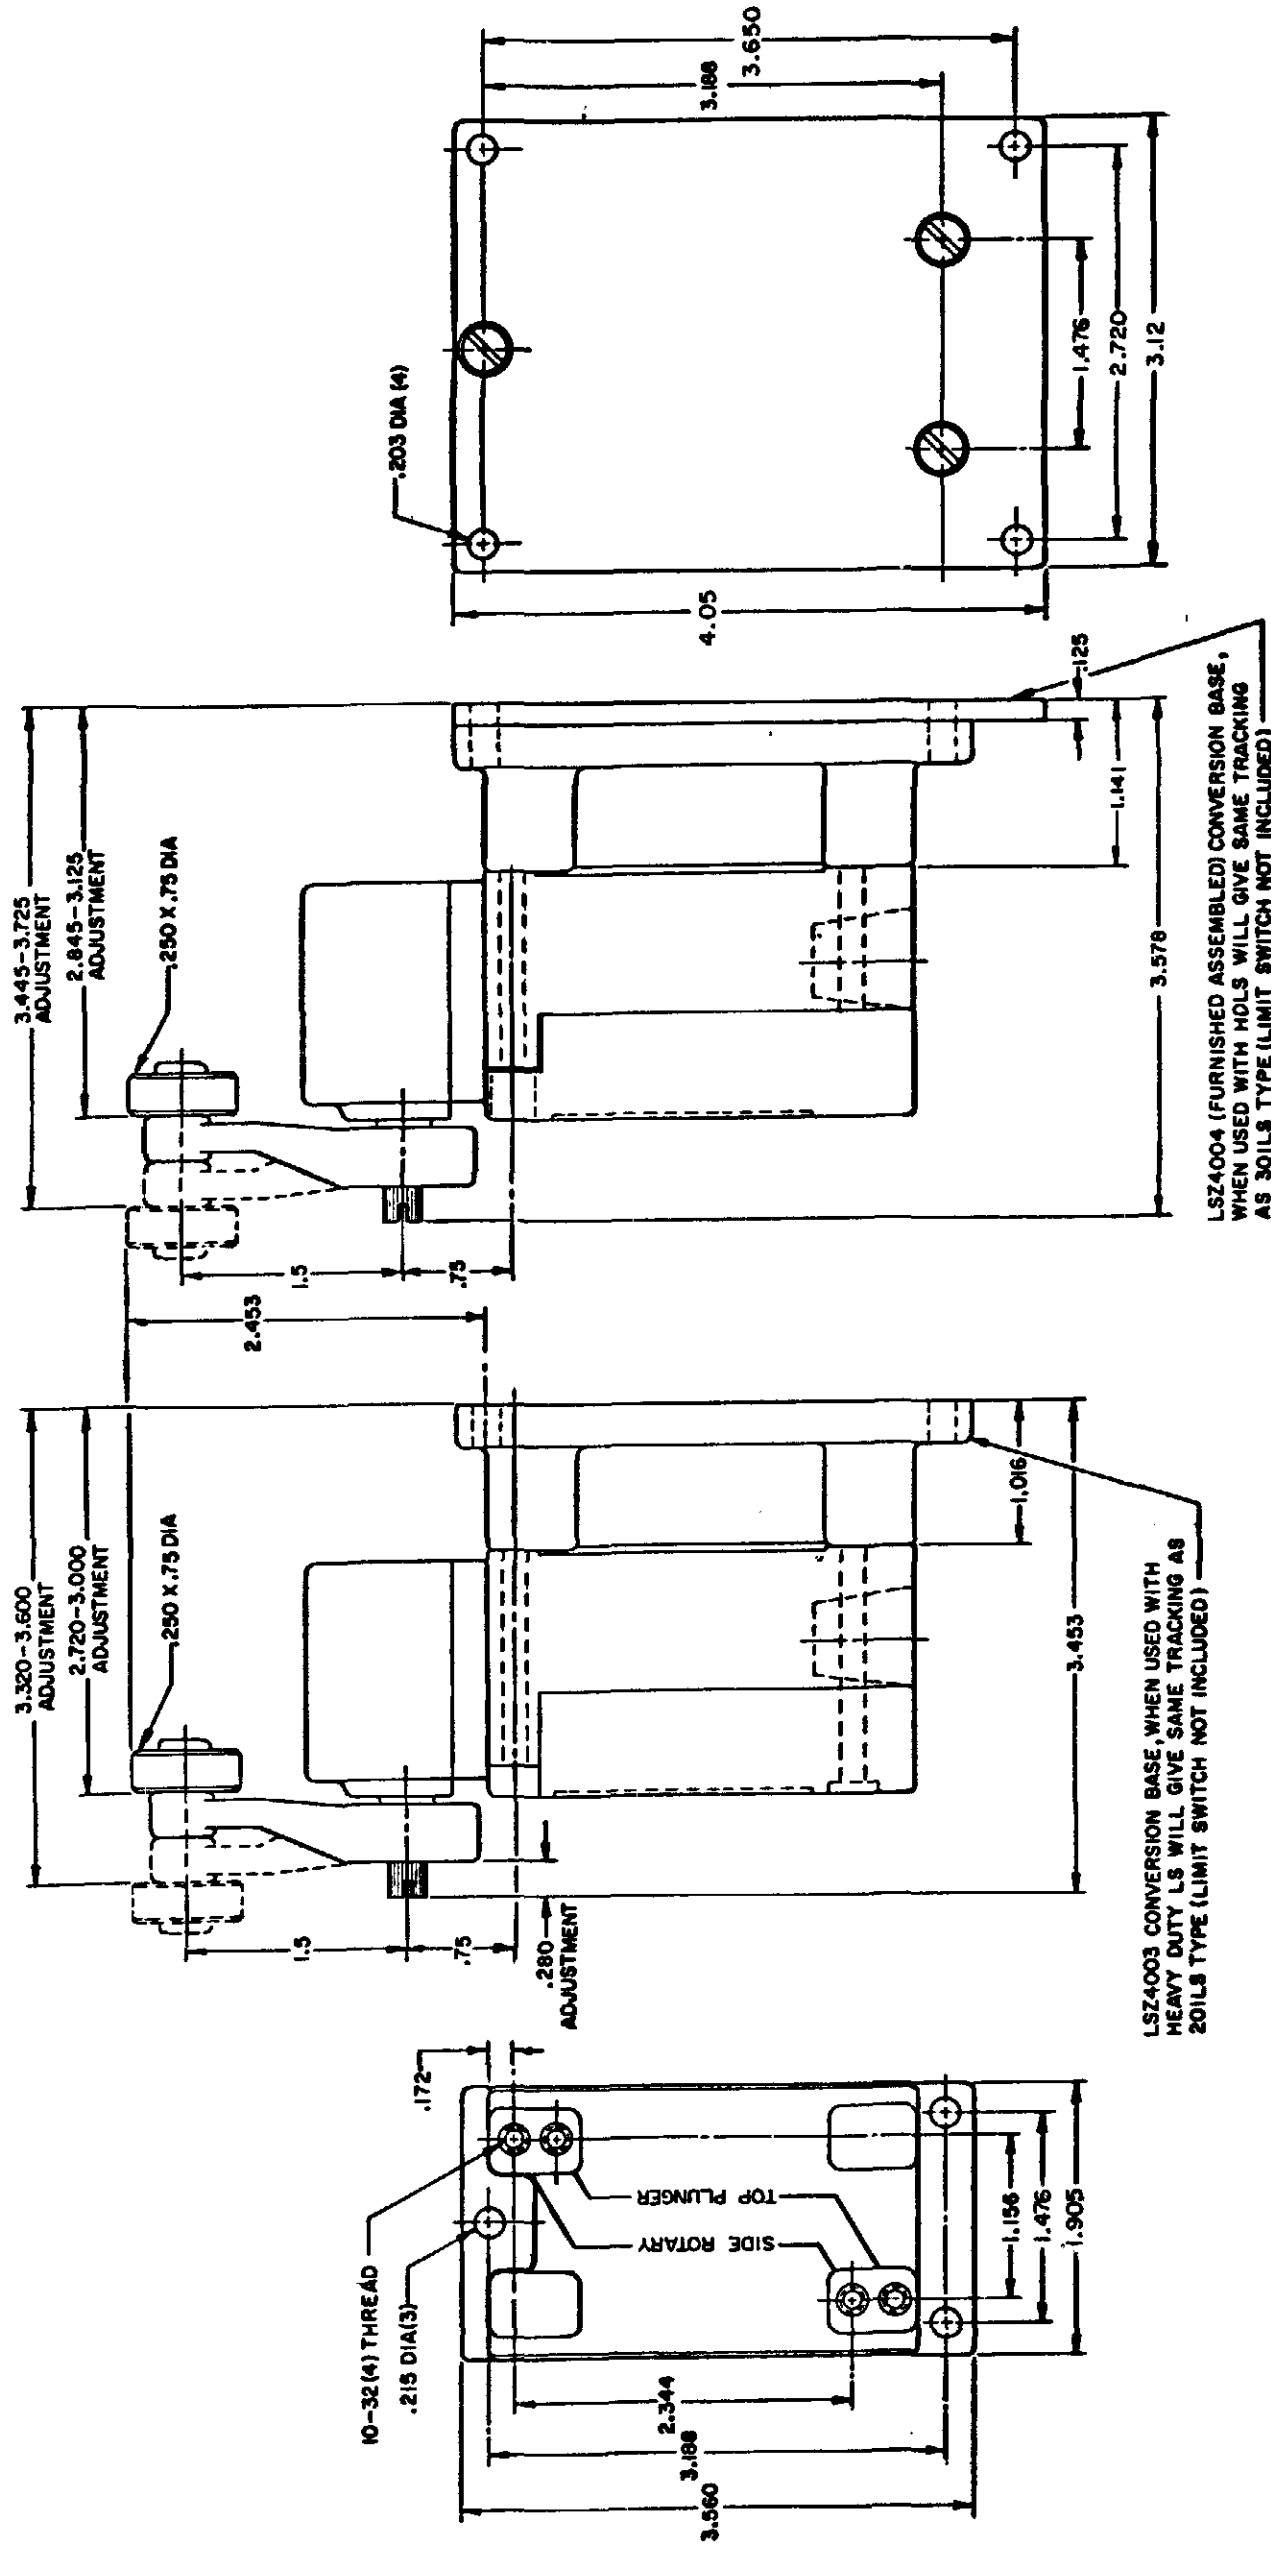

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE
TOP PLUNGER
LSZ 4003

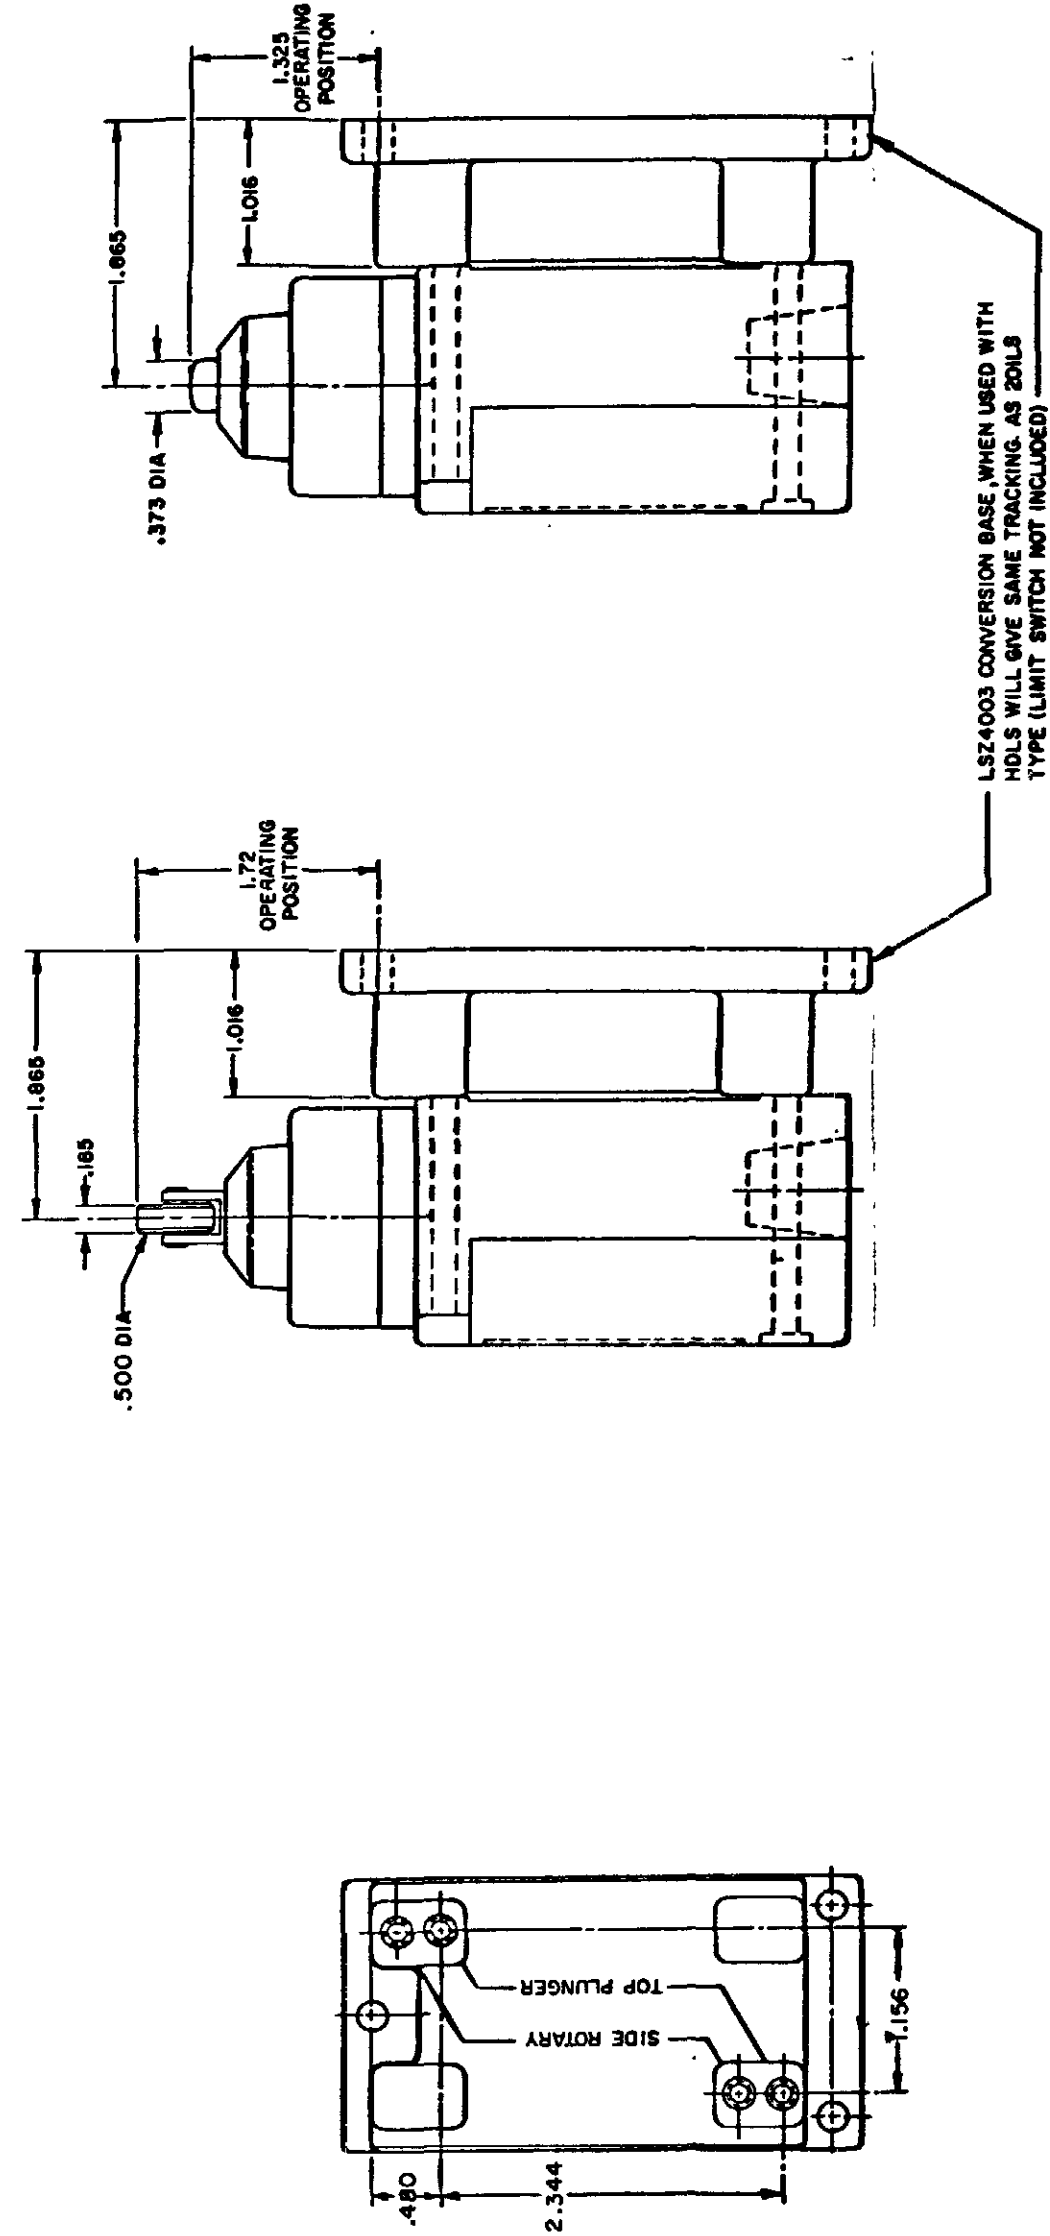

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMIT SWITCH

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F

SCALE



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331