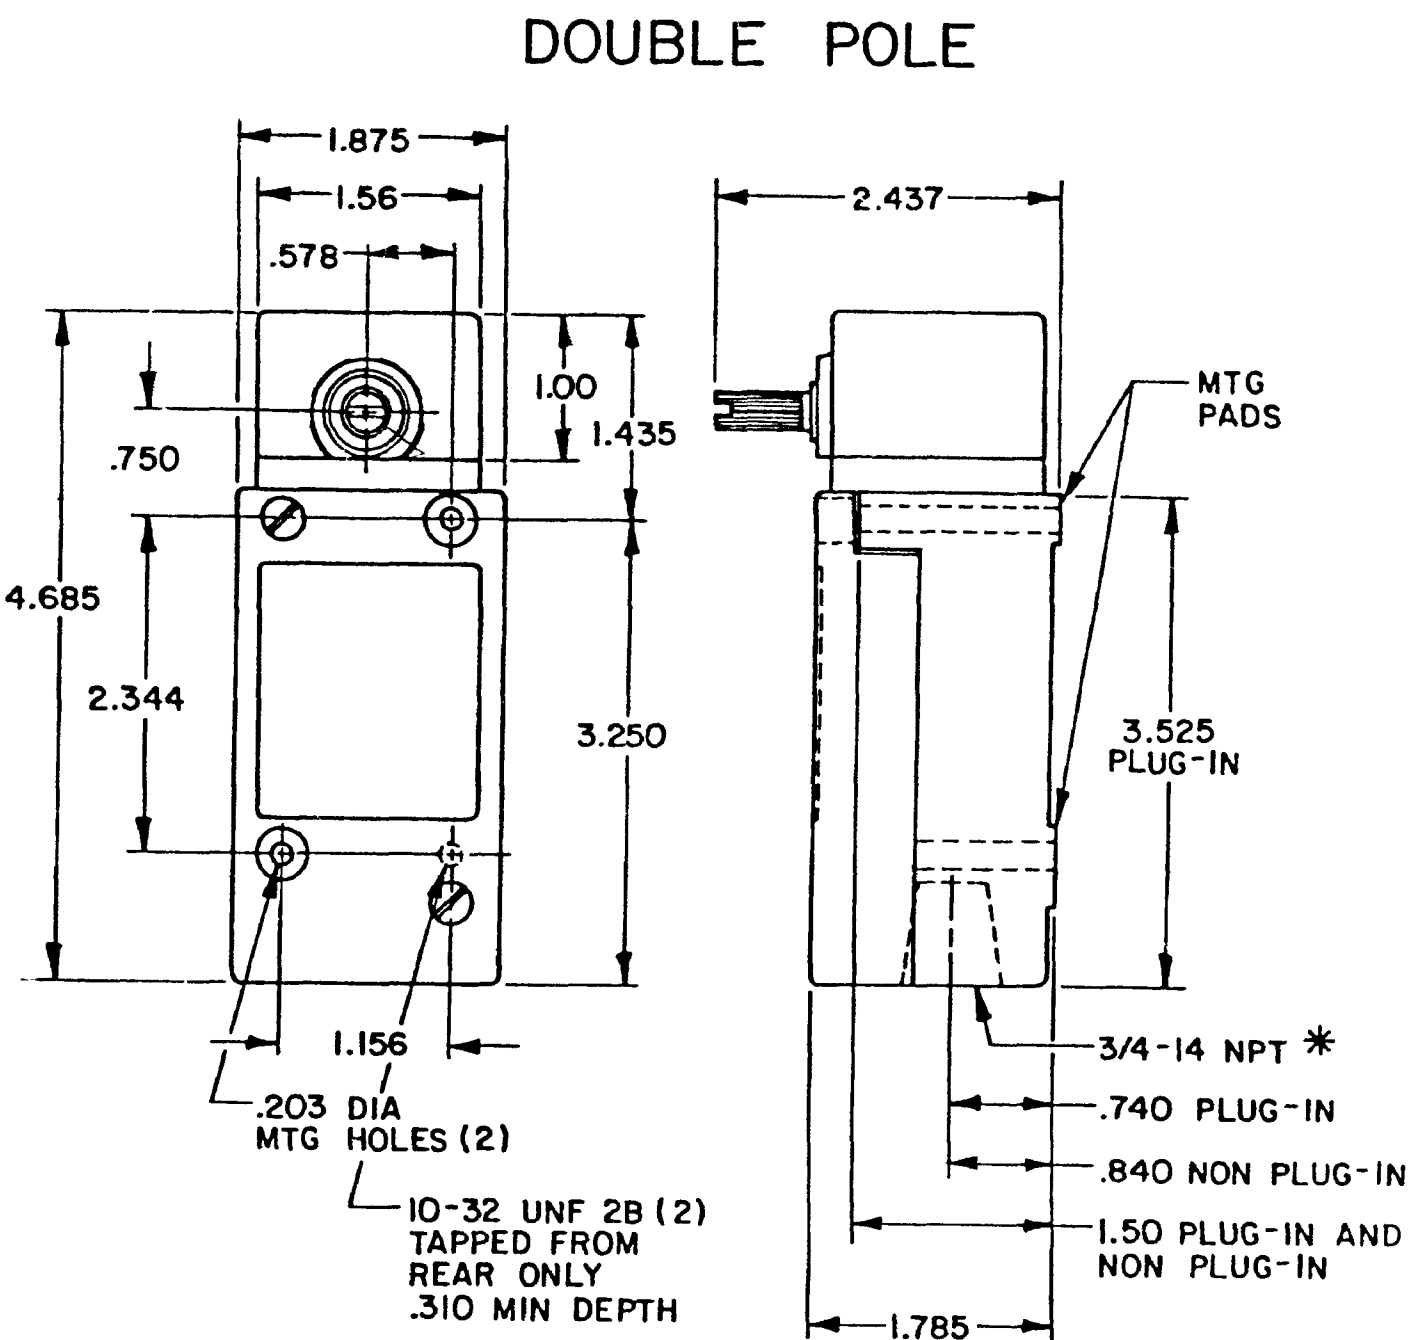


[illegible]

TYPE: LSA2, LSH2, LSM2, LSN2, LSP2, LSR2
LSA4, LSH4, LSM4, LSN4, LSP4, LSR4




SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

1.900

.180 X .400 LENS
(FLUSH WITH HOUSING)


The diagram shows a rectangular plug-in unit. A vertical dimension line on the left indicates a height of 1.900. A horizontal dimension line at the bottom indicates a width of .180. A small rectangular lens is shown on the front face, with a callout indicating it is .400 wide and flush with the housing. The unit has a screw terminal on the left and a circular indicator lamp on the right.

240 LAMP VOLTAGE -
TYPE LSA8, LSH8, LSN8, LSP8, LSR8

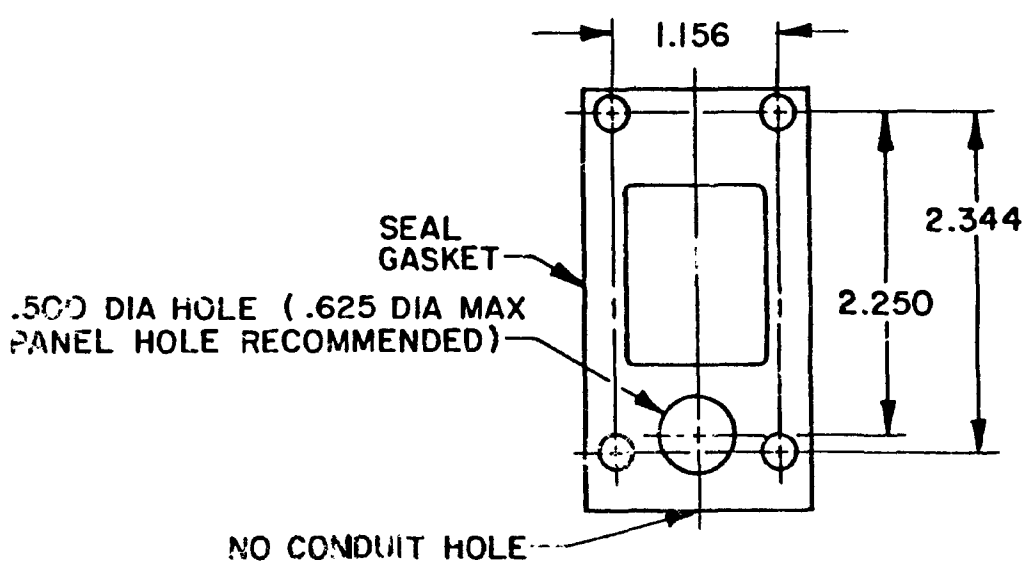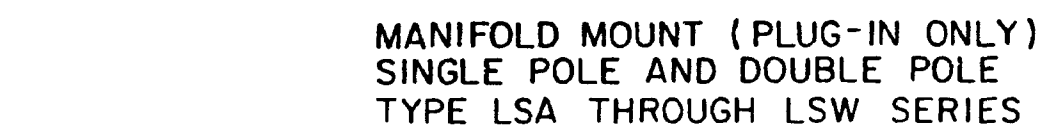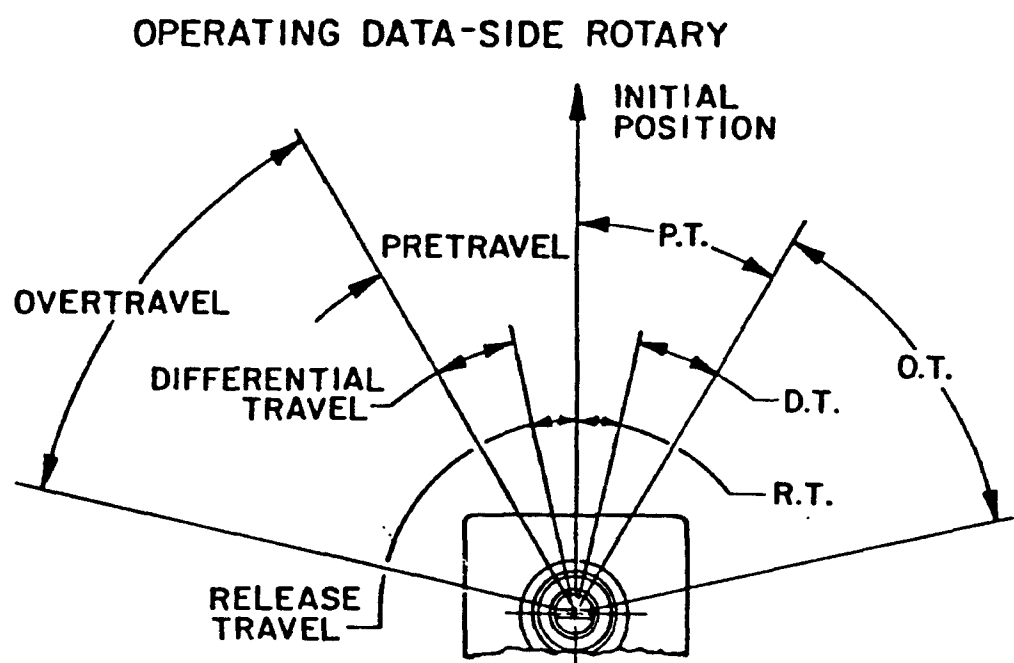


NOTE
 OPERATE AND RELEASE POINTS WILL EXCHANGE LOCATIONS IF SHAFT IS ROTATED 180°


SIDE ROTARY CAM TRACKING

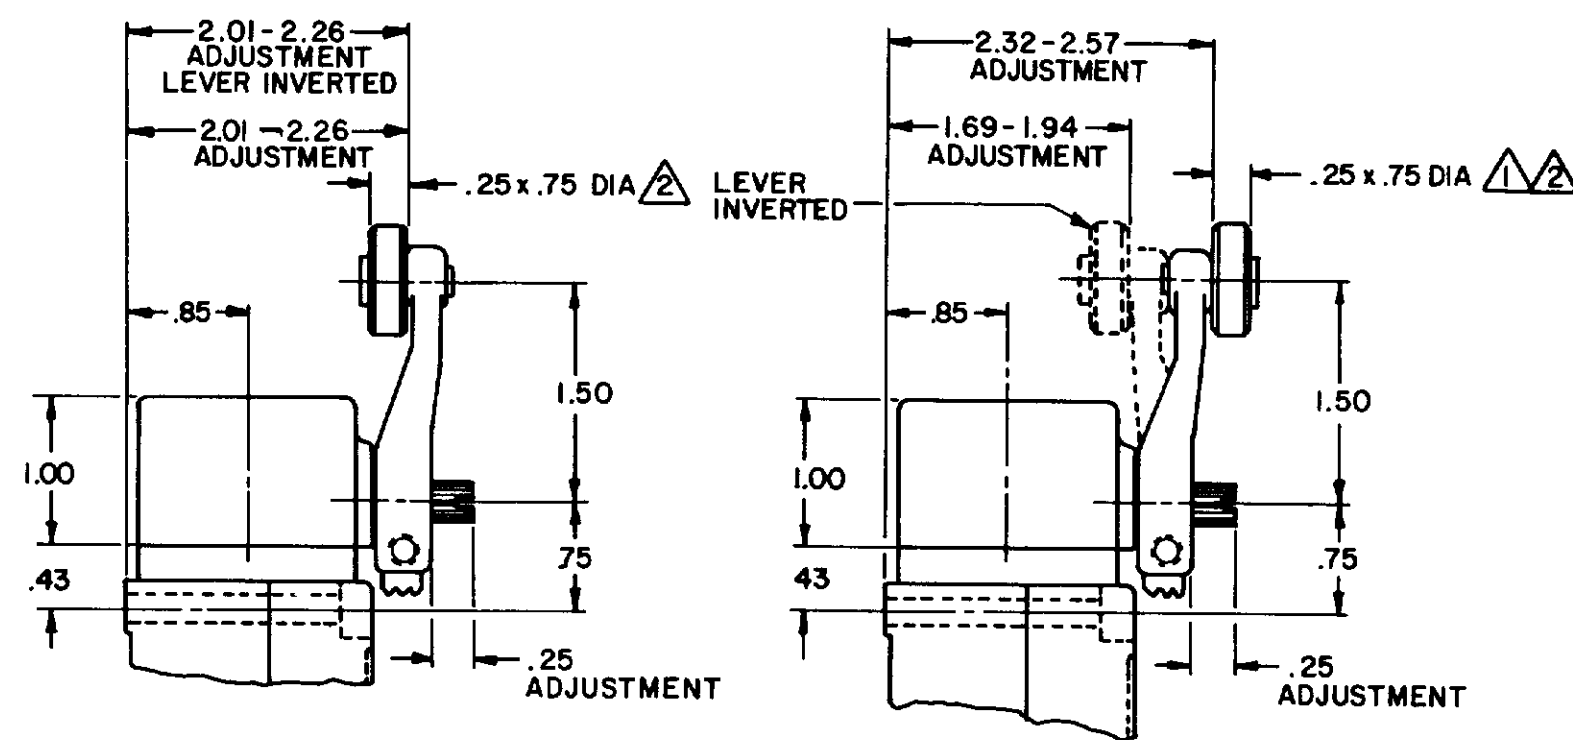


LSZ51 TYPE LEVERS

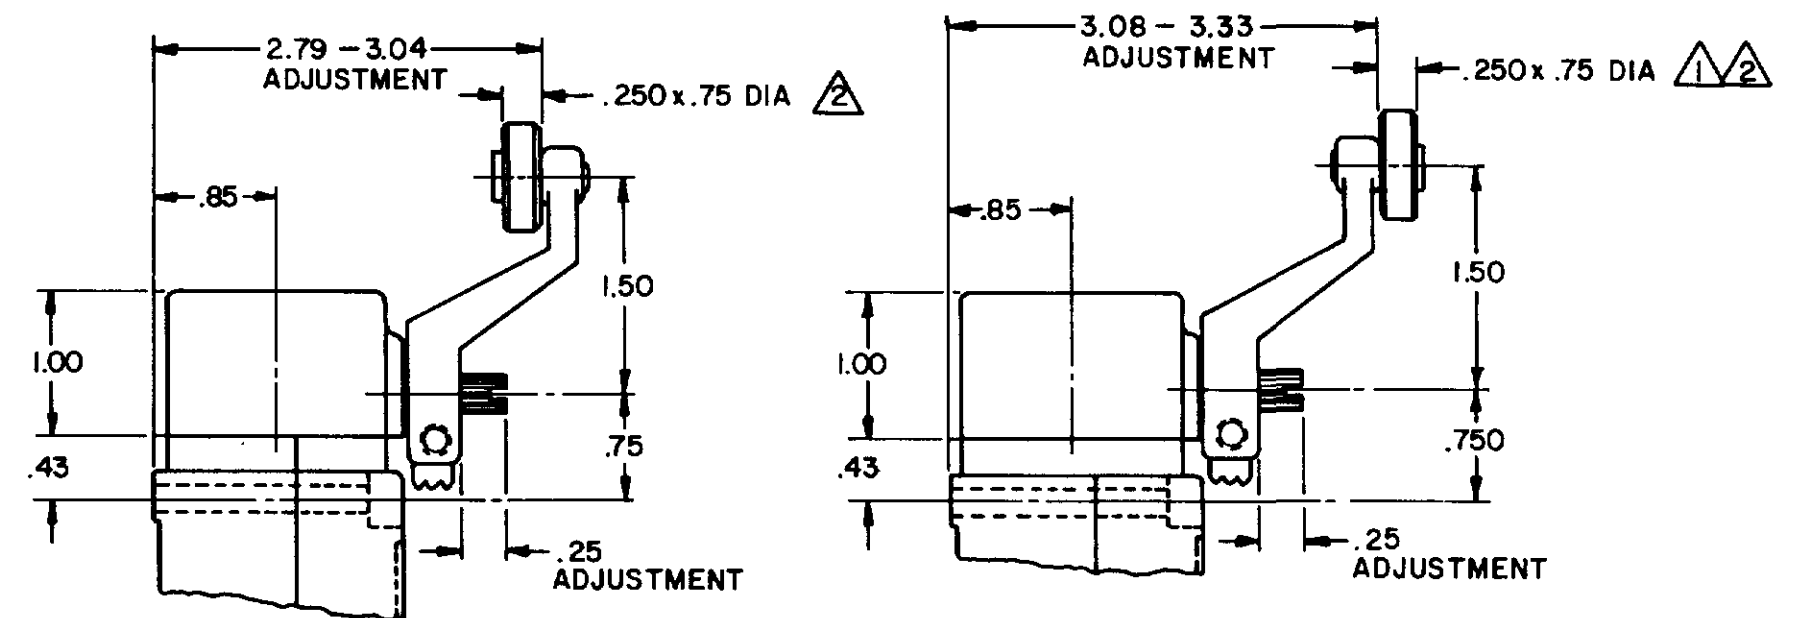


LSZ55 TYPE LEVERS

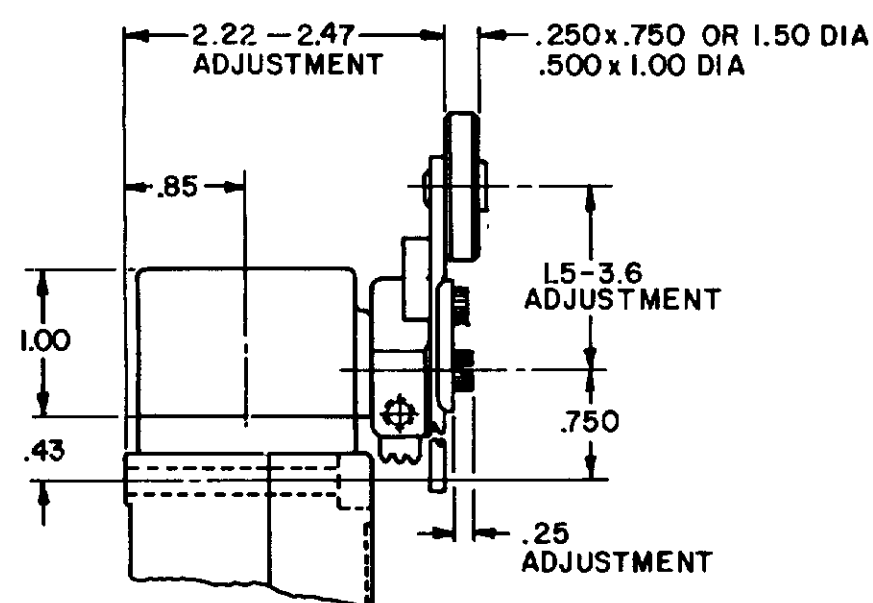


LSZ52 TYPE LEVER

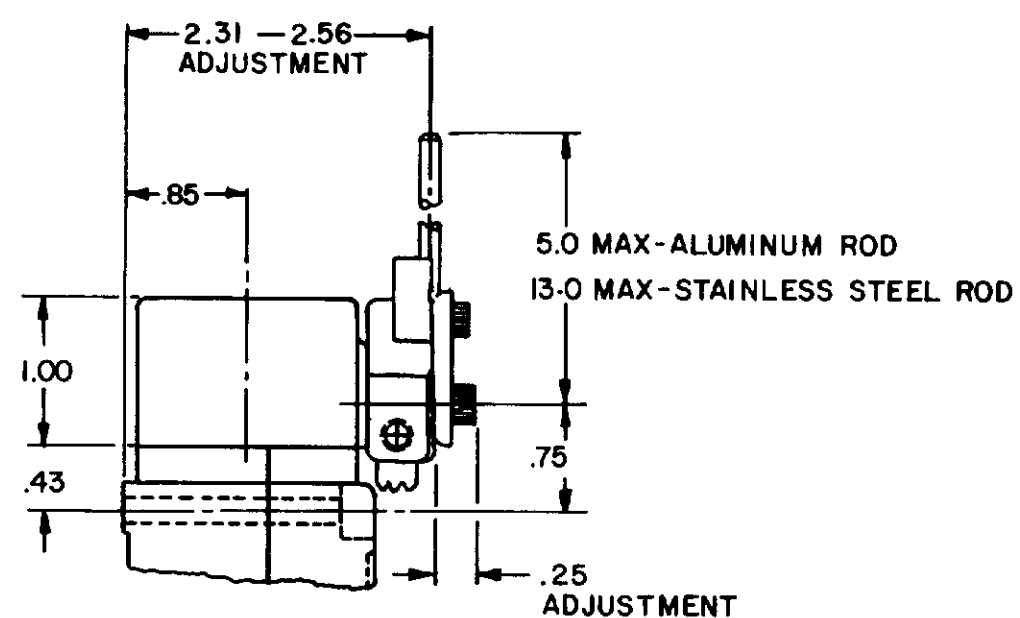

LSZ54 TYPE LEVER

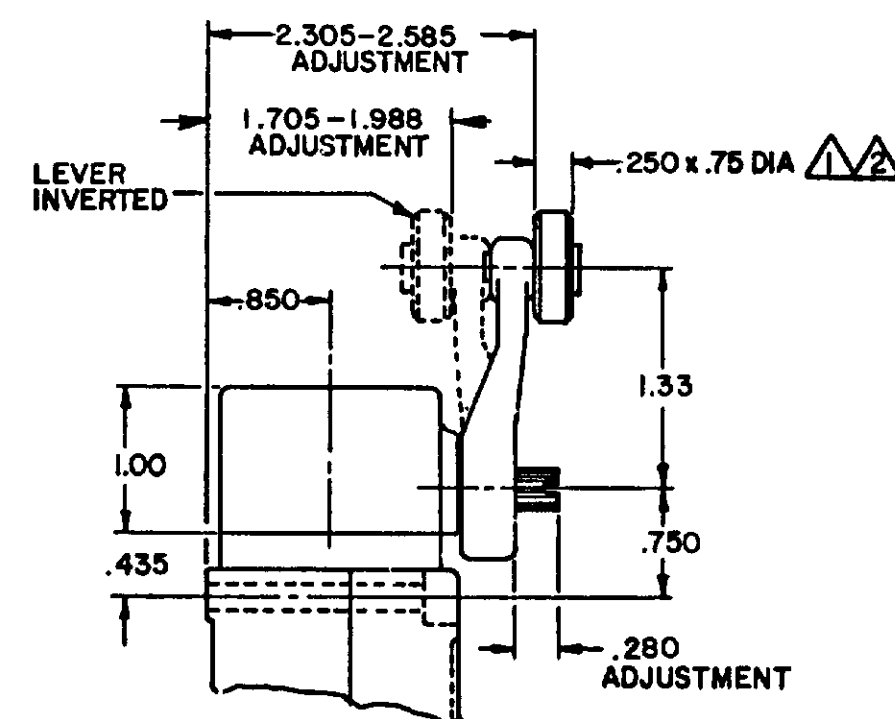

OPEN MOUNTED ROLLER

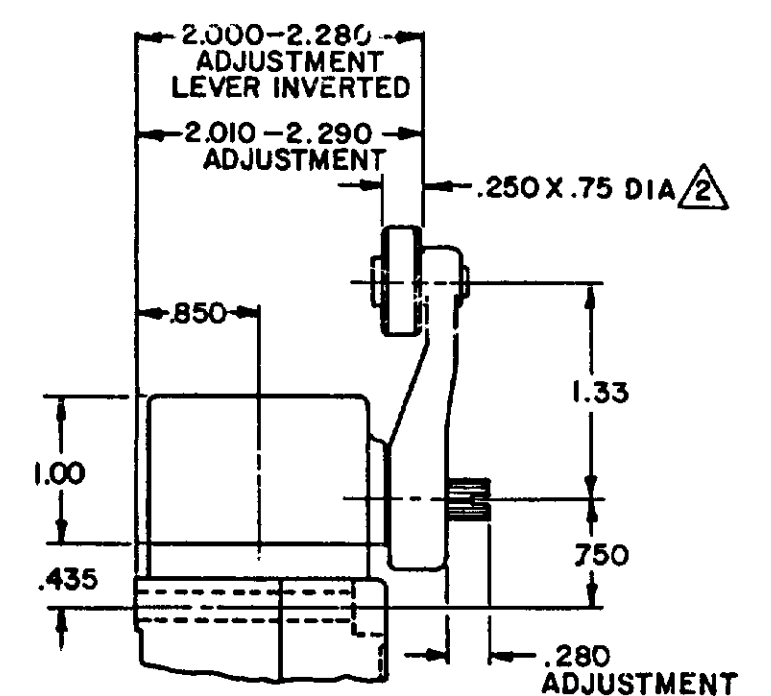


CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

NOTES

- NOTES
- ① ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT
LEVER CANNOT BE INVERTED
- ② FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS
REFER TO "M" DRAWING
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER
TO LSZ CHART 1 "M" DRAWING

THIRD ANGLE PROJECTION



SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (0) $\pm .030$

TWO PLACES (00) $\pm .015$

THREE PLACES (1.000) $\pm .005$

WEIGHT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

PAGE 2 OF 10

A-LSW SERIES
CHART 1

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING

A-LSW SERIES
CHART 1

ISSUE	12	M	LSA-LSW	SERIES CHART 1	CATALOG LISTING	PAGE 2 OF 10	PSR	CHECK	11AUG04	AK	11 JUL 94	JAF	CHECK	15 JUN 94	MAM	DRAWN	RASTER	LSA-LSW SERIES	REPLACES	CO-78498	RELEASE NO	10JUL07																						
<table border="1"> <thead> <tr> <th colspan="2">REVISONS</th> </tr> </thead> <tbody> <tr> <td>L</td> <td>0031956 BS 10JUL07</td> </tr> <tr> <td>B</td> <td>2010004 10AUG00</td> </tr> <tr> <td>C</td> <td>2011748 CST 17NOV00</td> </tr> <tr> <td>D</td> <td>2021998 CST 23JAN01</td> </tr> <tr> <td>E</td> <td>204871 G L W FEB 02</td> </tr> <tr> <td>F</td> <td>206581 GTH 14OCT02</td> </tr> <tr> <td>G</td> <td>206763 31 OCT 02</td> </tr> <tr> <td>H</td> <td>207179 GTH 14 JAN 03</td> </tr> <tr> <td>J</td> <td>207474 TSM 18FEB03</td> </tr> <tr> <td>K</td> <td>2060871 NR 11AUG01</td> </tr> </tbody> </table>																							REVISONS		L	0031956 BS 10JUL07	B	2010004 10AUG00	C	2011748 CST 17NOV00	D	2021998 CST 23JAN01	E	204871 G L W FEB 02	F	206581 GTH 14OCT02	G	206763 31 OCT 02	H	207179 GTH 14 JAN 03	J	207474 TSM 18FEB03	K	2060871 NR 11AUG01
REVISONS																																												
L	0031956 BS 10JUL07																																											
B	2010004 10AUG00																																											
C	2011748 CST 17NOV00																																											
D	2021998 CST 23JAN01																																											
E	204871 G L W FEB 02																																											
F	206581 GTH 14OCT02																																											
G	206763 31 OCT 02																																											
H	207179 GTH 14 JAN 03																																											
J	207474 TSM 18FEB03																																											
K	2060871 NR 11AUG01																																											

TOP ROTARY

SINGLE POLE

DOUBLE POLE



TYPE LSB1 and LSB3

**TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2" - 14 NPT
CONDUIT HOLE**

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

10 AMP CONT.	A.C. VOLTAGE	AMPS AT 35 POWER FACTOR					
		SINGL POLE		DOUBLE POLE		BREAK	
		MAKE	BREAK	MAKE	BREAK	MAKE	BREAK
	120	60	6	30	3		
	240	30	3	15	1.5		
	480	15	1.5	7.5	75		
	600	12	1.2	6	6		

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT

VOLTAGE	
5 AC OR DC MIN	01 AMP MIN
600 AC	720 VA
240 DC	30 WATT

**DIRECT ACTING (ALSO RATED AT A. C. 10
AMP CONT.)**


D. C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

**WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)**


DOUBLE POLE




SINGLE POLE

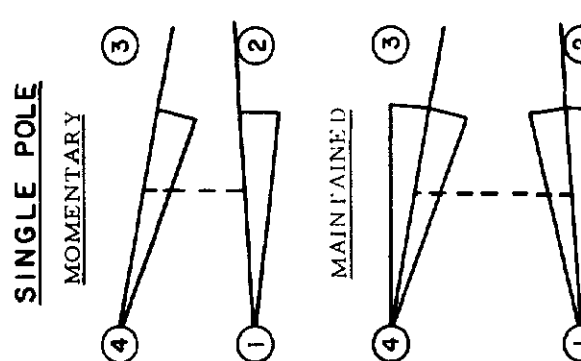

SINGLE POLE

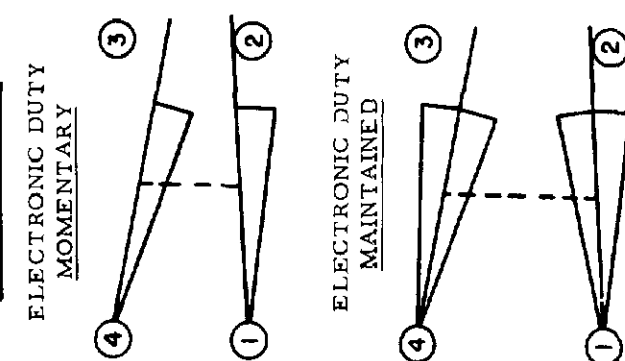


ELECTRONIC DUTY

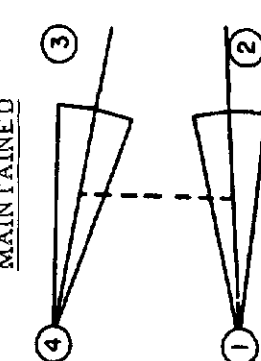

DIRECT ACTING



SINGLE POLE

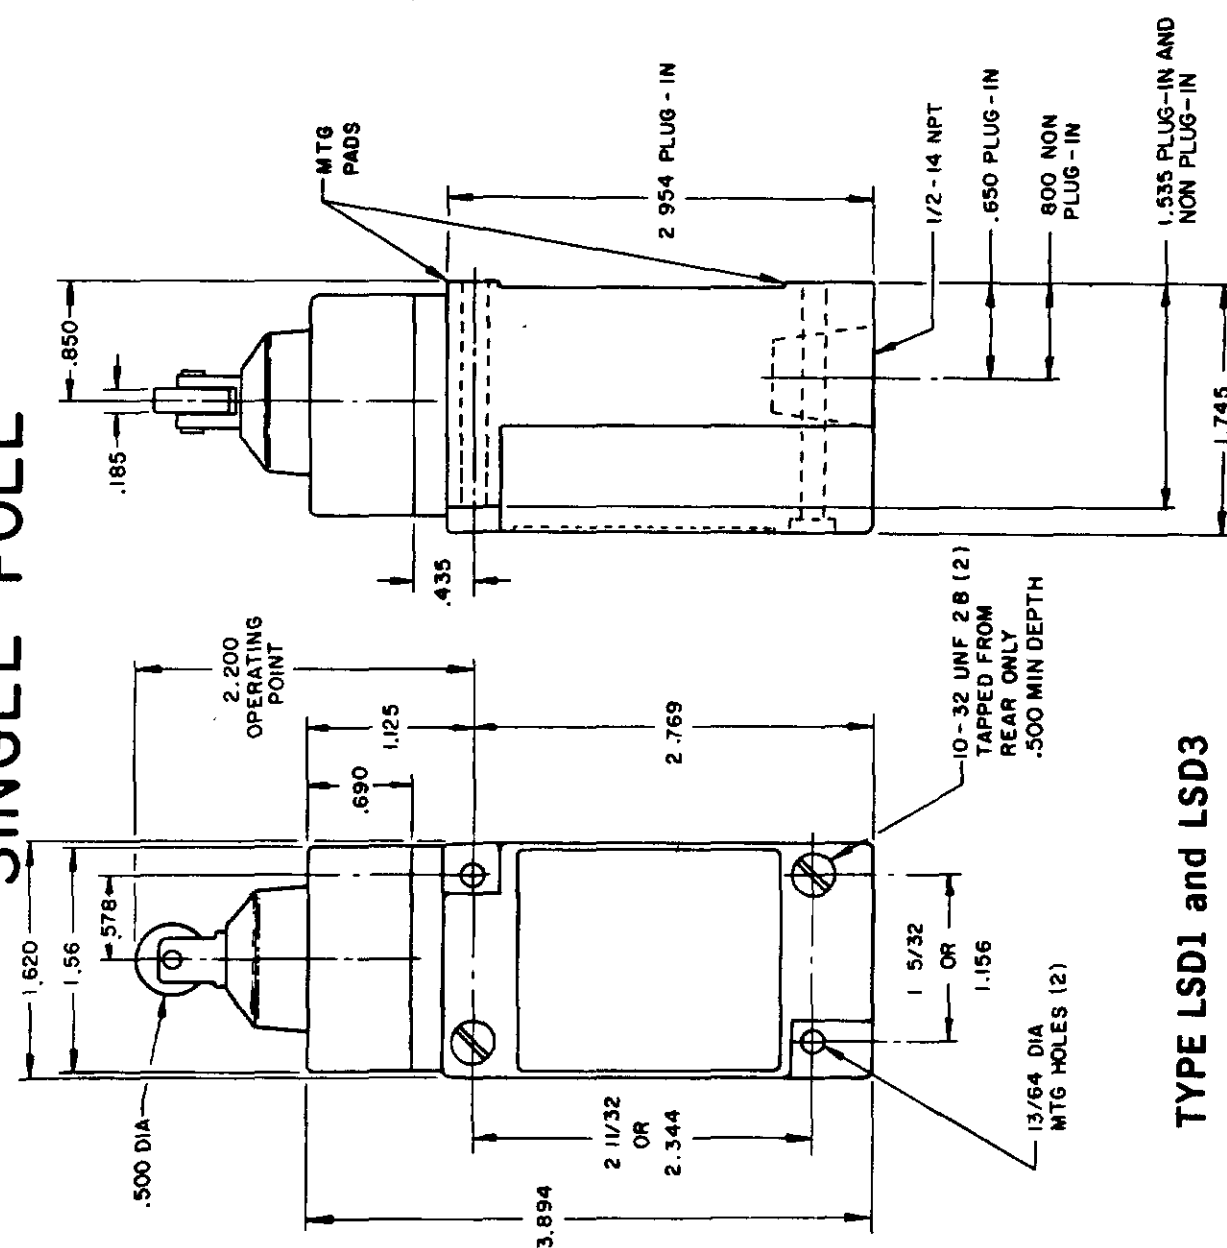


TYPE LSD1 and LSD3

DOUBLE POLE




TYPE LSD2 and LSD4


*(LSD6 and LSD7 have 1/2 - 14 NPT CON

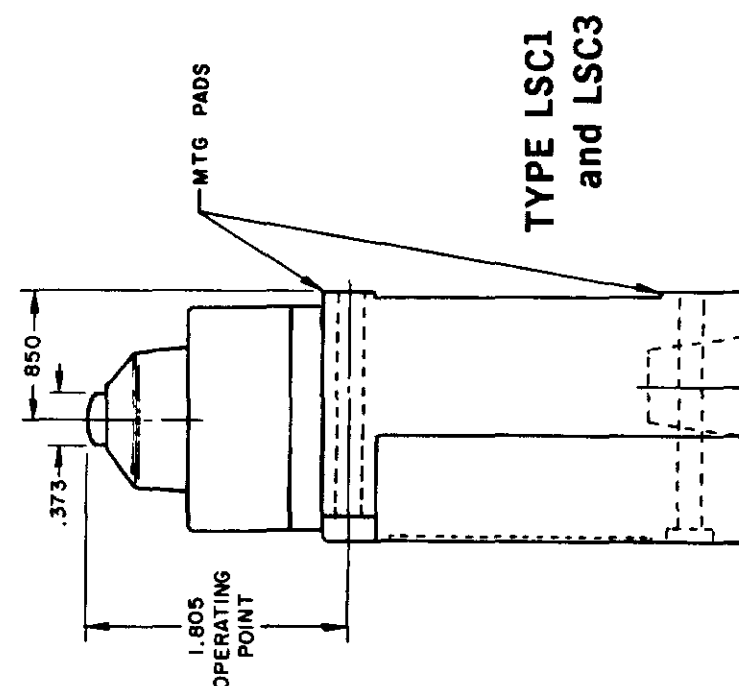


TYPE LSC1 and LSC3

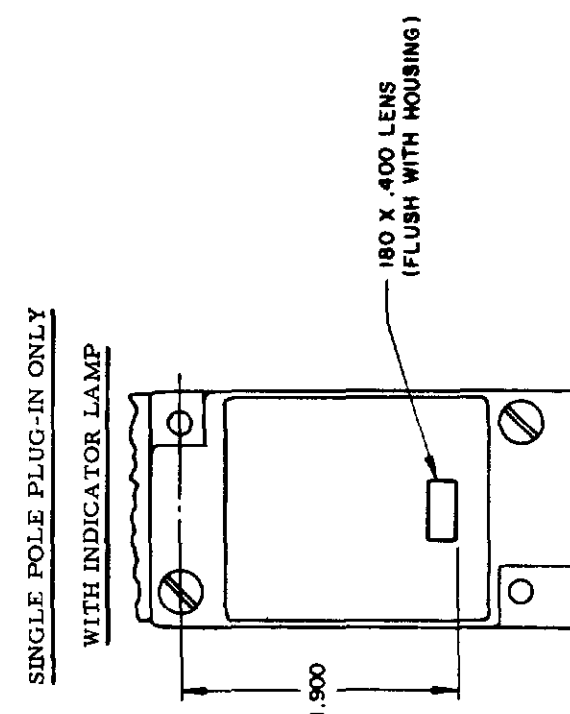



**TYPE LSC2
and LSC4**

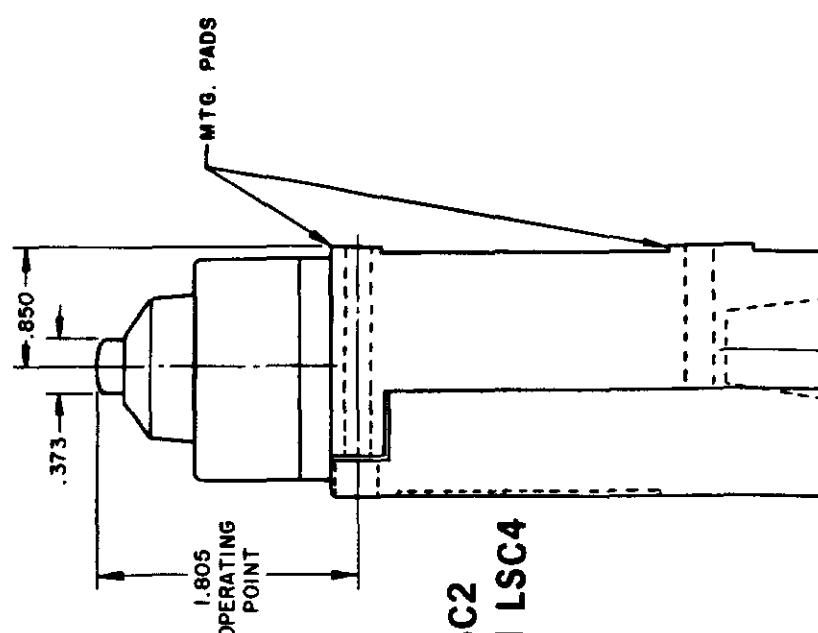

**TYPE LSV1
and LSV3**

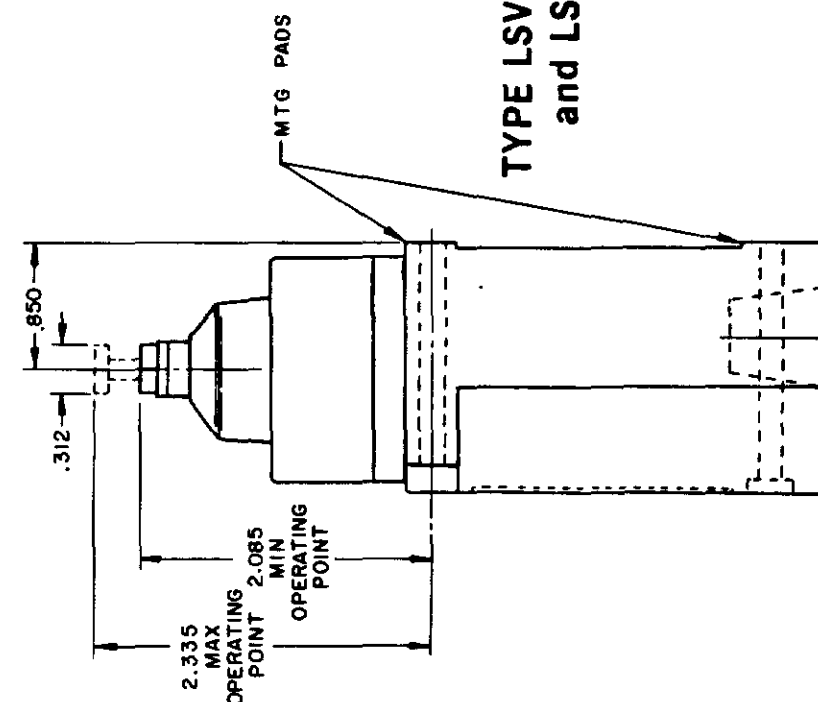

**TYPE LSV2
and LSV4**

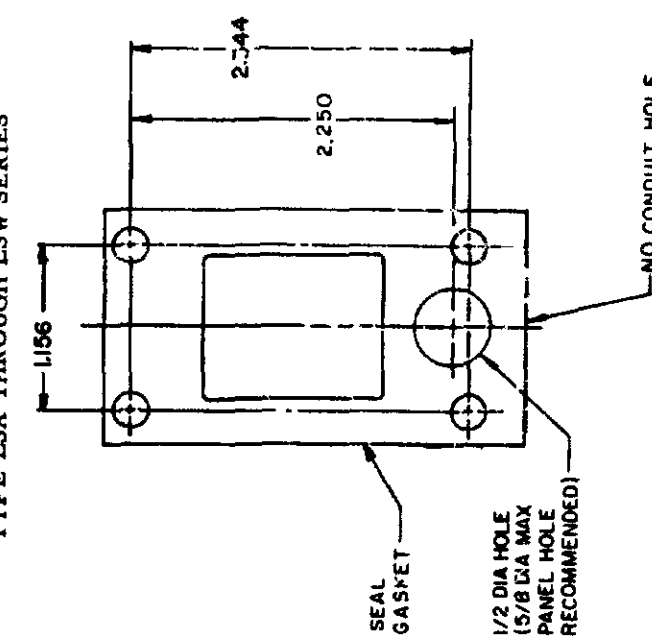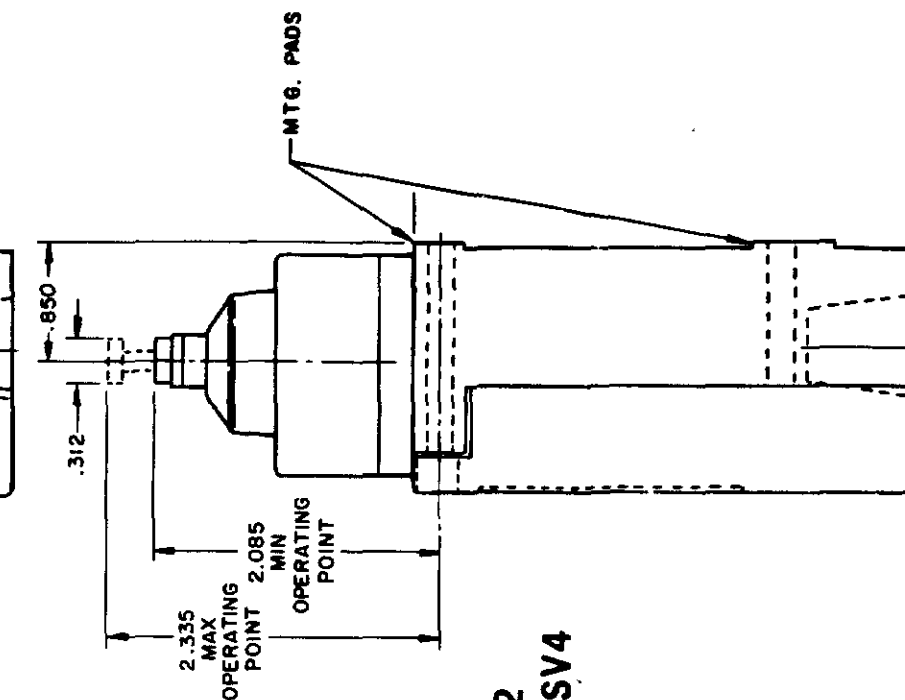

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF
HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING

LSA-LSW SERIES



CHART 1

PAGE 4 OF 10

SCALE NONE

NO MORE SCALE PRINT

SINGLE POLE DOUBLE POLE

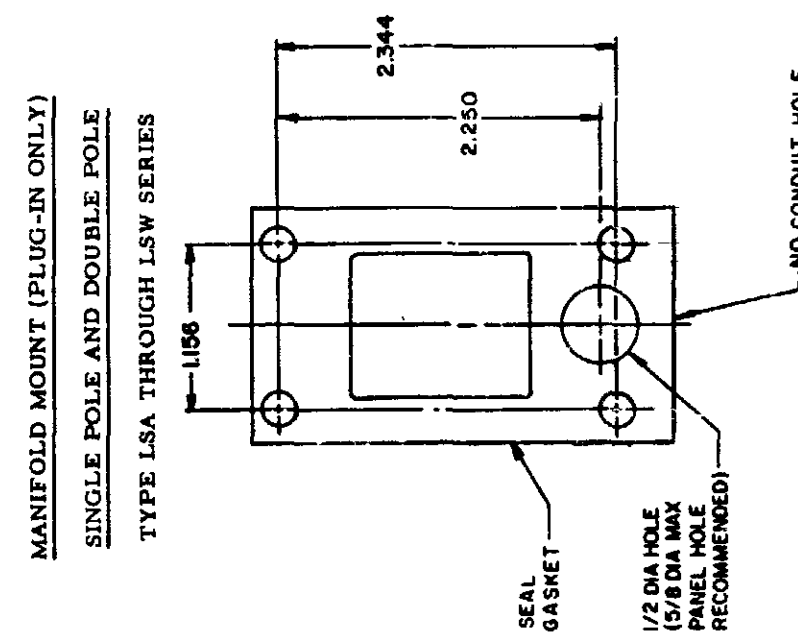

FED MFG CODE 91928


CATALOG LISTING

LSA-LSW SERIES

CHART 1

SCALE NONE

DO NOT SCALE PRINT

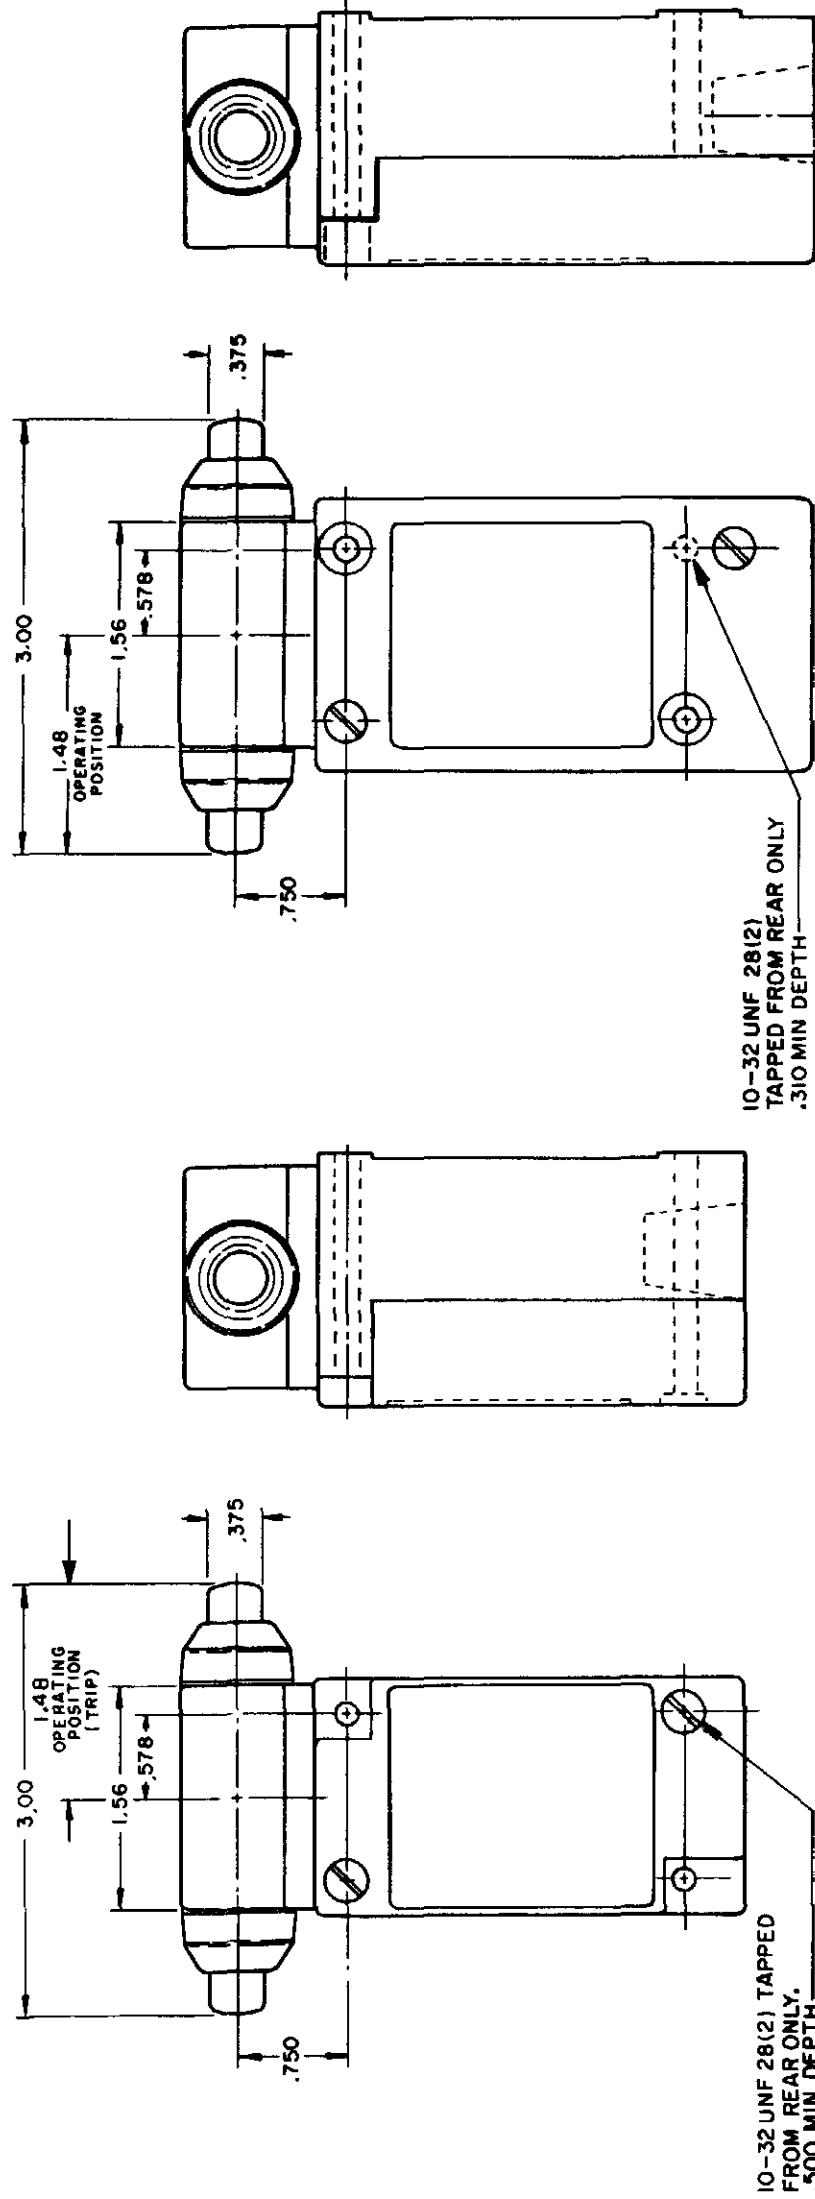

TYPE LSG1 and LSG3

TYPE LSG2 and LSG4

INITIAL POSITION —
(FREE POSITION) } PRETRAVEL
OPERATING POINT } DIFFERENTIAL TRAVEL
FULL TRAVEL — } OVERTRAVEL

TOP PLUNGER TYPES

OPERATING POINT GIVEN
IN RELATION TO TOP
MOUNTING HOLE


CHARACTERISTICS	LSC PLUNGER	LSD ROLLER PLUNGER	LSV ADJ PLUNGER	SEQUENCE BASIC		
				LSC	LSD	LSV
PRETRAVEL (MAX)	.070	.070	.070	1ST STEP .070		
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE .015 DOUBLE POLE .020	SINGLE POLE .015 DOUBLE POLE .020	SINGLE POLE .015 DOUBLE POLE .020	2ND STEP .016 MIN ADD'L		
OVERTRAVEL (MIN)	.190	.190	.190	.015 EACH STEP		
OPERATING FORCE (MAX)	4 LBS	4 LBS	4 LBS	.170		
OPERATING POINT	1.805 ± .030	2.200 ± .040	2.085 MIN	1ST STEP		
FULL OVERTRAVEL FORCE (MAX)	7 LBS	7 LBS	7 LBS	1.815 ± .030 / 2.210 ± .040 / 2.095 MIN / 2.345 MAX		

SIDE PLUNGER TYPES

OPERATING POINT GIVEN IN
RELATION TO CENTER OF HEAD

CHARACTERISTICS	LSE PLUNGER	LSF ROLLER PLUNGER	LSW ADJ PLUNGER	SEQUENCE BASIC		
				LSE	LSF	LSW
PRETRAVEL (MAX)	.100	.100	.170	1ST STEP .100		
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.090	2ND STEP .020 MIN ADD'L		
OVERTRAVEL (MIN)	.190	.190	.080	.025 EACH STEP		
OPERATING FORCE (MAX)	6 LBS	6 LBS	10 LBS	.170		
OPERATING POINT	1.300 ± .030	1.735 ± .040	ADJUSTABLE FROM 1.615 MIN 1.865 MAX	1ST STEP		
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	10 LBS	1.310 ± .030 / 1.745 ± .040 / 1.625 MIN / 1.875 MAX		


WOBBLE STICK DOUBLE POLE

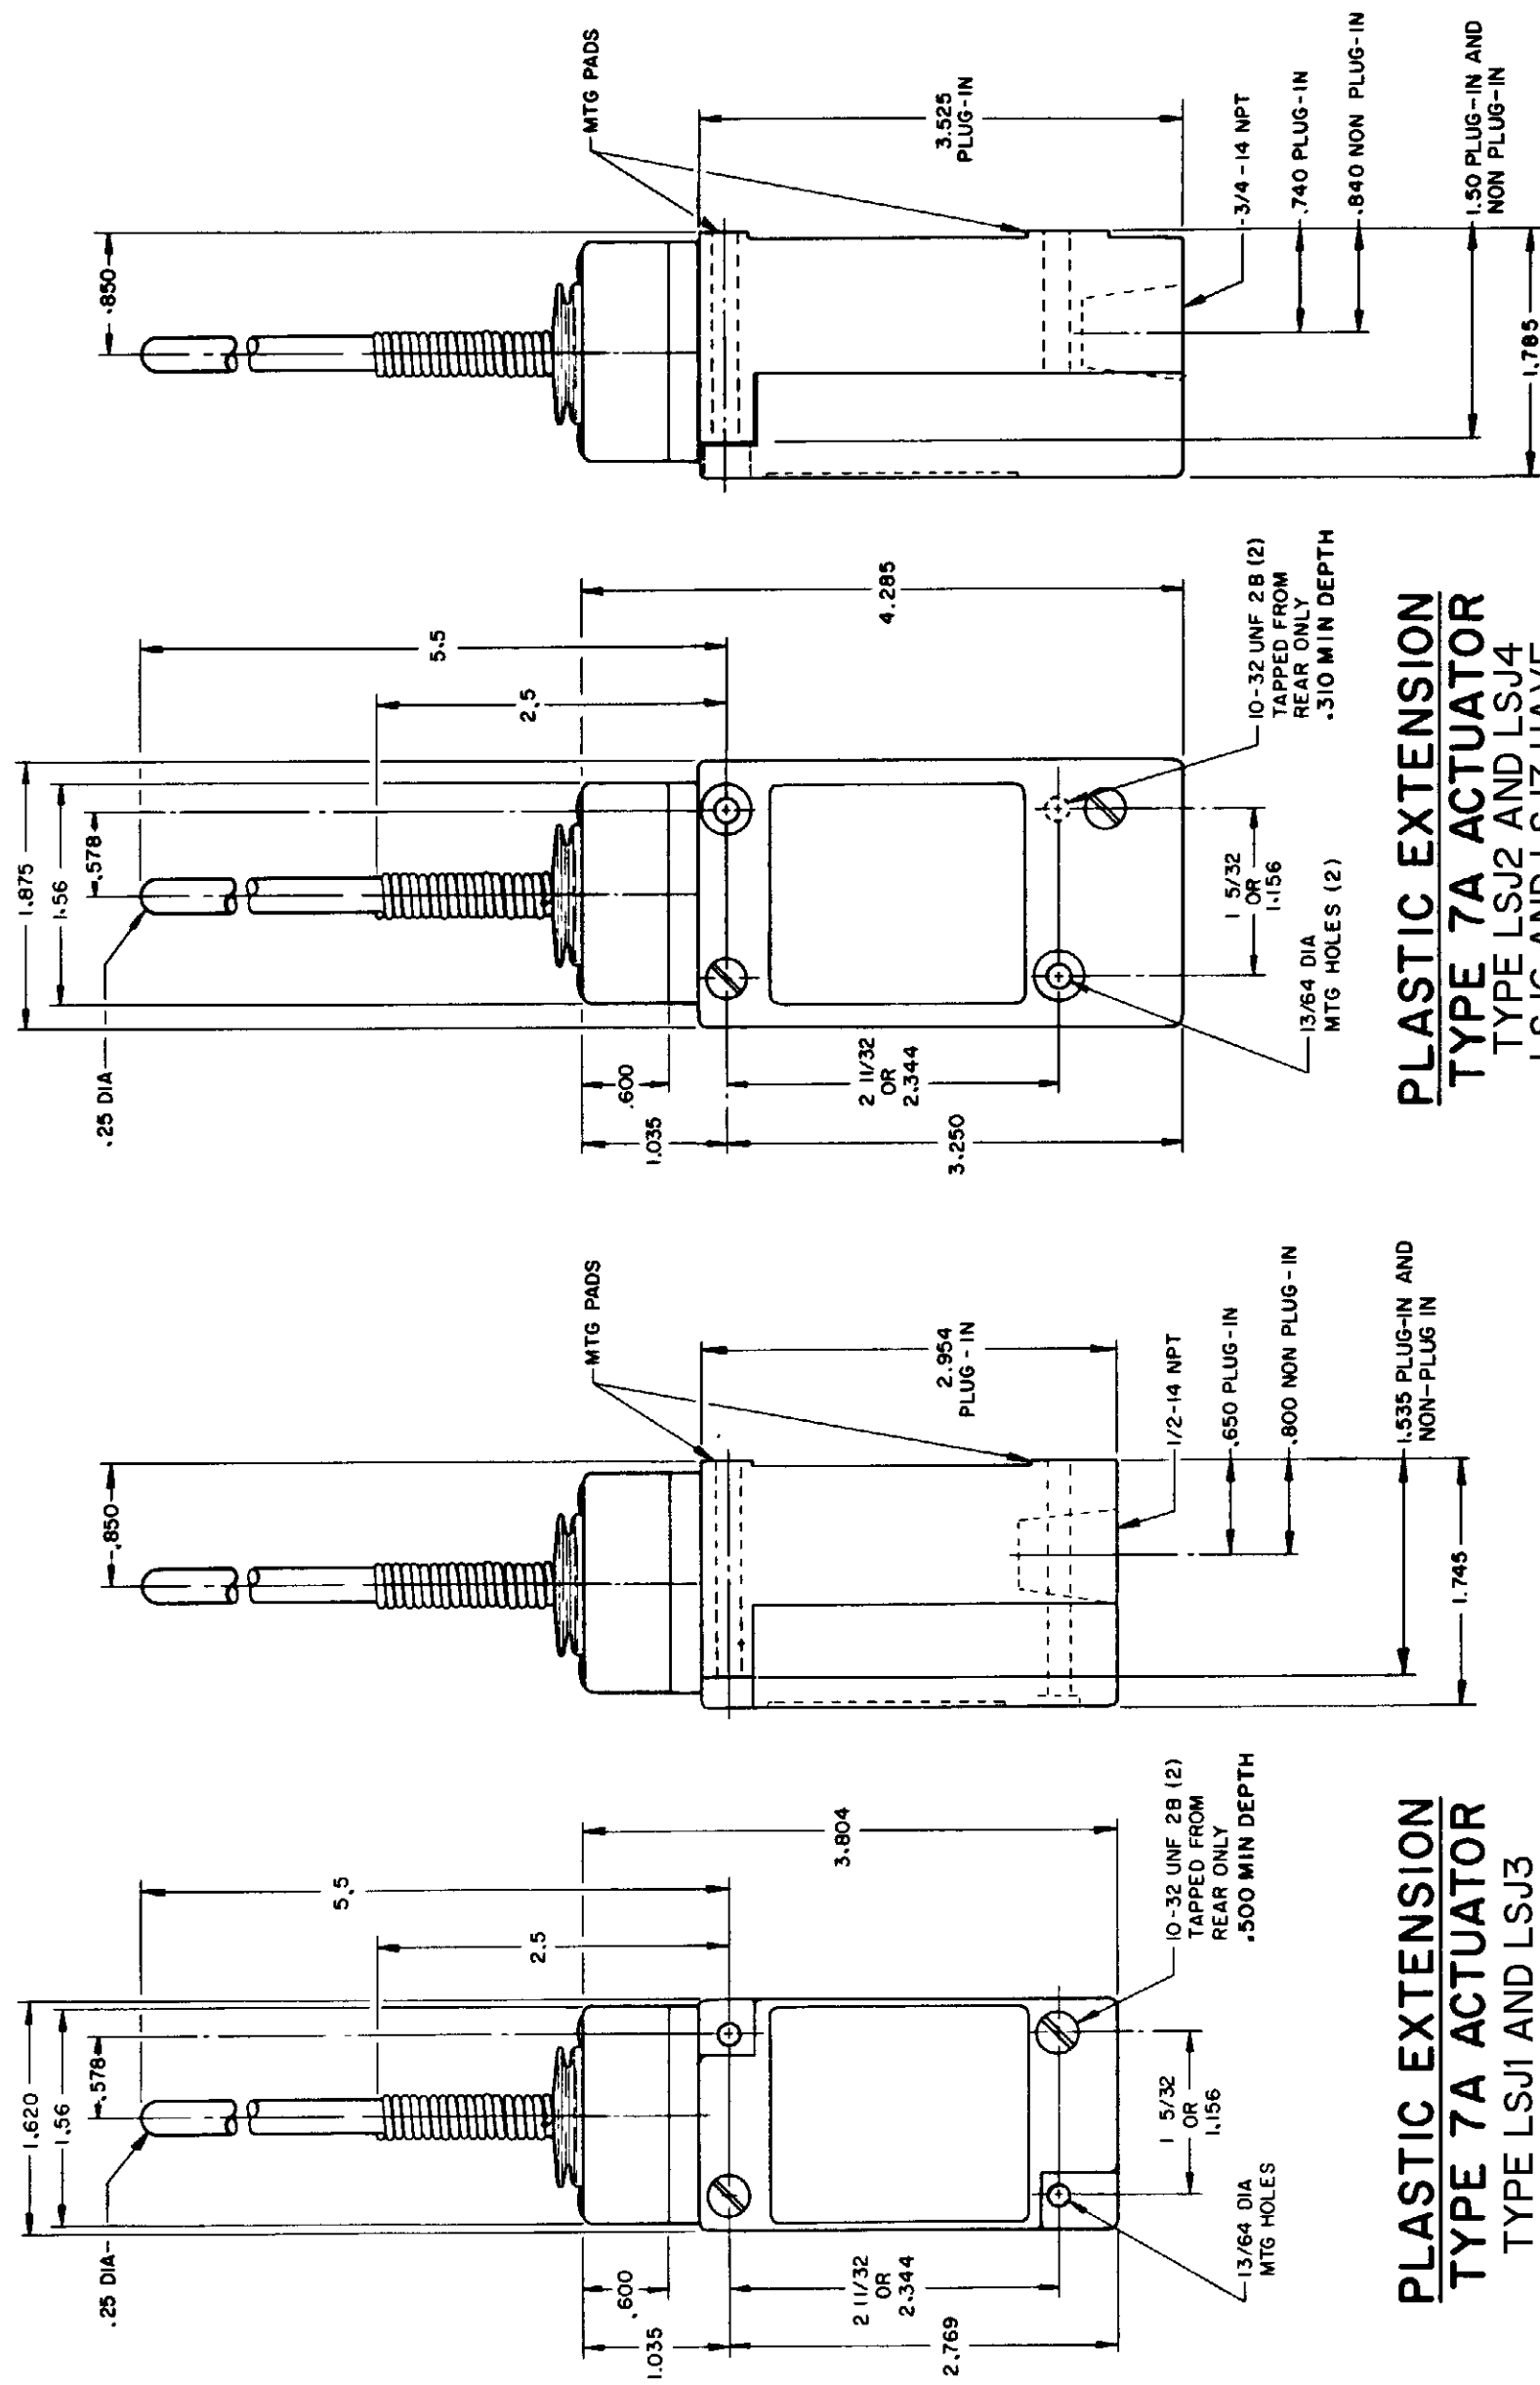


PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ1 AND LSJ3

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE


REPLACEMENT ACTUATOR
LSZ-4009

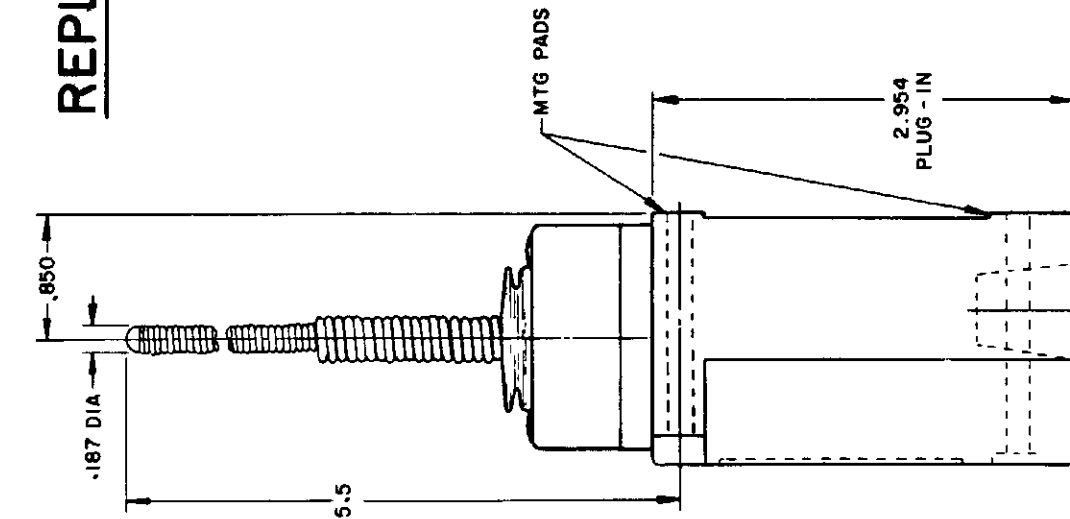


CABLE EXTENSION
TYPE 7 N ACTUATOR

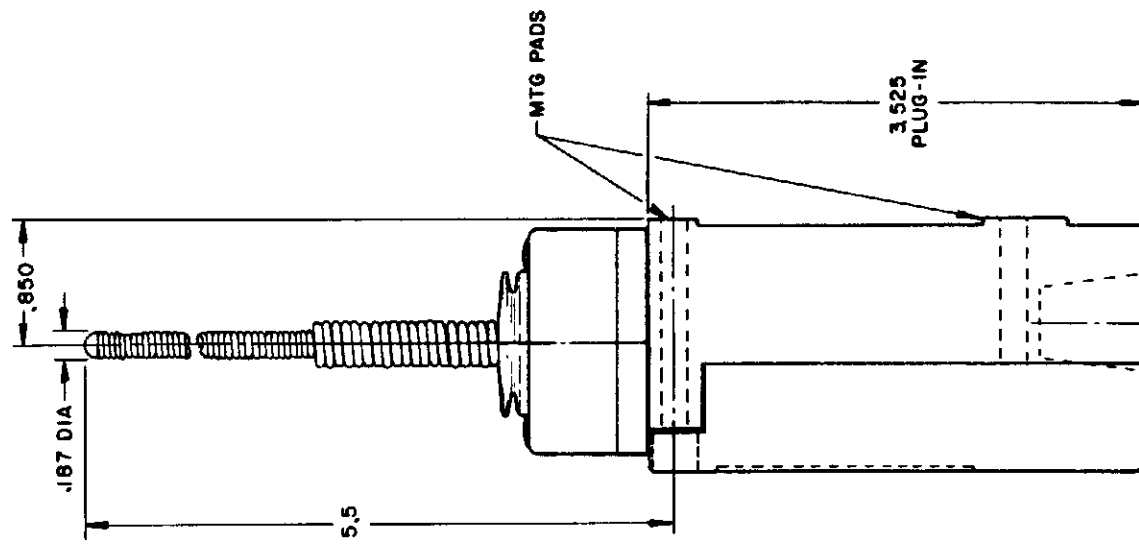


CABLE EXTENSION
TYPE 7 N ACTUATOR

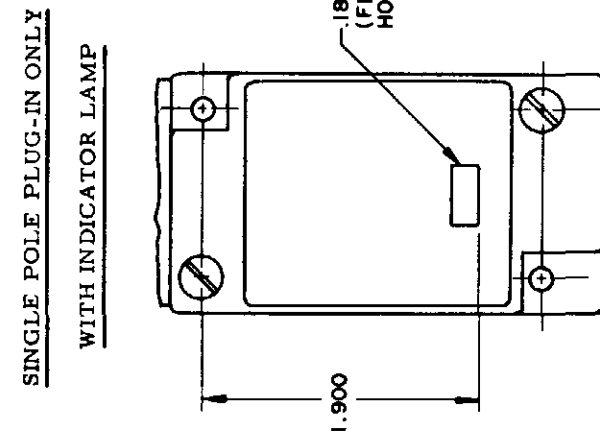

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8
24 LED VOLTAGE TYPE LSJ9

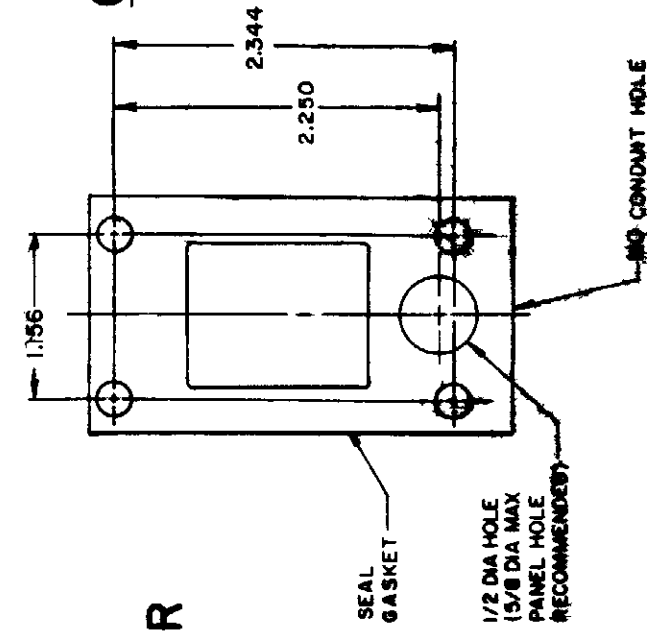

REPLACEMENT ACTUATOR
LSZ-40II

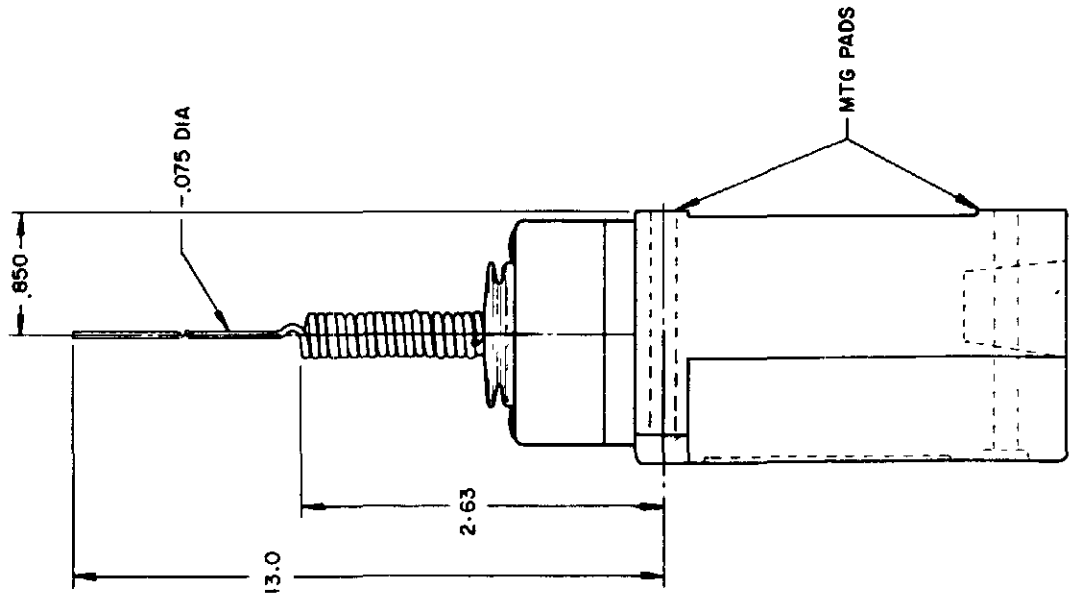


WIRE EXTENSION TYPE 7M ACTUATOR


TYPE LSJ1 and LSJ3

REPLACEMENT ACTUATOR - LSZ 4010

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

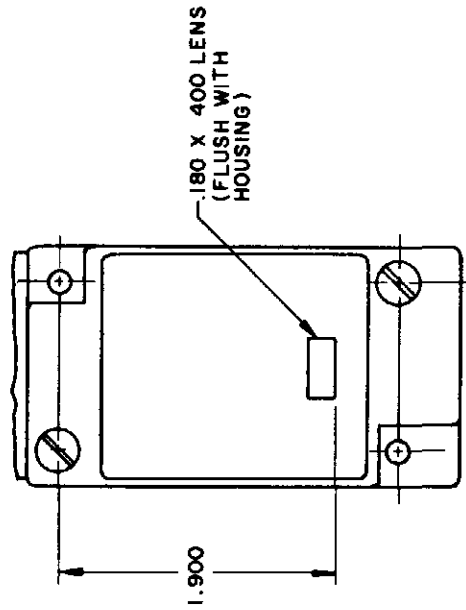

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8

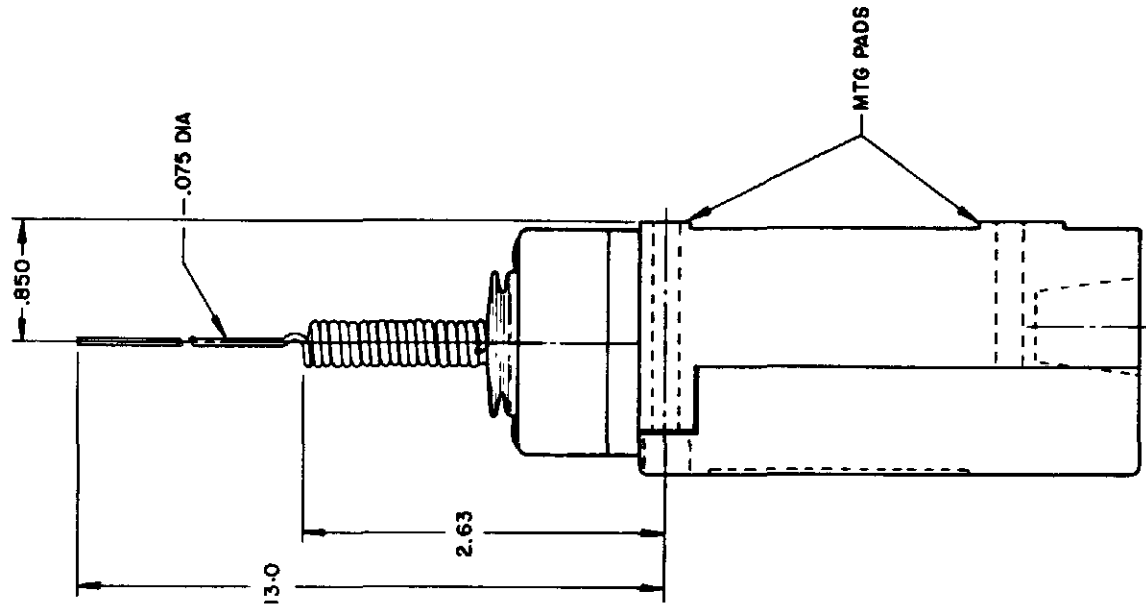


WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ2 and LSJ4

LSJ6 and LSJ7 have 1/2 - 14 NPT CONDUIT HOLE

CAT WHISKER

SINGLE POLE

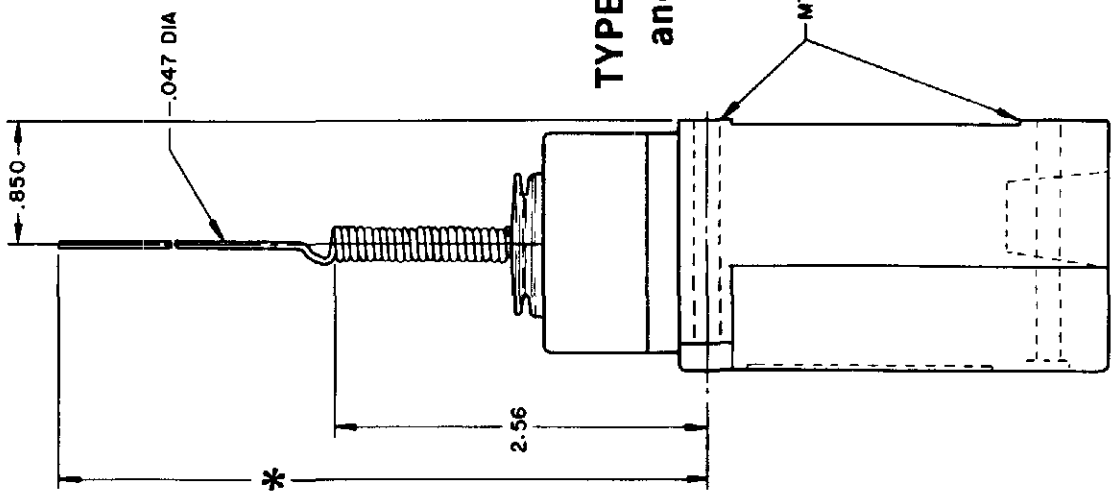


TYPE LSK1
and LSK3

120 LAMP VOLTAGE
TYPE LSK5 - CAT WHISKER TYPE LSB5 - TOP ROTARY
240 LAMP VOLTAGE
TYPE LSK8 - CAT WHISKER TYPE LSB8 - TOP ROTARY

*WIRE EXTENSION REPLACEMENT ACTUATOR
TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012
TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013
TYPE 8C COIL ACTUATOR 5.5 IN.-LSZ 4014
ACTUATOR 9.5 IN. - LSZ4036

DOUBLE POLE

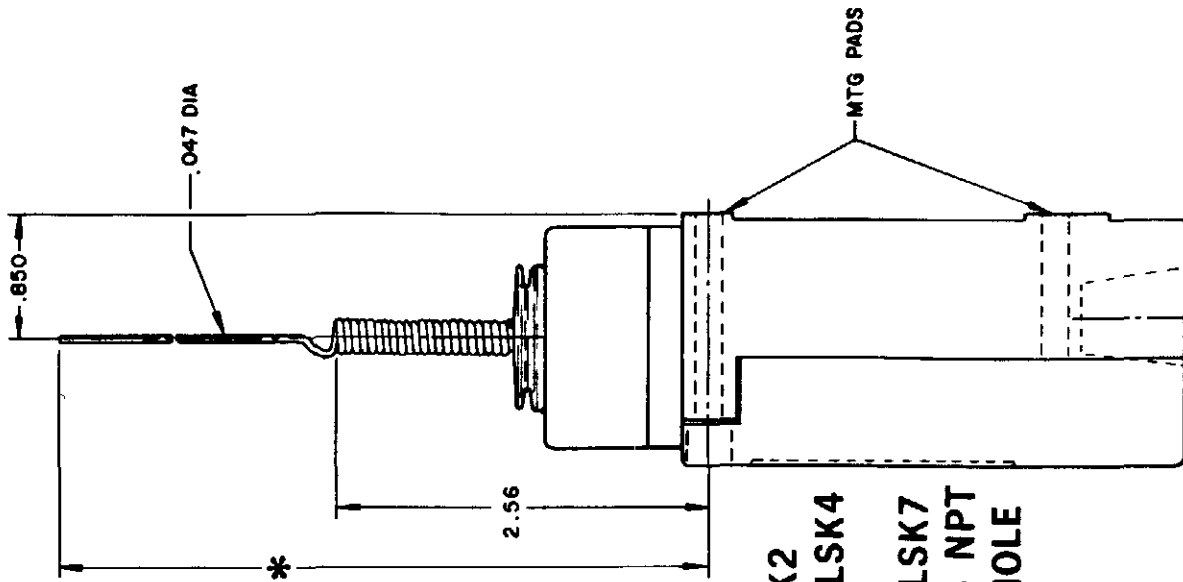

TYPE LSK2
and LSK4
LSK6 and LSK7
have 1/2 - 14 NPT
CONDUIT HOLE

WIRE EXTENSION
*TYPE 8A ACTUATOR 5.5 IN.
TYPE 8B ACTUATOR 7.5 IN.
TYPE 8C ACTUATOR 5.5 IN.
TYPE 8D ROD ACTUATOR 5.5 IN.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division
FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

PAGE 8 OF 10


SCALE NONE
DO NOT SCALE PRINT

PRETRAVEL (APPROX) IN. RADIUS	CAT. WHISKER		WOBBLE STICK	
	5/16" COIL	5/16" WIRE	7/16" WIRE	7/16" WIRE
2	2	2	1.5	4.0
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	7.0

CONVERSION BASES


SINGLE POLE (SIDE ROTARY) LSZ 4003

**DOUBLE POLE
(SIDE ROTARY)
LSZ4004**

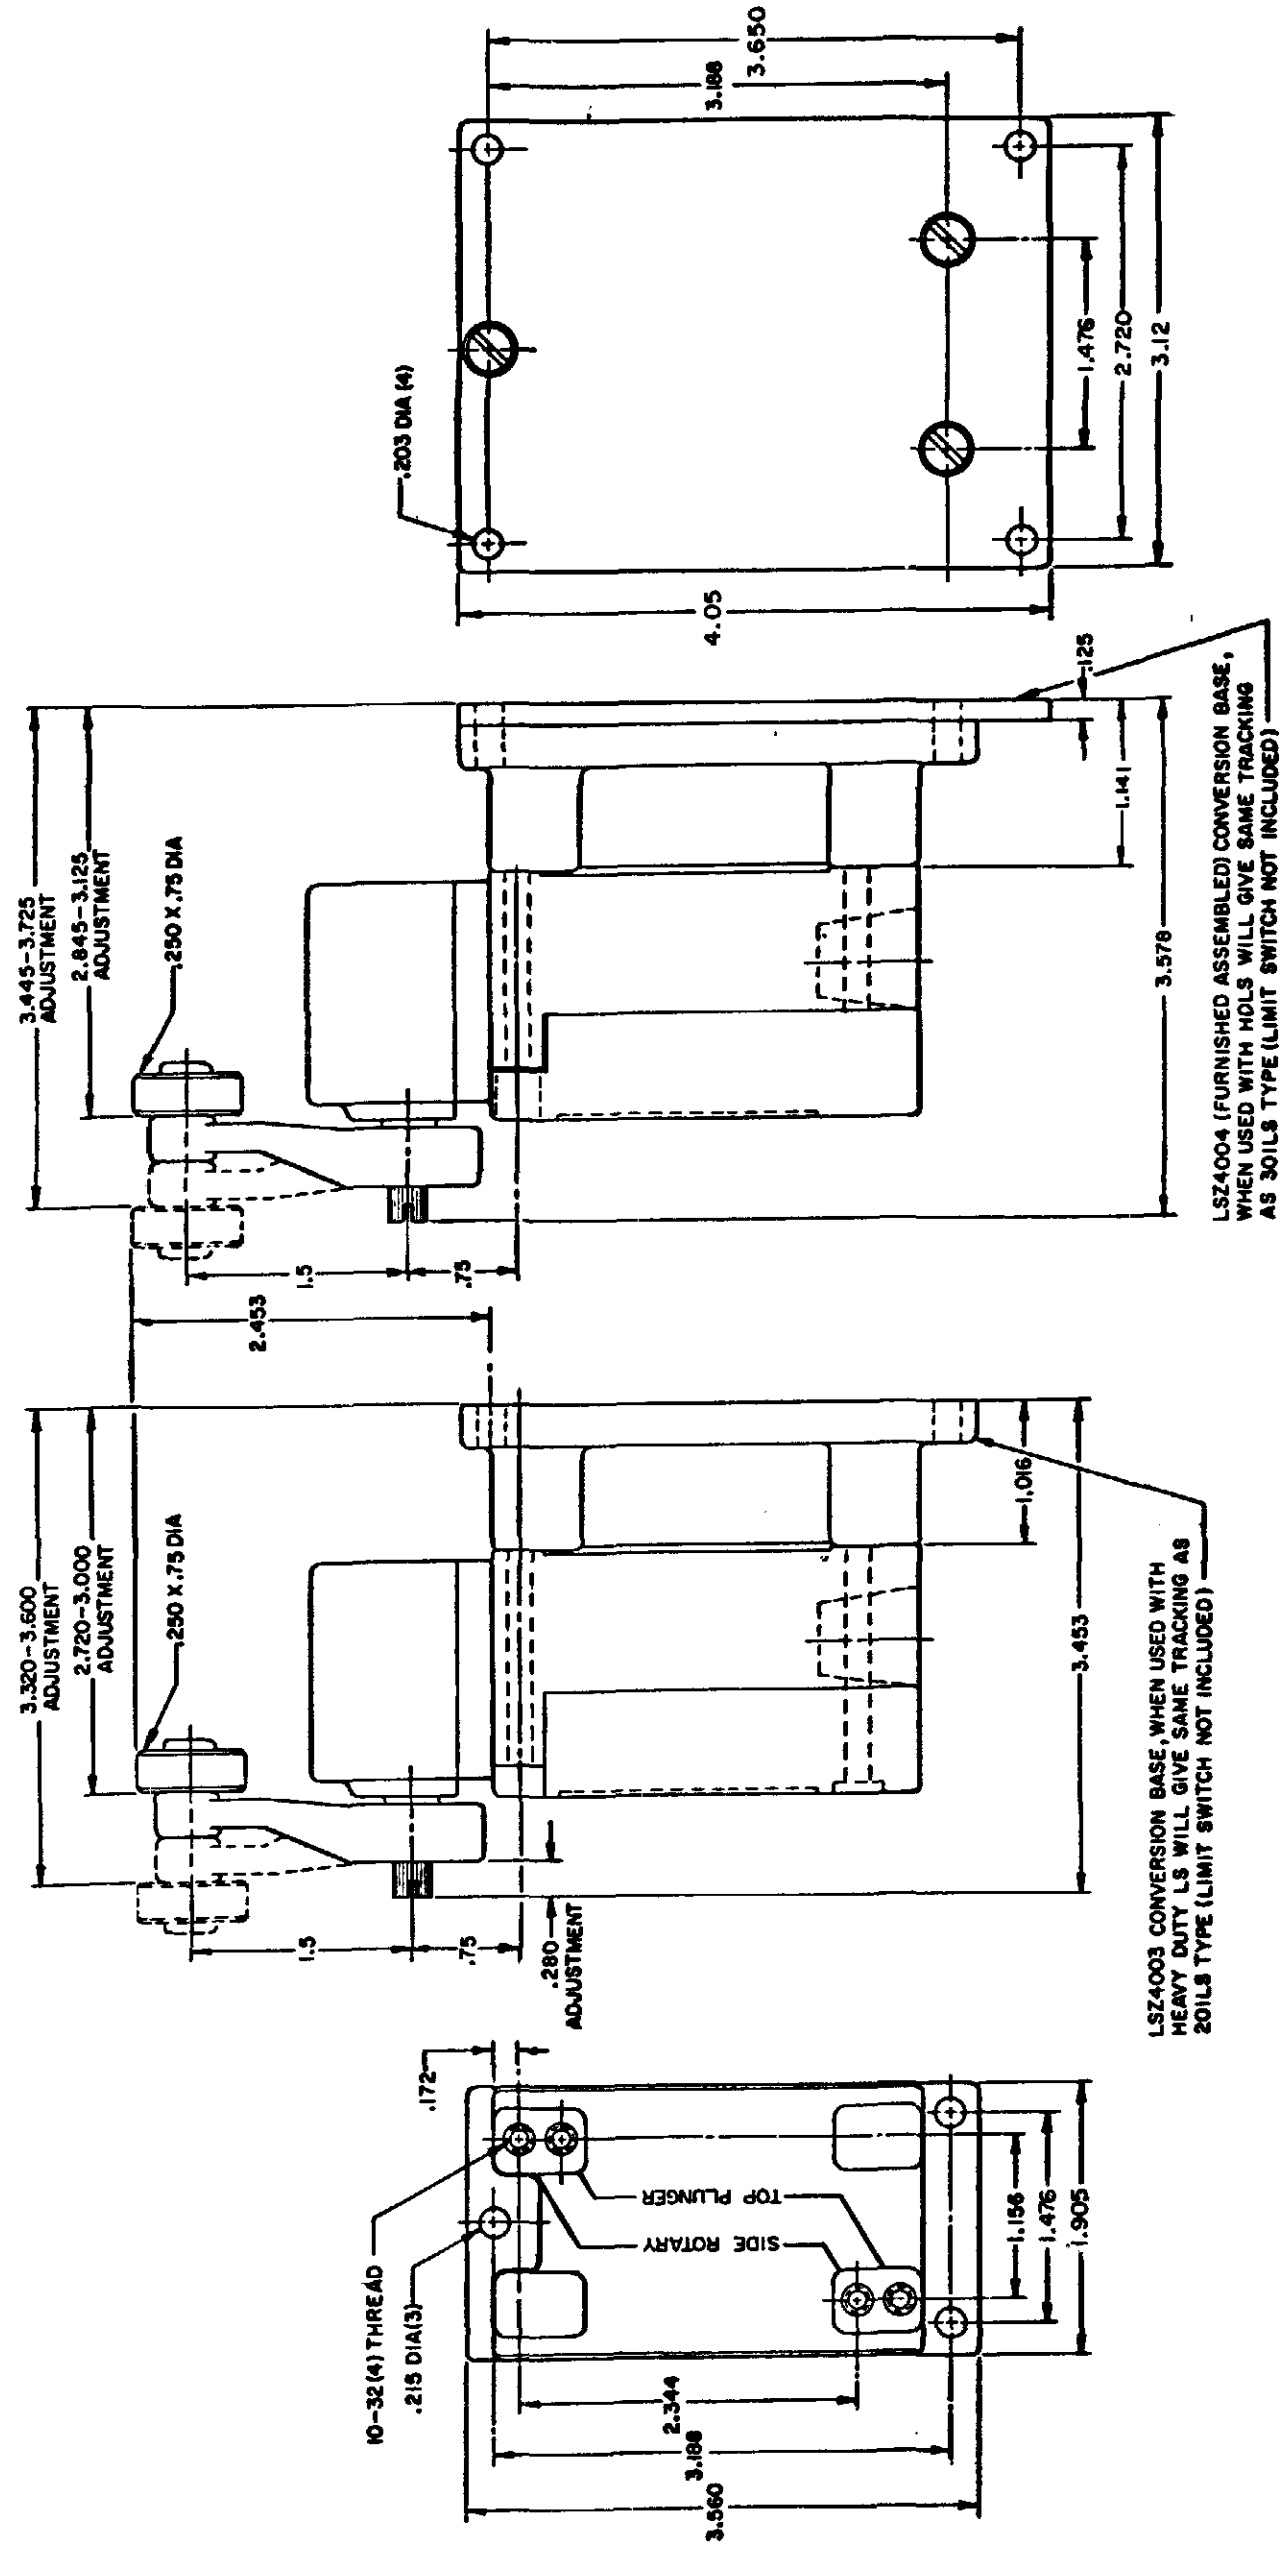

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE TOP PLUNGER LSZ4003

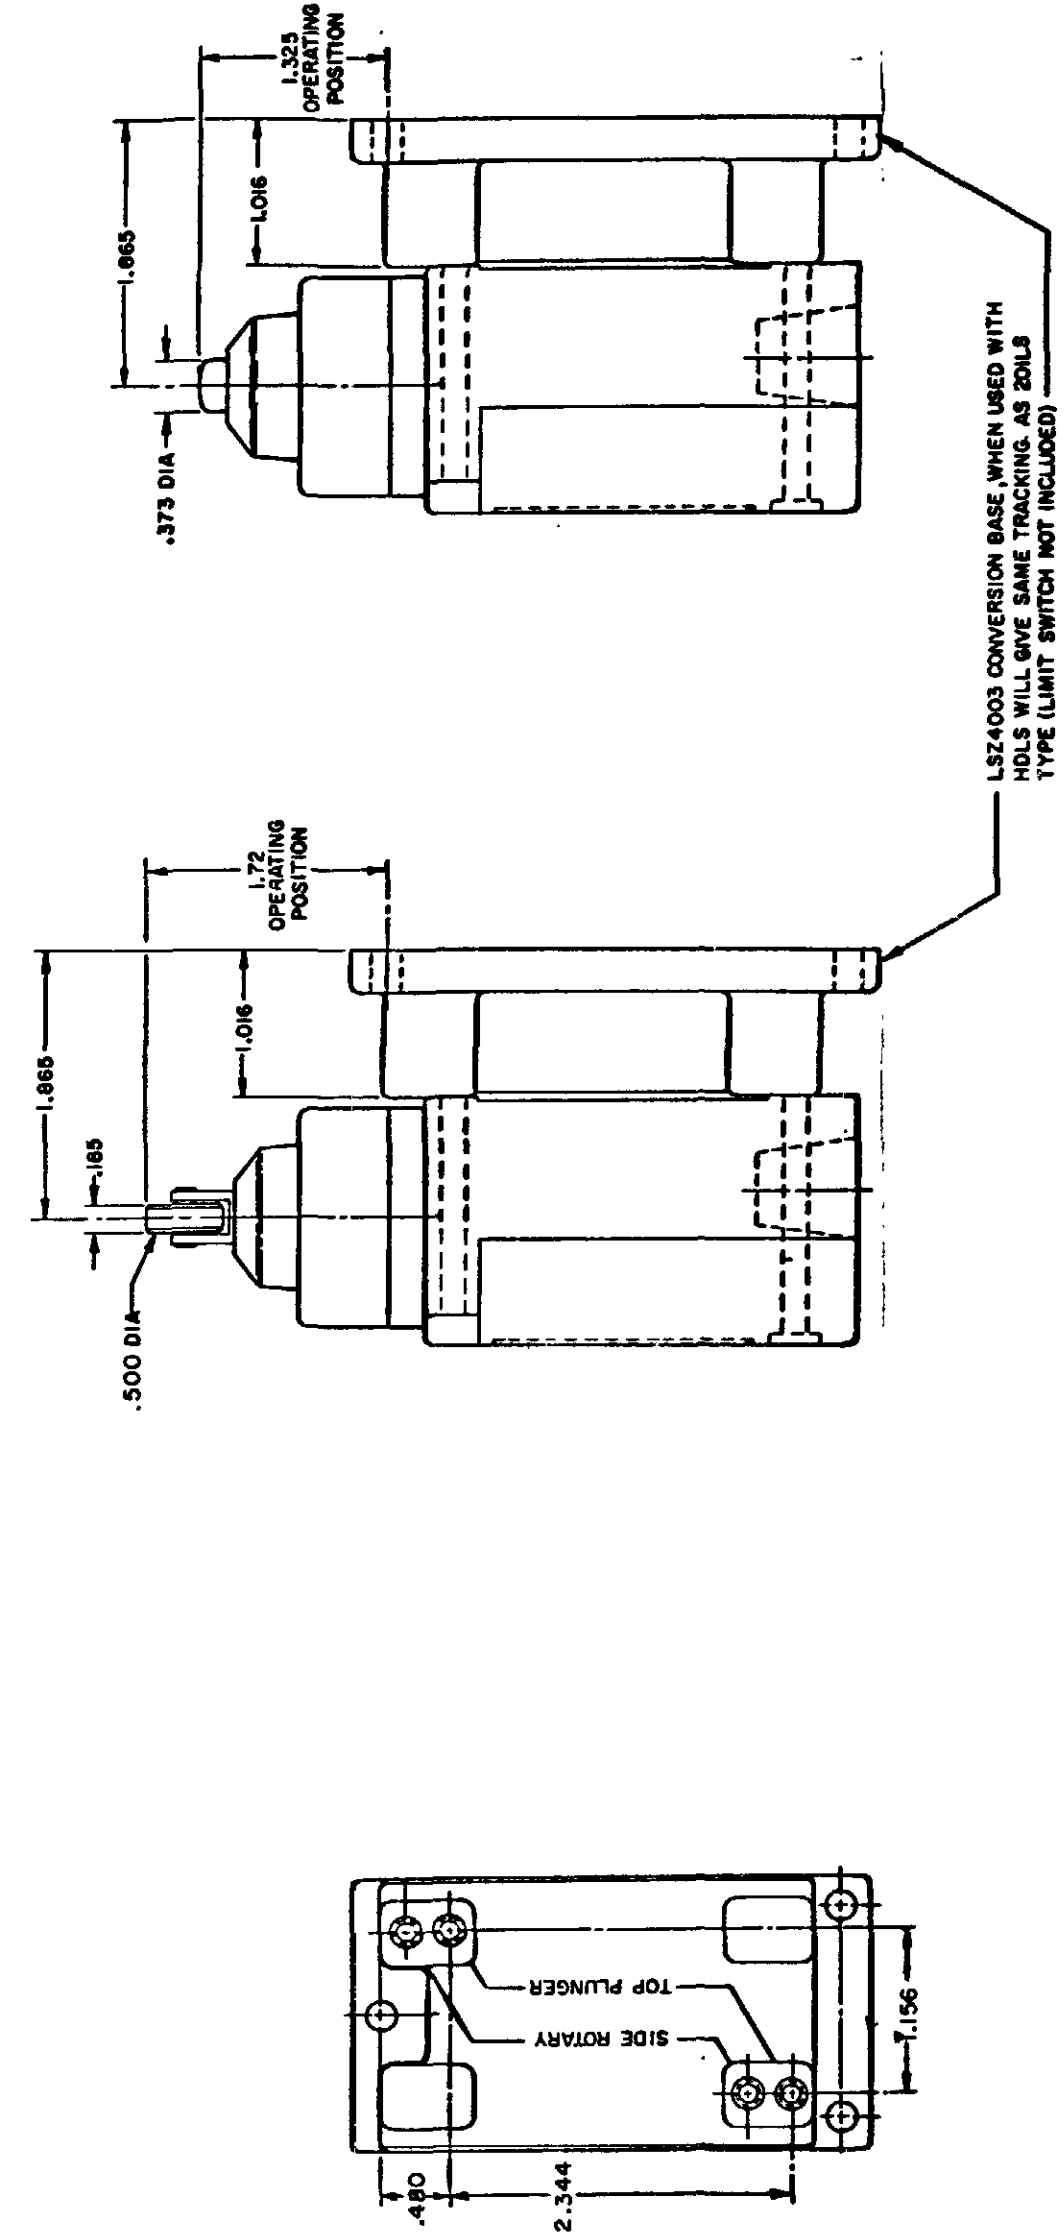

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF
LIMIT SWITCH

REVISIONS	
L	0031956
BS	10JUL07
B	201004
CSL	10 AUG 00
C	201748
CSL	17 NOV 00
D	202198
CSL	23 JAN 01
E	204871
GLW	FEB 02
F	206581
GLH	14 OCT 02
G	206783
CSL	31 OCT 02
H	207179
GLH	14 JAN 03
J	207474
TSM	18 FEB 03
K	0006871
KR	11AUG04

HEAD TYPE	CELLULOSE	DETERGENT	5 STAR	ASTM #1	ASTM #2	ASTM #3	ASTM #4	HOUGHTON SAFE 271	HOUGHTON SAFE 820	HOUGHTON SAFE 1010	HOUGHTON SAFE 1055	MINERAL OIL	PETROL OIL	SILICON CR & OIL	SUNSAFE	BEER	STODDARD SOLV.	CHLORINATED SOLVENTS	CITRIC ACID	DI-ESTER SYN. LUBRICANTS	OZONE	HYDRAUL	PROGUARD	PETROL BASE HYDRAULIC OIL	LARD OIL	SILICATE ESTERS	
LSA	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2			
LSB	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2			
LSC	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2			
LSD	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2			
LSE	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2			
LSF	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	2	4	4	2	2	2			
LSG	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2			
LSH	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2			
LSJ	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2			
LSK	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2			
LSL	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2			
LSM	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2			
LSN	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2			
LSP	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2			
LSR	4	1	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2			
LSV	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	3	4	4	2	2	2			
LSW	4	2	2	1	2	4	4	2	4	2	2	1	2	1	2	4	1	4	2	4	4	2	2	2			
LST	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																										
LSS	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																										

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331