



CATALOG LISTING		M LSA-LSW SERIES CHART 1	
ISSUE	NO	PAGE 1	OF 10
12	121994	PSR	12/10/07
12	121994	CHECK	12/10/07
REVIEWS			
A	85	04/01/07	
B	210104	04/01/07	
C	210104	04/01/07	
D	201748	04/01/07	
E	1778	04/01/07	
F	202198	04/01/07	
G	204871	04/01/07	
H	204871	04/01/07	
I	204871	04/01/07	
J	204871	04/01/07	
K	204871	04/01/07	
L	204871	04/01/07	
M	204871	04/01/07	
N	204871	04/01/07	
O	204871	04/01/07	
P	204871	04/01/07	
Q	204871	04/01/07	
R	204871	04/01/07	
S	204871	04/01/07	
T	204871	04/01/07	
U	204871	04/01/07	
V	204871	04/01/07	
W	204871	04/01/07	
X	204871	04/01/07	
Y	204871	04/01/07	
Z	204871	04/01/07	
AA	204871	04/01/07	
AB	204871	04/01/07	
AC	204871	04/01/07	
AD	204871	04/01/07	
AE	204871	04/01/07	
AF	204871	04/01/07	
AG	204871	04/01/07	
AH	204871	04/01/07	
AI	204871	04/01/07	
AJ	204871	04/01/07	
AK	204871	04/01/07	
AL	204871	04/01/07	
AM	204871	04/01/07	
AN	204871	04/01/07	
AO	204871	04/01/07	
AP	204871	04/01/07	
AQ	204871	04/01/07	
AR	204871	04/01/07	
AS	204871	04/01/07	
AT	204871	04/01/07	
AU	204871	04/01/07	
AV	204871	04/01/07	
AW	204871	04/01/07	
AX	204871	04/01/07	
AY	204871	04/01/07	
AZ	204871	04/01/07	
BA	204871	04/01/07	
BB	204871	04/01/07	
BC	204871	04/01/07	
BD	204871	04/01/07	
BE	204871	04/01/07	
BF	204871	04/01/07	
BG	204871	04/01/07	
BH	204871	04/01/07	
BI	204871	04/01/07	
BJ	204871	04/01/07	
BK	204871	04/01/07	
BL	204871	04/01/07	
BM	204871	04/01/07	
BN	204871	04/01/07	
BO	204871	04/01/07	
BP	204871	04/01/07	
BQ	204871	04/01/07	
BR	204871	04/01/07	
BS	204871	04/01/07	
BT	204871	04/01/07	
BU	204871	04/01/07	
BV	204871	04/01/07	
BW	204871	04/01/07	
BX	204871	04/01/07	
BY	204871	04/01/07	
BZ	204871	04/01/07	
CA	204871	04/01/07	
CB	204871	04/01/07	
CC	204871	04/01/07	
CD	204871	04/01/07	
CE	204871	04/01/07	
CF	204871	04/01/07	
CG	204871	04/01/07	
CH	204871	04/01/07	
CI	204871	04/01/07	


SIDE ROTARY CAM TRACKING

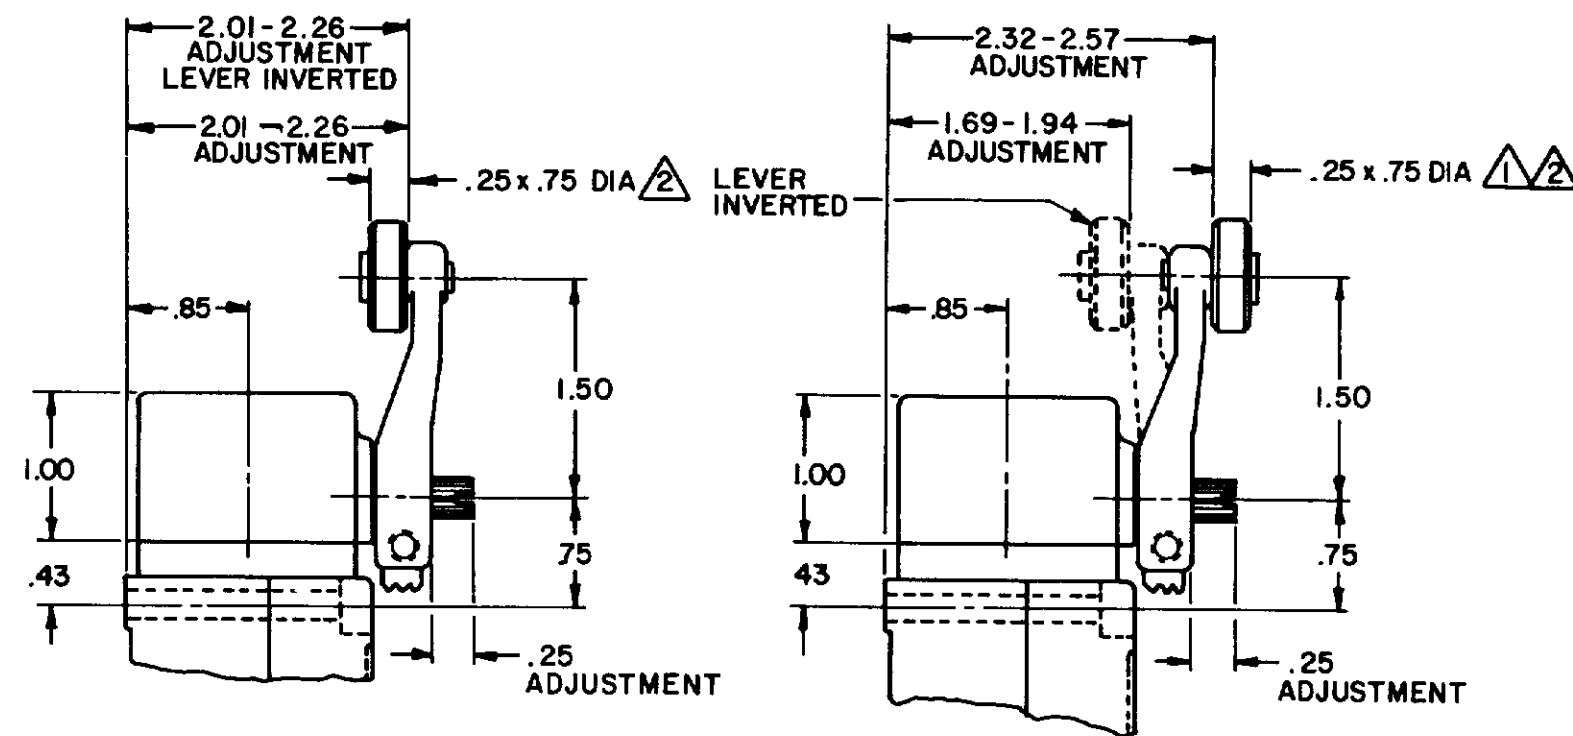


LSZ51 TYPE LEVERS

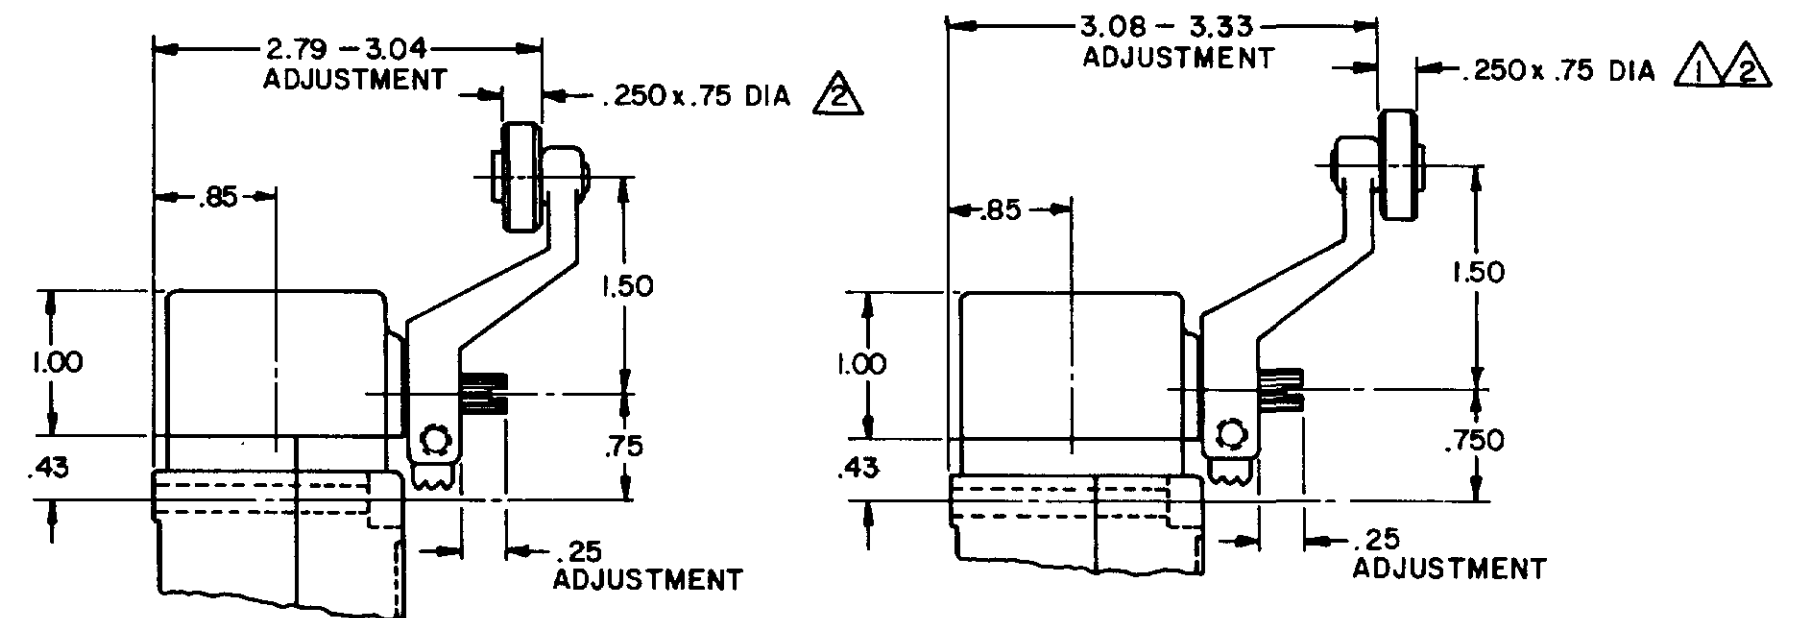


LSZ55 TYPE LEVERS

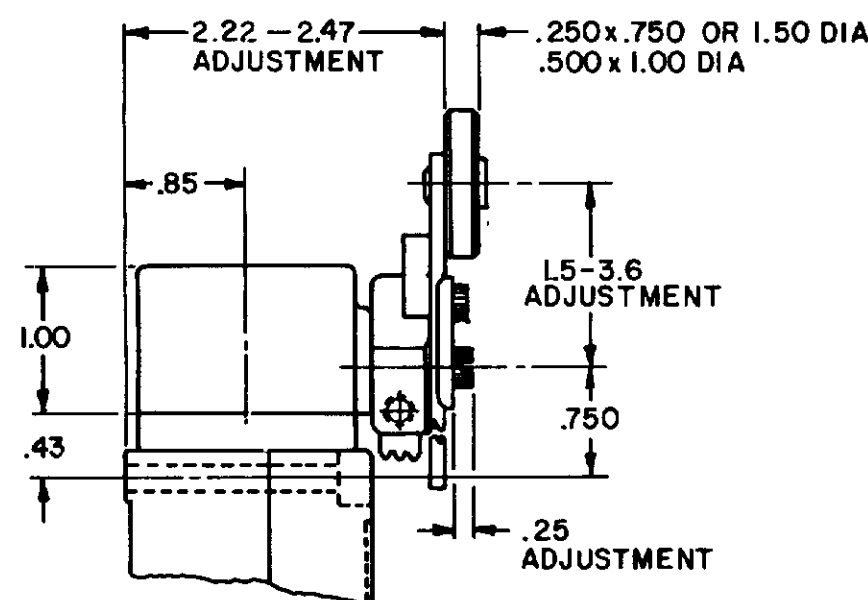


LSZ52 TYPE LEVER

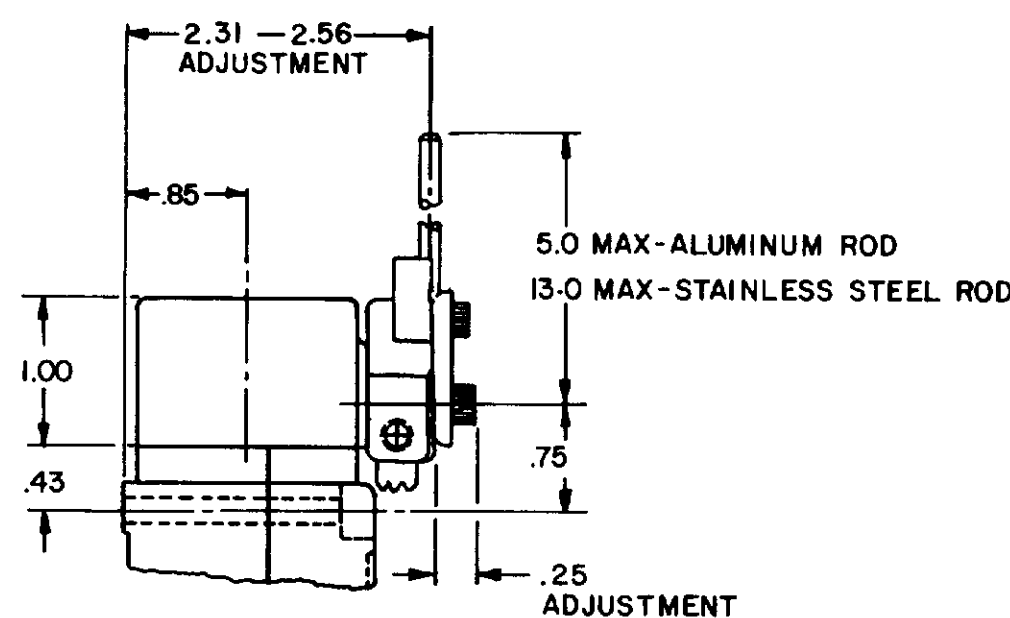

LSZ54 TYPE LEVER

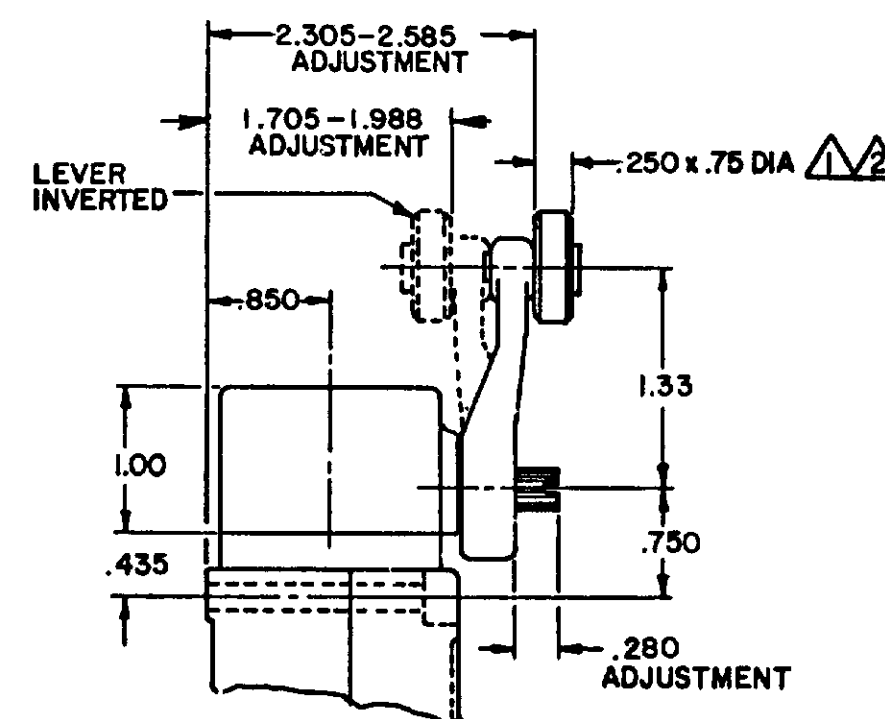

OPEN MOUNTED ROLLER

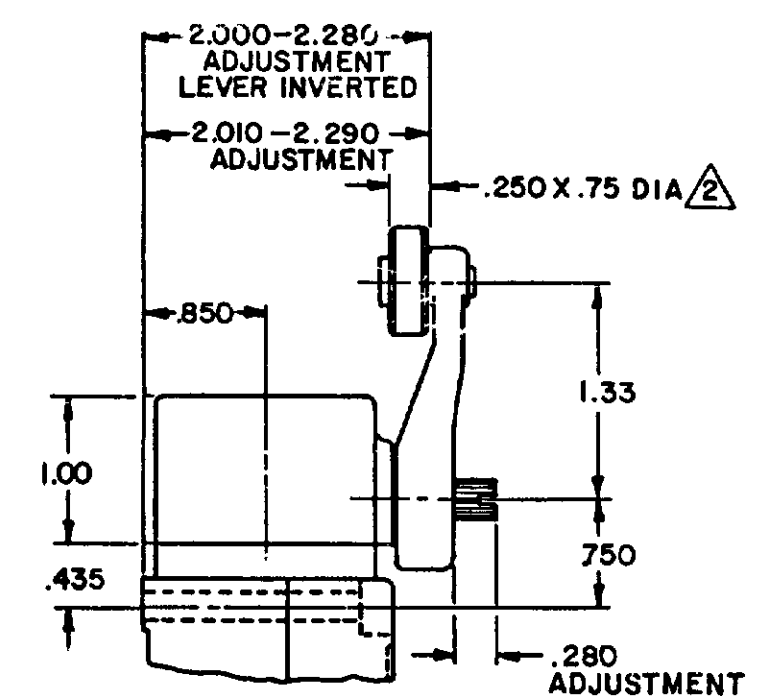

CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

- NOTES
- 1 ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT LEVER CANNOT BE INVERTED
 - 2 FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO "M" DRAWING
 - 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 "M" DRAWING

CATALOG LISTING
LSA-LSW SERIES CHART 1
PAGE 2 OF 10
REPLACES LSA-LSW SERIES
10JUL07 RELEASE NO. CO-78498
PSR
CHECK
11AUG04
AK
11JUL94
JAF
15JUN94
MAM
DRAWN
MASTER

REVISIONS


L	0031956	BS	10JUL07	10JUL07	10JUL07
B	201004	C	10AUG00	10AUG00	10AUG00
C	201748	D	202198	202198	202198
D	202198	E	204871	204871	204871
E	204871	F	206581	206581	206581
F	206581	G	206763	206763	206763
G	206763	H	207179	207179	207179
H	207179	I	207474	207474	207474
I	207474	J	207474	207474	207474
J	207474	K	0006871	0006871	0006871
K	0006871				

THIRD ANGLE PROJECTION			
SCALE NONE			
DO NOT SCALE PRINT			
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
ONE PLACE	(0)	±.030	
TWO PLACES	(.00)	±.015	
THREE PLACES	(.000)	±.005	
ANGLES		±	
WEIGHT			

TOP ROTARY

SINGLE POLE

DOUBLE POLE

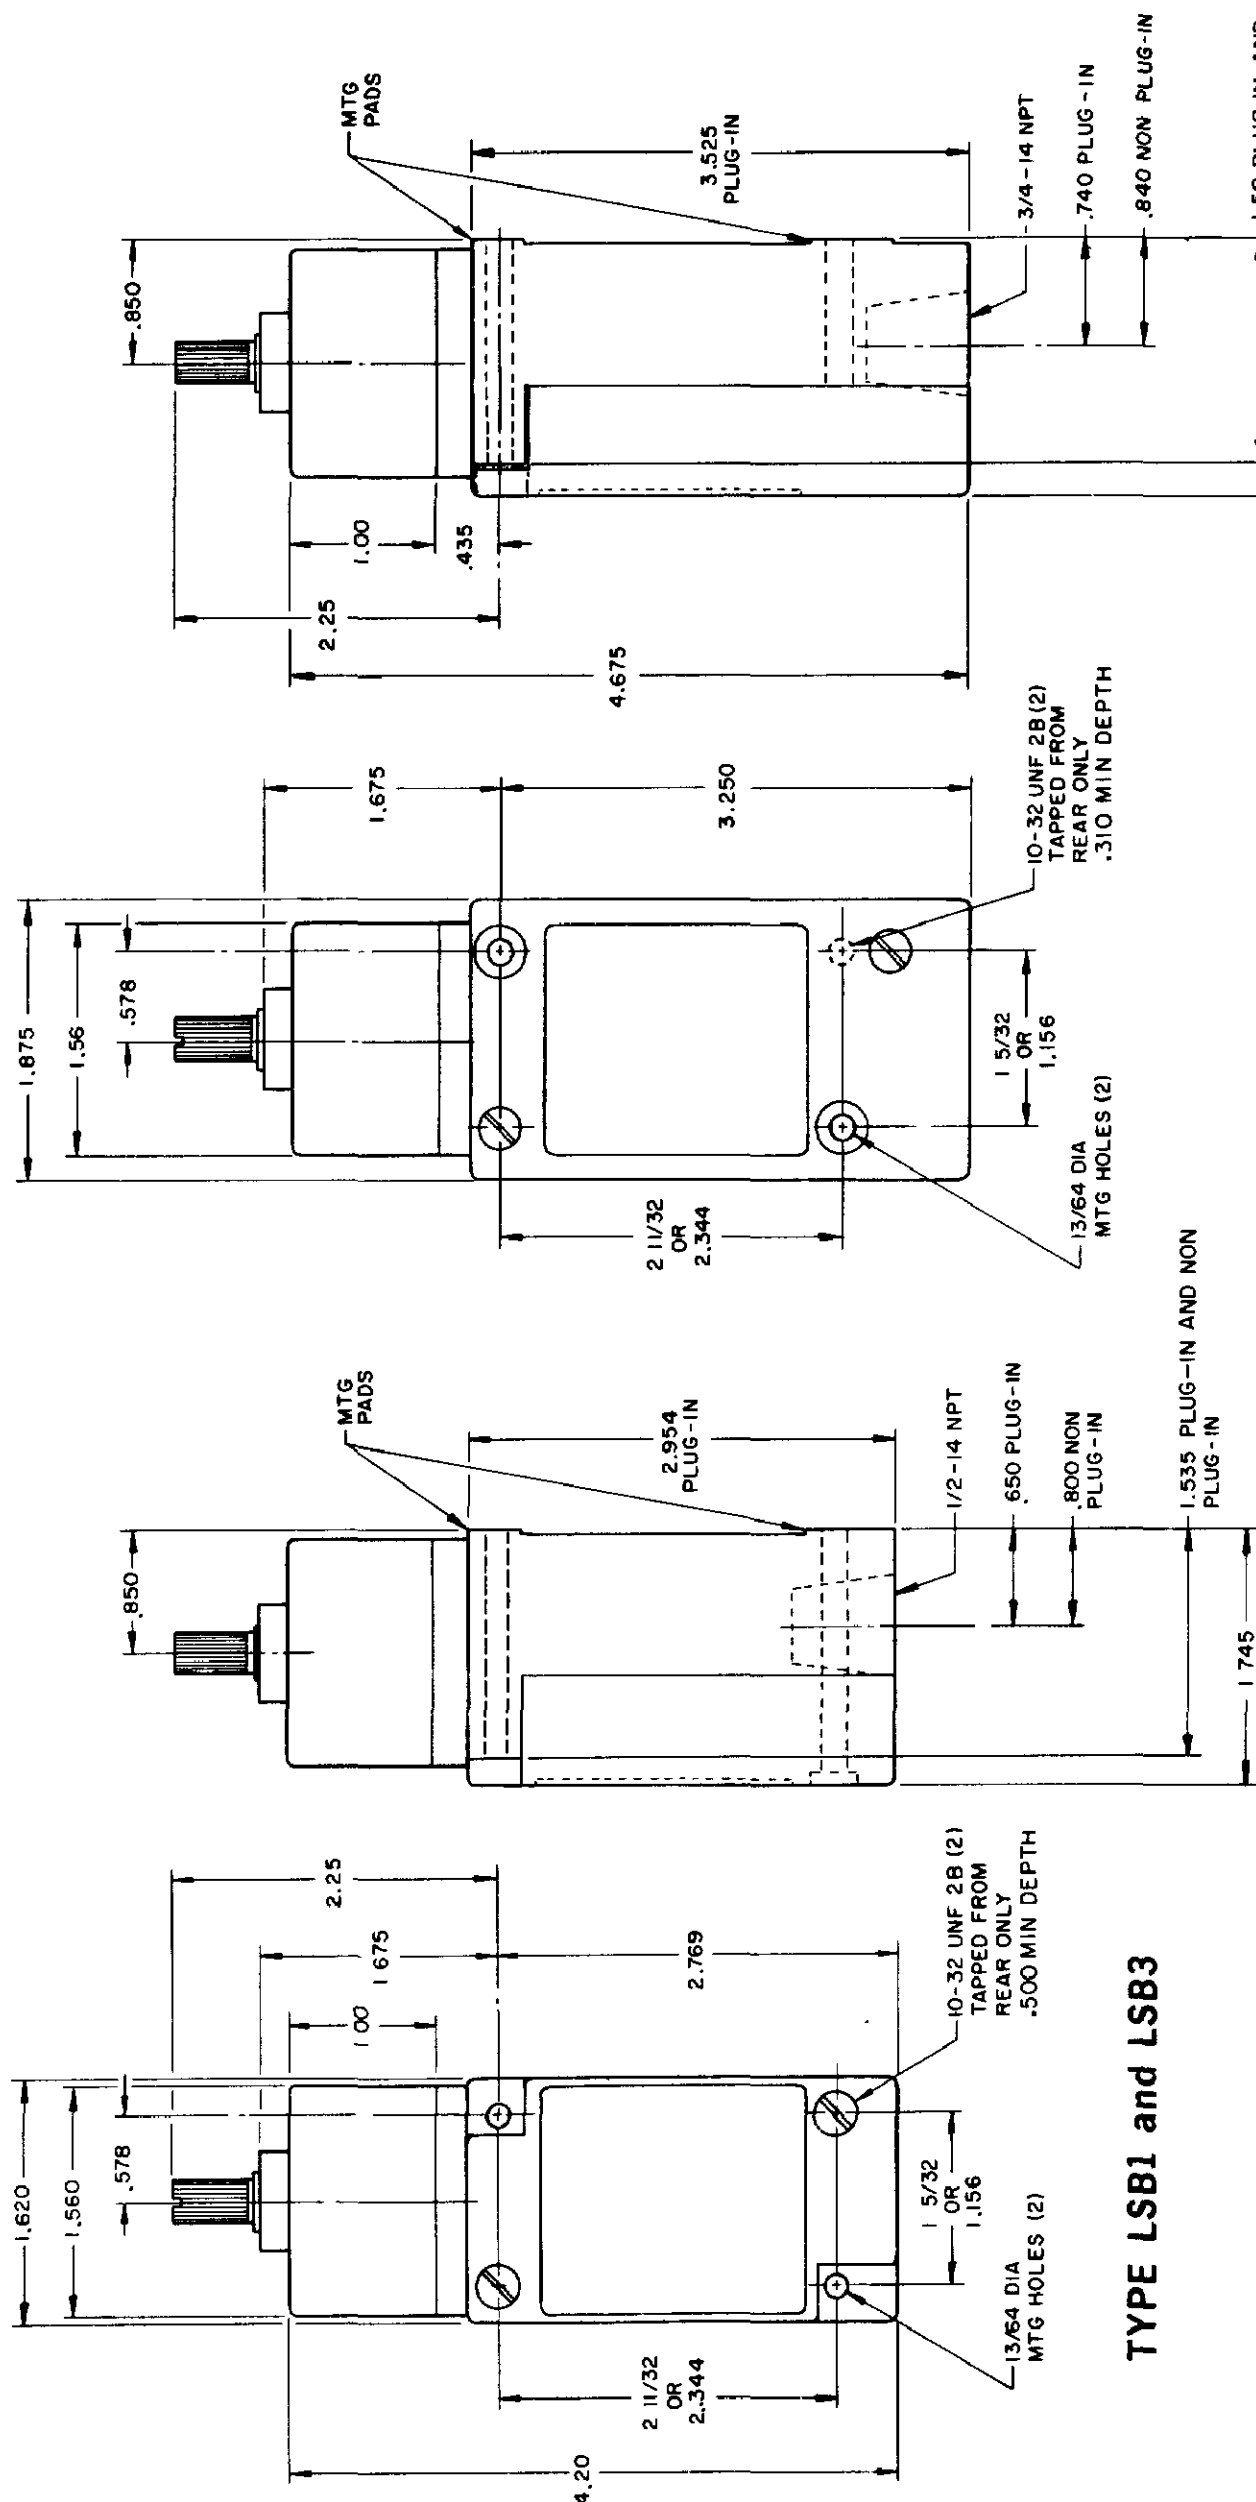

TYPE LSB1 and LSB3

TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2 - 14 NPT
CONDUIT HOLE

	SINGLE POLE	DOUBLE POLE
PRETRAVEL MAX	25°	25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

A.C. VOLTAGE	AMPS AT 35 POWER FACTOR			
	SINGLF POLE		DOUBLE POLE	
	MAKE	BREAK	MAKE	BREAK
120	60	6	30	3
240	30	3	15	1.5
480	15	1.5	7.5	75
600	12	1.2	6	6

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE		RESISTIVE
120	0.25	0.80	
240	0.15	0.40	

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT


VOLTAGE		30 WATT
5 AC OR DC MIN		
600 AC		
240 DC		

DIRECT ACTING (ALSO RATED AT A.C. 10
AMP CONT.)


D. C. VOLTAGE	MAKE AND BREAK AMPS		RESISTIVE
	INDUCTIVE		
30	4.2		4.2
120	1.1		1.1
240	.55		.55

WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)


DOUBLE POLE

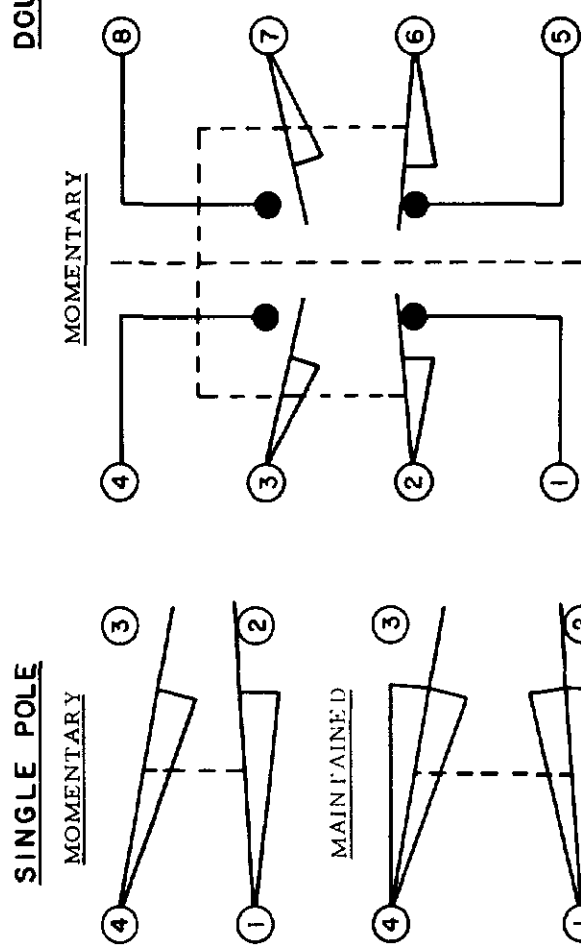

SINGLE POLE

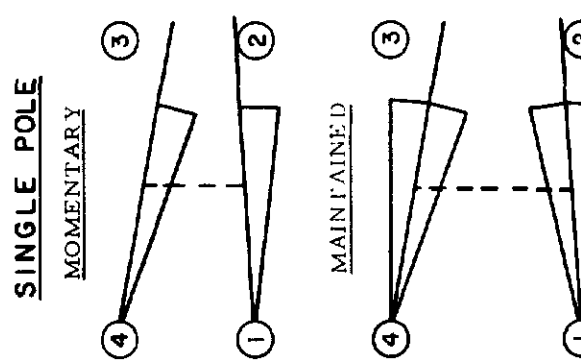

SINGLE POLE

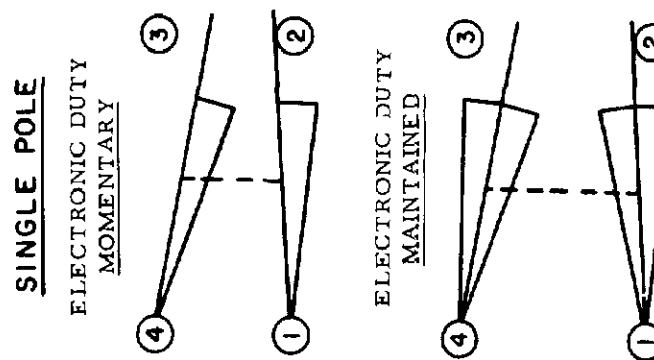


DIRECT ACTING




NOTES
DIFFERENTIAL TRAVEL ON ALL OPERATING
CHARACTERISTICS NOT APPLICABLE

SINGLE POLE

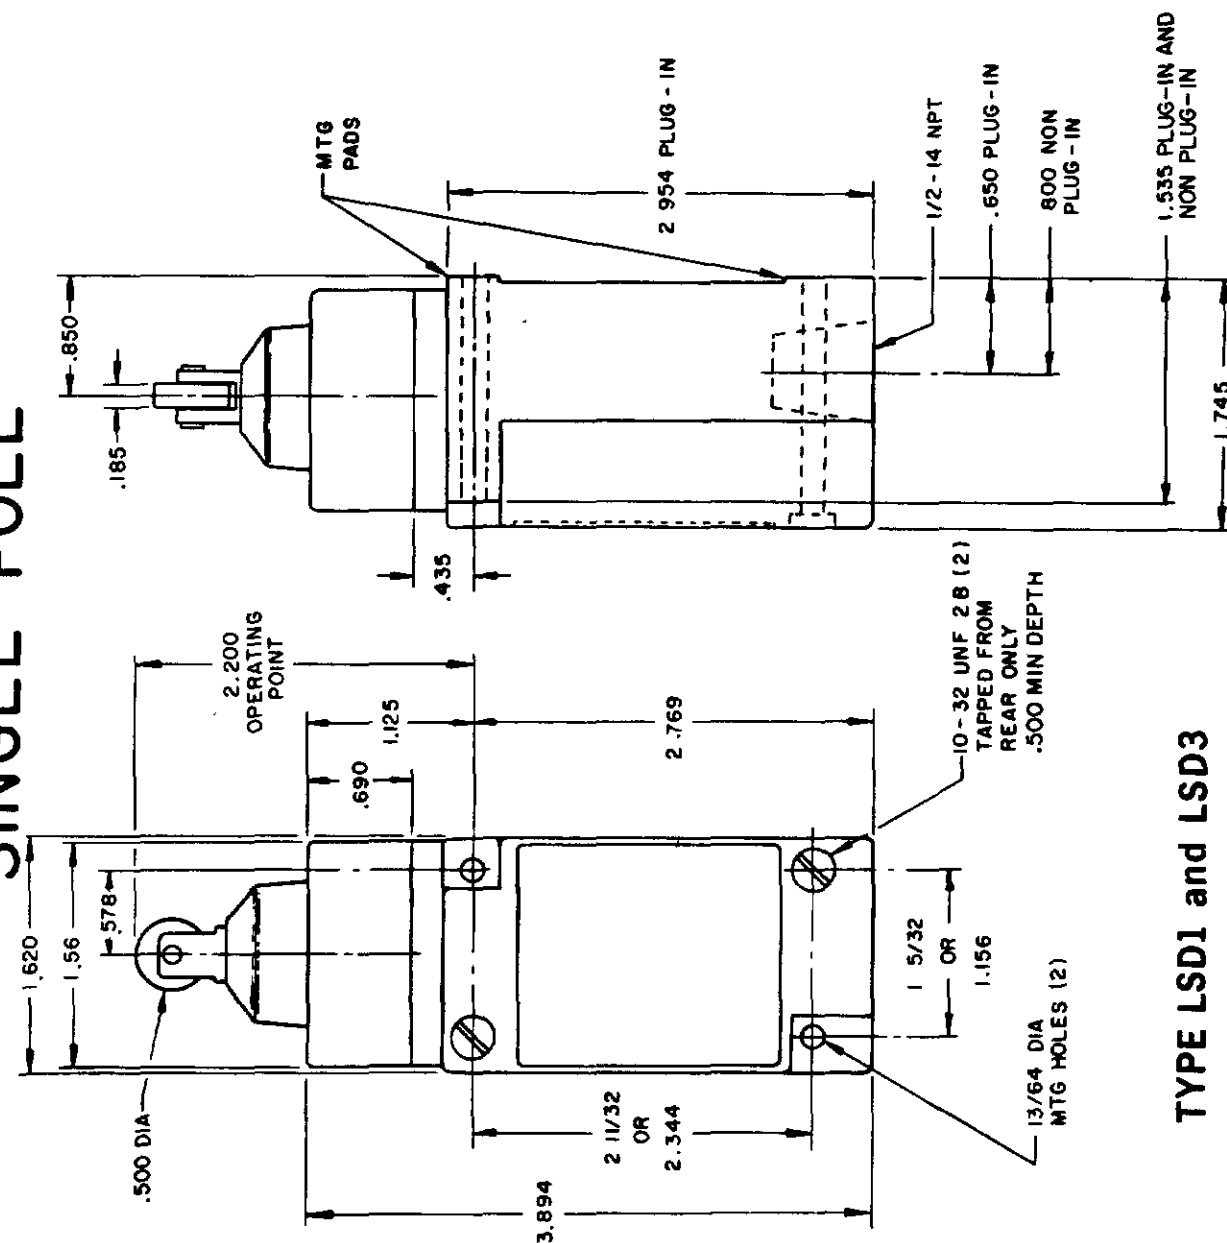


TYPE LSD1 and LSD3

DOUBLE POLE

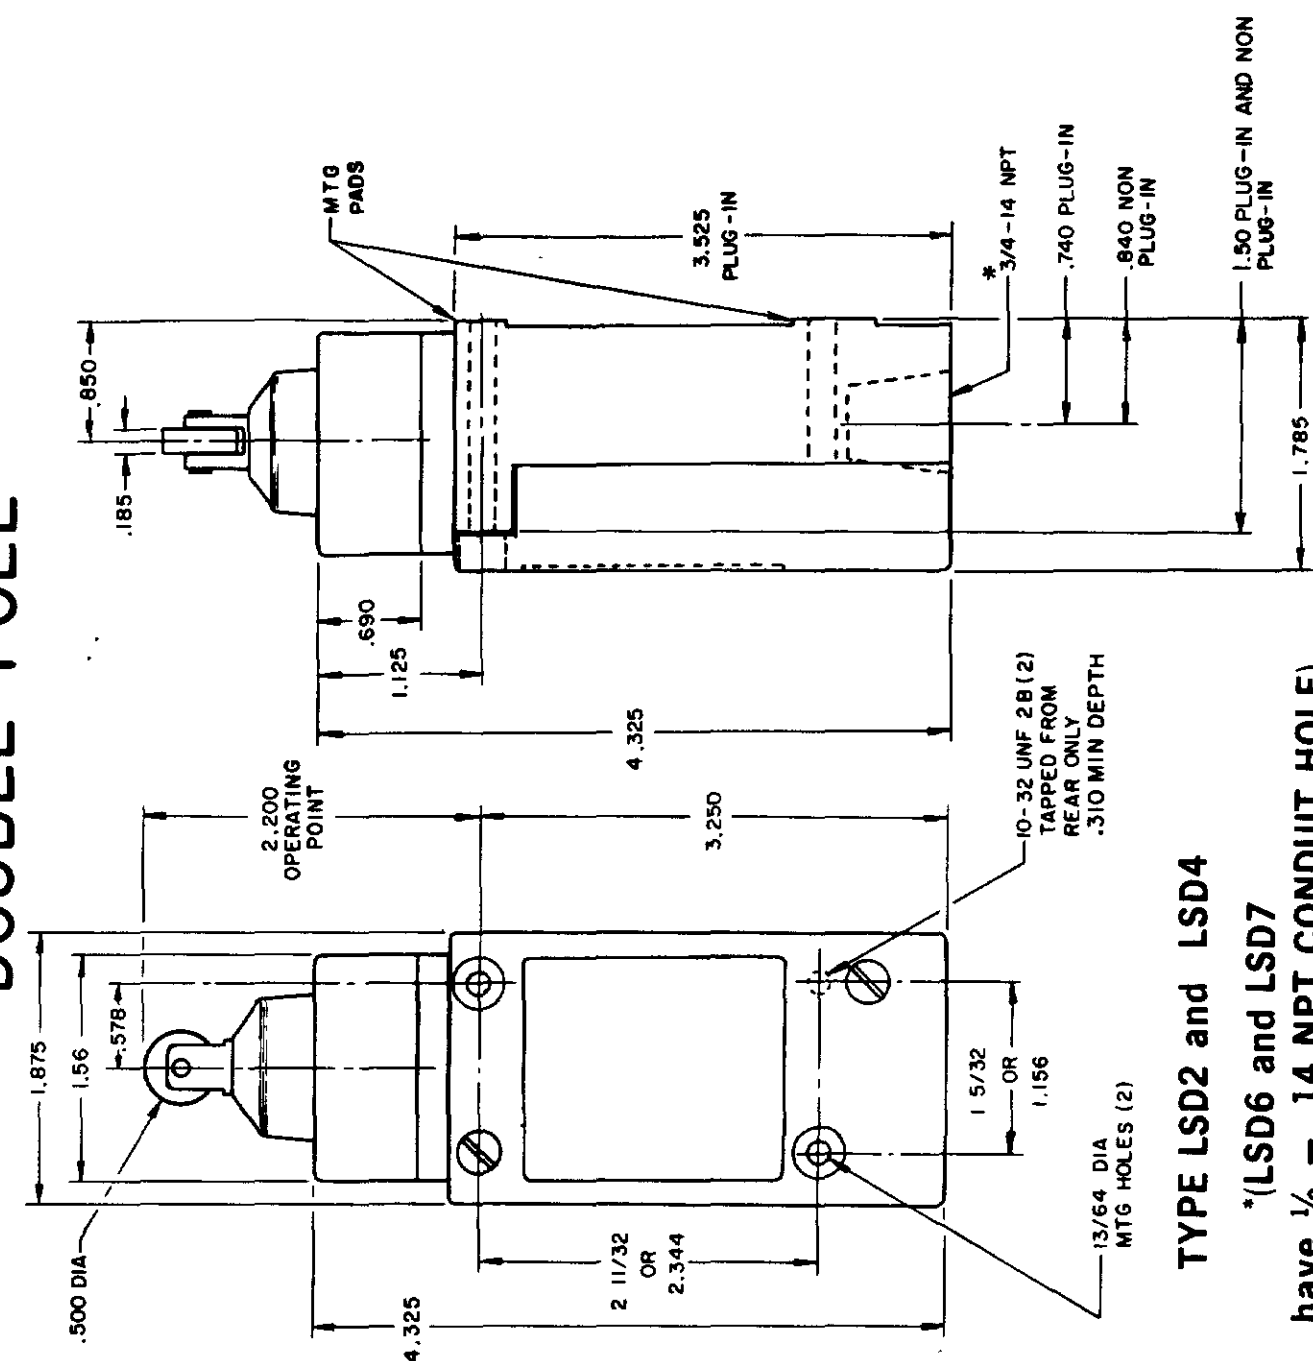


TYPE LSD2 and LSD4


*(LSD6 and LSD7 have 1/2 - 14 NPT CON

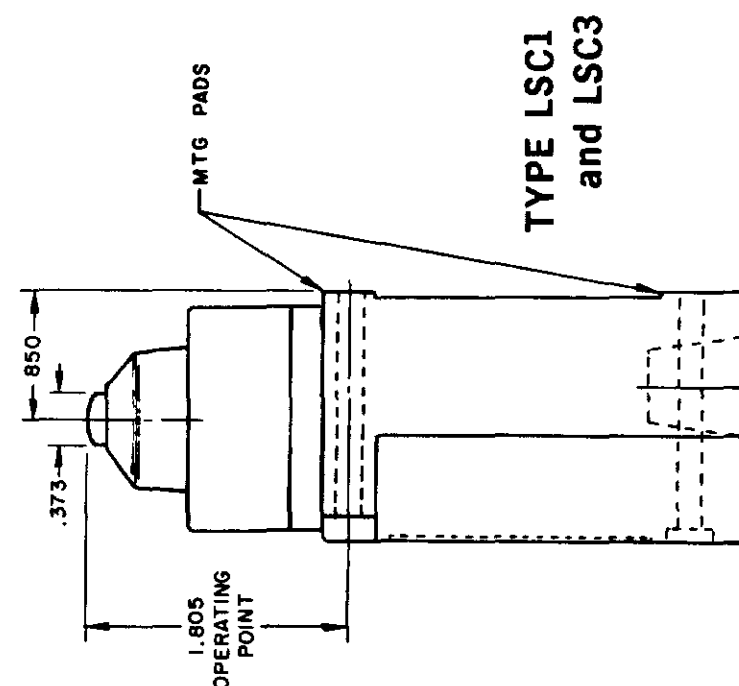

TYPE LSC1 and LSC3

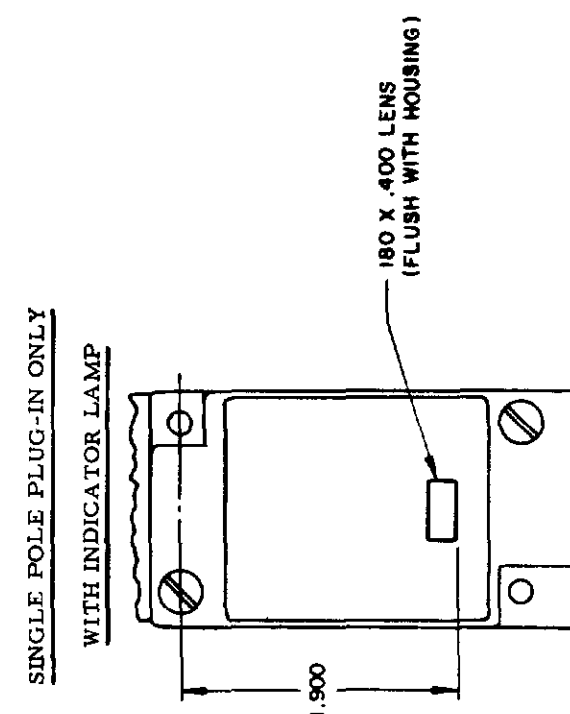


**TYPE LSC2
and LSC4**

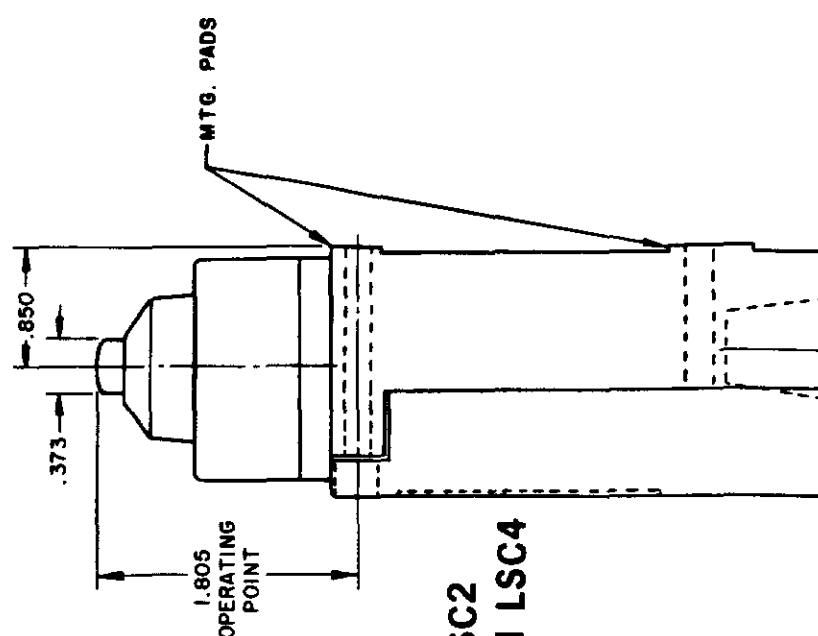


**120 LAMP VOLTAGE -
TYPE LSC5, LSD5 or LSV5**


240 LAMP VOLTAGE .
TYPE LSC8, LSD8 or LSV8

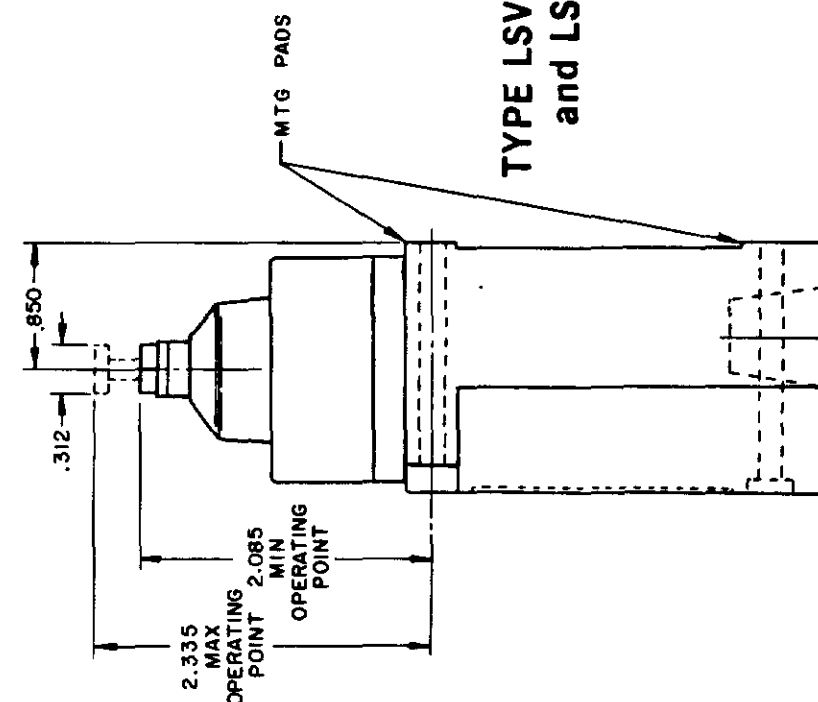

TYPE LSV1 and LSV3

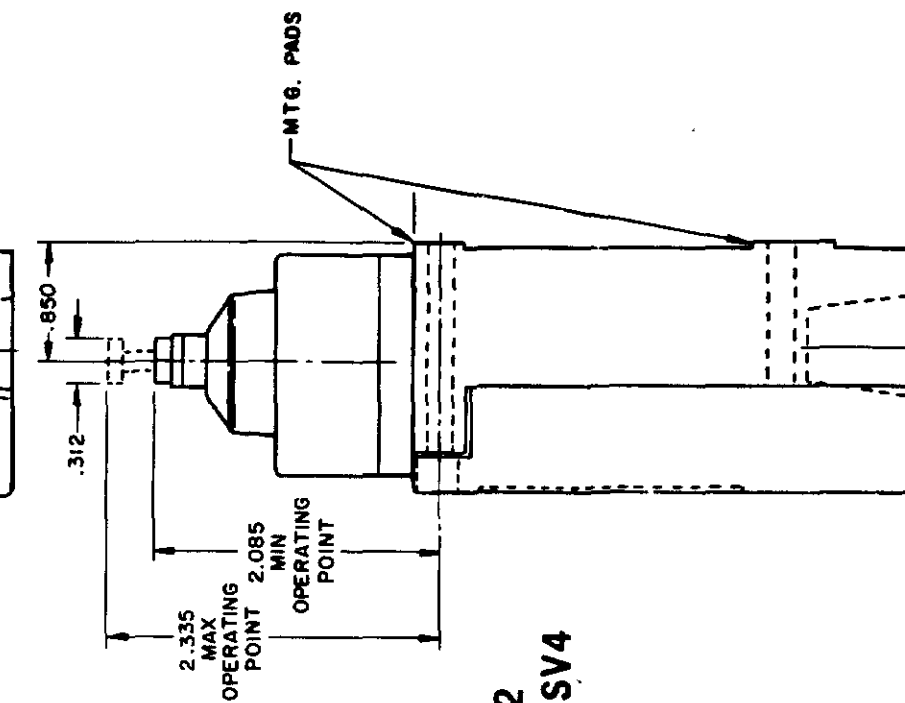

**TYPE LSV2
and LSV4**

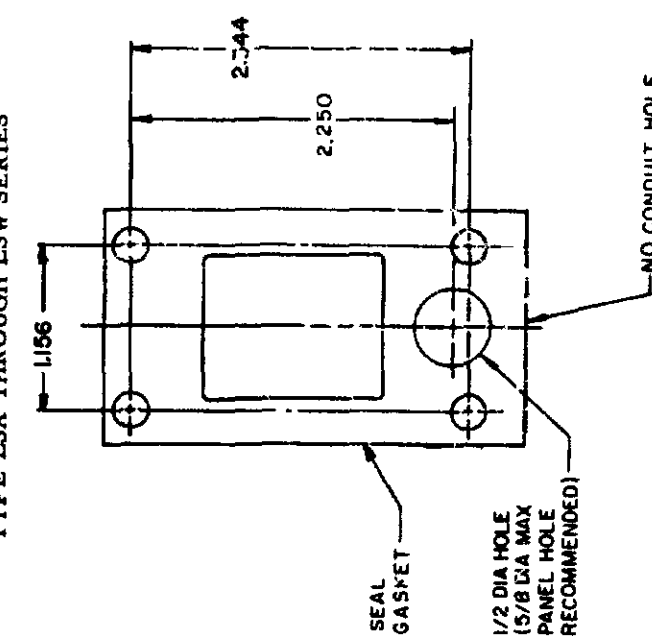

PAGE 4 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING




LSA-LSW SERIES

CHART 1

SCALE NONE

NO-NOT-SCALE-PRINT

SINGLE POLE DOUBLE POLE

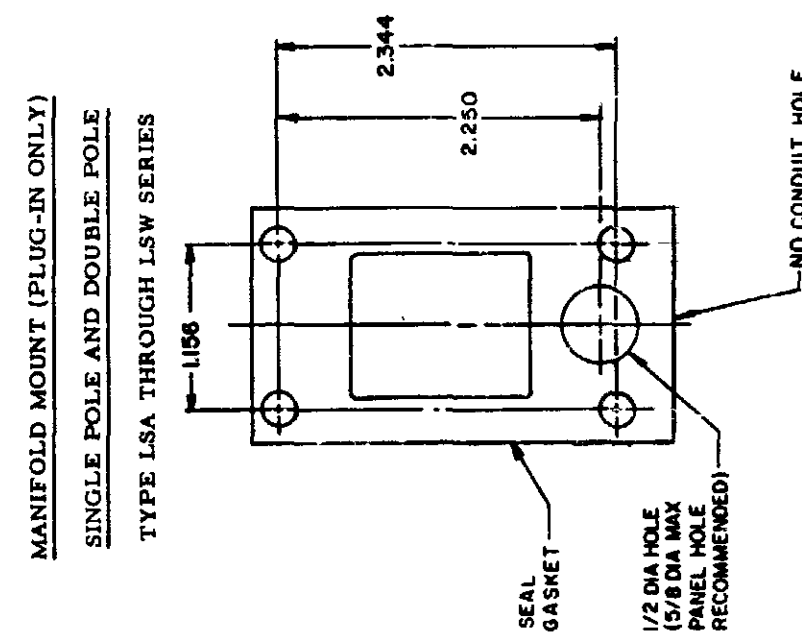

FED MFG CODE 91929


CATALOG LISTING

LSA-LSW SERIES

CHART 1

SCALE NONE

DO NOT SCALE PRINT



TYPE LSG1 and LSG3

INITIAL POSITION —
(FREE POSITION) } PRETRAVEL
DIFFERENTIAL TRAVEL
OPERATING POINT } OVERTRAVEL
FULL TRAVEL —

OPERATING POINT GIVEN
IN RELATION TO TOP
MOUNTING HOLE

SIDE	PLUNGER	TYPES
1	1	1
2	2	2
3	3	3
4	4	4
5	5	5
6	6	6
7	7	7
8	8	8
9	9	9
10	10	10
11	11	11
12	12	12
13	13	13
14	14	14
15	15	15
16	16	16
17	17	17
18	18	18
19	19	19
20	20	20
21	21	21
22	22	22
23	23	23
24	24	24
25	25	25
26	26	26
27	27	27
28	28	28
29	29	29
30	30	30
31	31	31
32	32	32
33	33	33
34	34	34
35	35	35
36	36	36
37	37	37
38	38	38
39	39	39
40	40	40
41	41	41
42	42	42
43	43	43
44	44	44
45	45	45
46	46	46
47	47	47
48	48	48
49	49	49
50	50	50
51	51	51
52	52	52
53	53	53
54	54	54
55	55	55
56	56	56
57	57	57
58	58	58
59	59	59
60	60	60
61	61	61
62	62	62
63	63	63
64	64	64
65	65	65
66	66	66
67	67	67
68	68	68
69	69	69
70	70	70
71	71	71
72	72	72
73	73	73
74	74	74
75	75	75
76	76	76
77	77	77
78	78	78
79	79	79
80	80	80
81	81	81
82	82	82
83	83	83
84	84	84
85	85	85
86	86	86
87	87	87
88	88	88
89	89	89
90	90	90
91	91	91
92	92	92
93	93	93
94	94	94
95	95	95
96	96	96
97	97	97
98	98	98
99	99	99
100	100	100

PAGE 6 OF 10

SWITCH - ENCLOSED


CATALOG LISTING

LSA-LSW SERIES

CHART 1

SCALE	NONE	
DO NOT SCALE PRINT		
UNLESS		
DIMENSIONS ARE NOTED		
TOLERANCES		
ONE PLACE	(.0)	±
TWO PLACE	(.00)	±
THREE PLACE	(.000)	±
ANGLES		±
WEIGHT		


WOBBLE STICK
SINGLE POLE
DOUBLE POLE

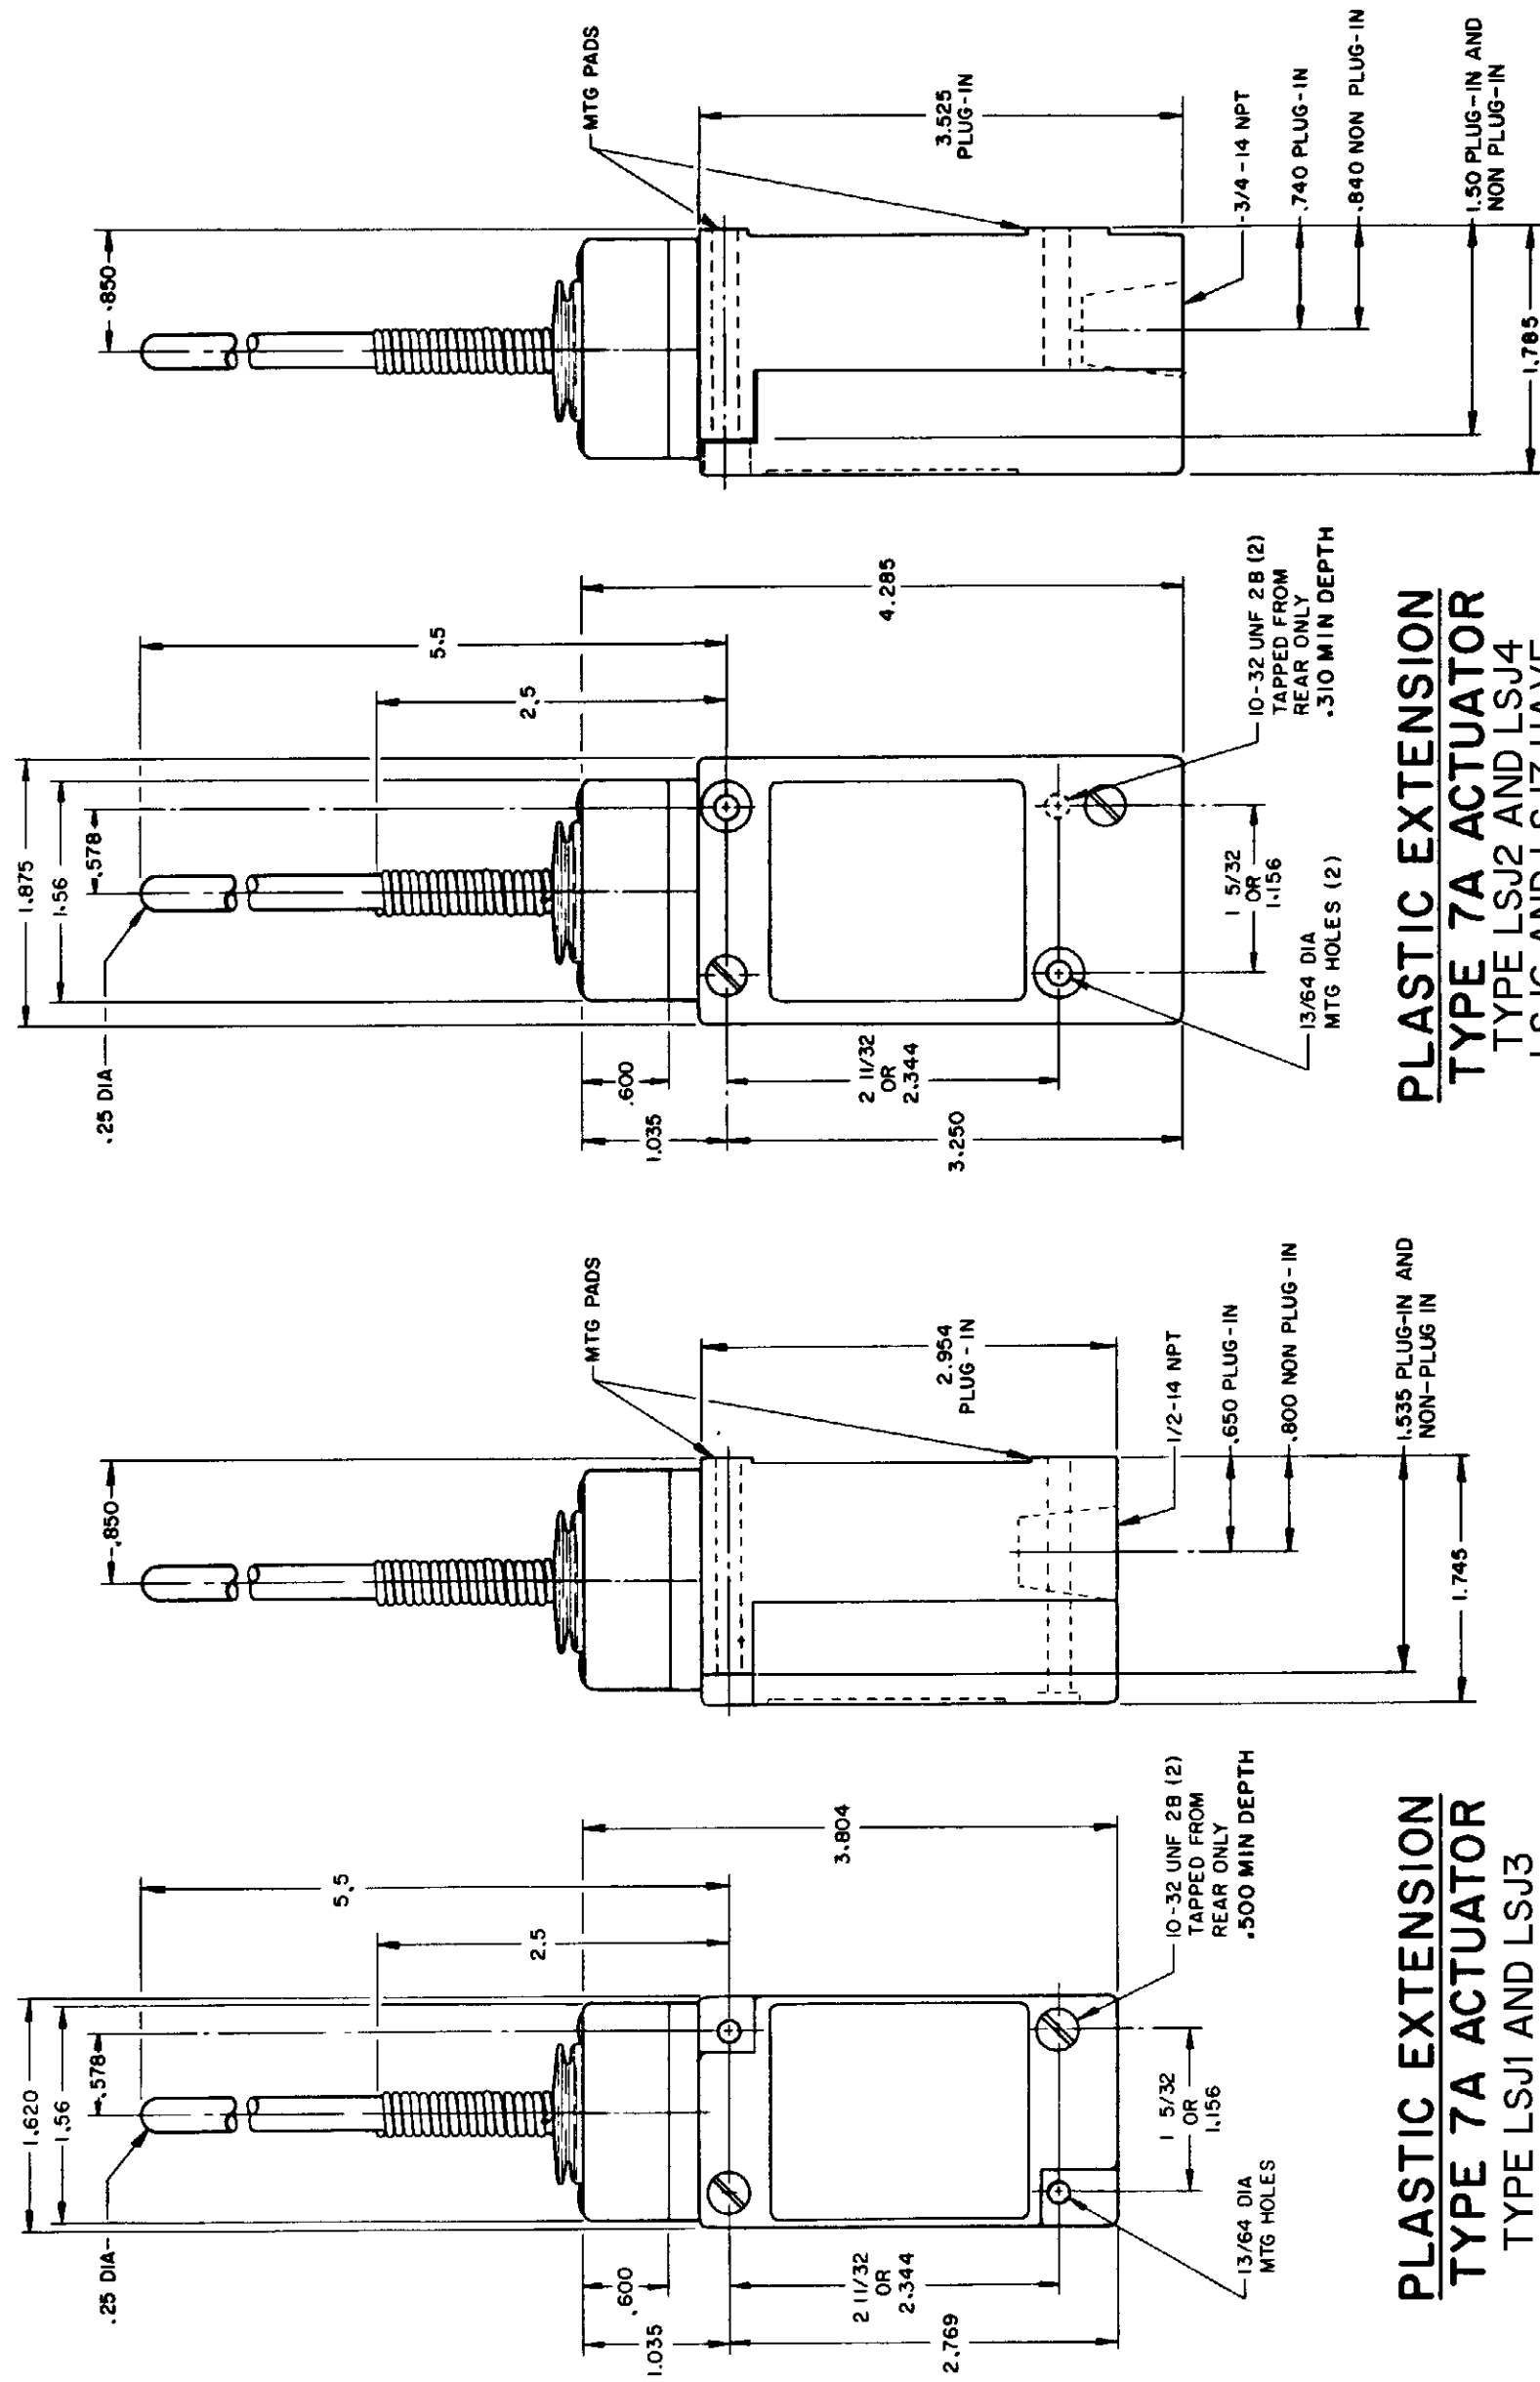


PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ1 AND LSJ3

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE


REPLACEMENT ACTUATOR
LSZ-4009

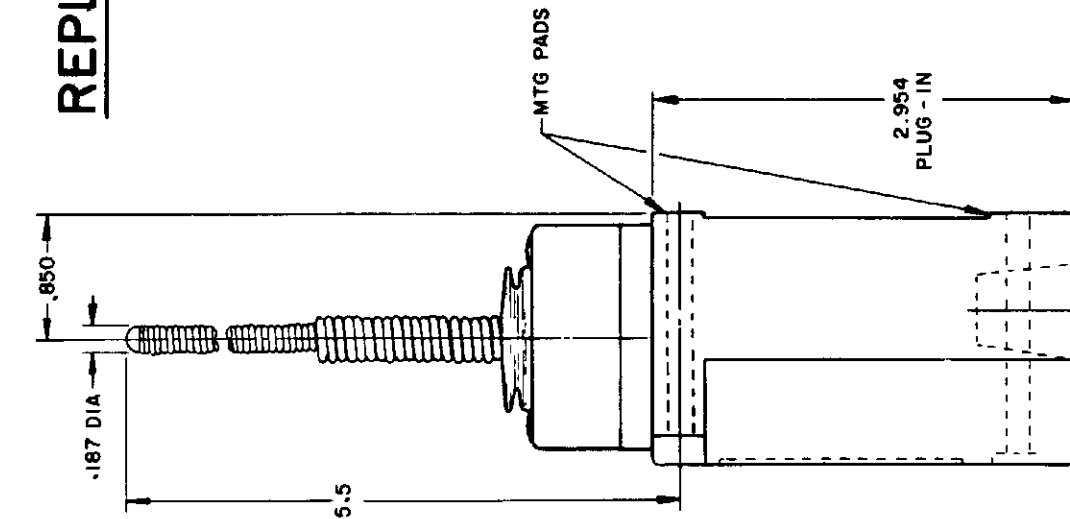


CABLE EXTENSION
TYPE 7N ACTUATOR

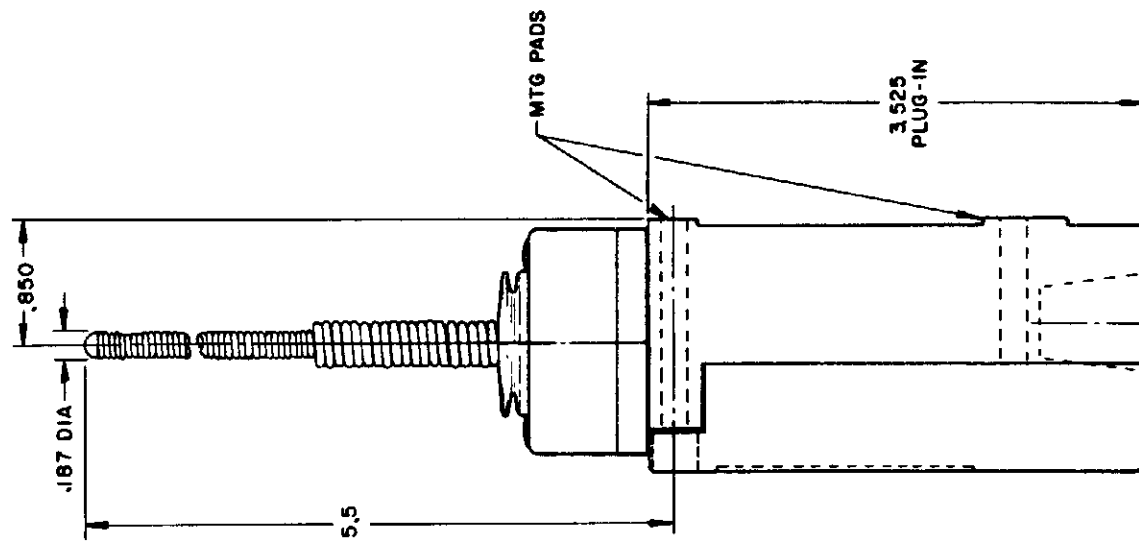


CABLE EXTENSION
TYPE 7 N ACTUATOR

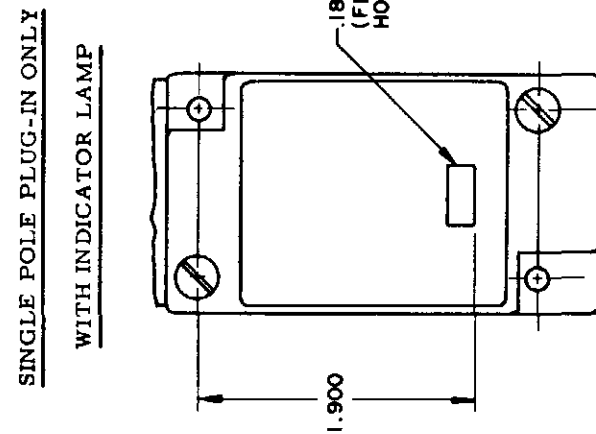

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8
24 LED VOLTAGE TYPE LSJ9

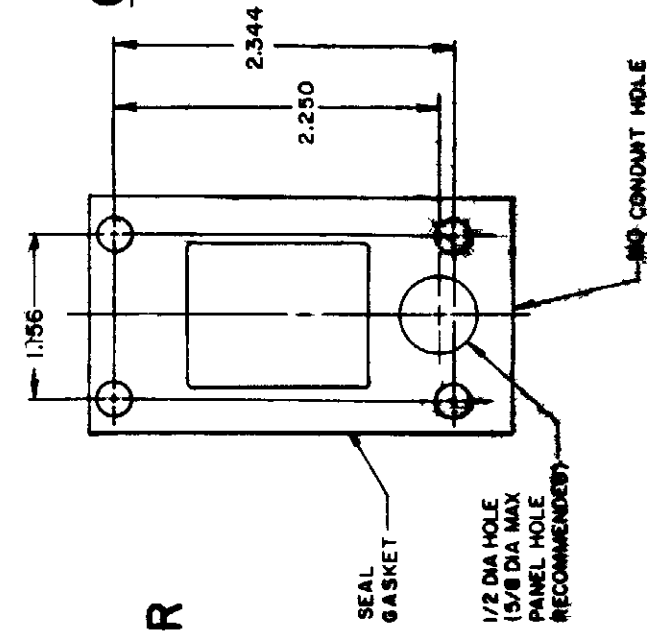

REPLACEMENT ACTUATOR
LSZ-40II

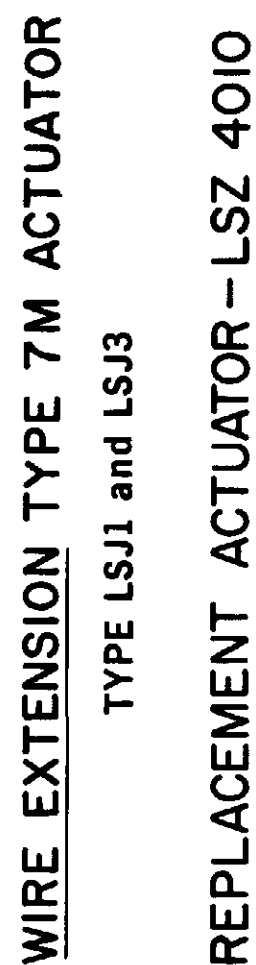

SINGLE POLE



	CAT WHISKER		WOBBLE STICK			
	5 1/2" COIL	5 1/2" WIRE	1/4" WIRE	RDD.	CABLE	WIRE
PRETRAVEL (APPROX) IN. RADIUS	2	2	4.5	1.0	1.5	4.0
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	10.0	7.0	5.0


REV	DATE	BY	CHKD	DESCRIPTION
L	0031956			BS
B	10JUL07			201004
C	201748			201748
D	202198			202198
E	204871			204871
F	206581			206581
G	206763			206763
H	207179			207179
J	207474			207474
K	0006871			0006871

ISSUE	CATALOG LISTING	12	PSR	10JUL07	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES
M	LSA-LSW SERIES CHART 1	PAGE 9 OF 10						
MAM	15 JUN 94	CHKD	JAF	11 JUL 94	CHKD	AK	11 AUG 04	CHKD

CONVERSION BASES


SINGLE POLE
(SIDE ROTARY)
LSZ 4003

DOUBLE POLE
(SIDE ROTARY)
LSZ4004

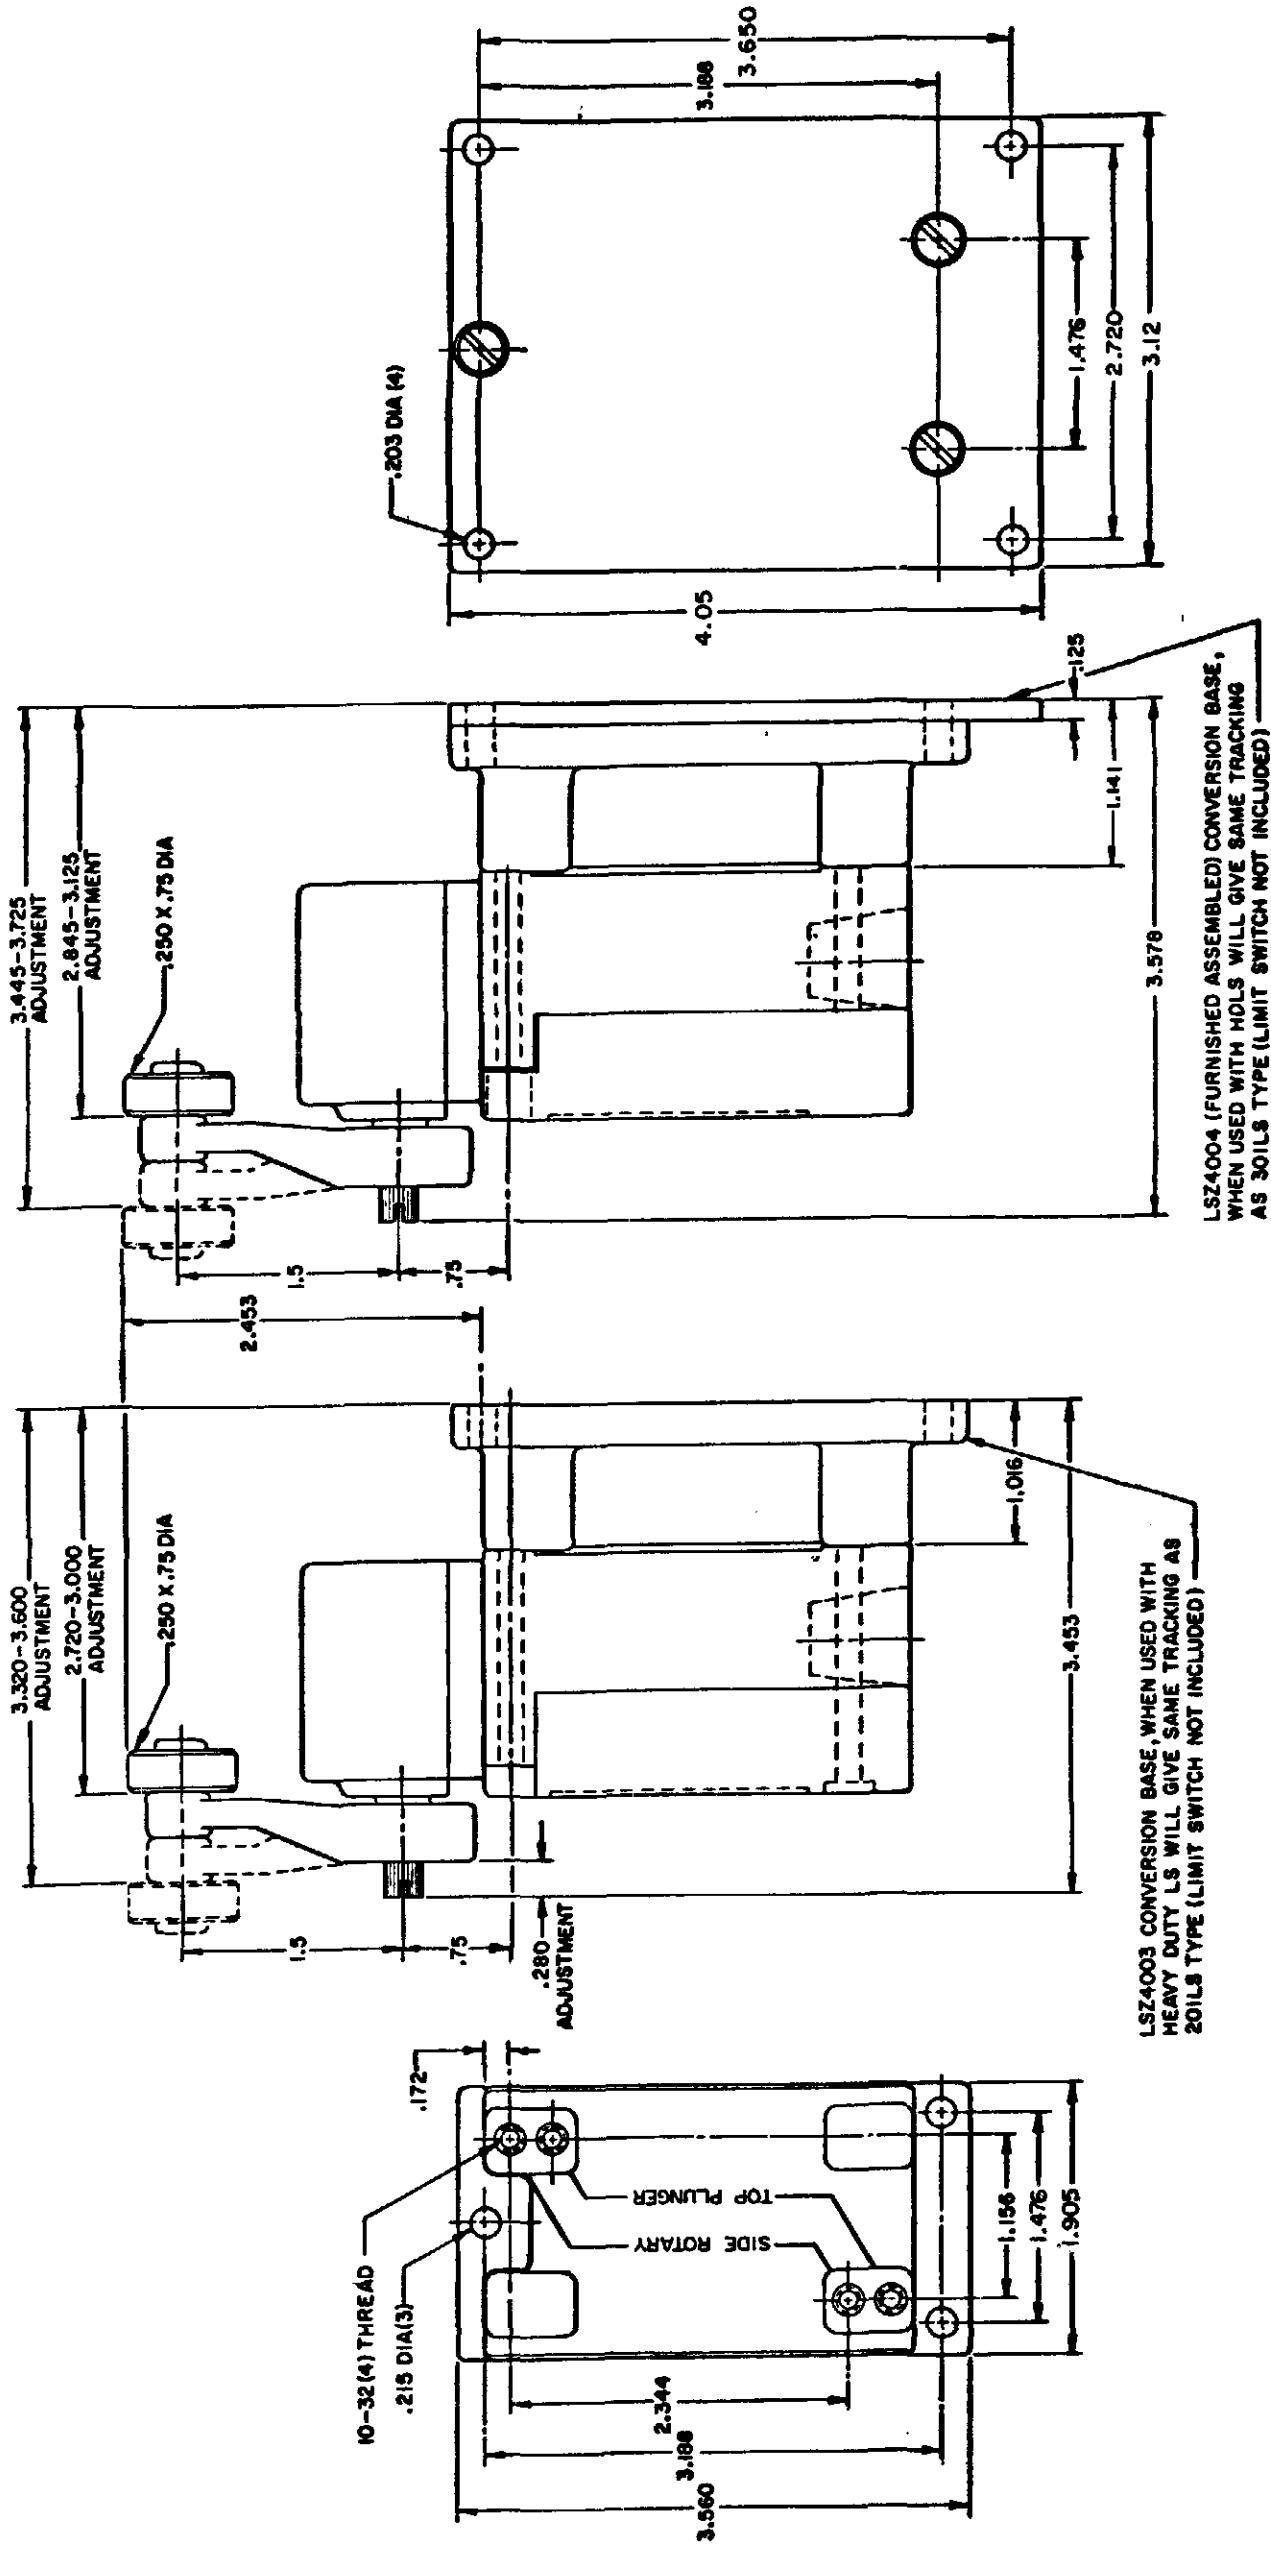

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE
TOP PLUNGER
LSZ4003

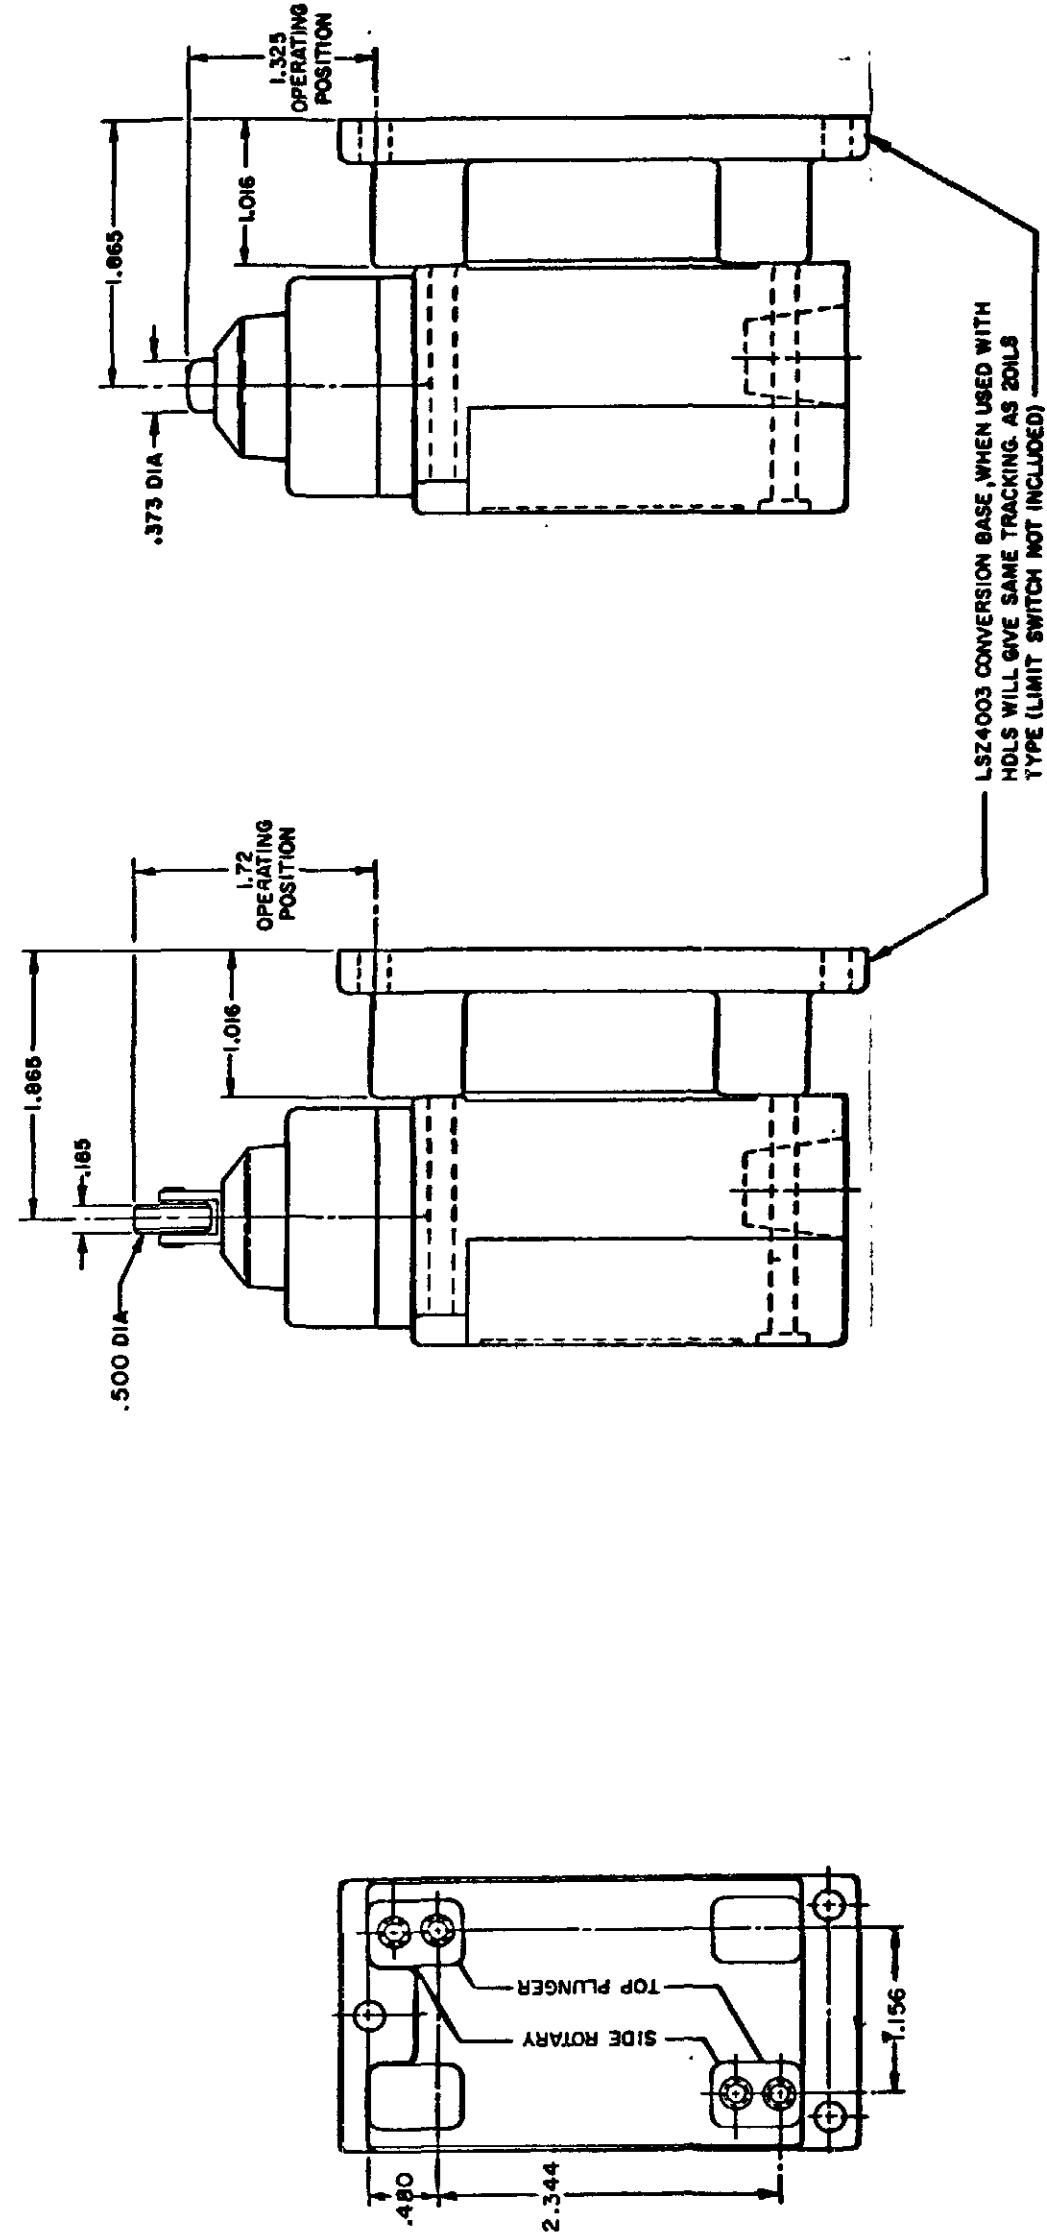

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMIT SWITCH

HEAD TYPE	CELLULOSE	DETERGENT	5 STAR	ASTM #1	ASTM #2	ASTM #3	ASTM #4	HOUGHTON SAFE 271	HOUGHTON SAFE 820	HOUGHTON SAFE 1010	MINERAL OIL	PETROL OIL	SILICON CR & OIL	SUNSAFE	BEER	STODDARD SOLV.	CHLORINATED SOLVENTS	CITRIC ACID	DI-ESTER SYN. LUBRICANTS	OZONE	HYDRAUL	PROGUARD	PETROL BASE HYDRAULIC OIL	LARD OIL	SILICATE ESTERS
LSA	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSB	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSC	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSD	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSE	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSF	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	2	4	4	2	2	2		
LSG	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSH	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSJ	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSK	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSL	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSM	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSN	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSP	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSR	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSV	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSW	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	2	4	4	2	2	2		
LST	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																								
LSS	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																								

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F

CATALOG LISTING
M LSA-LSW SERIES CHART 1
PAGE 10 OF 10
ISSUE 12
PSR 10JUL07
CHECK 11AUG04
AK 11JUL94
JAF 11JAN93
J 207474
TSM 18FEB03
K 0006871
KR 11AUG04
MAM 15 JUN 94
DRAWN
RASTER

REVISIONS
L 0031956
BS 10JUL07
B 201004
CSL 10 AUG 00
C 201748
CSL 17 NOV 00
D 202198
CSL 23 JAN 01
E 204871
GLW FEB 02
F 206581
GLH 14 OCT 02
G 206783
CSL 31 OCT 02
H 207179
GLH 14 JAN 03
J 207474
TSM 18FEB03
K 0006871
KR 11AUG04



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331