



[illegible]


SIDE ROTARY CAM TRACKING

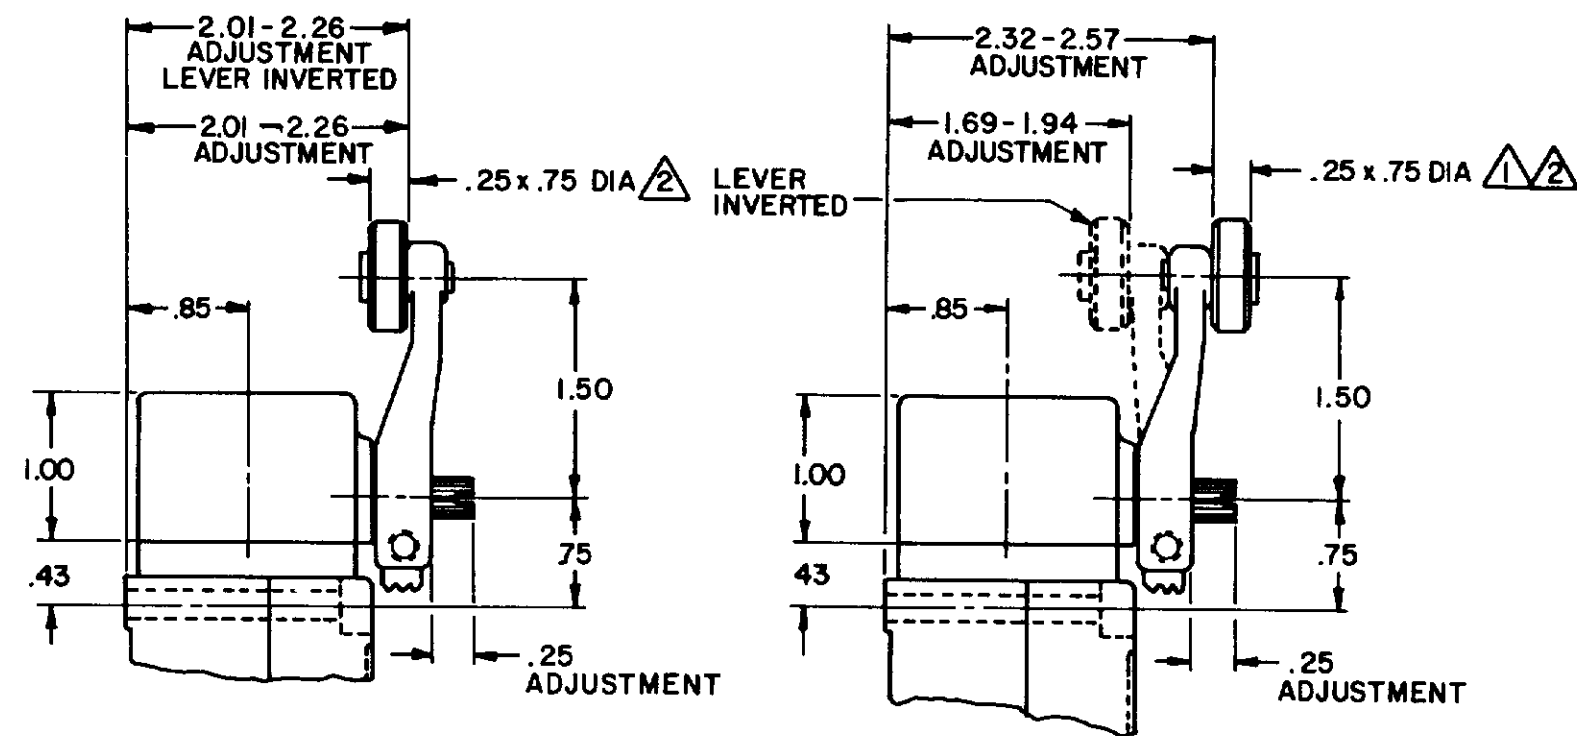


LSZ51 TYPE LEVERS

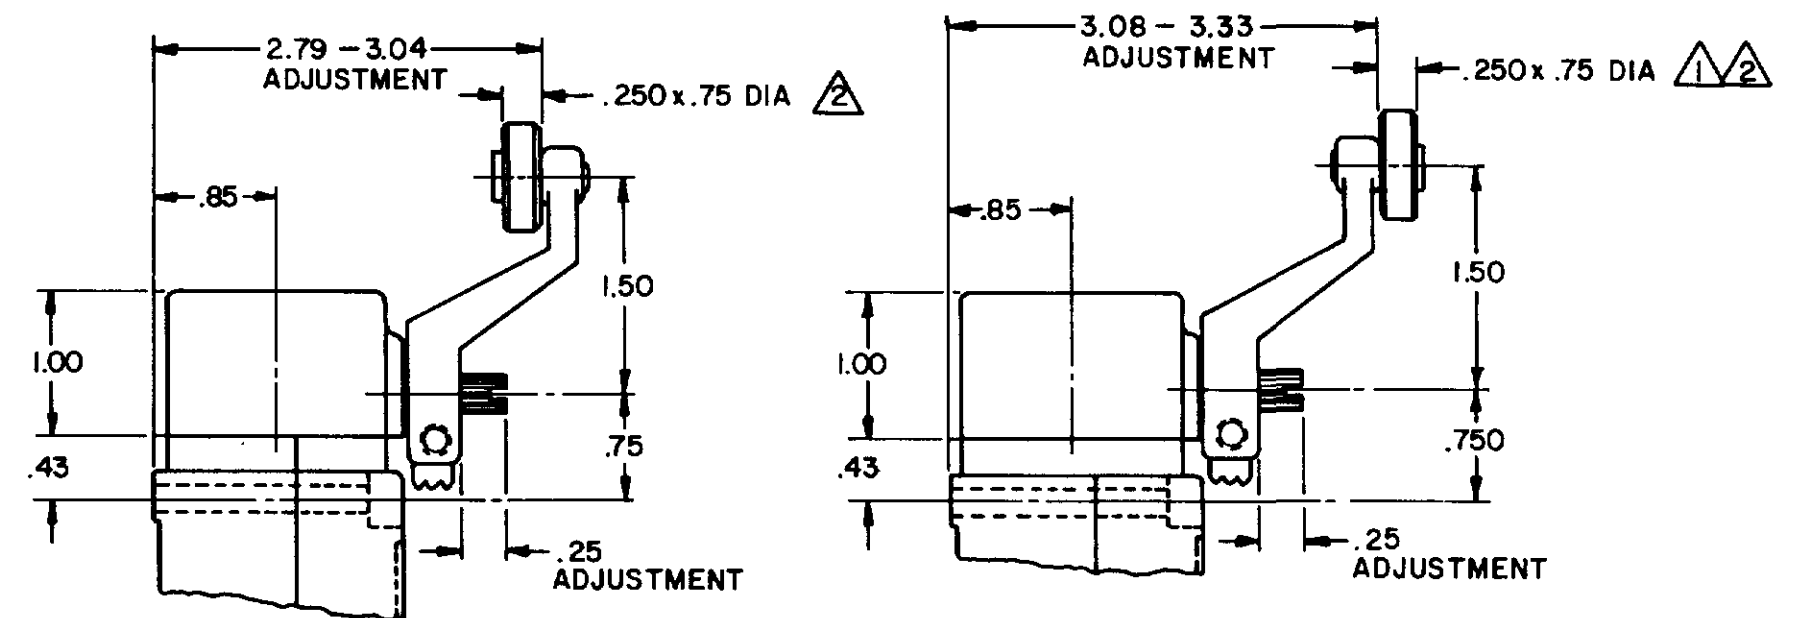


LSZ55 TYPE LEVERS

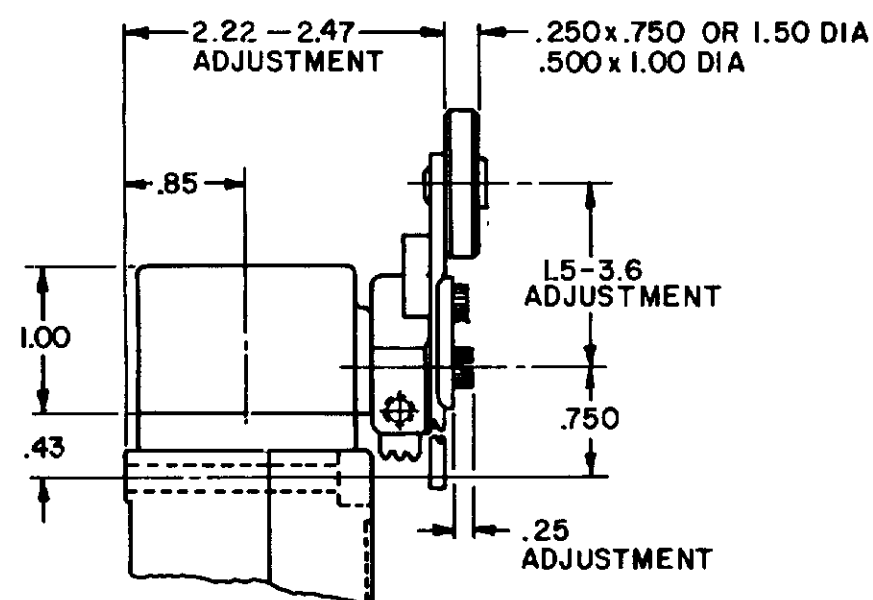


LSZ52 TYPE LEVER

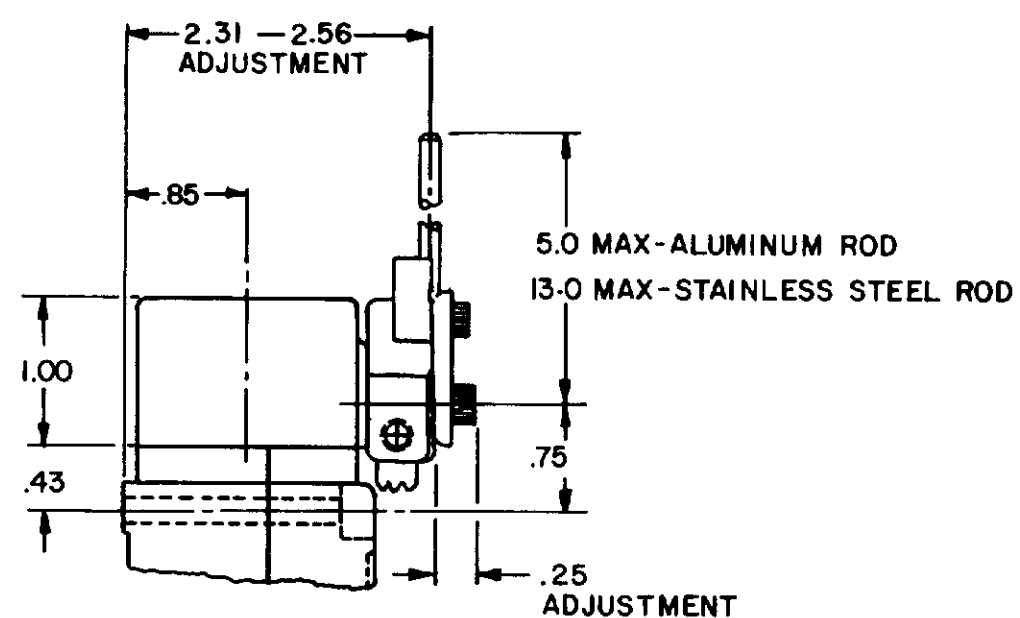

LSZ54 TYPE LEVER

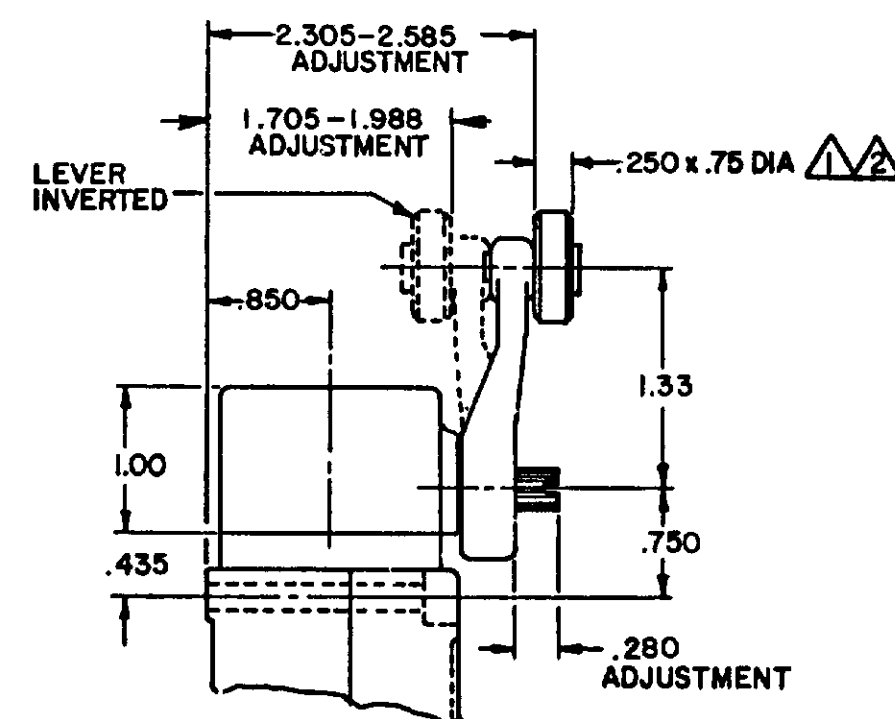

OPEN MOUNTED ROLLER

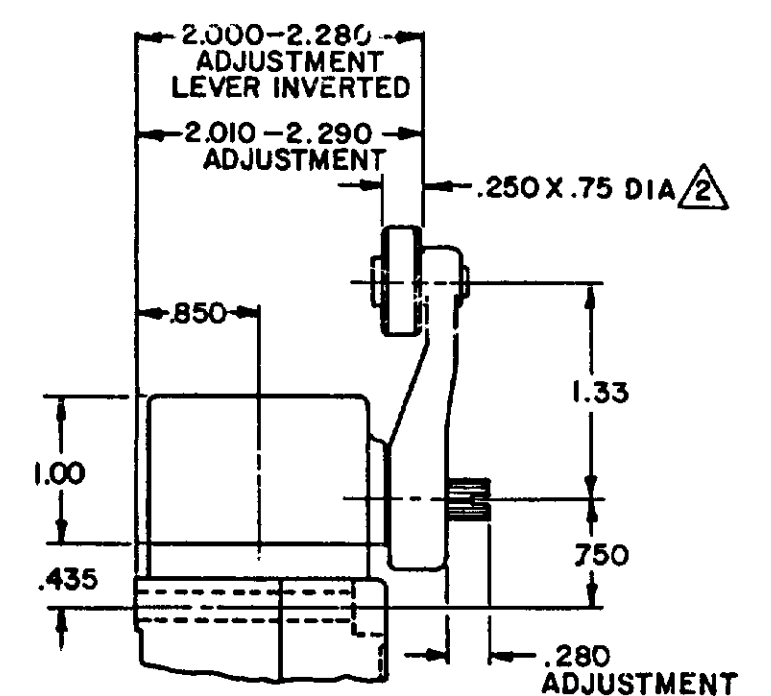


CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

NOTES

- NOTES
- ① ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT
LEVER CANNOT BE INVERTED
- ② FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS
REFER TO "M" DRAWING
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER
TO LSZ CHART 1 "M" DRAWING

THIRD ANGLE PROJECTION



SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (0) $\pm .030$

TWO PLACES (00) $\pm .015$

THREE PLACES (1.000) $\pm .005$

WEIGHT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

PAGE 2 OF 10

A-LSW SERIES
CHART 1

MICRO SWITCH
a Honeywell Division

FFD MEG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING

ISSUE	12	M LSA-LSW SERIES CHART 1 PAGE 2 OF 10	CATALOG LISTING	PSR	10JUL07	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES

[illegible]

RASTER

DRAWN

MAM	15
-----	----

TOP ROTARY

SINGLE POLE

DOUBLE POLE



TYPE LSB1 and LSB3

TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2" - 14 NPT
CONDUIT HOLE

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

10 AMP CONT.	A.C. VOLTAGE	AMPS AT 35 POWER FACTOR					
		SINGL POLE		DOUBLE POLE		BREAK	
		MAKE	BREAK	MAKE	BREAK	MAKE	BREAK
	120	60	6	30	3		
	240	30	3	15	1.5		
	480	15	1.5	7.5	75		
	600	12	1.2	6	6		

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT

VOLTAGE	
5 AC OR DC MIN	01 AMP MIN
600 AC	720 VA
240 DC	30 WATT

**DIRECT ACTING (ALSO RATED AT A. C. 10
AMP CONT.)**


D. C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

**WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)**


DOUBLE POLE




SINGLE POLE

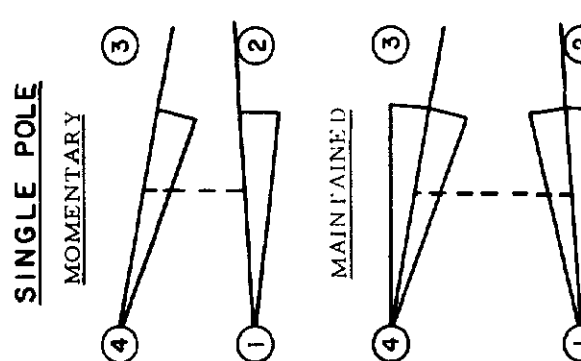

SINGLE POLE

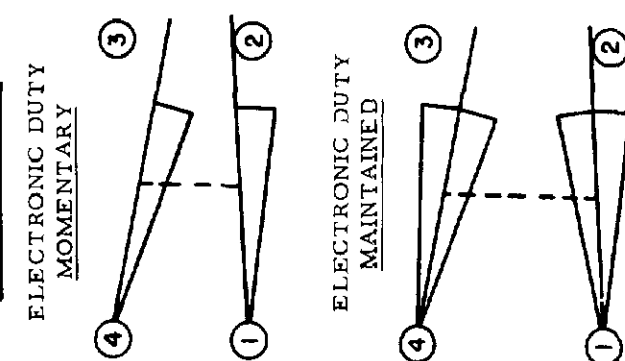


ELECTRONIC DUTY

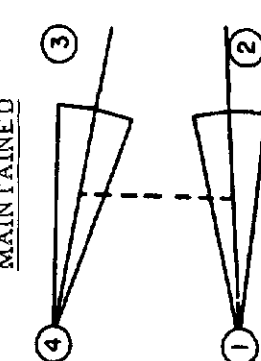

DIRECT ACTING



SINGLE POLE

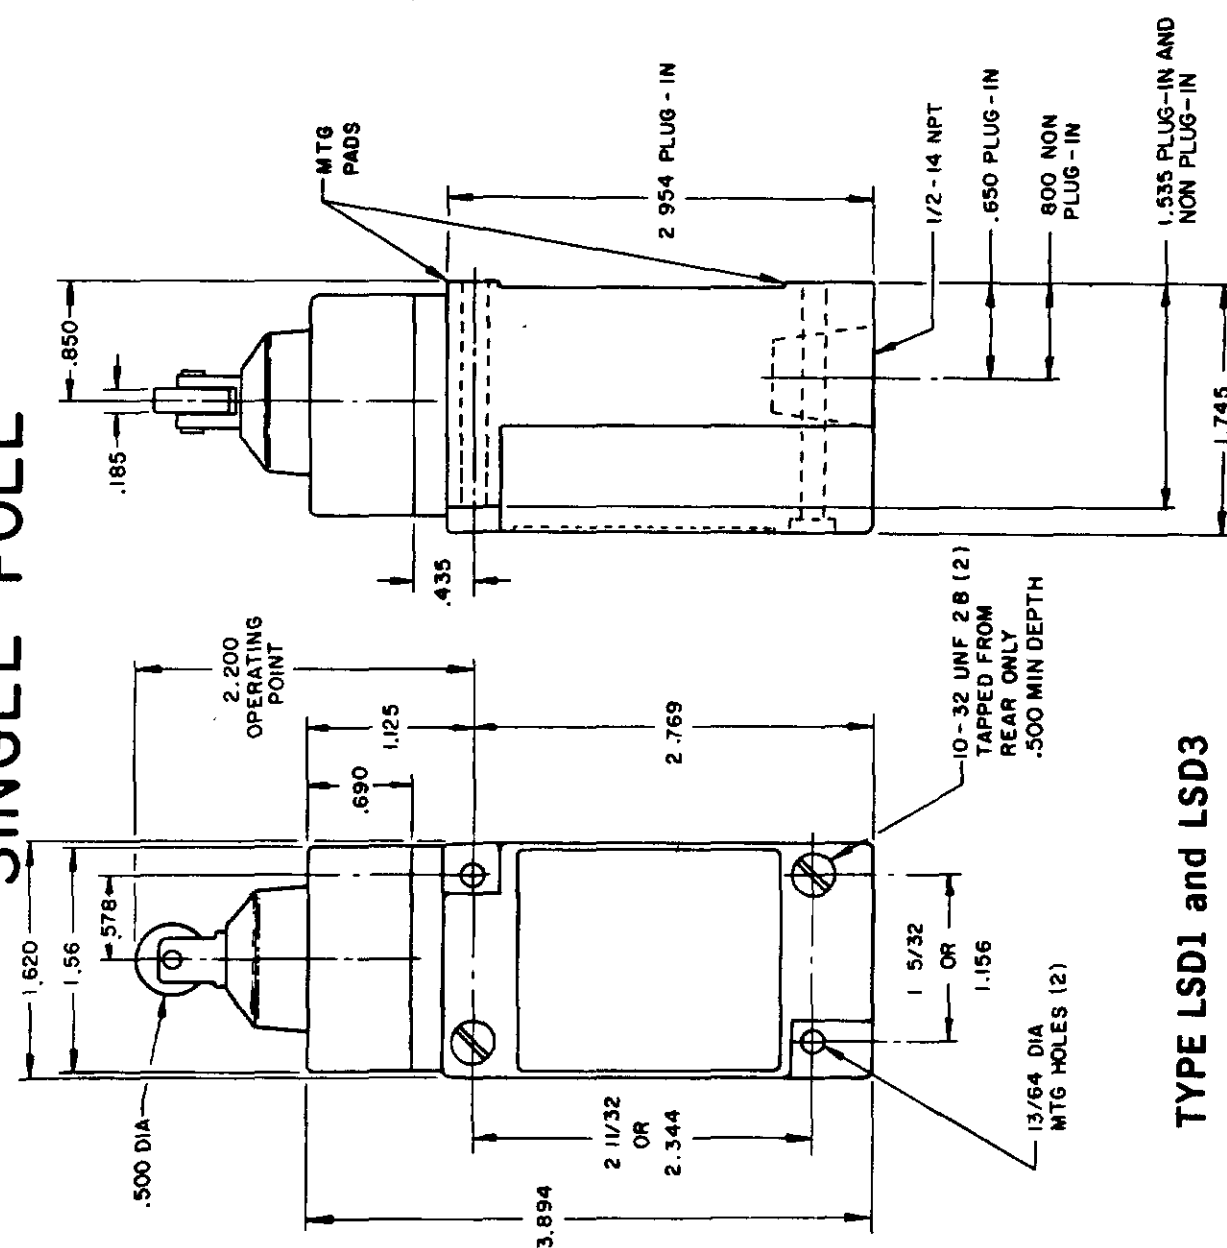


TYPE LSD1 and LSD3

DOUBLE POLE




TYPE LSD2 and LSD4


*(LSD6 and LSD7 have 1/2 - 14 NPT CON

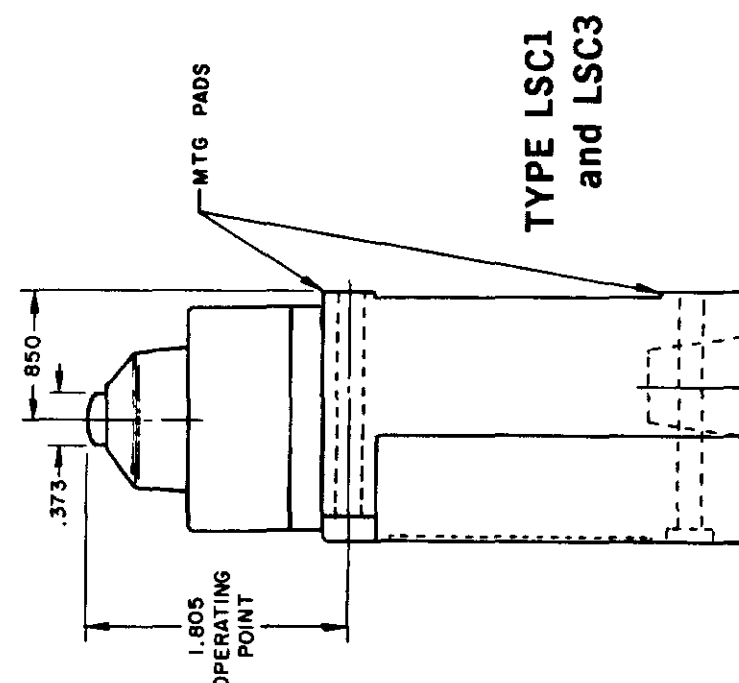

TYPE LSC1 and LSC3

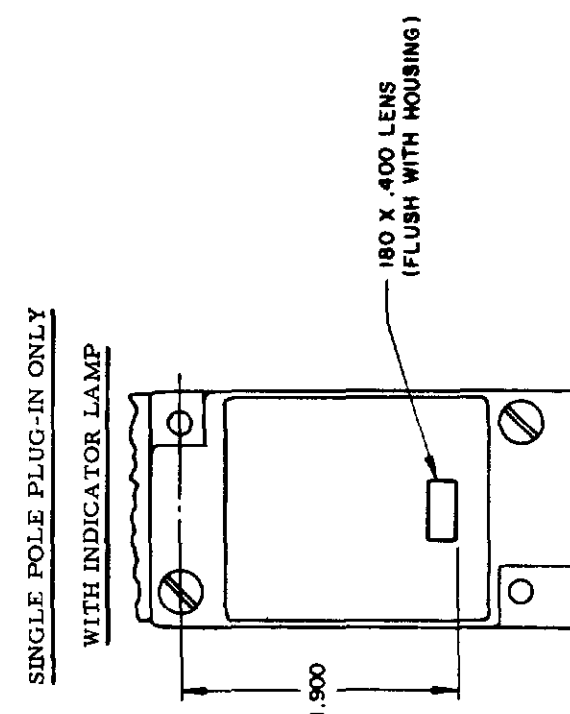


**TYPE LSC2
and LSC4**

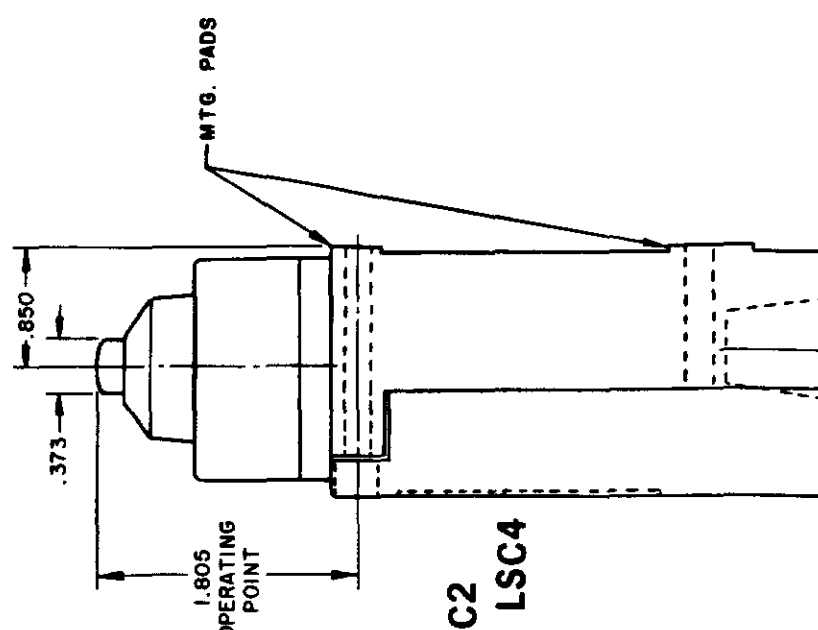


**120 LAMP VOLTAGE .
TYPE LSC5, LSD5 or LSV5**


**240 LAMP VOLTAGE .
TYPE LSC8, LSD8 or LSV8**

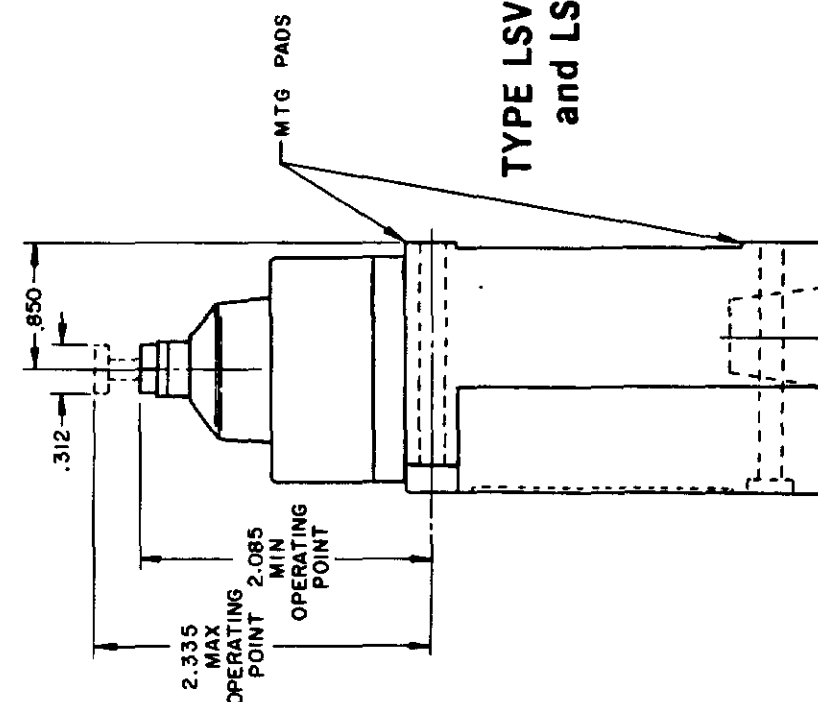

**TYPE LSV1
and LSV3**

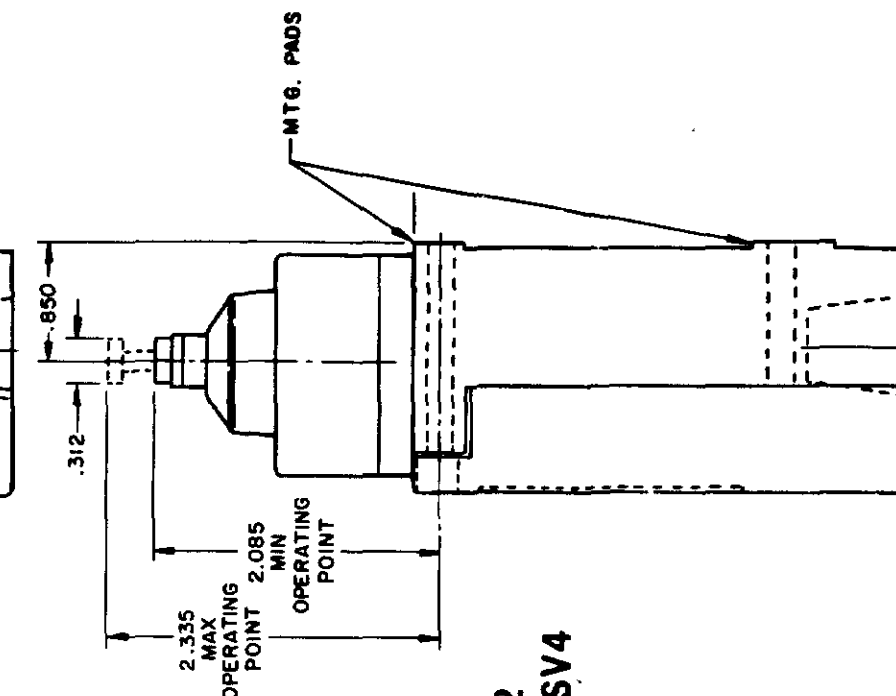

**TYPE LSV2
and LSV4**

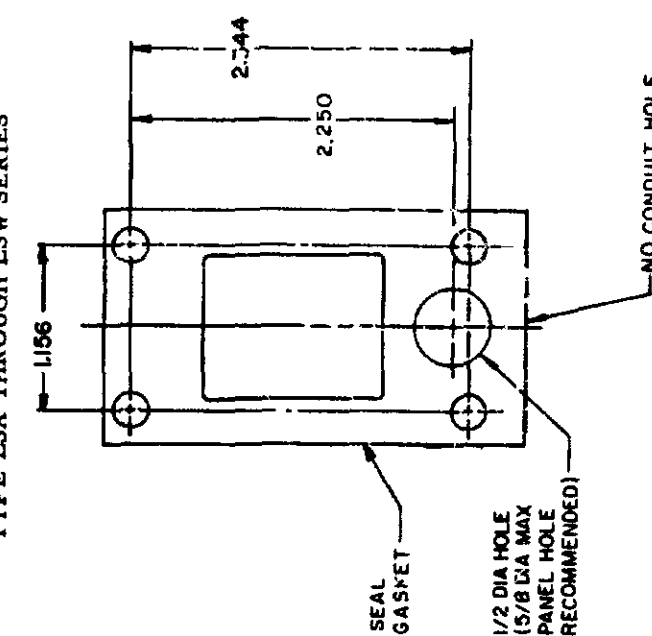

PAGE 4 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING



LSA-LSW SERIES

CHART 1

SCALE NONE


~~NO-MOL-SCALE-PRINT~~

SINGLE POLE DOUBLE POLE

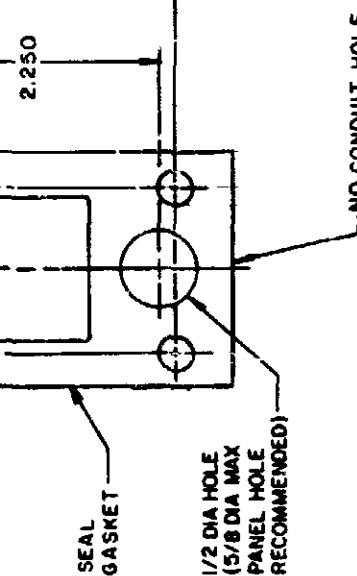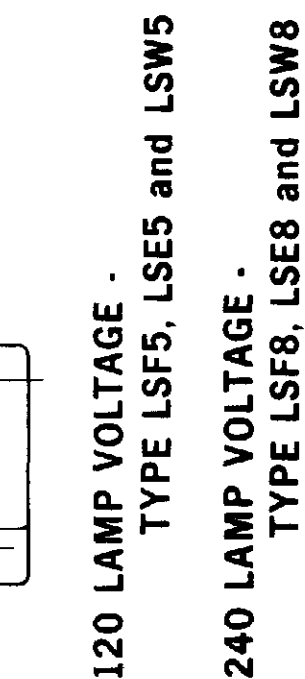

SCALE NONE

DO NOT SCALE PRINT

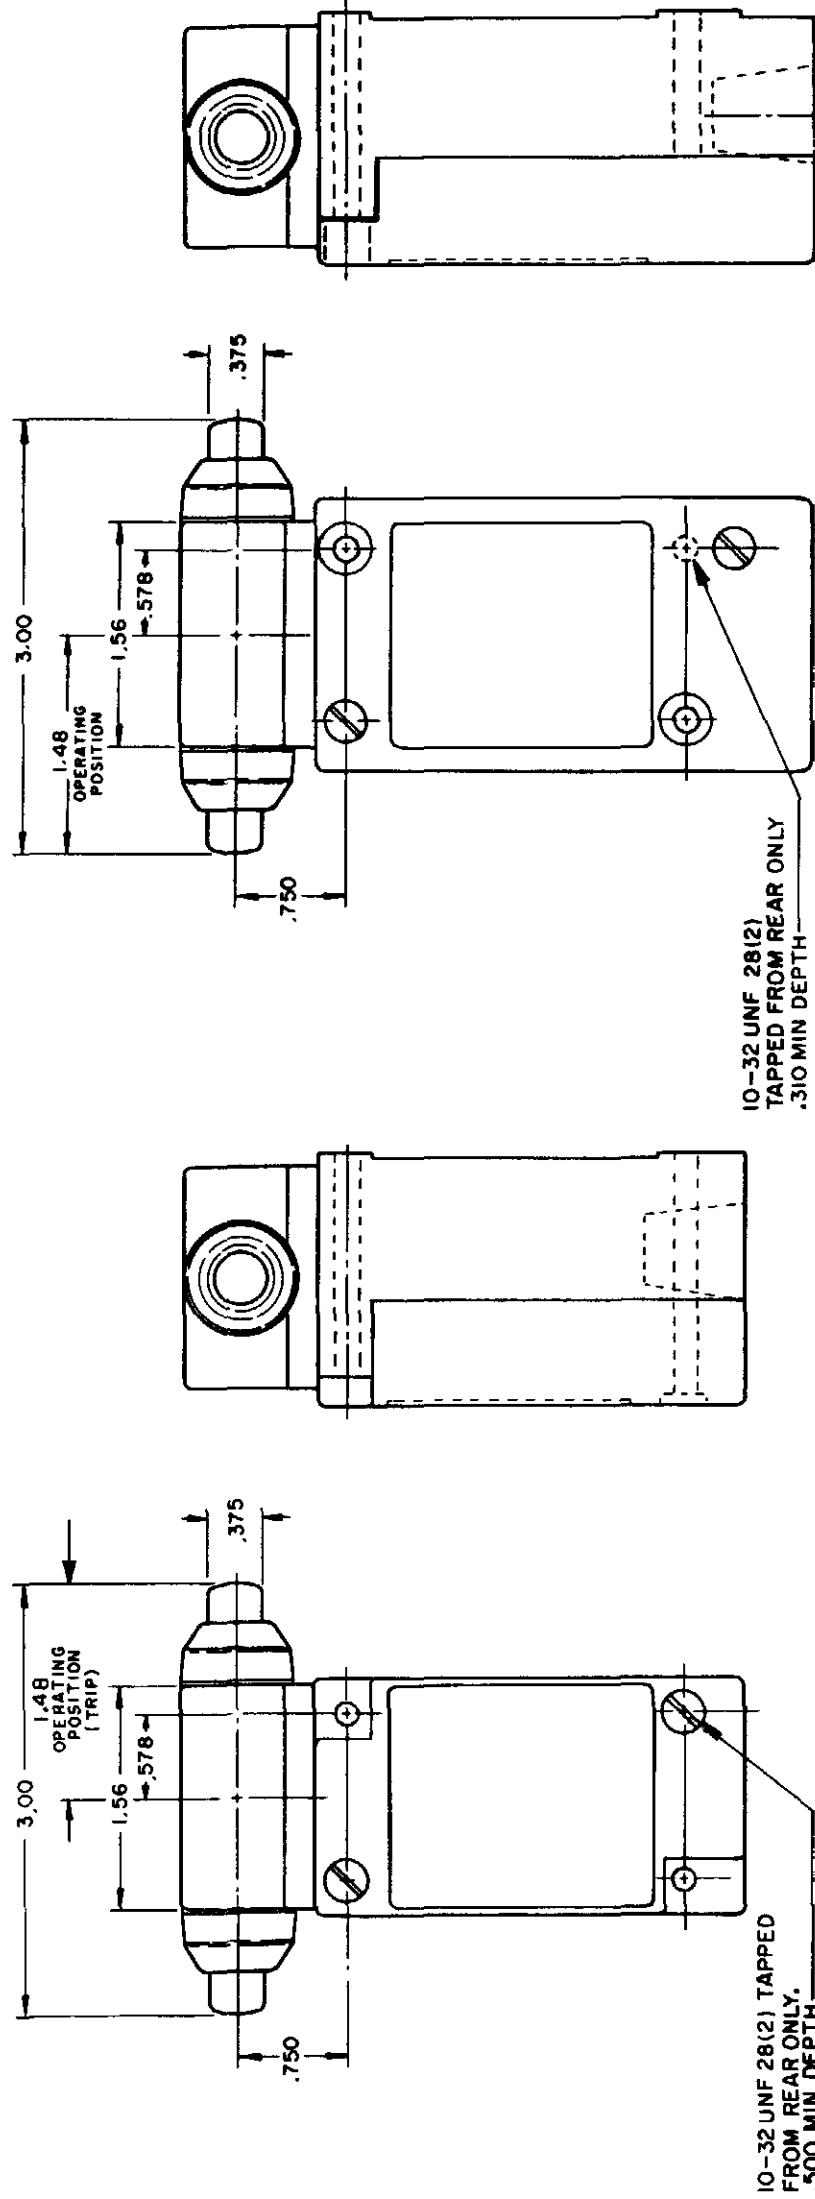

TYPE LSG1 and LSG3

TYPE LSG2 and LSG4

INITIAL POSITION —
(FREE POSITION) } PRETRAVEL
OPERATING POINT } DIFFERENTIAL TRAVEL
FULL TRAVEL — } OVERTRAVEL


TOP PLUNGER TYPES			
OPERATING POINT GIVEN IN RELATION TO TOP MOUNTING HOLE		SEQUENCE BASIC	
CHARACTERISTICS	LSC PLUNGER	LSD ROLLER PLUNGER	LSV ADJ PLUNGER
PRETRAVEL (MAX)	.070	.070	.070
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE DOUBLE POLE .015	SINGLE POLE DOUBLE POLE .020	SINGLE POLE DOUBLE POLE .015
OVERTRAVEL (MIN)	.190	.190	.190
OPERATING FORCE (MAX)	4 LBS	4 LBS	4 LBS
OPERATING POINT	1.805 ± .030	2.200 ± .040	2.085 MIN 2.335 MAX
FULL OVERTRAVEL FORCE (MAX)	7 LBS	7 LBS	7 LBS
OPERATING POINT GIVEN IN RELATION TO CENTER OF HEAD			
CHARACTERISTICS	LSE PLUNGER	LSF ROLLER PLUNGER	LSW ADJ PLUNGER
PRETRAVEL (MAX)	.100	.100	.170
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.090
OVERTRAVEL (MIN)	.190	.190	.170
OPERATING FORCE (MAX)	6 LBS	6 LBS	10 LBS
OPERATING POINT	1.300 ± .030	1.735 ± .040	1.480 ± .030
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	10 LBS

SIDE PLUNGER TYPES			
OPERATING POINT GIVEN IN RELATION TO CENTER OF HEAD		SEQUENCE BASIC	
CHARACTERISTICS	LSE PLUNGER	LSF ROLLER PLUNGER	LSW ADJ PLUNGER
PRETRAVEL (MAX)	.100	.100	.170
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.090
OVERTRAVEL (MIN)	.190	.190	.170
OPERATING FORCE (MAX)	6 LBS	6 LBS	10 LBS
OPERATING POINT	1.300 ± .030	1.735 ± .040	1.480 ± .030
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	10 LBS

WOBBLE STICK

SINGLE POLE

DOUBLE POLE

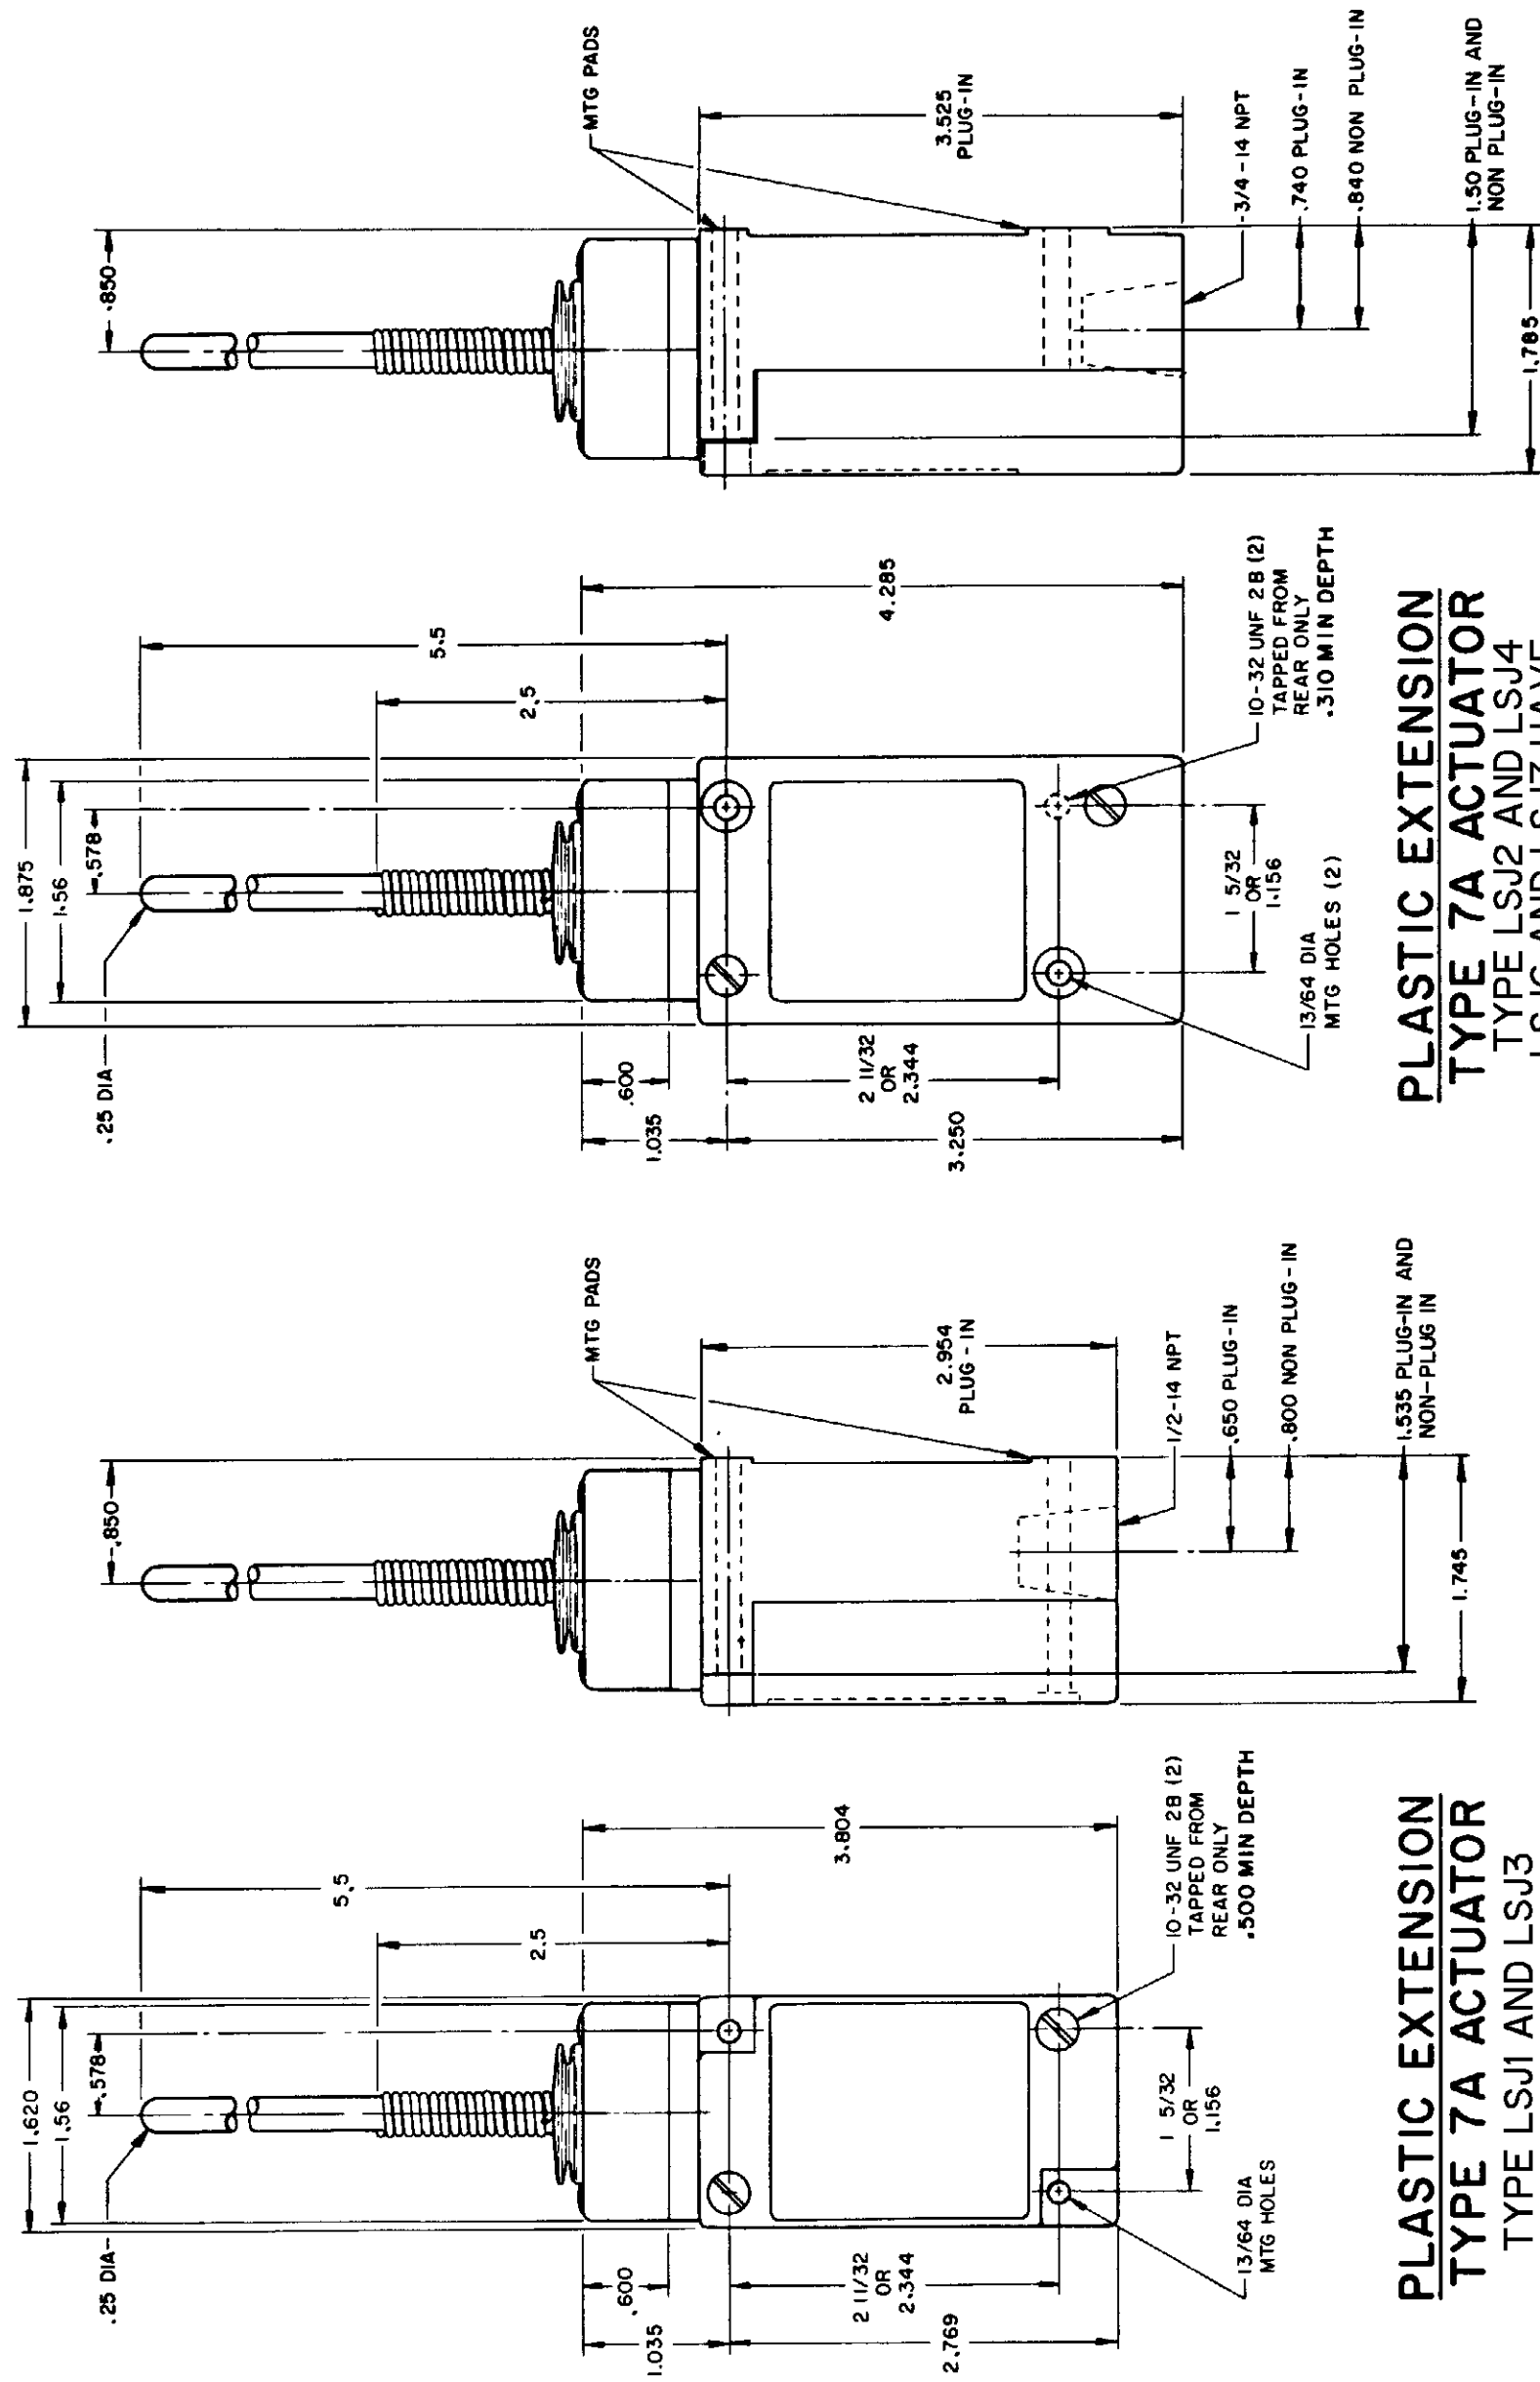

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ1 AND LSJ3

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE

MICRO SWITCH
Honeywell Division
FED MFG CODE 91929

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

SWITCH - ENCLOSED


LSA-LSW SERIES
CHART 1

CATALOG LISTING


PAGE 7 OF 10

SCALE NONE
DO NOT SCALE PRINT


REPLACEMENT ACTUATOR
LSZ-4009

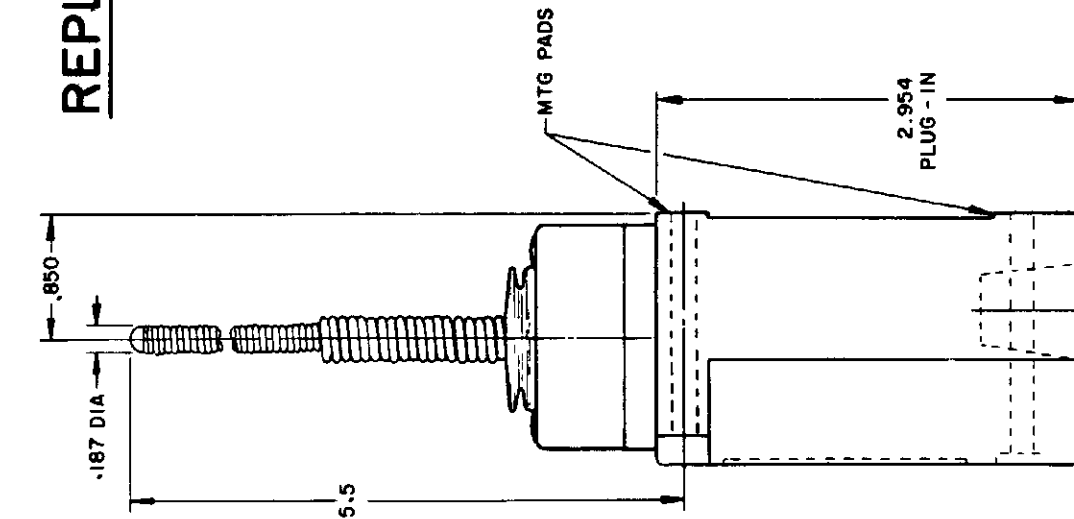


CABLE EXTENSION
TYPE 7N ACTUATOR

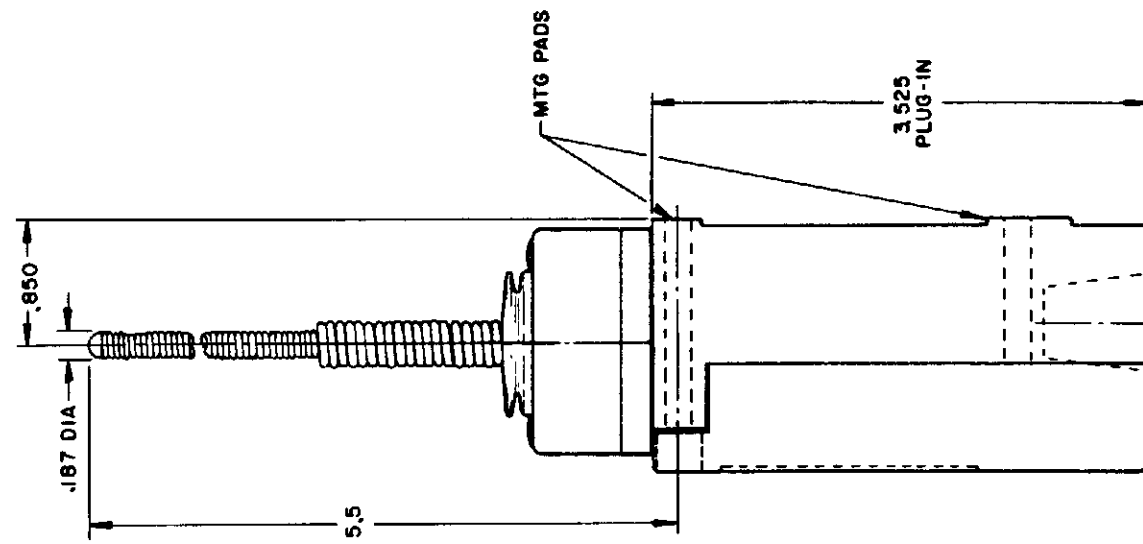


CABLE EXTENSION
TYPE 7 N ACTUATOR

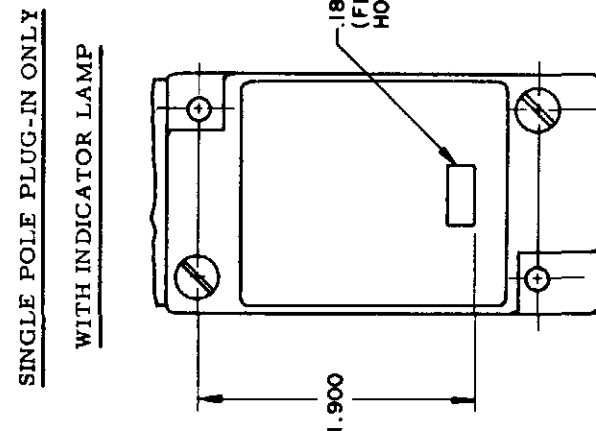

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8
24 LED VOLTAGE TYPE LSJ9

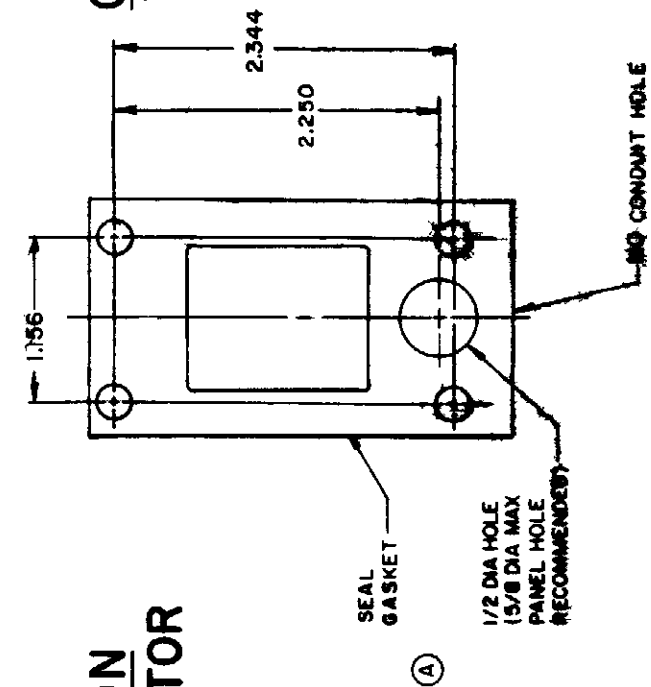

REPLACEMENT ACTUATOR
LSZ-40II

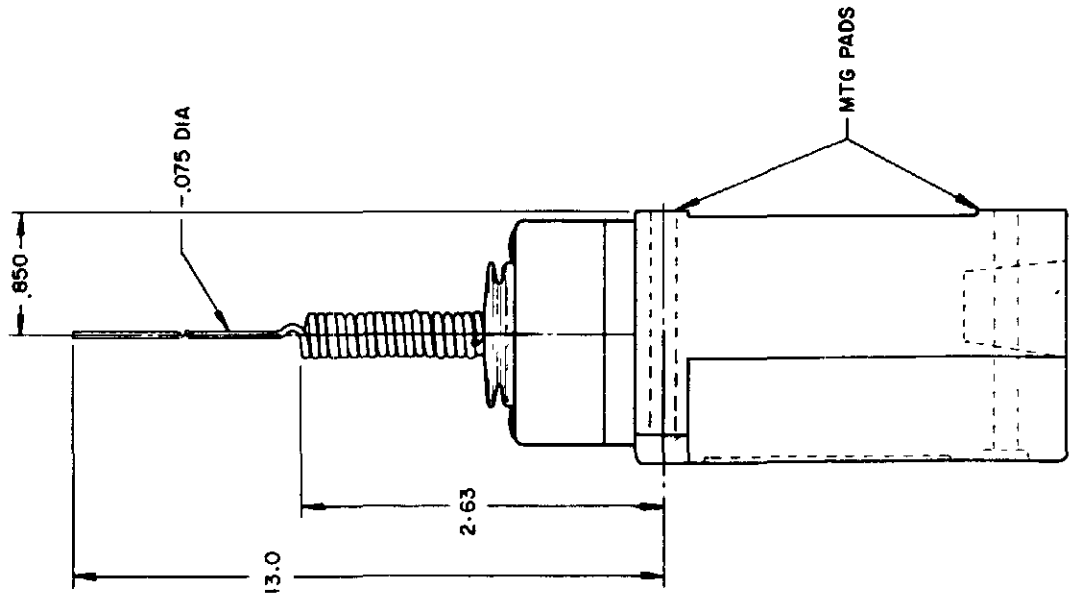


WIRE EXTENSION TYPE 7M ACTUATOR


TYPE LSJ1 and LSJ3

REPLACEMENT ACTUATOR - LSZ 4010

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

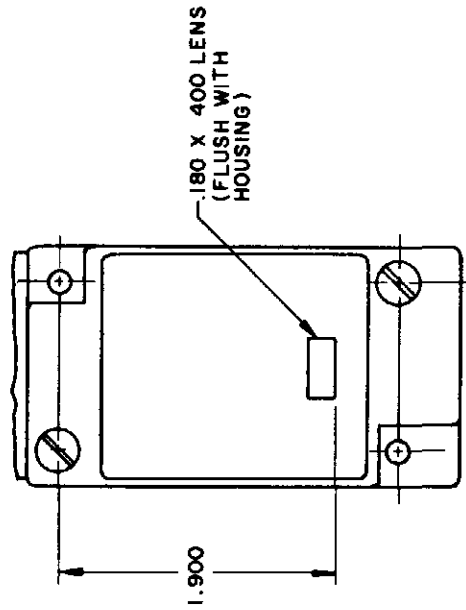

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8

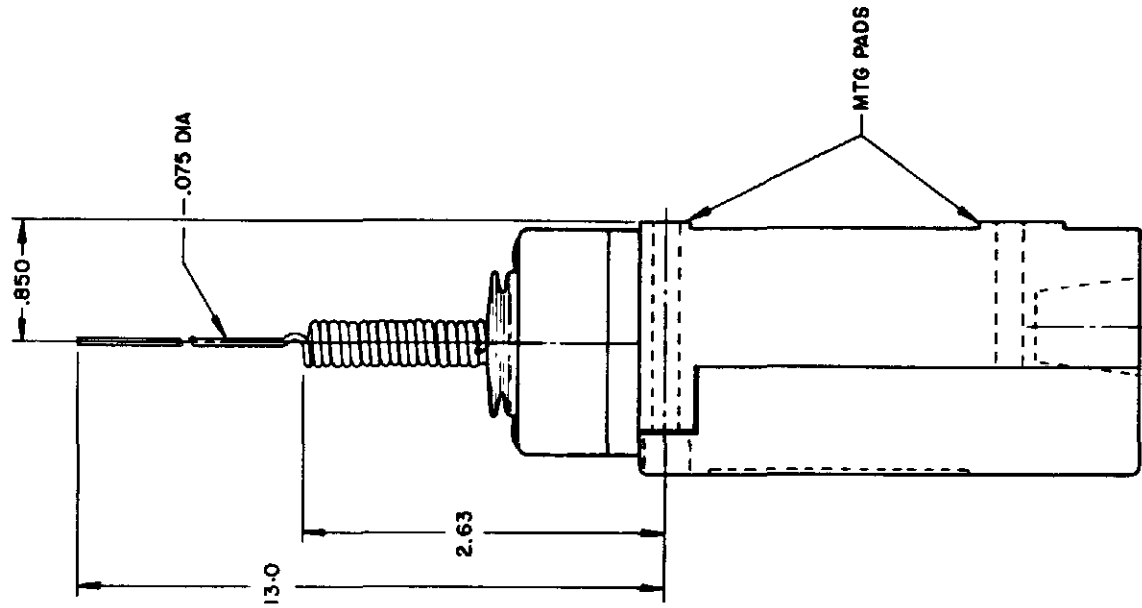


WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ2 and LSJ4

LSJ6 and LSJ7 have 1/2 - 14 NPT CONDUIT HOLE


CAT WHISKER

SINGLE POLE

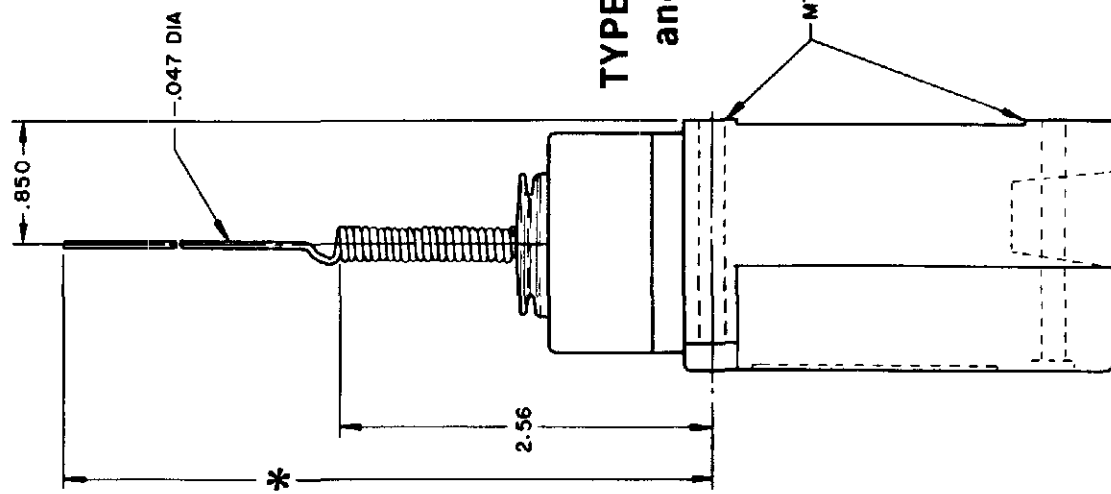


TYPE LSK1
and LSK3

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

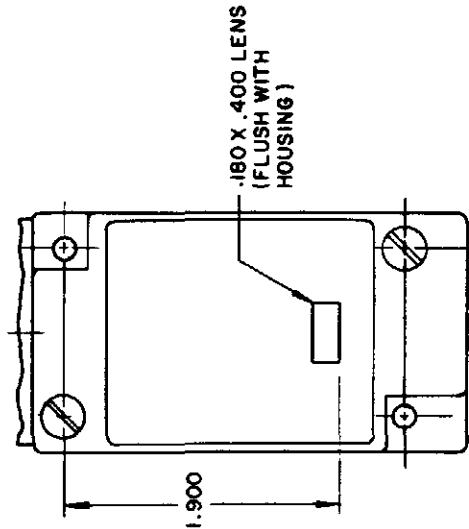

120 LAMP VOLTAGE
TYPE LSK5 - CAT WHISKER TYPE LSB5 - TOP ROTARY
240 LAMP VOLTAGE
TYPE LSK8 - CAT WHISKER TYPE LSB8 - TOP ROTARY

DOUBLE POLE

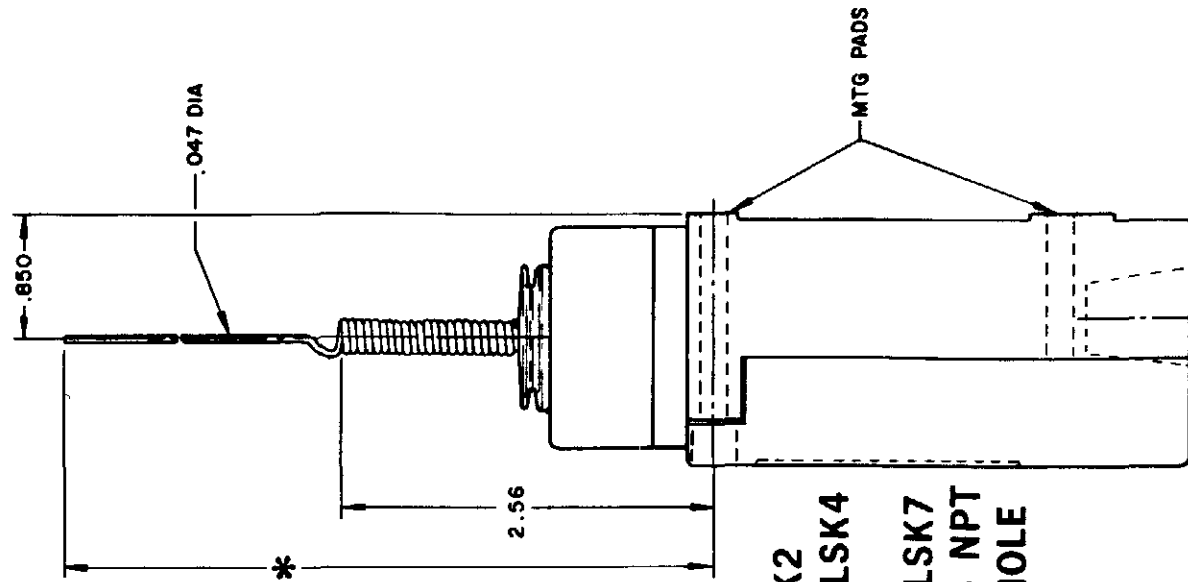

TYPE LSK2
and LSK4

LSK6 and LSK7
have 1/2 - 14 NPT
CONDUIT HOLE

* WIRE EXTENSION REPLACEMENT ACTUATOR

TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012

TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013

TYPE 8C COIL ACTUATOR 5.5 IN.-LSZ 4014
ACTUATOR 9.5 IN. - LSZ 4036

WIRE EXTENSION

* TYPE 8A ACTUATOR 5.5 IN.

TYPE 8B ACTUATOR 7.5 IN.

TYPE 8C ACTUATOR 5.5 IN.

TYPE 8D ROD ACTUATOR 5.5 IN.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

SCALE NONE

DO NOT SCALE PRINT

PRETRAVEL (APPROX) IN. RADIUS	CAT. WHISKER		WOBBLE STICK	
	5/16" COIL	7/16" WIRE	ROD	CABLE
2	2	4.5	1.0	1.5
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	7.0

REV	DATE	BY	CHKD	DESCRIPTION
L	0031956			BS
B	10JUL07			201004
C	201748			201748
D	202198			202198
E	204871			204871
F	206581			206581
G	206763			206763
H	207179			207179
J	207474			207474
K	0006871			0006871

ISSUE	12	PSR	10JUL07	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES
CATALOG LISTING	LSA-LSW SERIES CHART 1						
PAGE	9 OF 10						

MASTER


DRAWN

MAM 15 JUN 94

CONVERSION BASES


**SINGLE POLE
(SIDE ROTARY)
LSZ 4003**

**DOUBLE POLE
(SIDE ROTARY)
LSZ 4004**

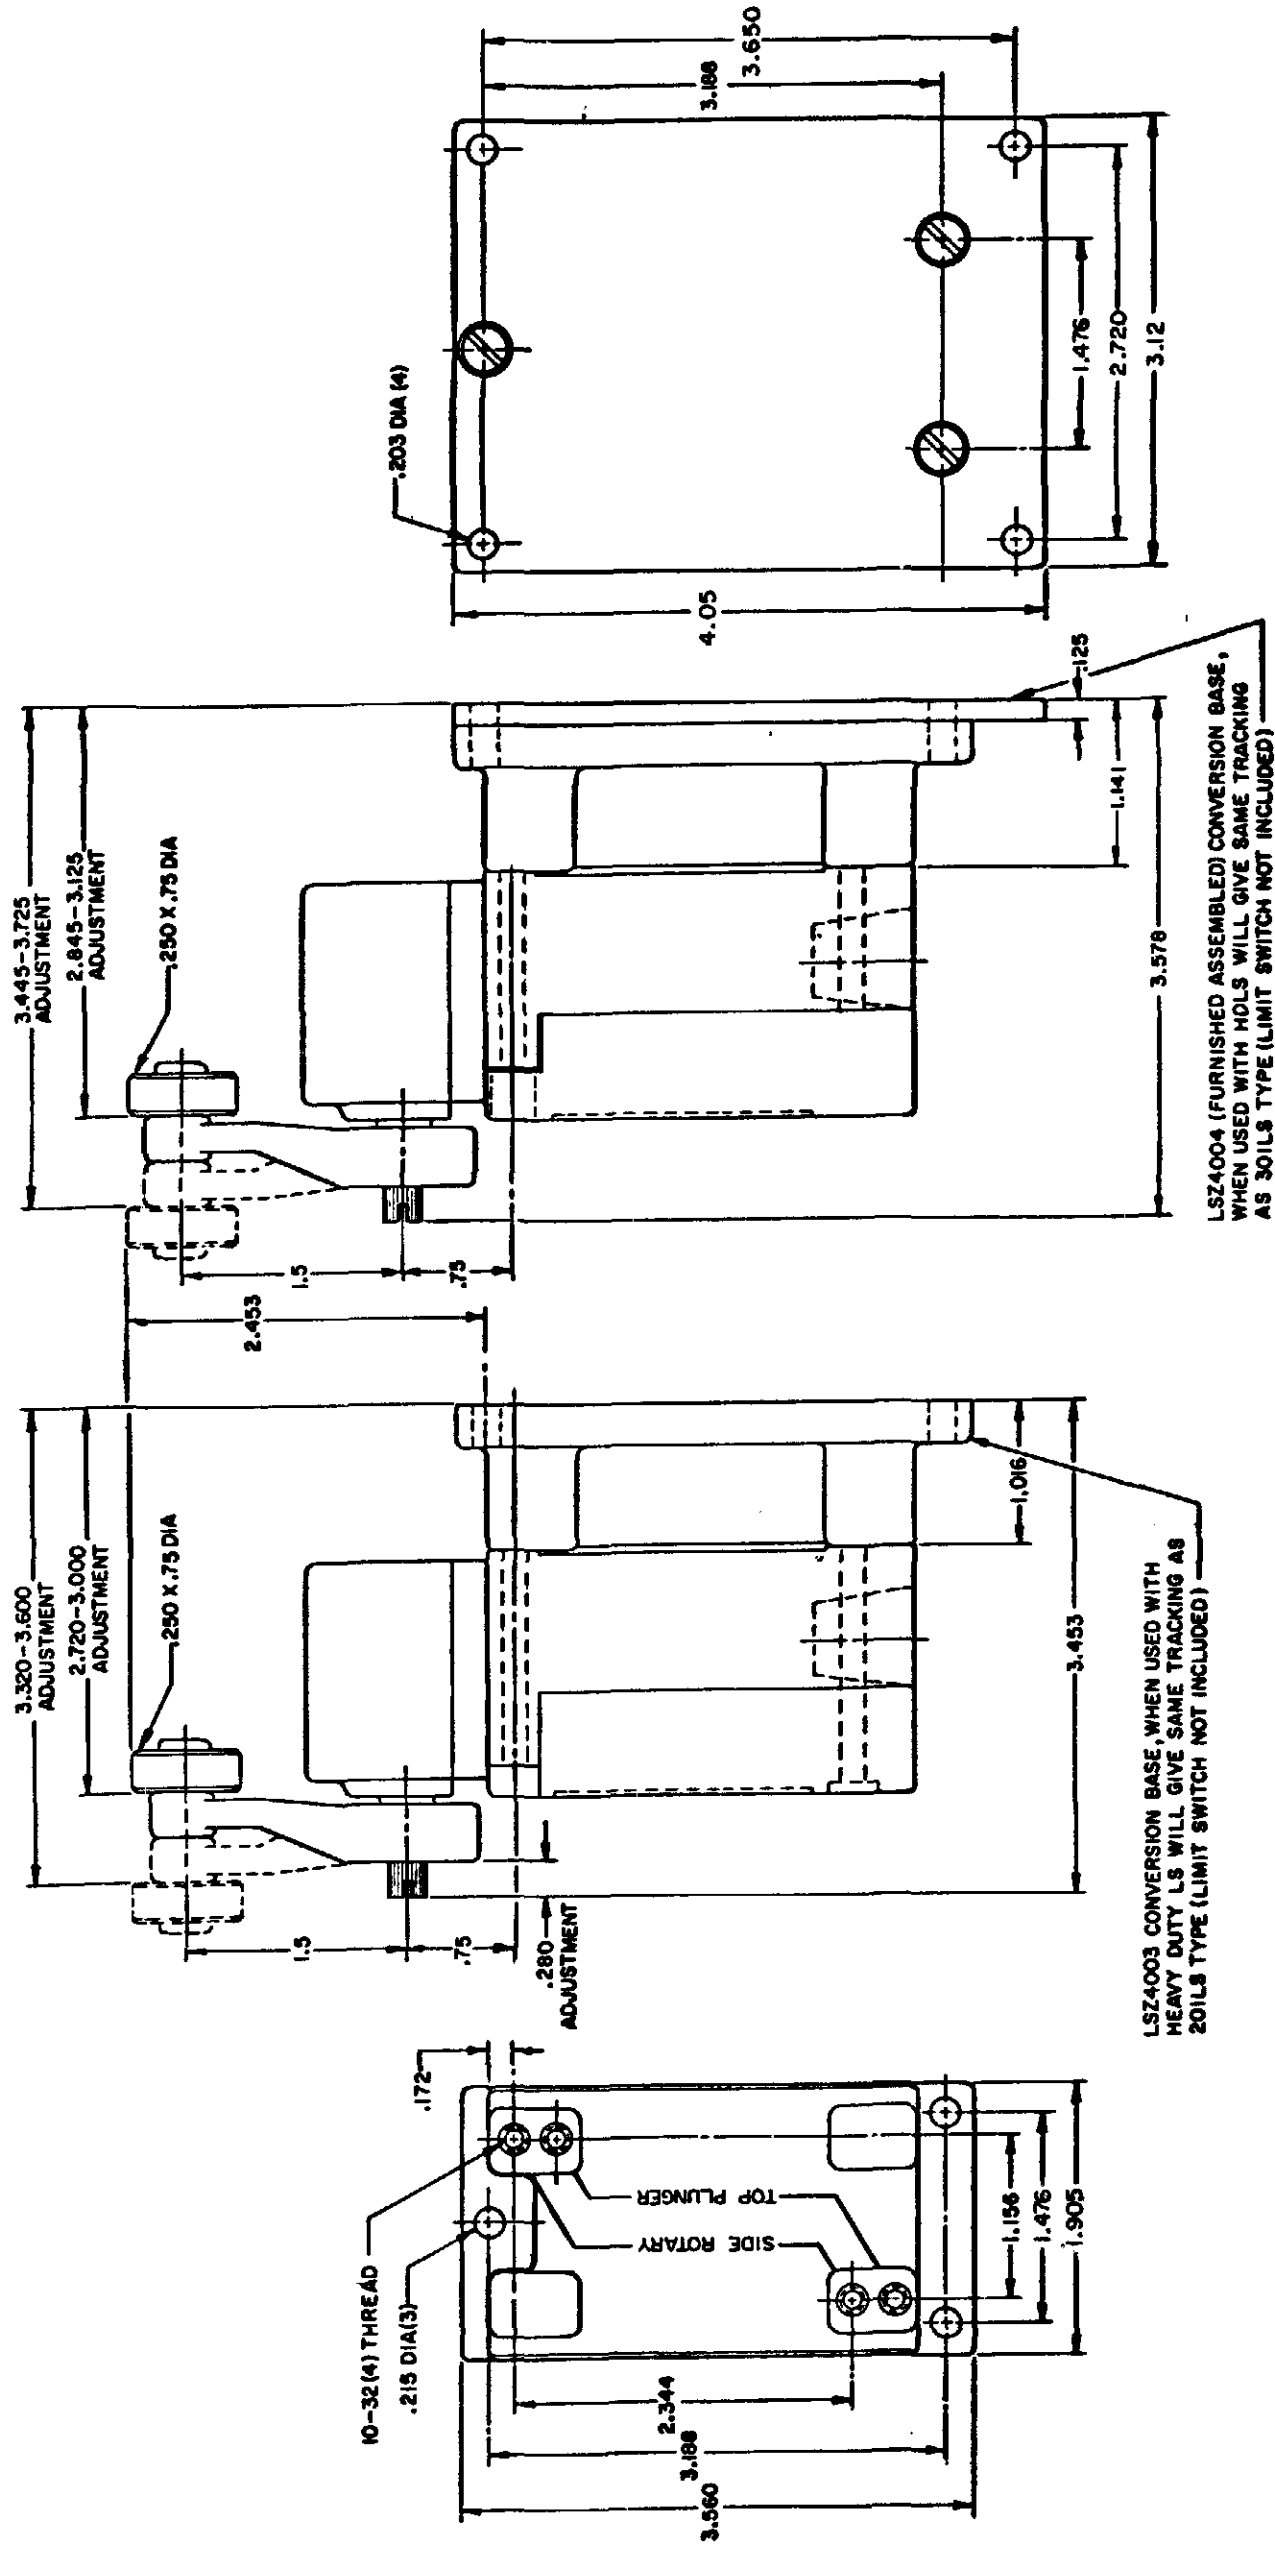

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

**SINGLE POLE
TOP PLUNGER
LSZ 4003**

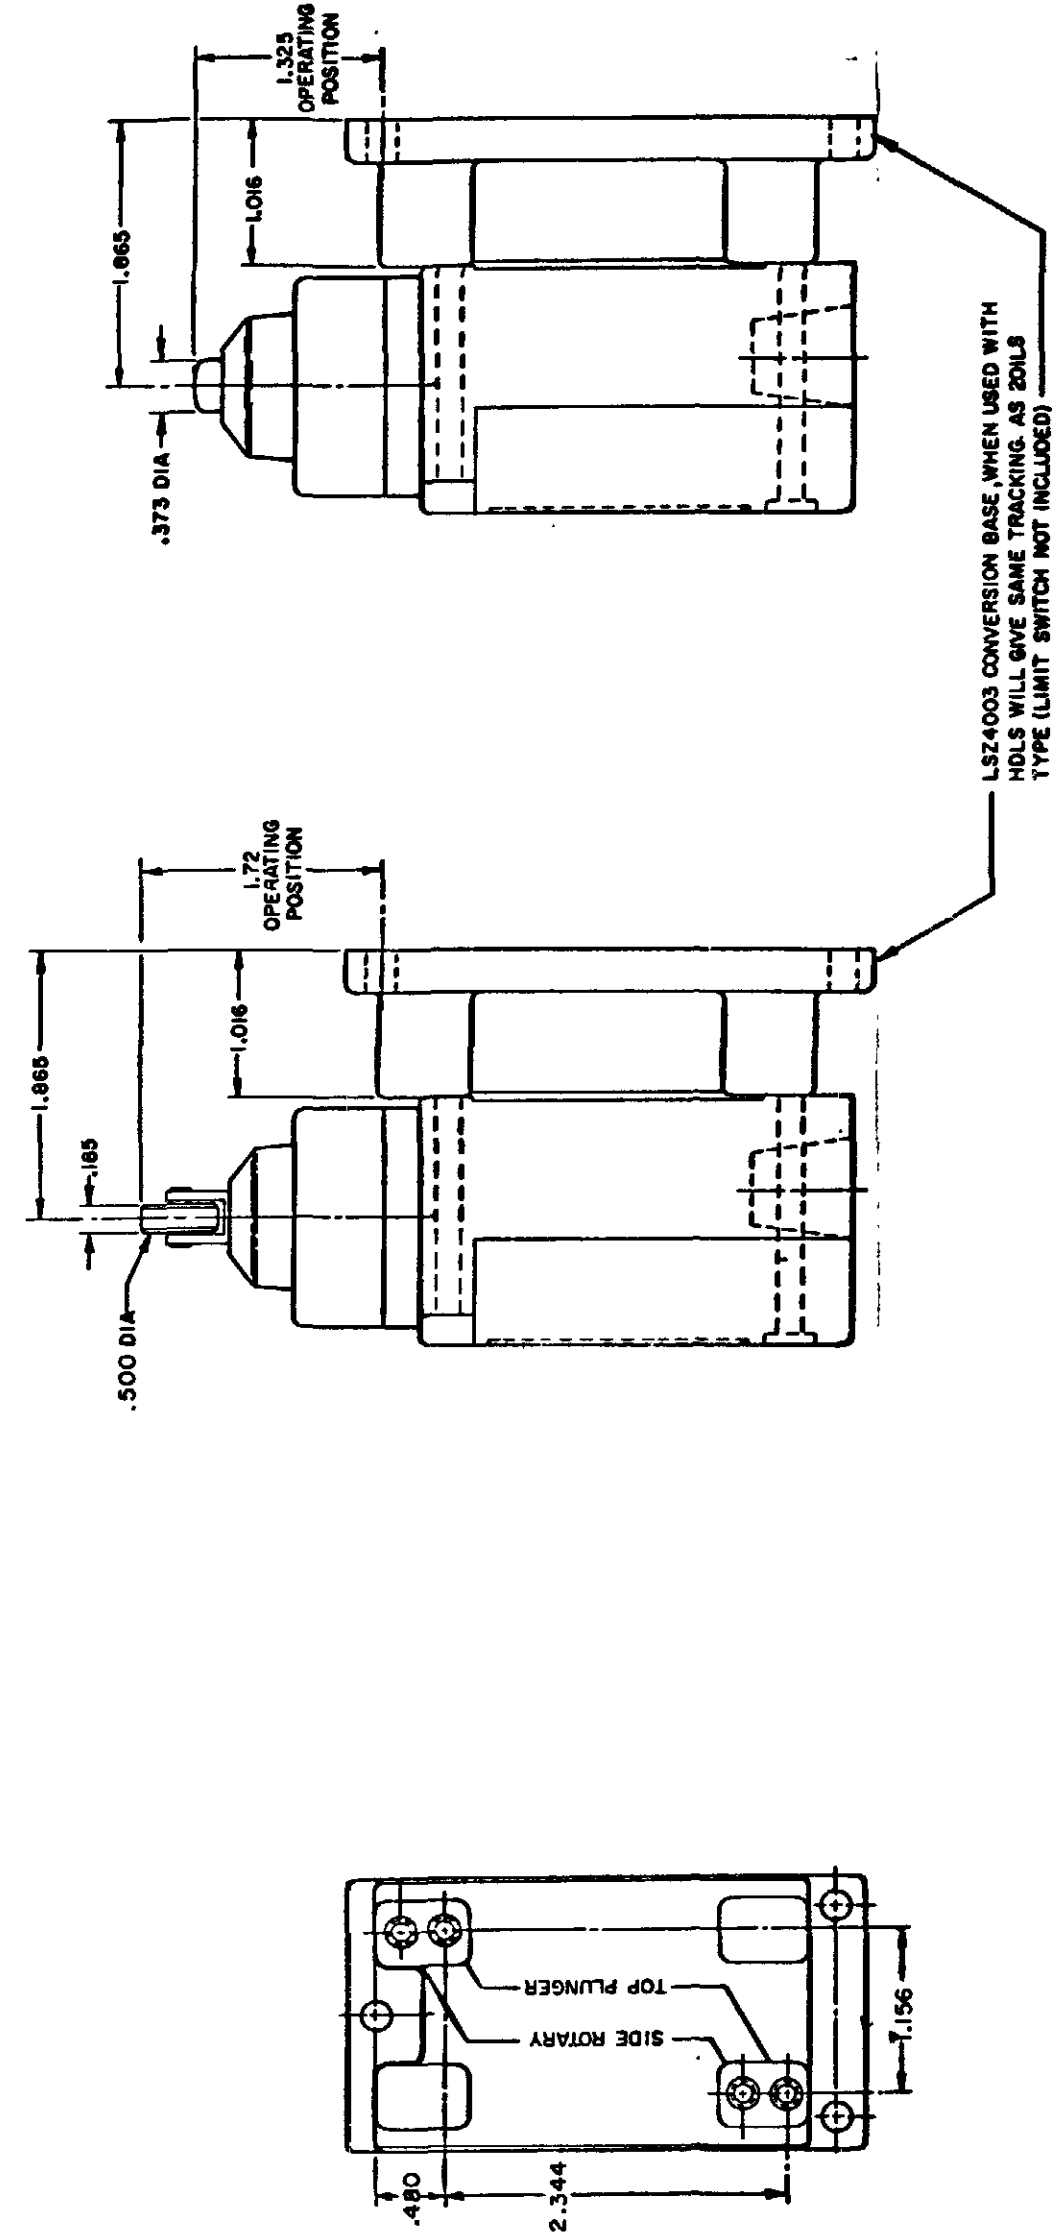

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMIT SWITCH

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91829

SWITCH - ENCLOSED

CATALOG LISTING
**LSA-LSW SERIES
CHART 1**

PAGE 9 OF 10

SCALE FULL
DO NOT SCALE PRINT

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F

SCALE



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331