



[illegible]

DOUBLE POLE

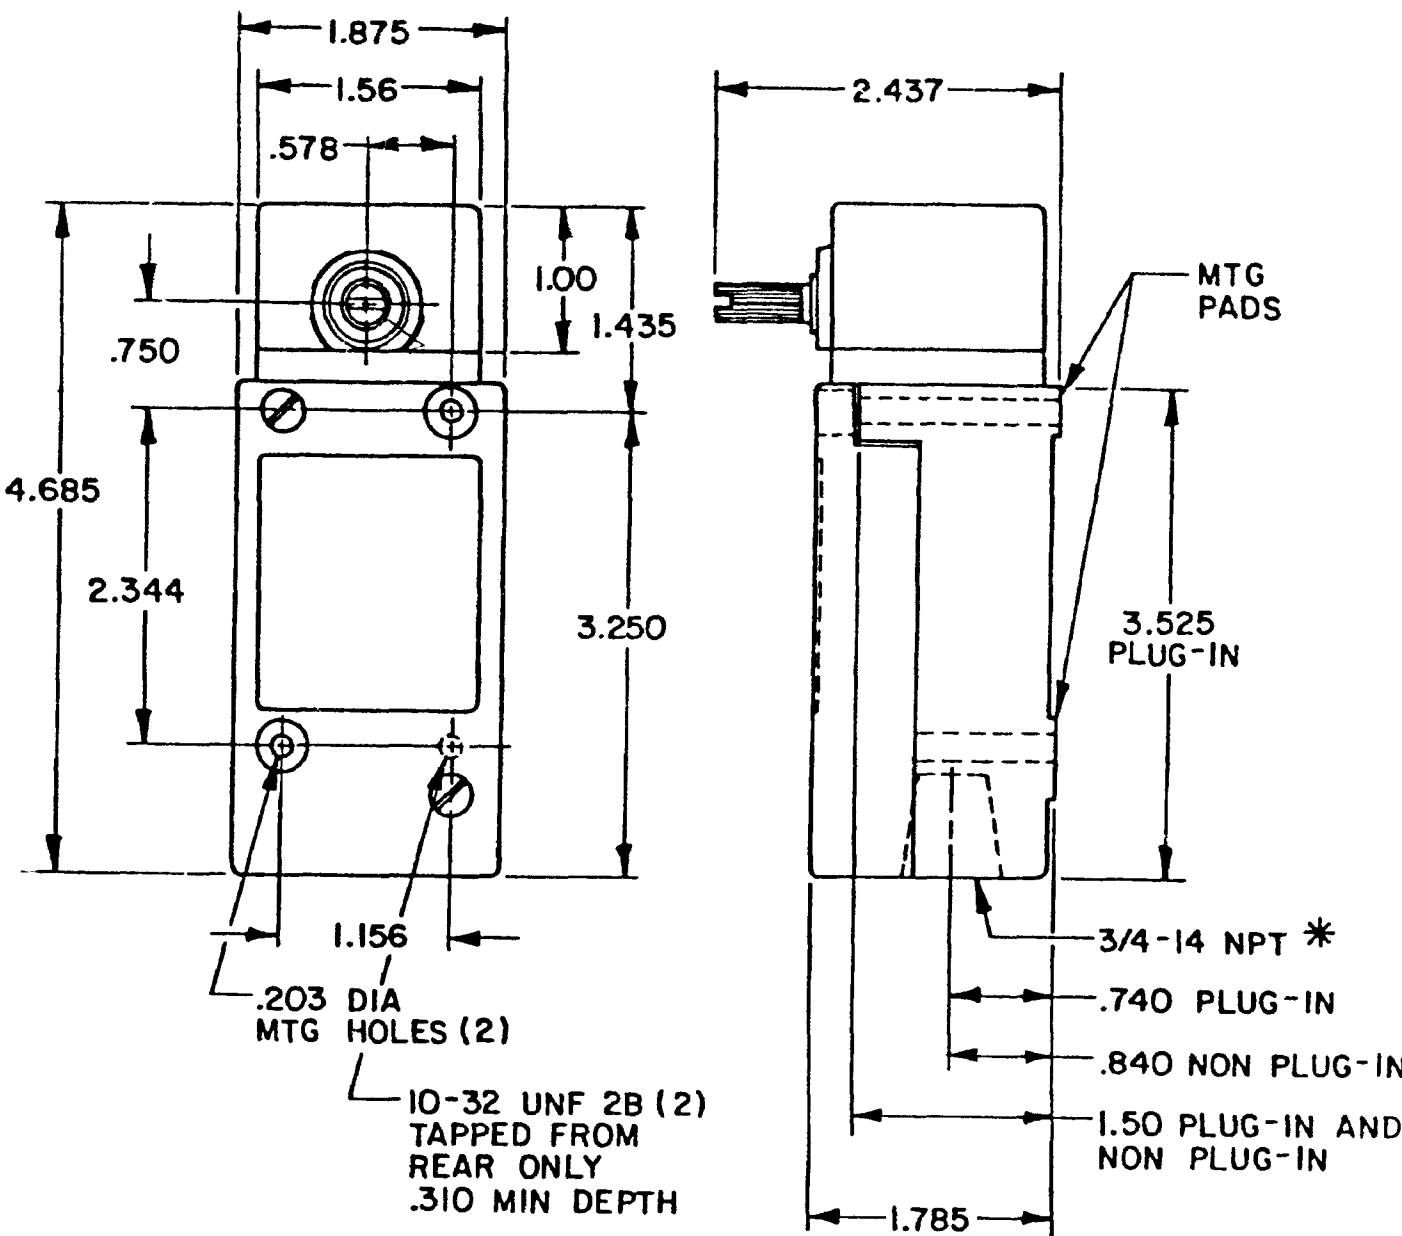


TYPE: LSA2, LSH2, LSM2, LSN2, LSP2, LSR2
LSA4, LSH4, LSM4, LSN4, LSP4, LSR4

*(LSA6, LSH6, LSM6, LSN6, LSP6, LSR6
LSA7, LSH7, LSM7, LSN7, LSP7, LSR7 HAVE
1/2-14 NPT CONDUIT HOLE)

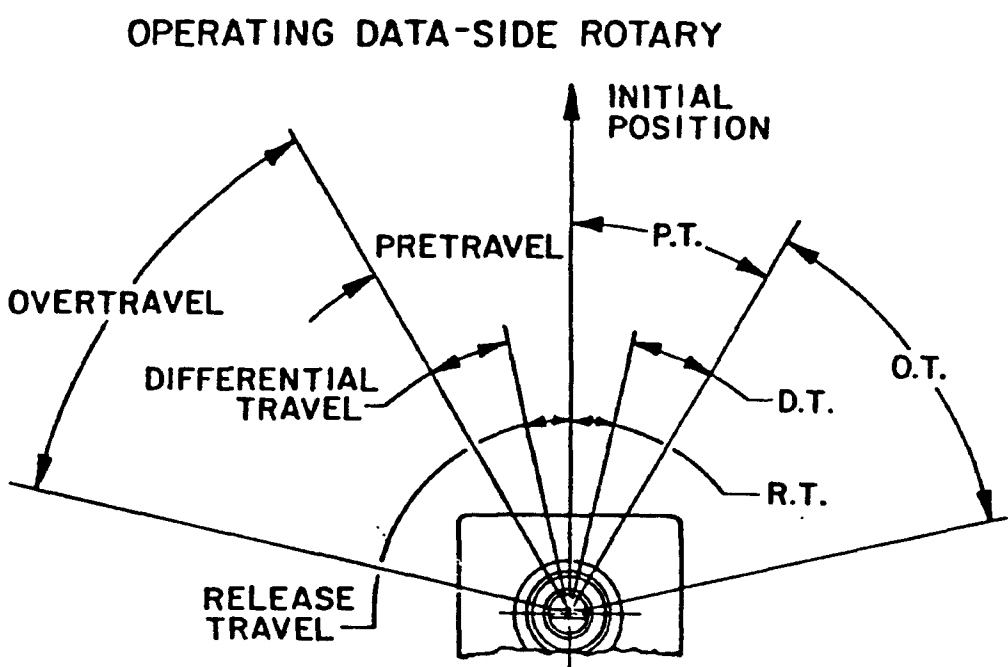

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSA THROUGH LSW SERIES

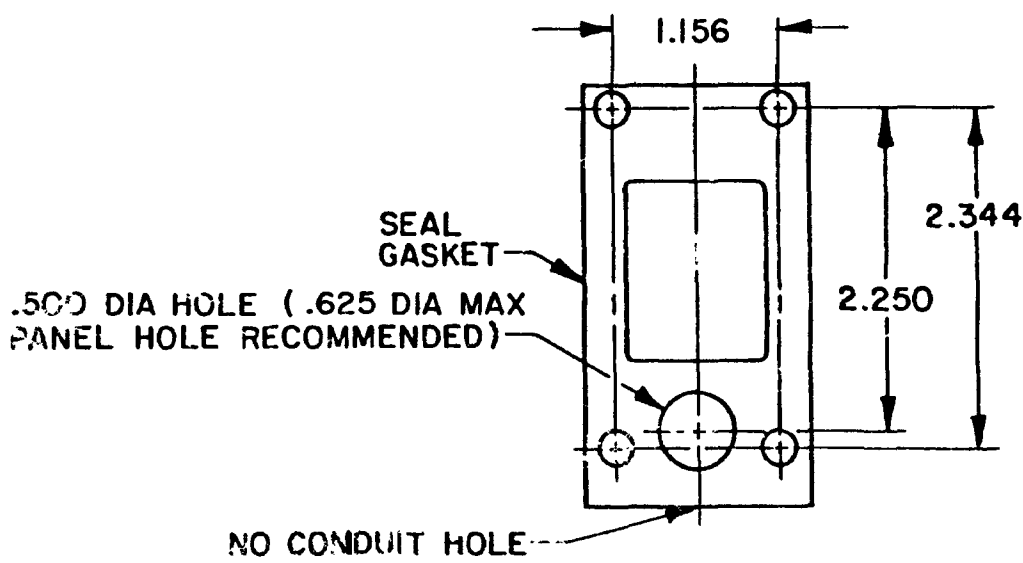

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
MICRO SWITCH a Honeywell Division FED. MFG. CODE 91929	SWITCH - ENCLOSED	CATALOG LISTING
		LSA-LSW SERIES CHART 1

THIRD ANGLE PROJECTION

SCALE NONE


DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE


ONE PLACE	(.0)	$\pm .030$
TWO PLACES	(.00)	$\pm .015$
THREE PLACES	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT


SIDE ROTARY CAM TRACKING

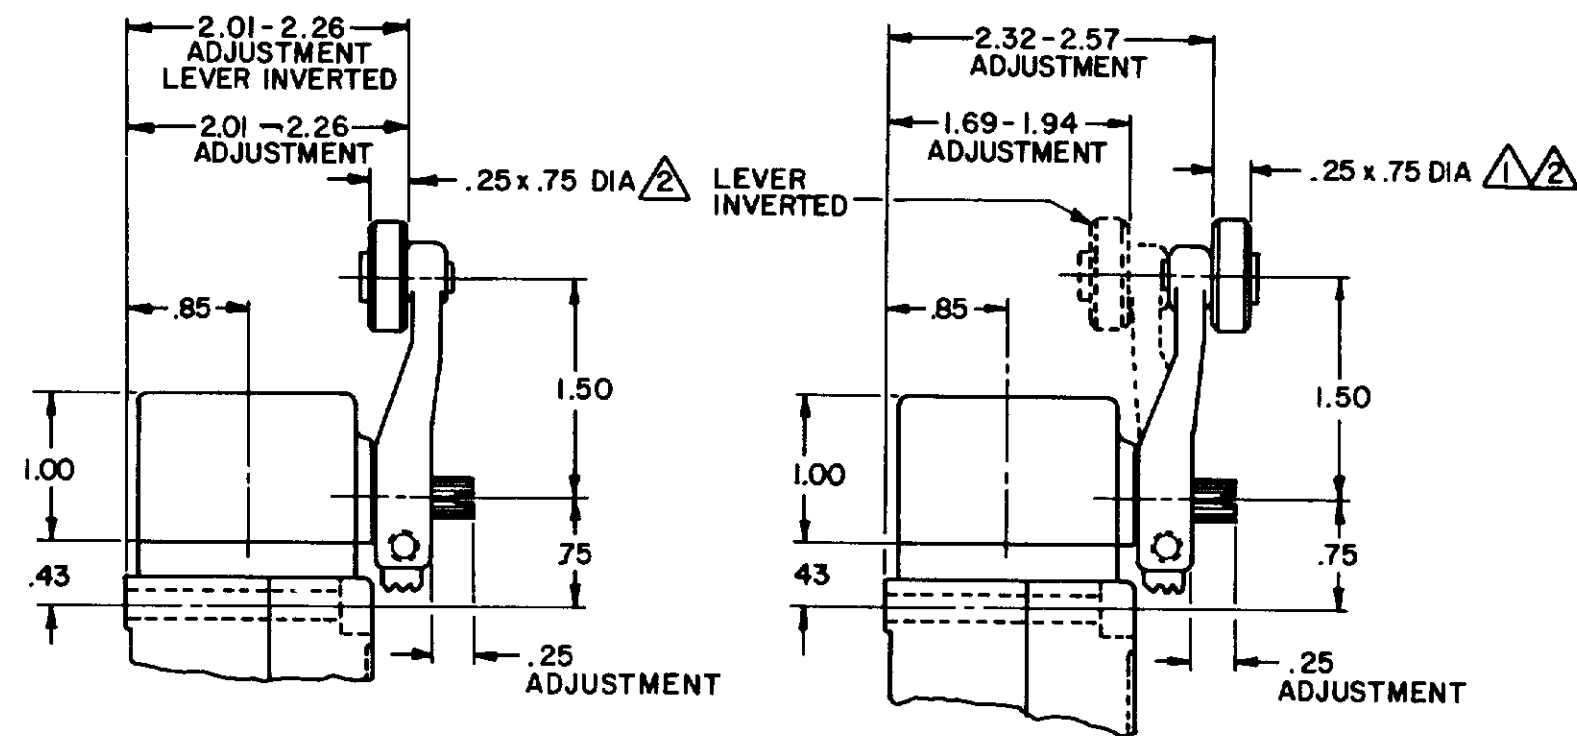


LSZ51 TYPE LEVERS

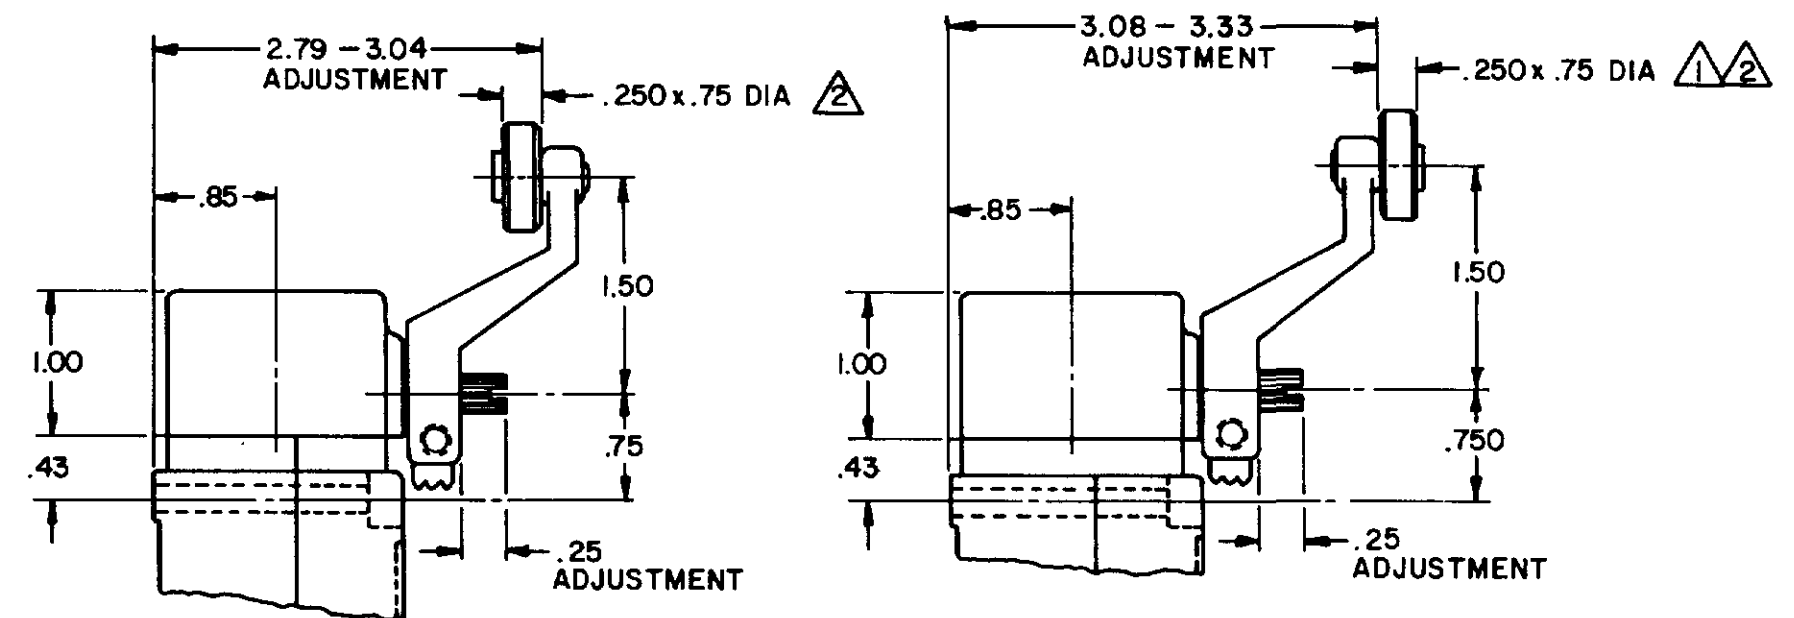


LSZ55 TYPE LEVERS

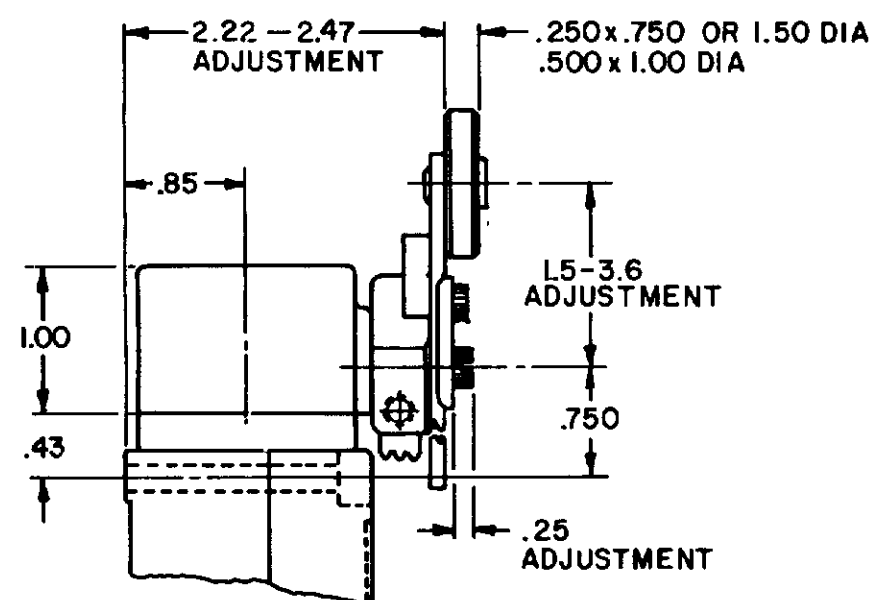


LSZ52 TYPE LEVER

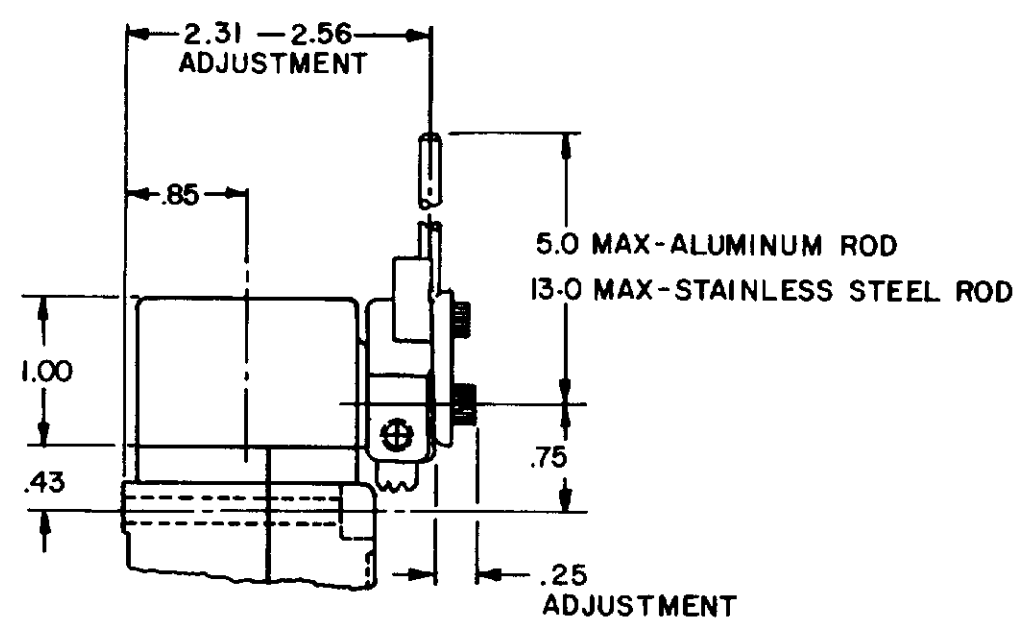

LSZ54 TYPE LEVER

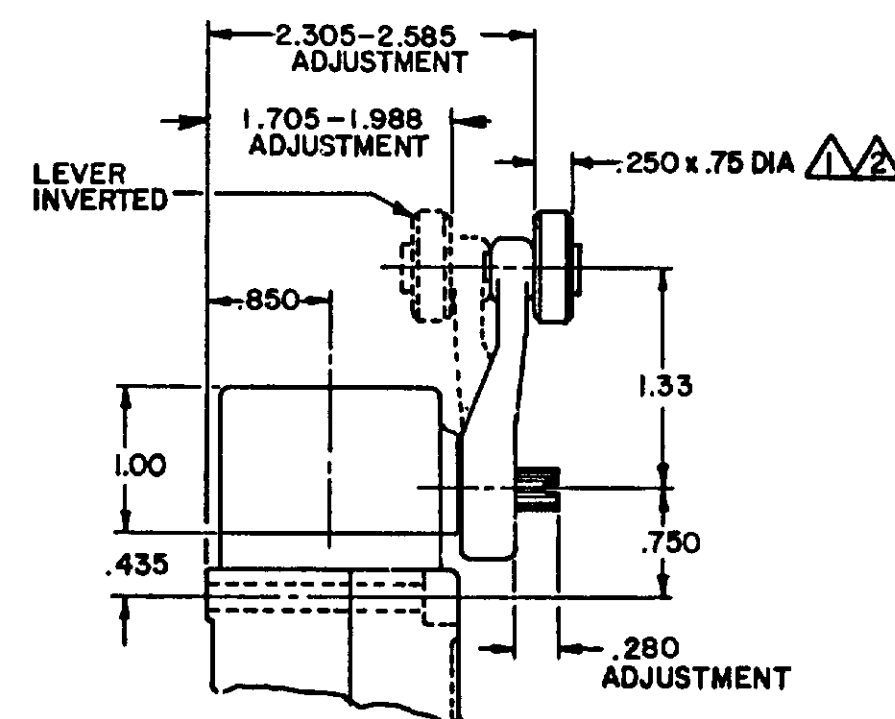

OPEN MOUNTED ROLLER

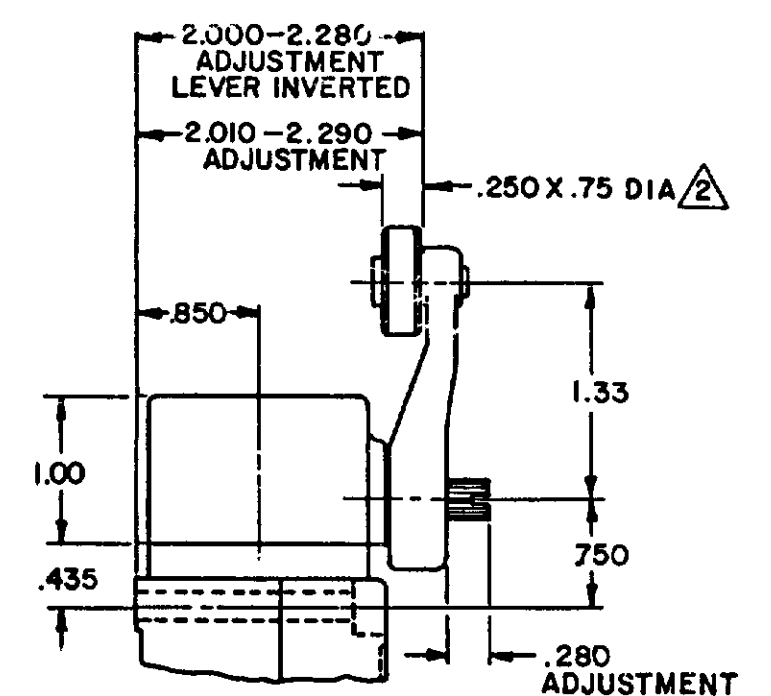


CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

NOTES

- NOTES
- ① ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT
LEVER CANNOT BE INVERTED
- ② FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS
REFER TO "M" DRAWING
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER
TO LSZ CHART 1 "M" DRAWING

THIRD ANGLE PROJECTION



SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (0) $\pm .030$

TWO PLACES (00) $\pm .015$

THREE PLACES (1.000) $\pm .005$

WEIGHT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

PAGE 2 OF 10

CATALOG LISTING

LSA-LSW SERIES
CHART 1

MICRO SWITCH
a Honeywell Division

FFD MEG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING

A-LSW SERIES
CHART 1

ISSUE	12	M	CATALOG LISTING	LSA-LSW SERIES CHART 1	
				PAGE 2 OF 10	
PSR	10JUL07	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES


REVISONS		11AUG04	
L	0031956		
	BS		
	10JUL07		
B	2011004		
	C SL		
	10 AUG 00		
C	201748		
	C SL		
	17 NOV 00		
D	202198		
	C SL		
E	23 JAN 01		
	204871		
	G LW		
	FEB 02		
F	206581		
	GLH		
	14 OCT 02		
G	206763		
	C SL		
	31 OCT 02		
H	207179		
	GLH		
	14 JAN 03		
J	207474		
	TSM		
	18 FEB 03		
K	0006871		
	KR		
	20060800		
	1		

RASTER	DRAWN	15
--------	-------	----

TOP ROTARY

SINGLE POLE

DOUBLE POLE

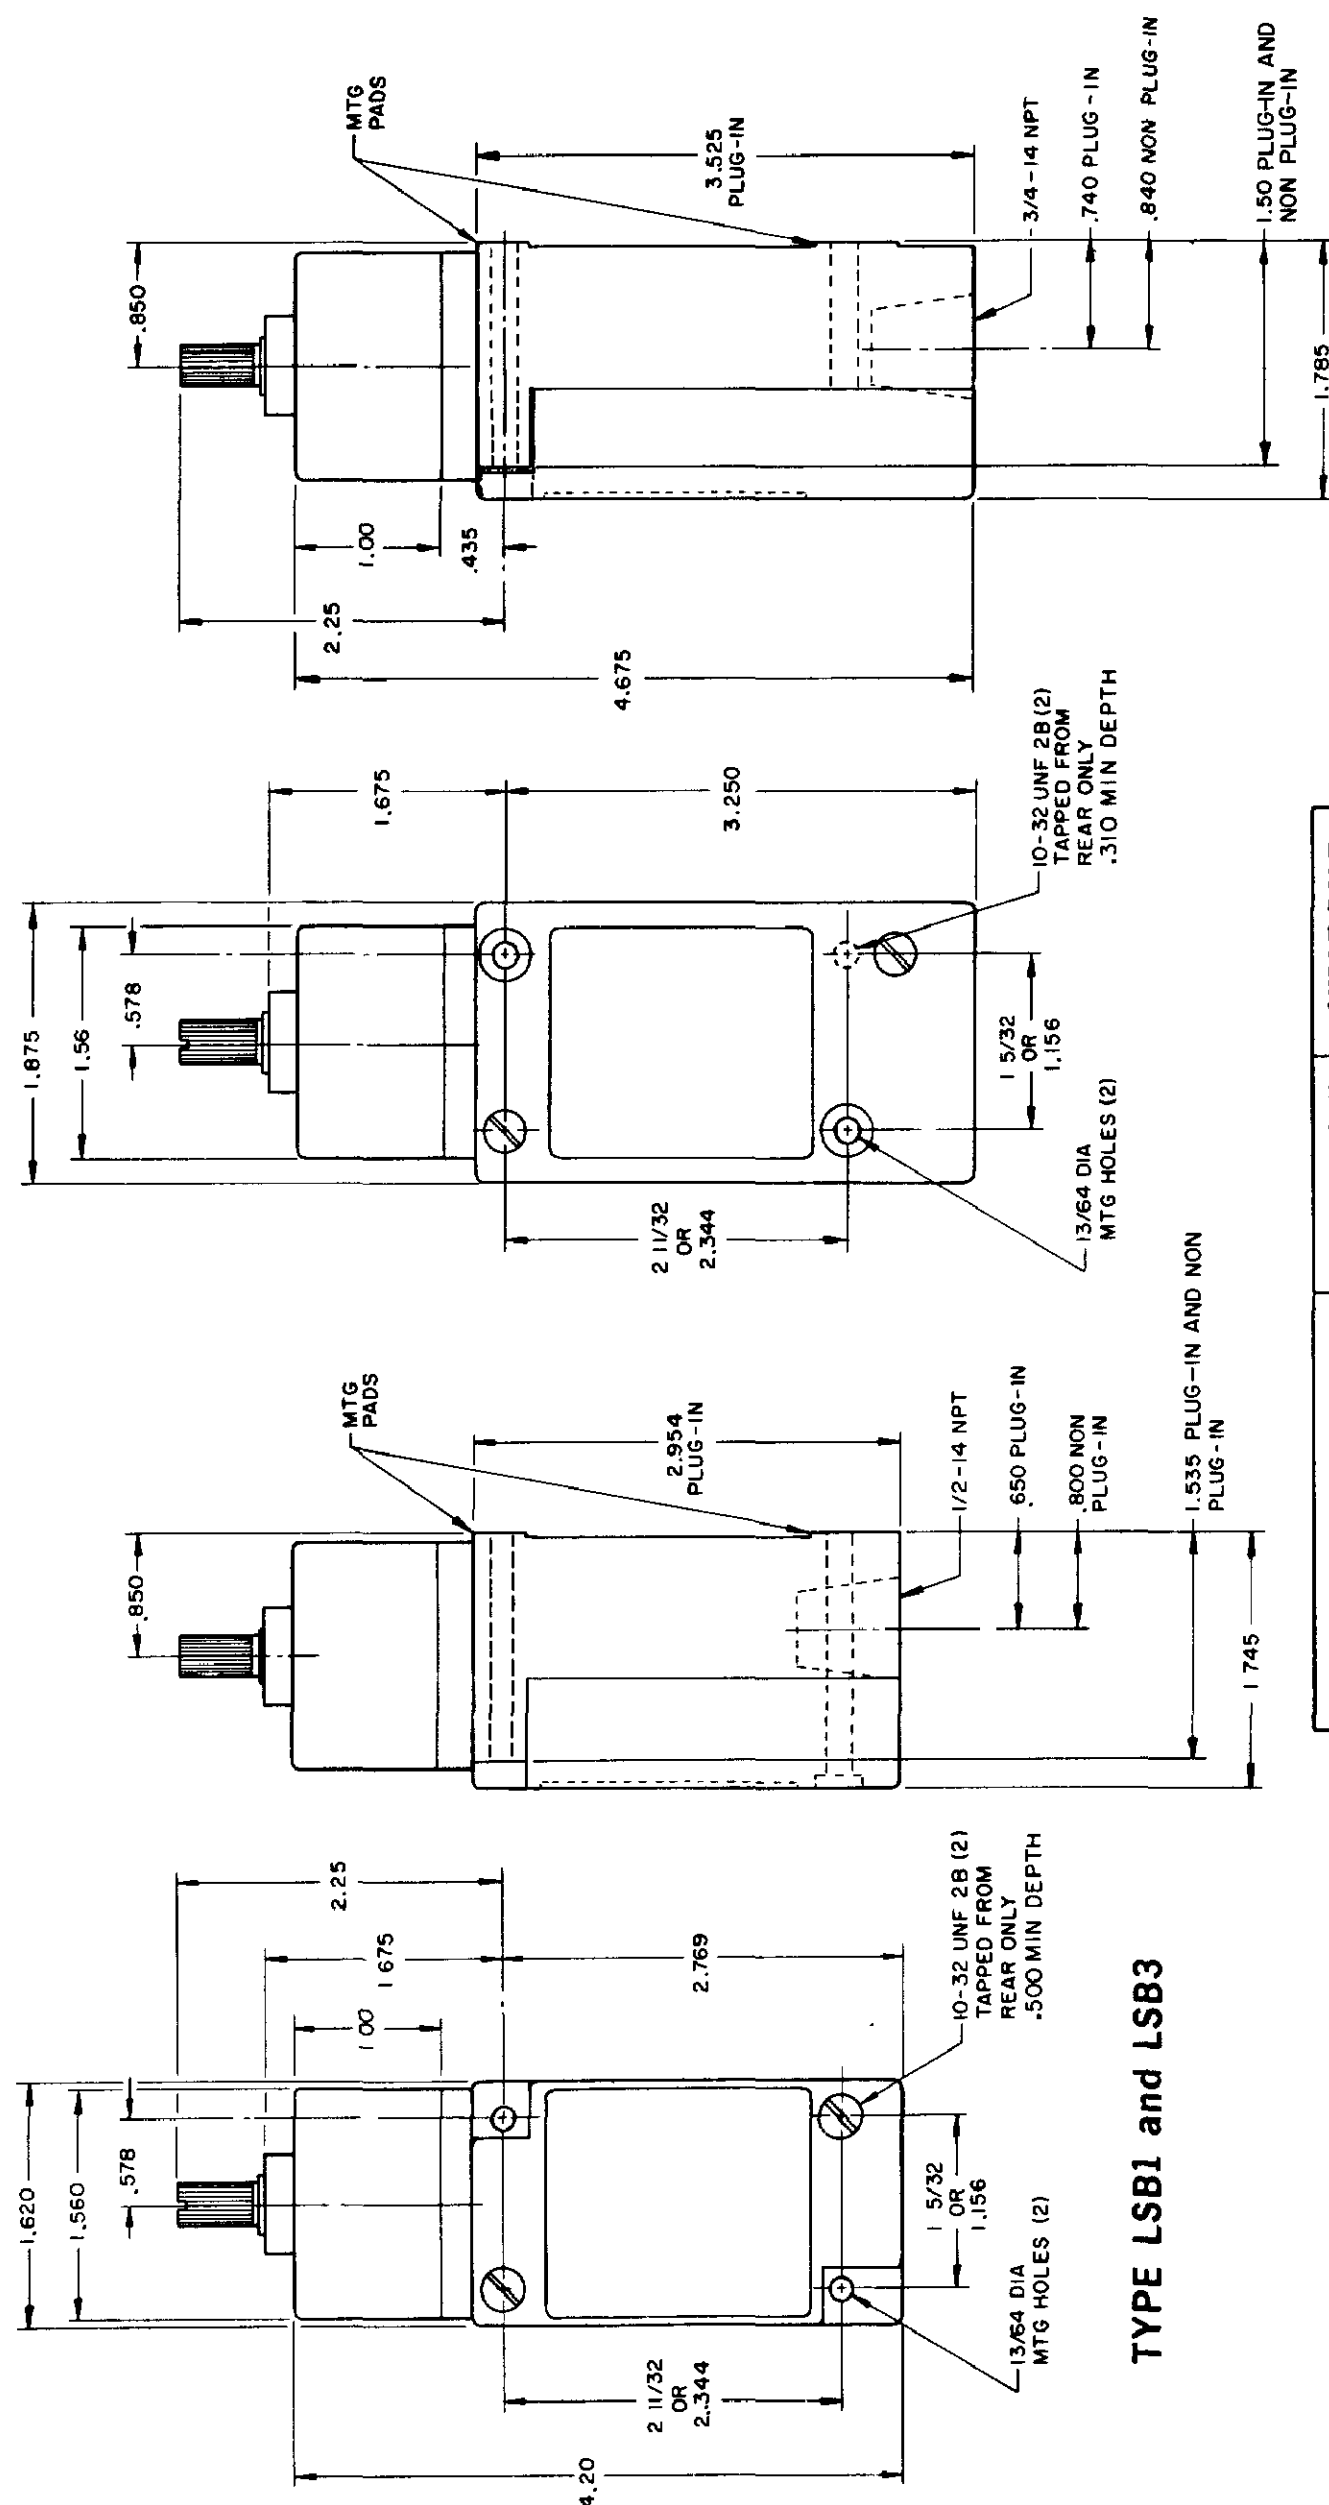

TYPE LSB1 and LSB3

**TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2" - 14 NPT
CONDUIT HOLE**

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

10 AMP CONT.	A.C. VOLTAGE	AMPS AT 35 POWER FACTOR					
		SINGL POLE		DOUBLE POLE		BREAK	
		MAKE	BREAK	MAKE	BREAK	MAKE	BREAK
	120	60	6	30	3		
	240	30	3	15	1.5		
	480	15	1.5	7.5	75		
	600	12	1.2	6	6		

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT


VOLTAGE	
5 AC OR DC MIN	01 AMP MIN
600 AC	720 VA
240 DC	30 WATT

**DIRECT ACTING (ALSO RATED AT A. C. 10
AMP CONT.)**


D. C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

**WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)**


DOUBLE POLE

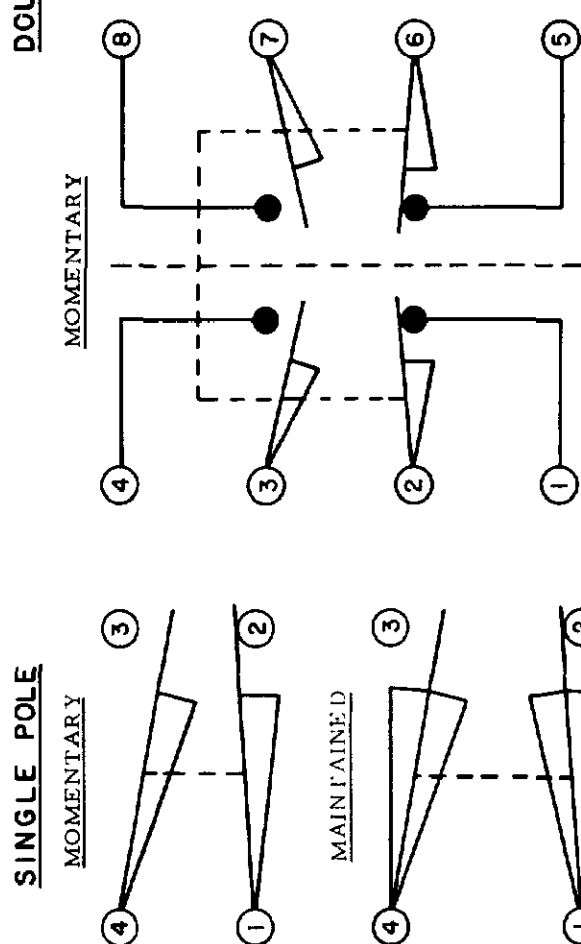


SINGLE POLE

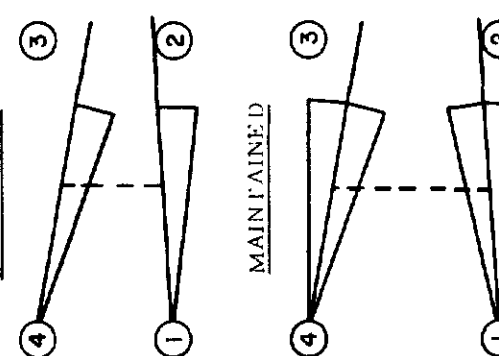

SINGLE POLE

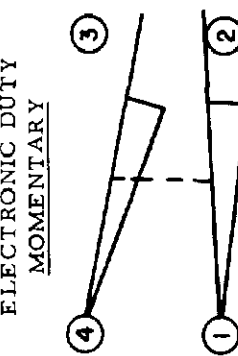

ELECTRONIC DUTY

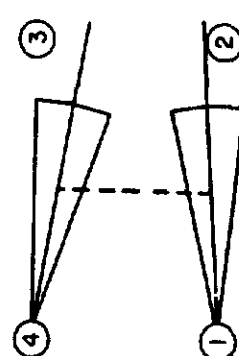


DIRECT ACTING



SINGLE POLE


DOUBLE POLE




TYPE LSD2 and LSD4

***(LSD6 and LSD7**

have 1/2 - 14 NPT CONDUIT HOLE)



**TYPE LSC2
and LSC4**



SINGLE POLE AND DOUBLE POLE

TYPE LSA THROUGH LSW SERIES

**TYPE LSV2
and LSV4**

PAGE 4 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF
HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

FED MFG CODE 91929

CATALOG LISTING



LSA-LSW SERIES
CHART 1

SCALE NONE

DO NOT SCALE PRINT

ONE
TWO
THREE
AND
W

SINGLE POLE DOUBLE POLE

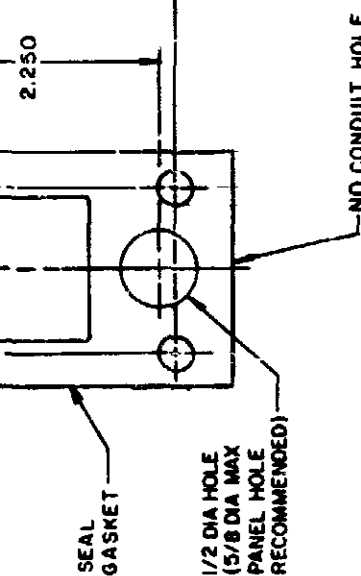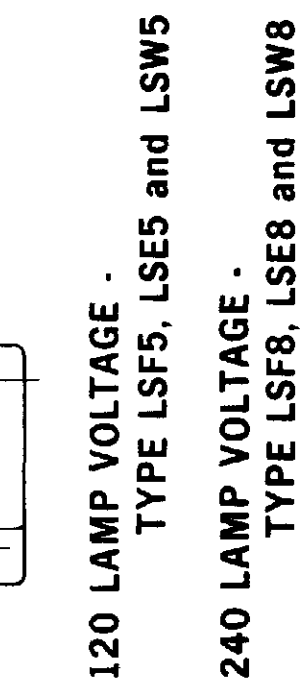

SCALE NONE

DO NOT SCALE PRINT



TYPE LSG1 and LSG3

INITIAL POSITION —
(FREE POSITION) }
OPERATING POINT }
PRETRAVEL }
DIFFERENTIAL TRAVEL }
OVERTRAVEL }
FULL TRAVEL —

OPERATING POINT GIVEN
IN RELATION TO TOP
MOUNTING HOLE

SIDE PLUNGER TYPES

PAGE 6 OF 10

SWITCH - ENCLOSED


CATALOG LISTING
LSA-LSW SERIES
CHART 1

SCALE		NONE	
DO NOT SCALE PRINT			
UNLESS			
DIMENSIONS ARE IN			
TOLERANCES			
ONE PLACE	(0)		
TWO PLACE	(.00)		01
THREE PLACE	(.000)		000
ANGLES			
WEIGHT			

WOBBLE STICK

SINGLE POLE

DOUBLE POLE

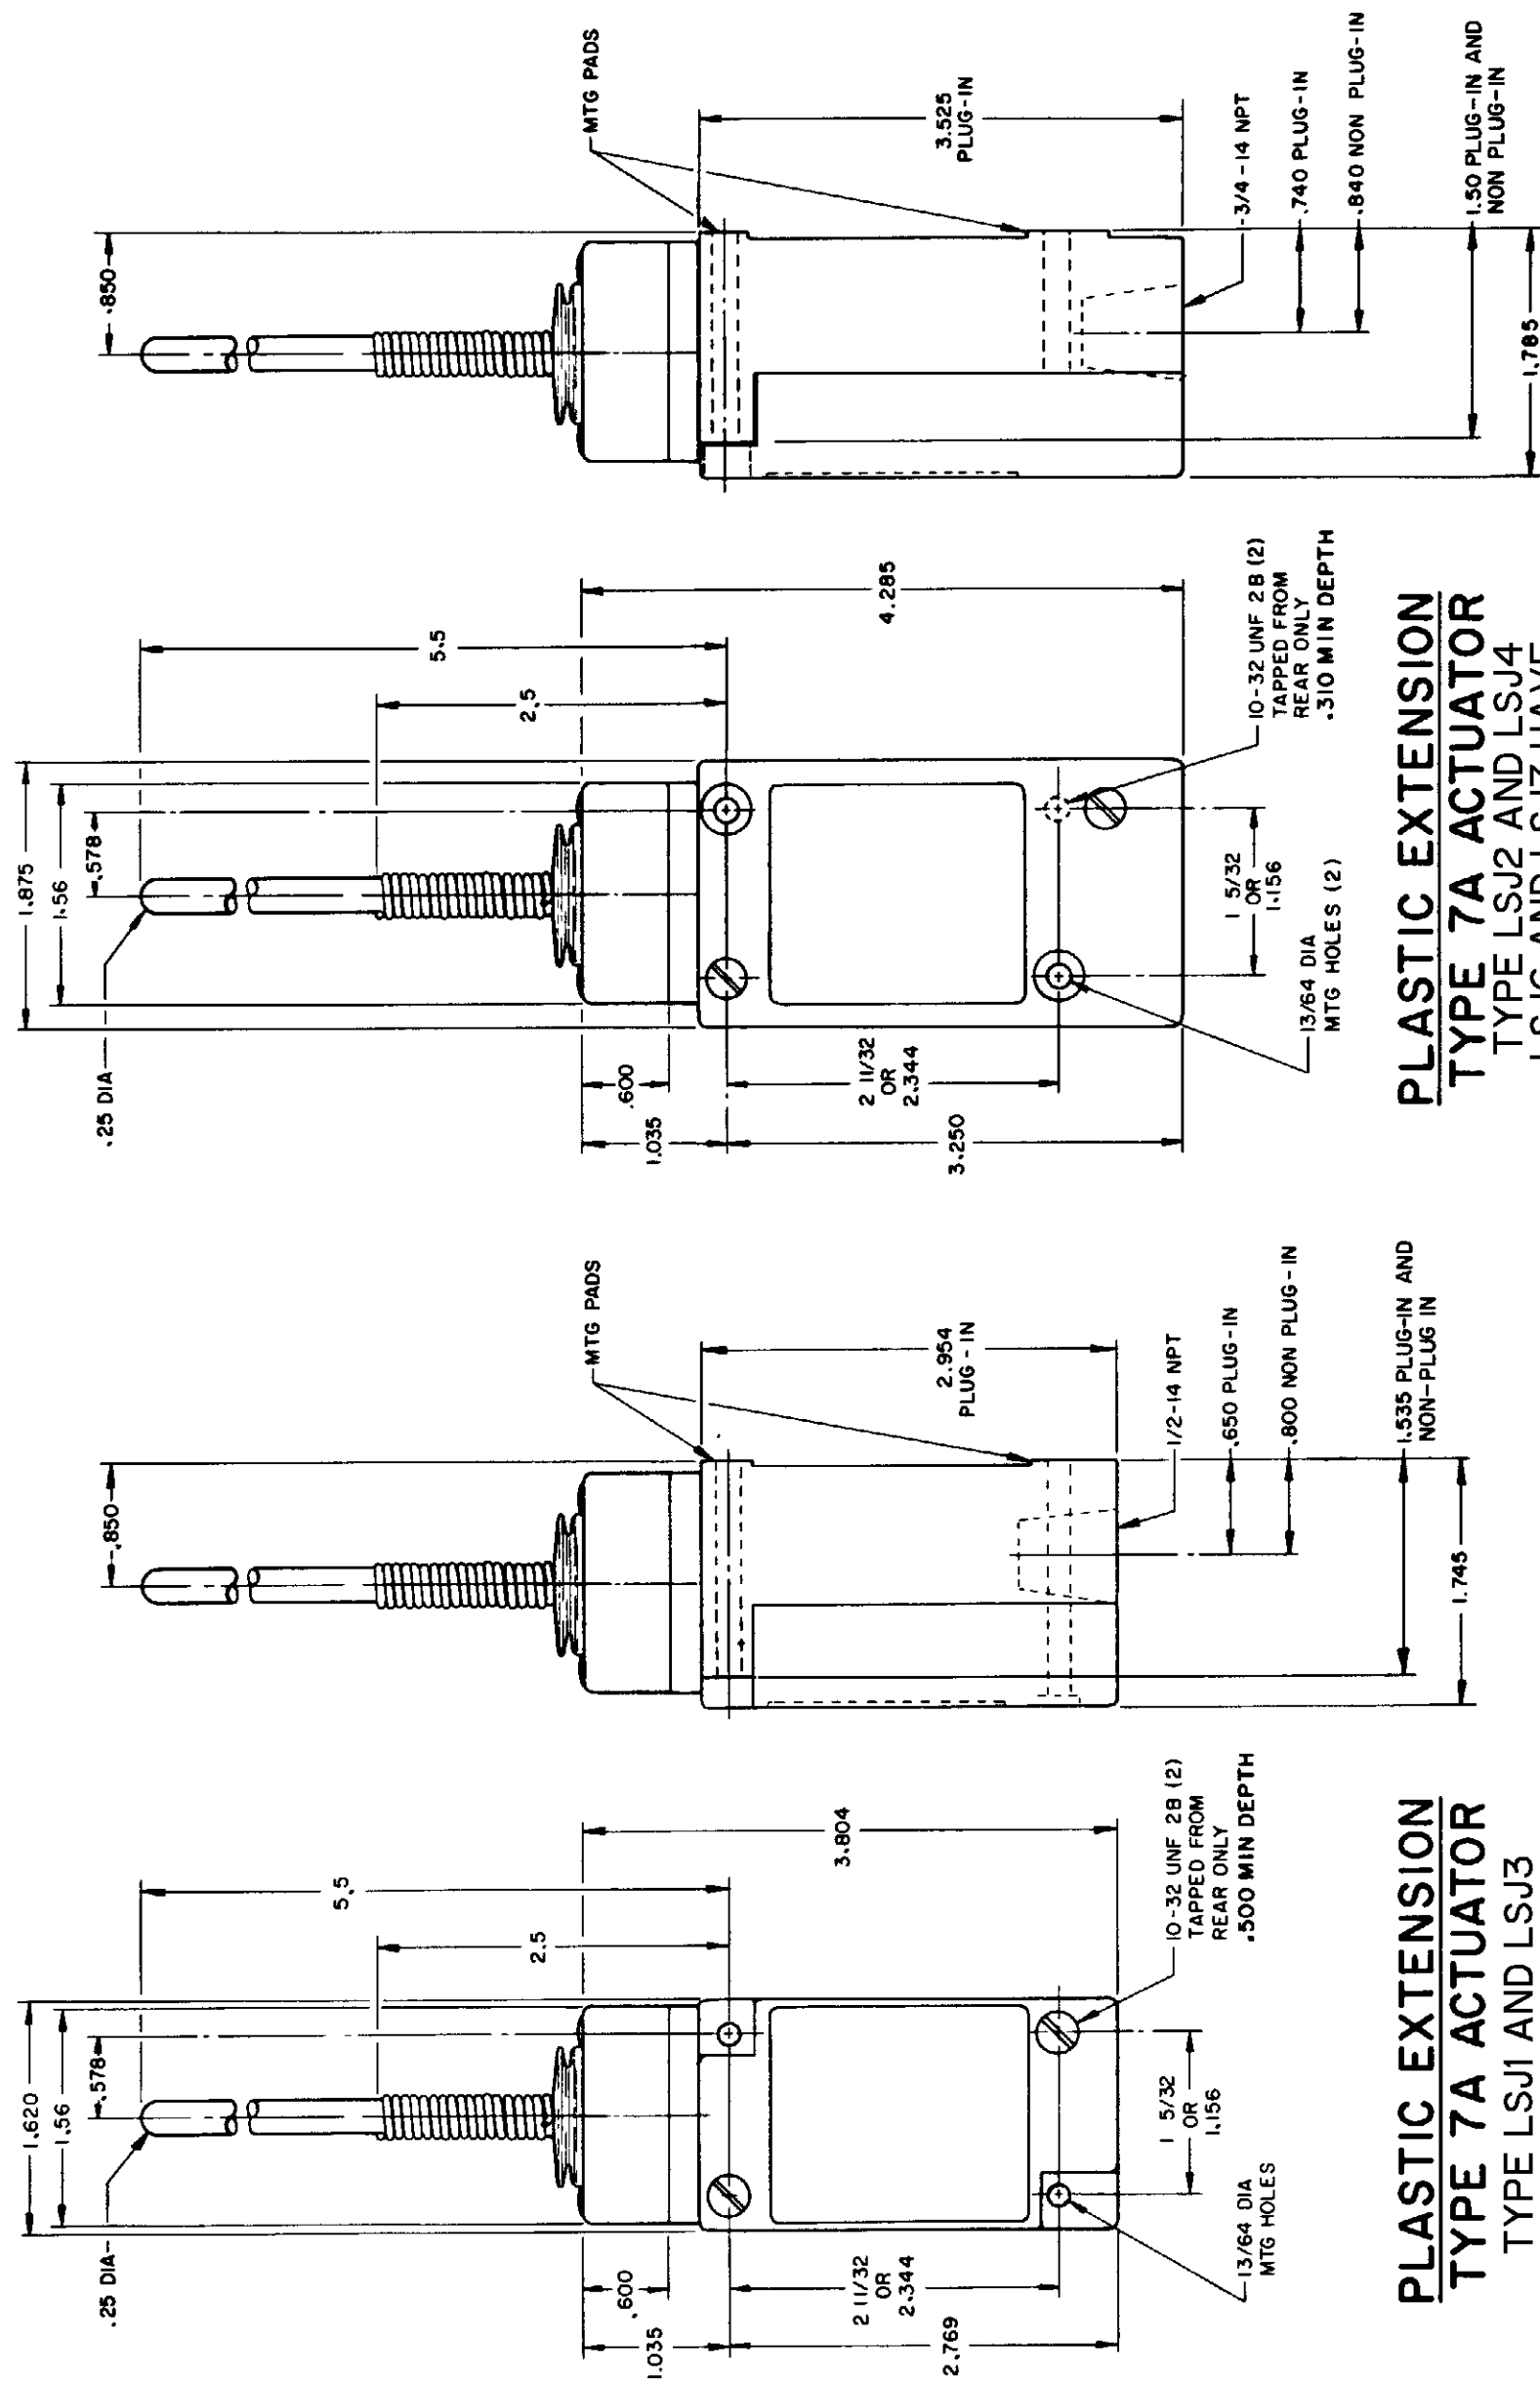

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ1 AND LSJ3

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE

MICRO SWITCH
Honeywell Division
FED MFG CODE 91929

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

SWITCH - ENCLOSED


LSA-LSW SERIES

CATALOG LISTING


PAGE 7 OF 10

SCALE NONE
DO NOT SCALE PRINT


REPLACEMENT ACTUATOR
LSZ-4009

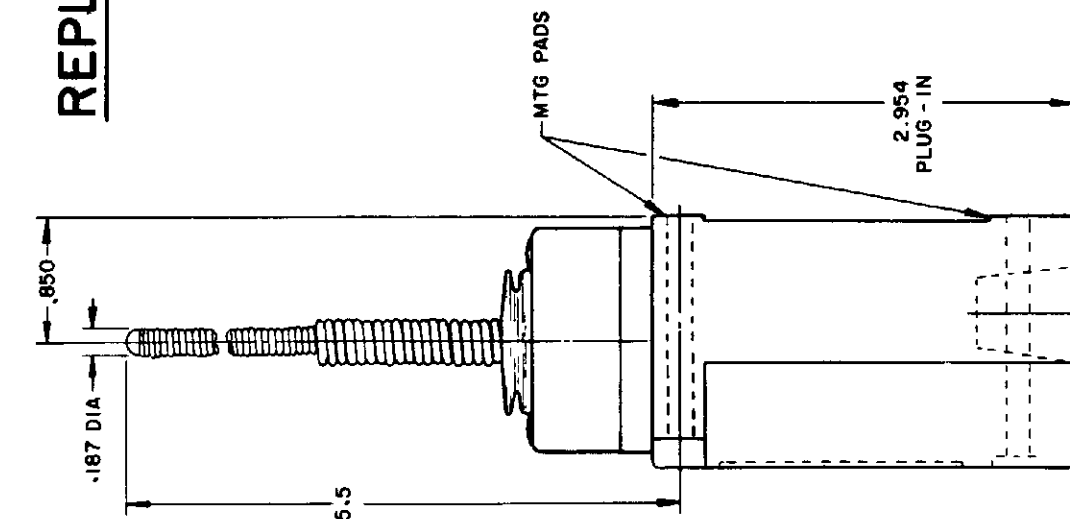


CABLE EXTENSION
TYPE 7N ACTUATOR

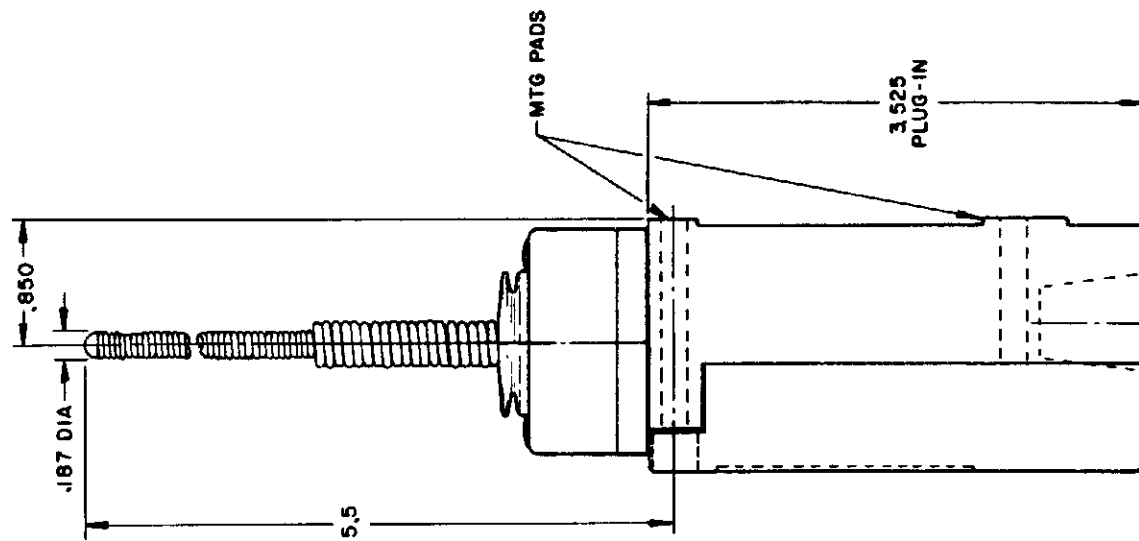


CABLE EXTENSION
TYPE 7 N ACTUATOR

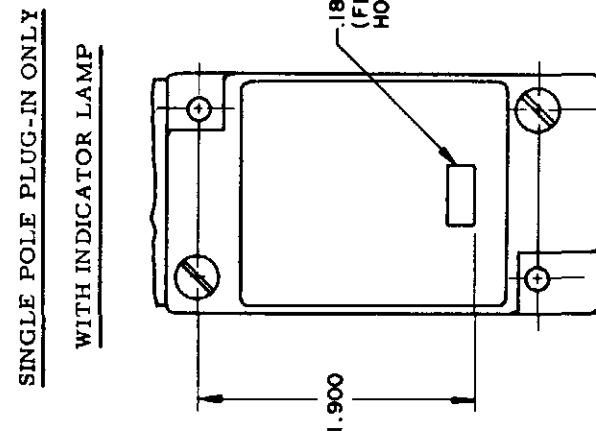

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8
24 LED VOLTAGE TYPE LSJ9

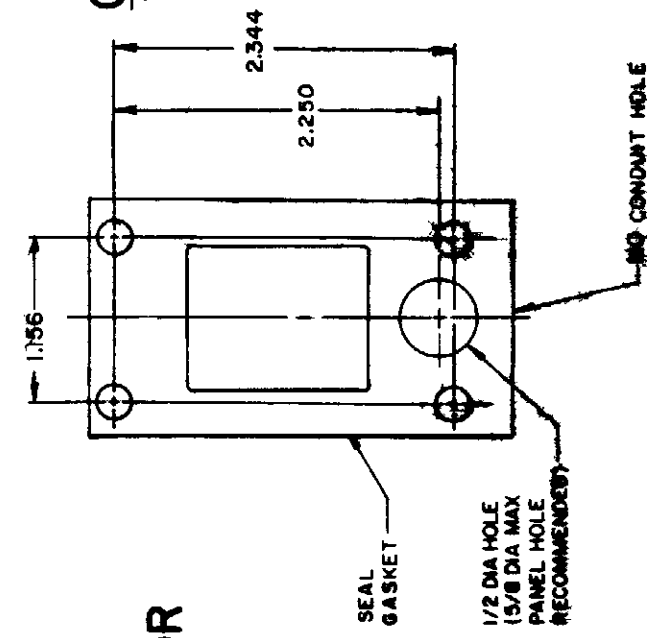

REPLACEMENT ACTUATOR
LSZ-40II

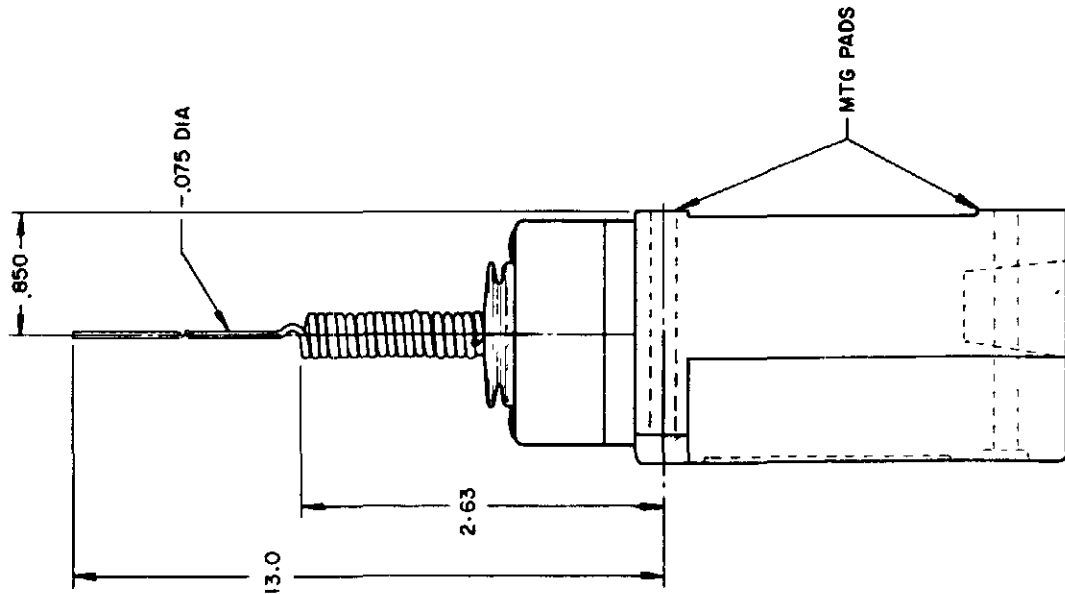


WIRE EXTENSION TYPE 7M ACTUATOR


TYPE LSJ1 and LSJ3

REPLACEMENT ACTUATOR - LSZ 4010

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

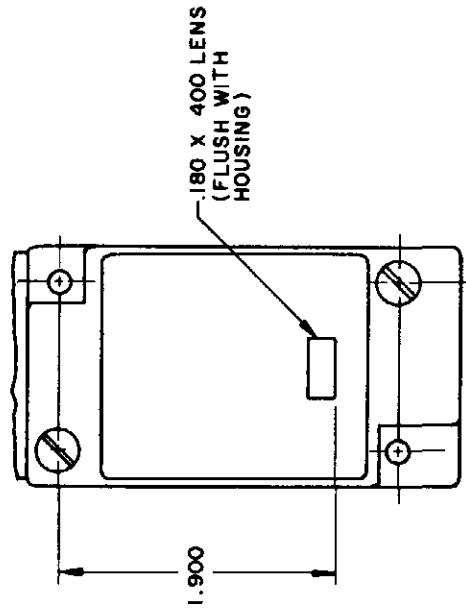

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8

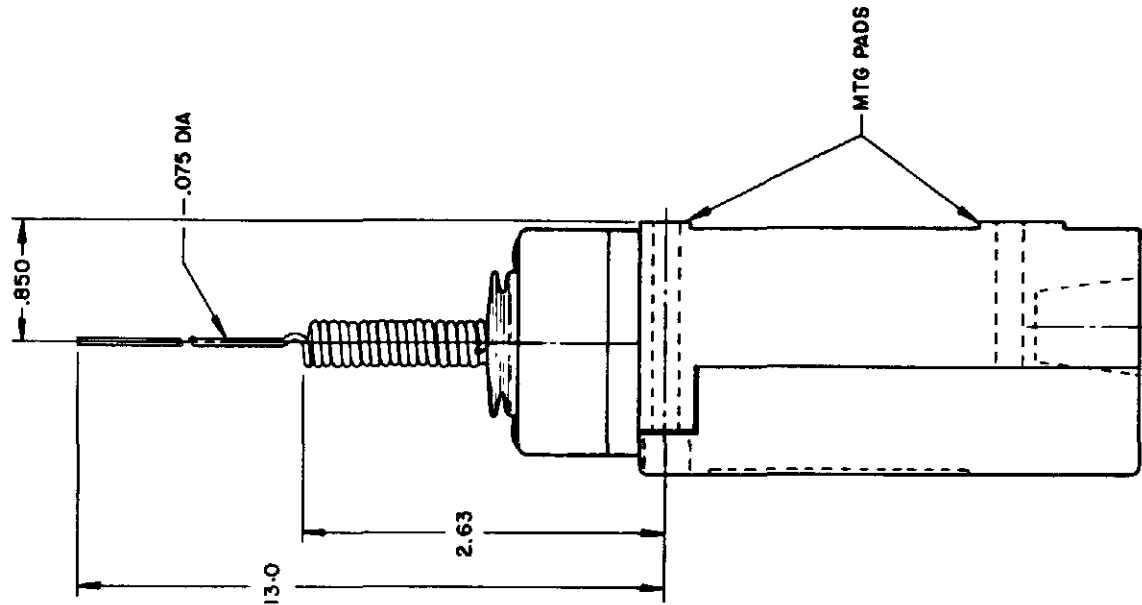


WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ2 and LSJ4

LSJ6 and LSJ7 have 1/2 - 14 NPT CONDUIT HOLE


CAT WHISKER

SINGLE POLE

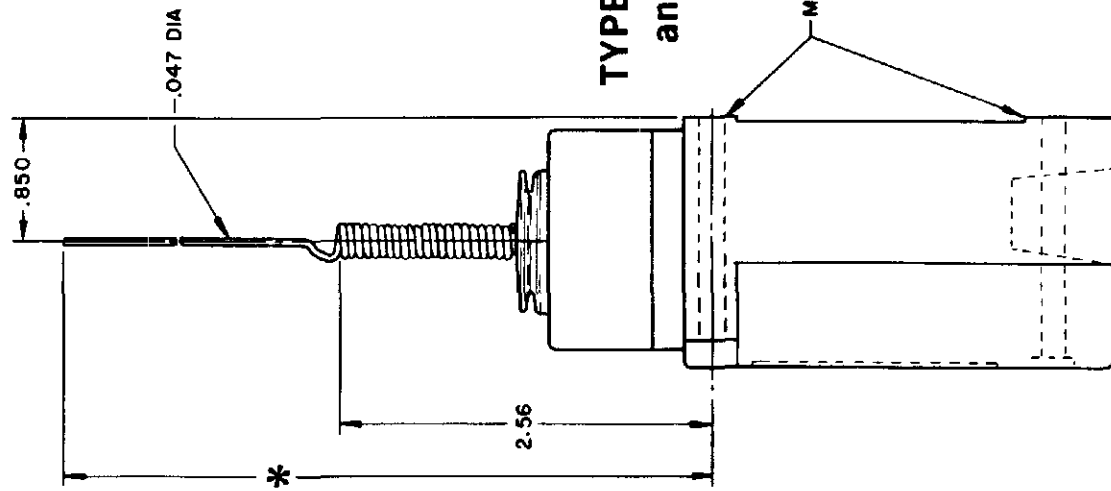


TYPE LSK1
and LSK3

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

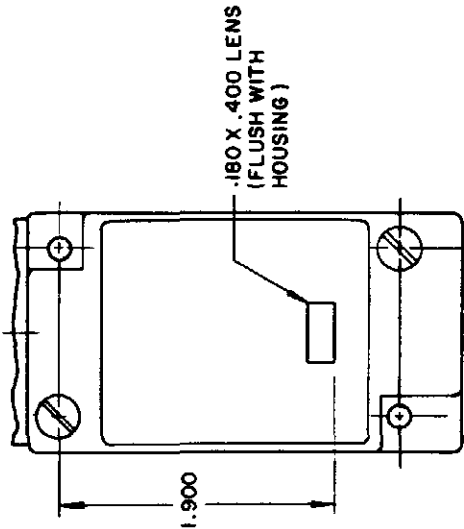

120 LAMP VOLTAGE
TYPE LSK5 - CAT WHISKER TYPE LSB5 - TOP ROTARY
240 LAMP VOLTAGE
TYPE LSK8 - CAT WHISKER TYPE LSB8 - TOP ROTARY

DOUBLE POLE

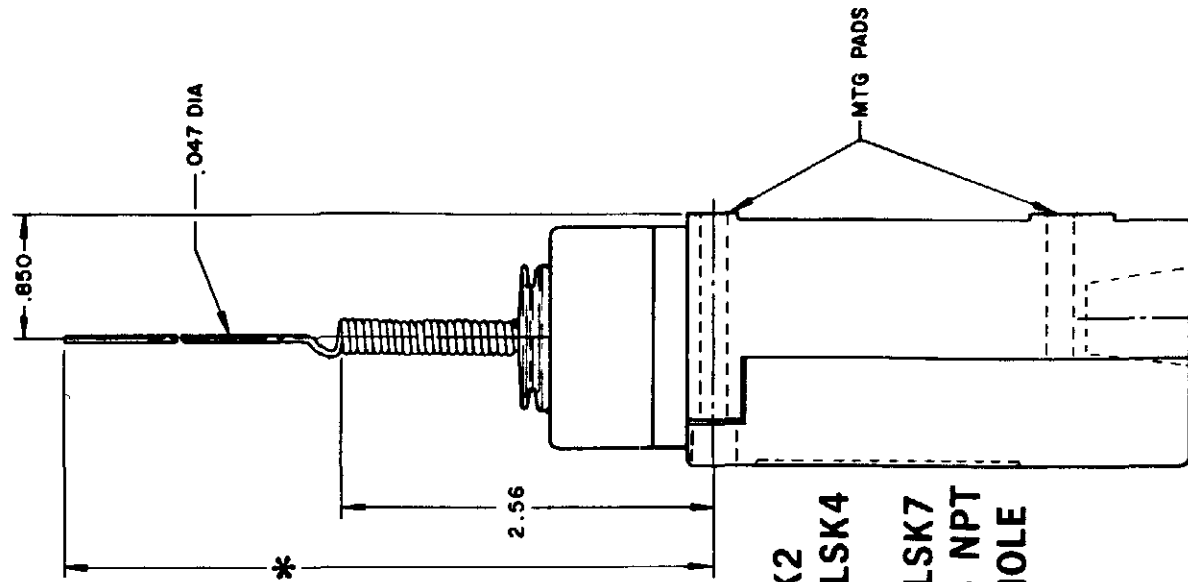

TYPE LSK2
and LSK4
LSK6 and LSK7
have 1/2 - 14 NPT
CONDUIT HOLE

*WIRE EXTENSION REPLACEMENT ACTUATOR

TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012

TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013

TYPE 8C COIL ACTUATOR 5.5 IN.-LSZ 4014
ACTUATOR 9.5 IN. - LSZ4036

WIRE EXTENSION

*TYPE 8A ACTUATOR 5.5 IN.

TYPE 8B ACTUATOR 7.5 IN.

TYPE 8C ACTUATOR 5.5 IN.

TYPE 8D ROD ACTUATOR 5.5 IN.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

SCALE NONE
DO NOT SCALE PRINT

PRETRAVEL (APPROX) IN. RADIUS	CAT. WHISKER		WOBBLE STICK	
	5/16" COIL	5/16" WIRE	7/16" ROD	WIRE
2	2	2	1.0	4.0
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	7.0
			10.0	5.0

REV	DATE	BY	CHKD	DESCRIPTION
L	0031956			BS
B	10JUL07			201004
C	201748			201748
D	202198			202198
E	204871			204871
F	206581			206581
G	206763			206763
H	207179			207179
J	207474			207474
K	0006871			0006871


ISSUE	CATALOG LISTING	12	PSR	10JUL07	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES
M	LSA-LSW SERIES CHART 1	PAGE 9 OF 10						
MAM	15 JUN 94	CHKD	JAF	11 JUL 94	CHKD	AK	11 AUG 04	CHKD

RASTER
DRAWN

CONVERSION BASES


SINGLE POLE
(SIDE ROTARY)
LSZ 4003

DOUBLE POLE
(SIDE ROTARY)
LSZ4004

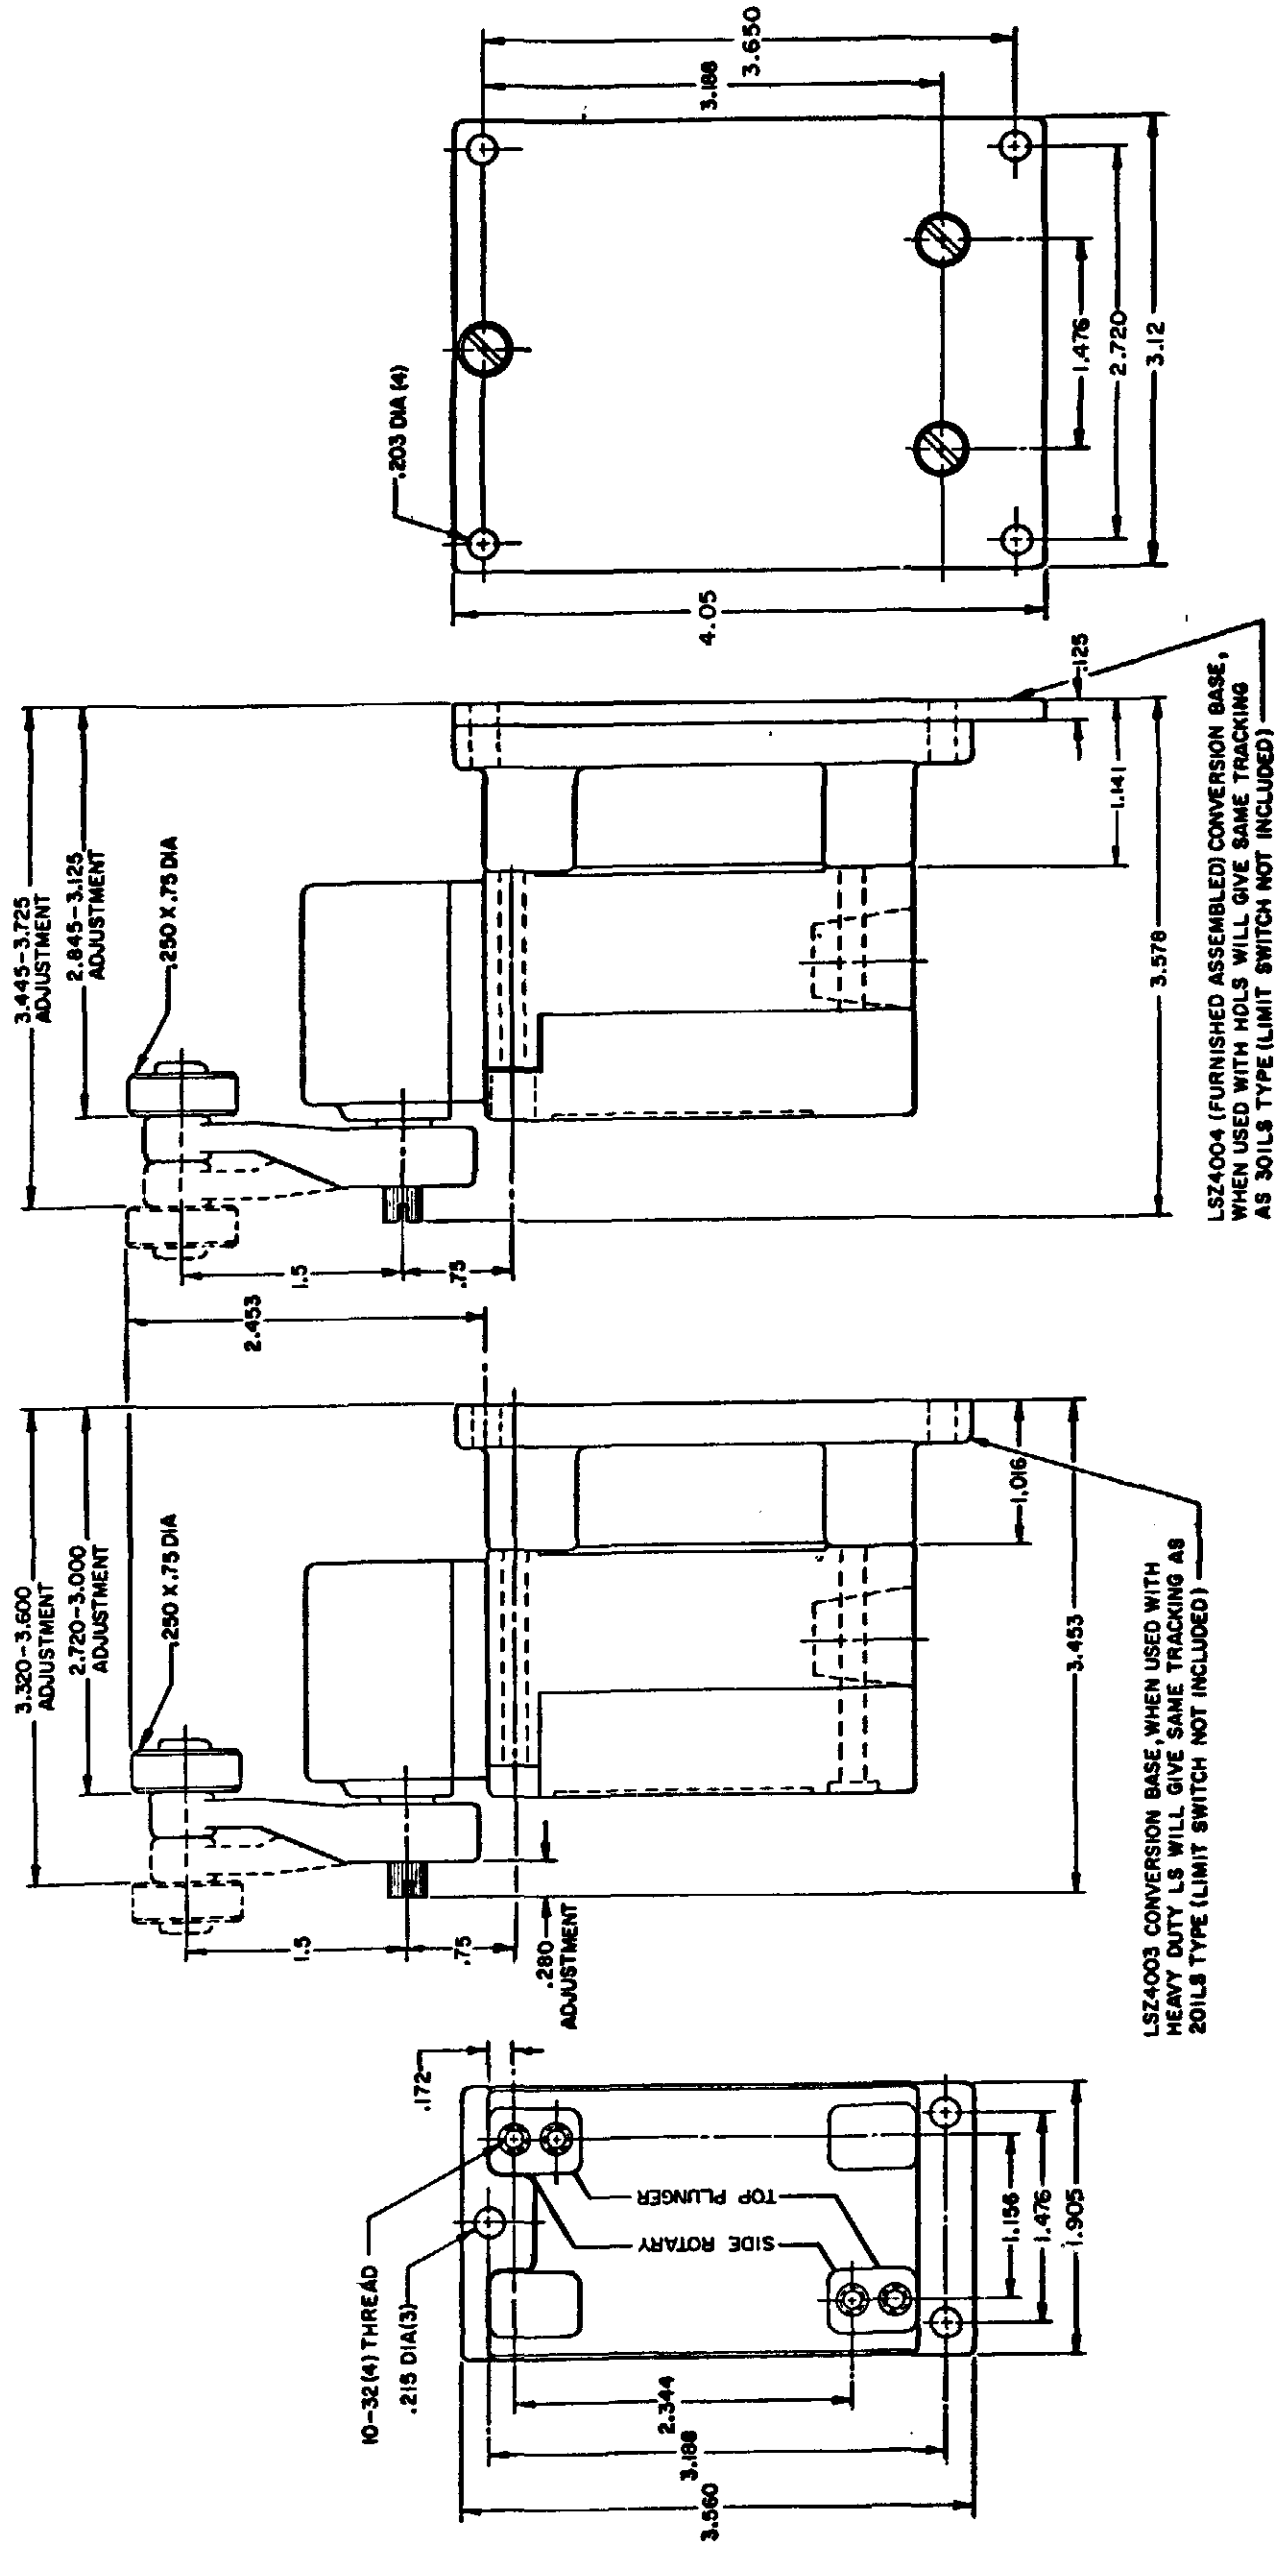

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE
TOP PLUNGER
LSZ4003

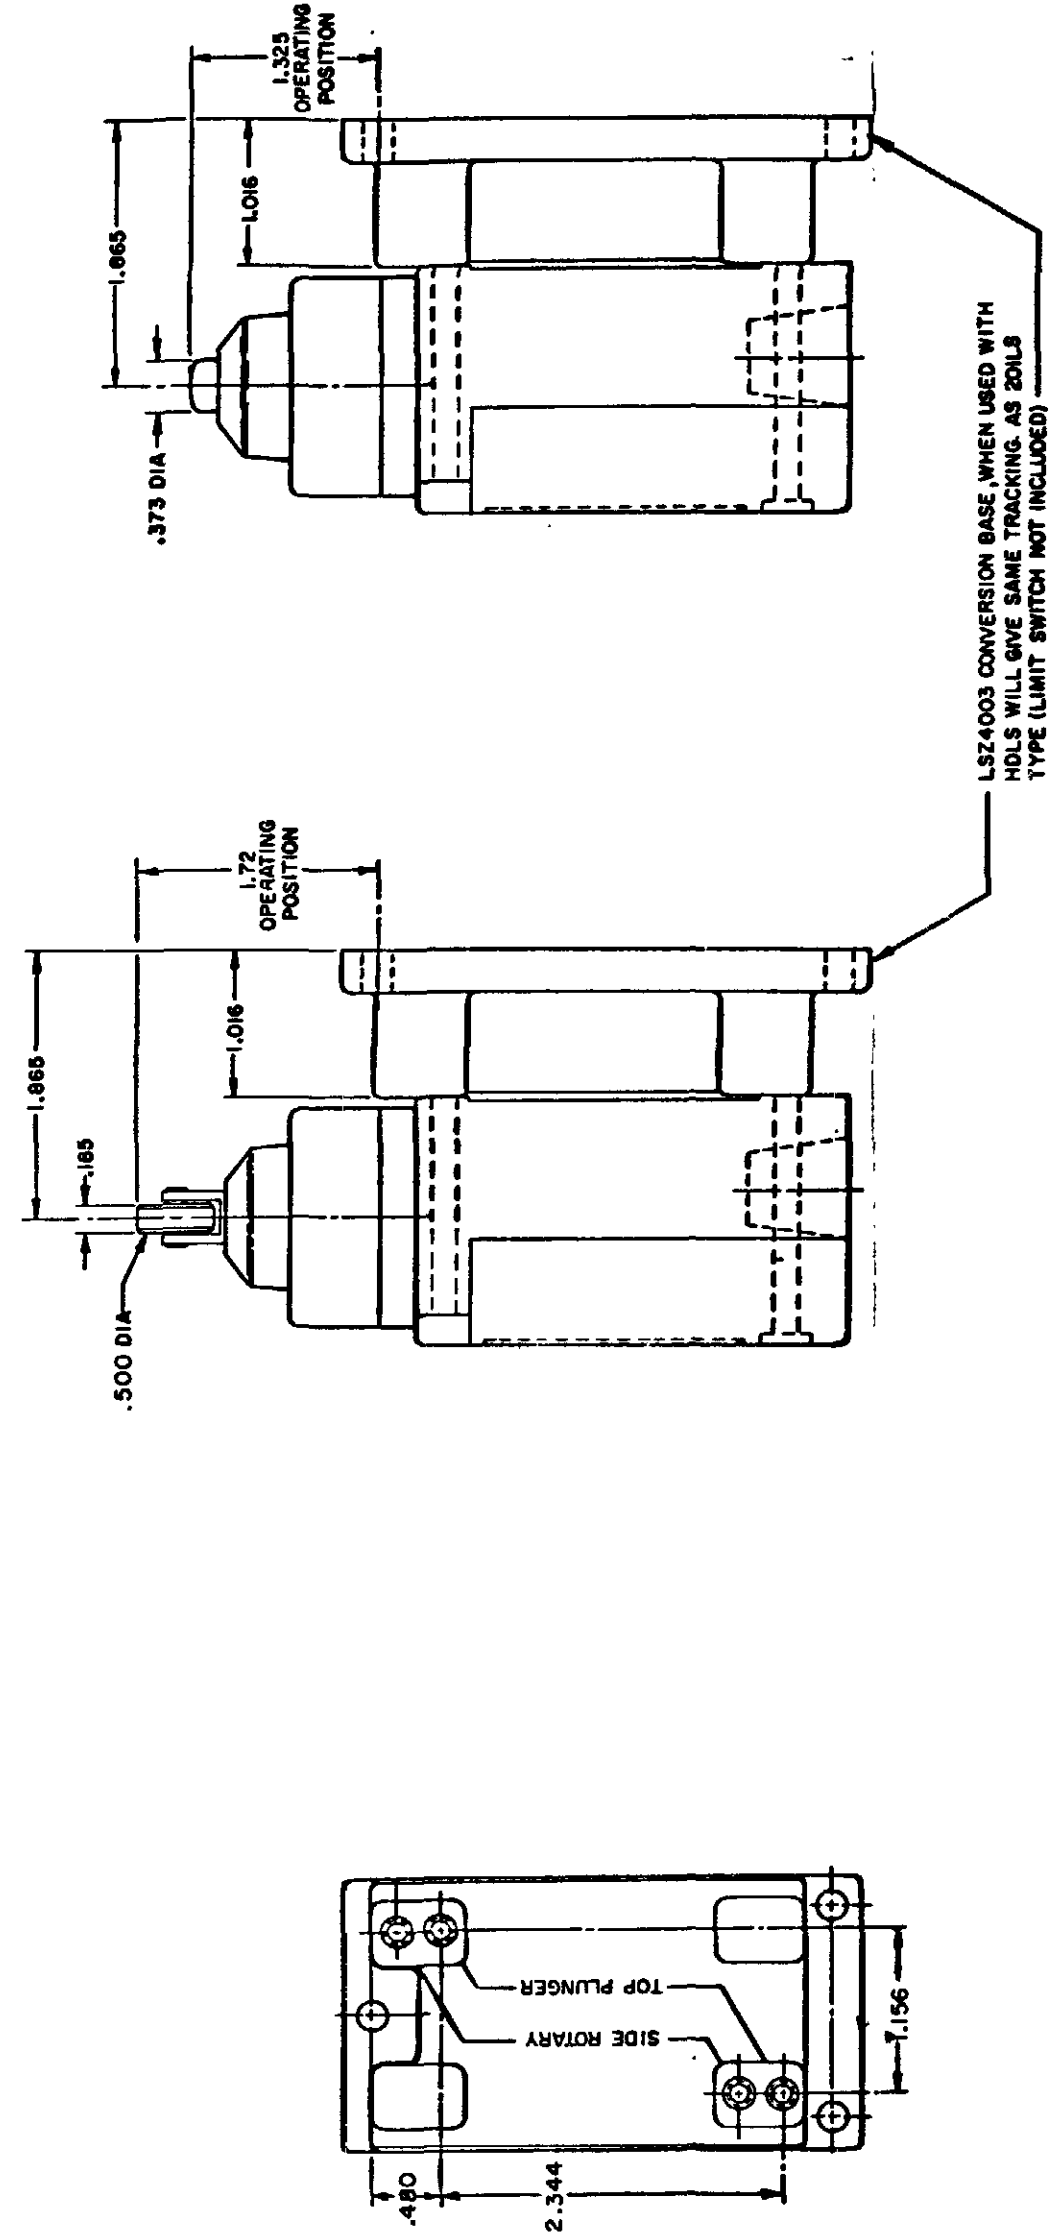

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF
LIMIT SWITCH

HEAD TYPE	CELLULOSE	DETERGENT	5 STAR	ASTM #1	ASTM #2	ASTM #3	ASTM #4	HOUGHTON SAFE 271	HOUGHTON SAFE 820	HOUGHTON SAFE 1010	MINERAL OIL	PETROL OIL	SILICON CR & OIL	SUNSAFE	BEER	STODDARD SOLV.	CHLORINATED SOLVENTS	CITRIC ACID	DI-ESTER SYN. LUBRICANTS	OZONE	HYDRAUL	PROGUARD	PETROL BASE HYDRAULIC OIL	LARD OIL	SILICATE ESTERS
LSA	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSB	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSC	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSD	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSE	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSF	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	2	4	4	2	2	2		
LSG	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSH	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSJ	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSK	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSL	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSM	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSN	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSP	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSR	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSV	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSW	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	2	4	4	2	2	2		
LST	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																								
LSS	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																								

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

LSA-LSW SERIES
CHART 1



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331