



[illegible]

DOUBLE POLE

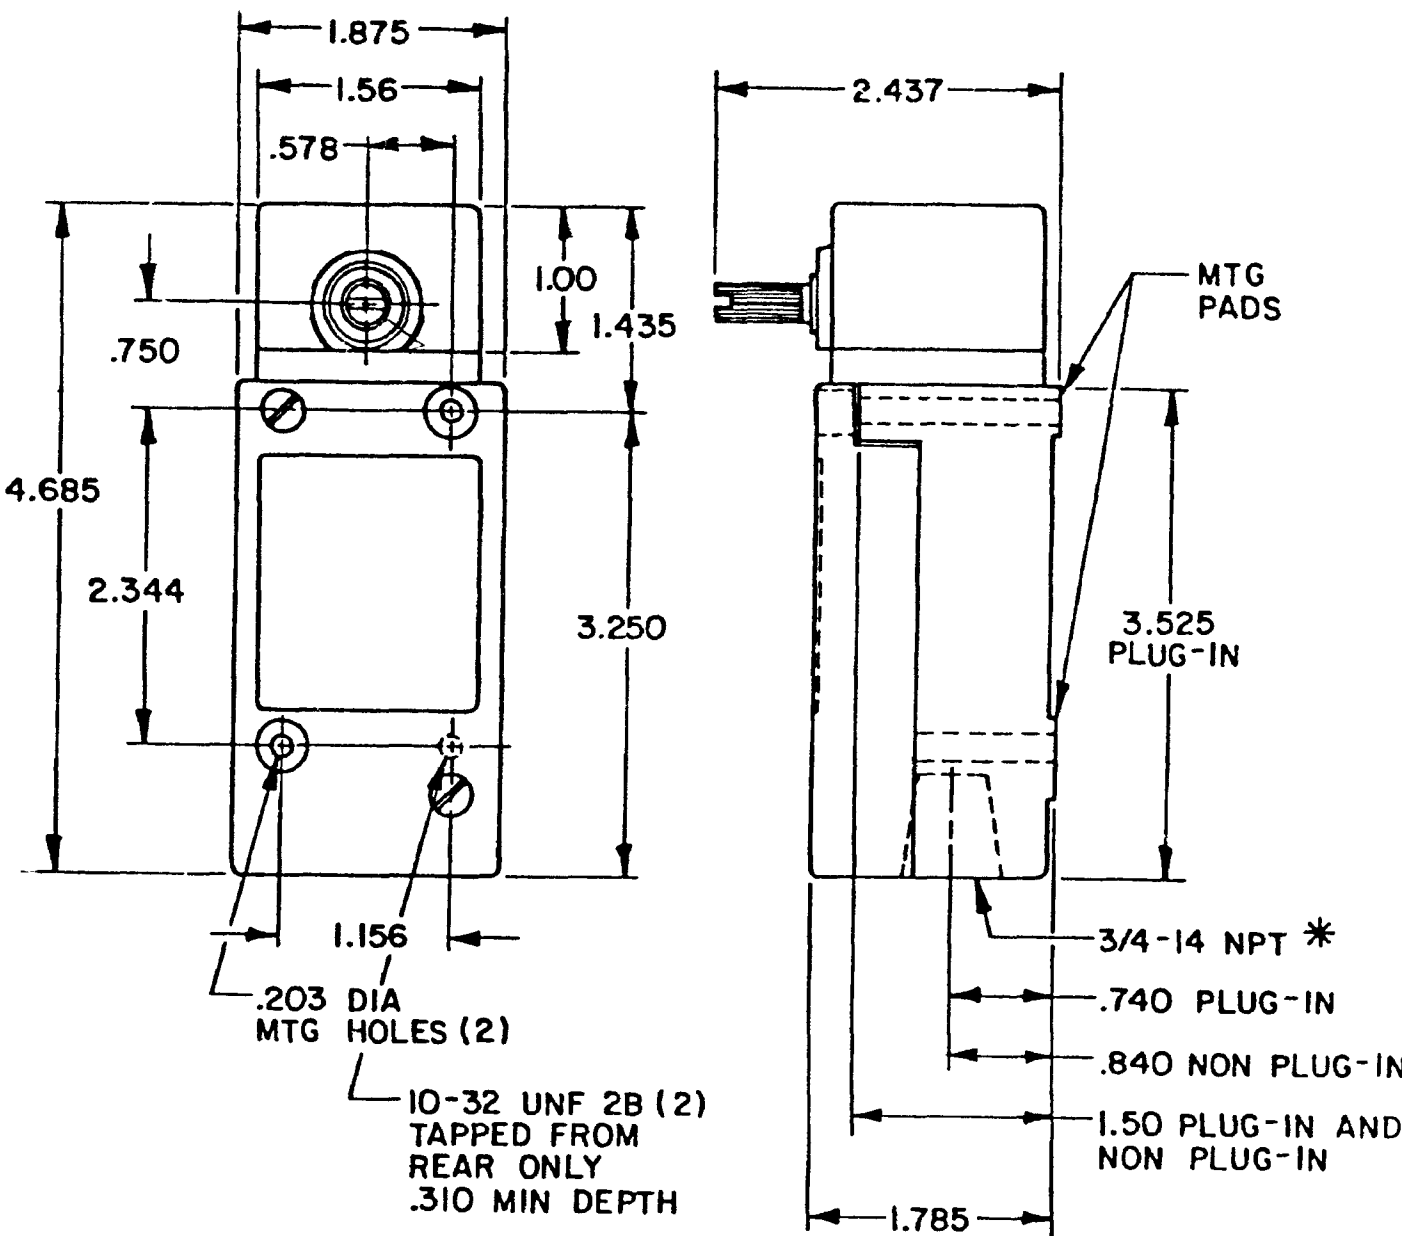


TYPE: LSA2, LSH2, LSM2, LSN2, LSP2, LSR2
LSA4, LSH4, LSM4, LSN4, LSP4, LSR4

*(LSA6, LSH6, LSM6, LSN6, LSP6, LSR6
LSA7, LSH7, LSM7, LSN7, LSP7, LSR7 HAVE
1/2-14 NPT CONDUIT HOLE)

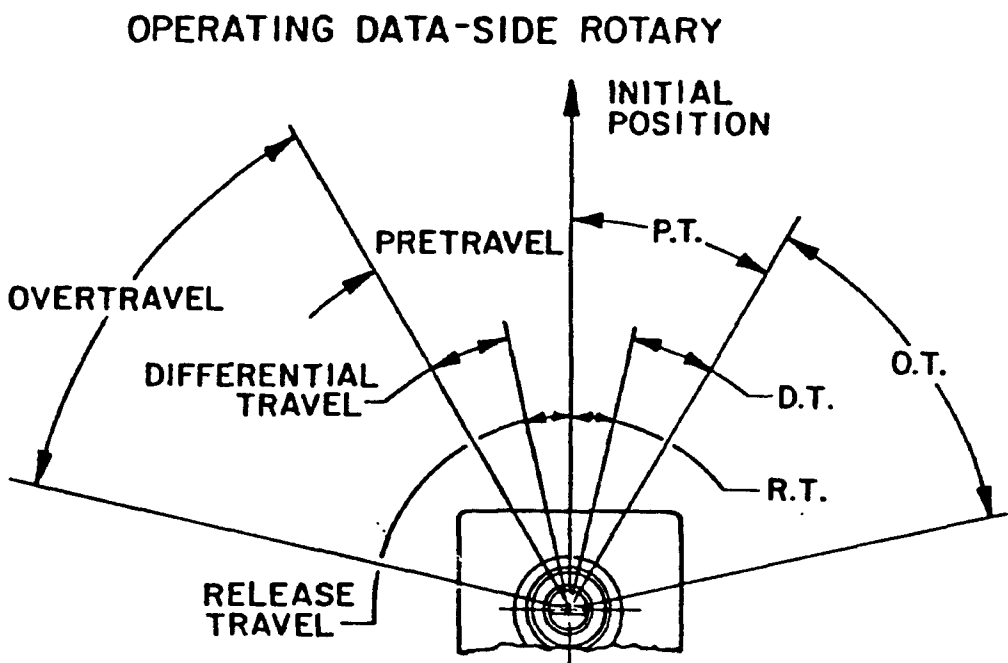

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSA THROUGH LSW SERIES

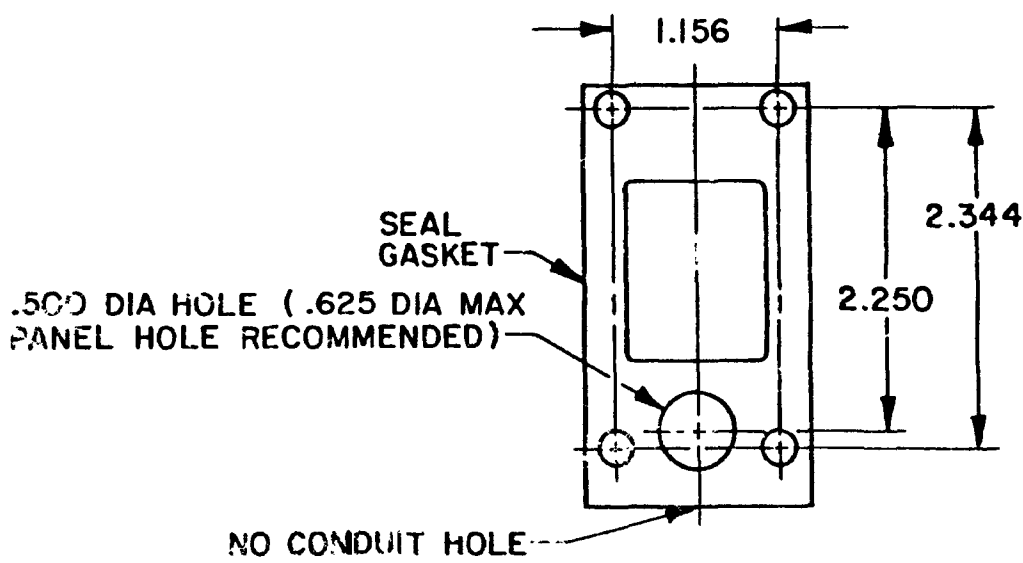

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
MICRO SWITCH A Honeywell Division FED. MFG. CODE 91929	SWITCH - ENCLOSED	CATALOG LISTING
		LSA-LSW SERIES CHART 1

THIRD ANGLE PROJECTION

SCALE NONE


DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE


ONE PLACE	(.0)	± .030
TWO PLACES	(.00)	± .015
THREE PLACES	(.000)	± .005
ANGLES		±

WEIGHT


SIDE ROTARY CAM TRACKING

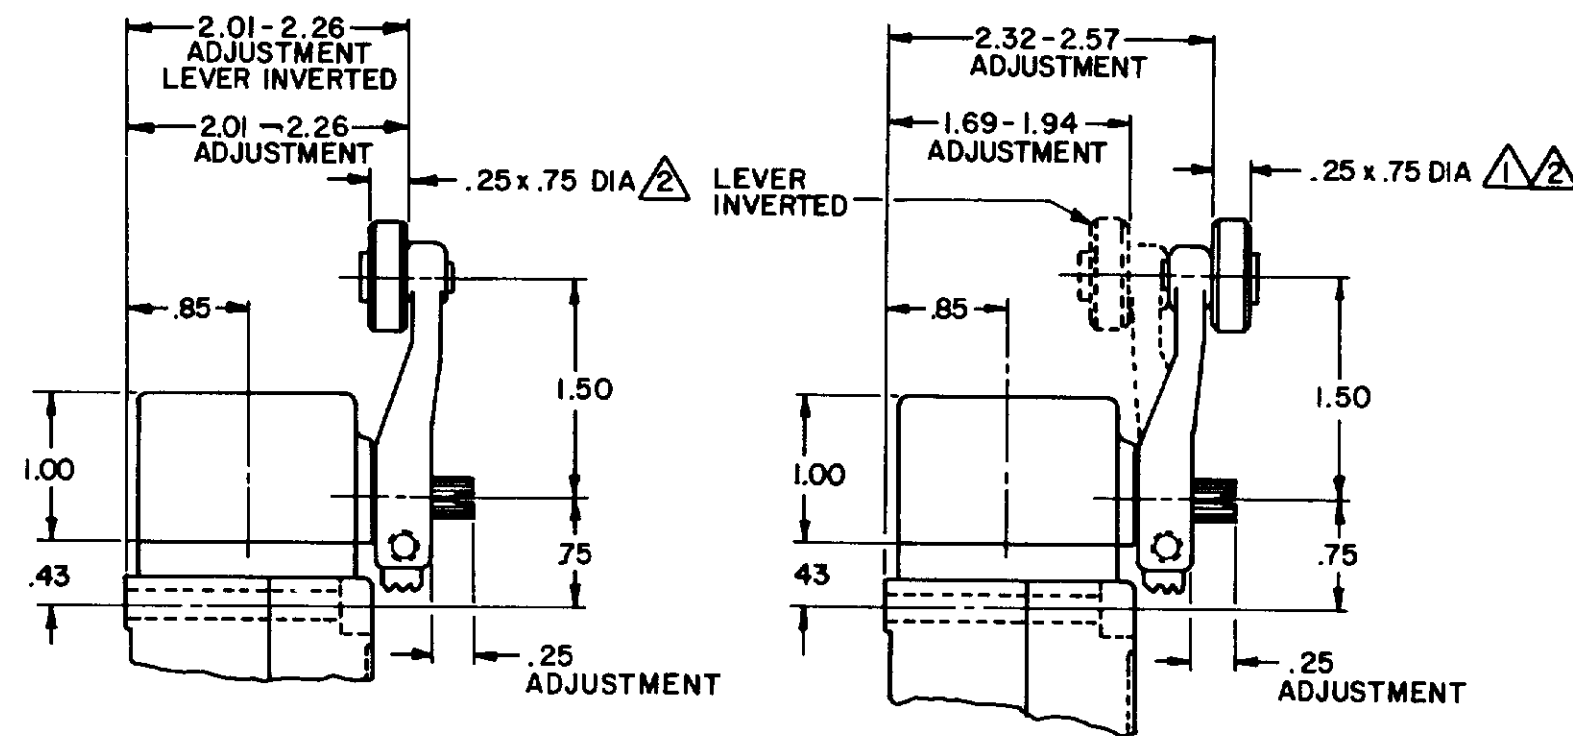


LSZ51 TYPE LEVERS

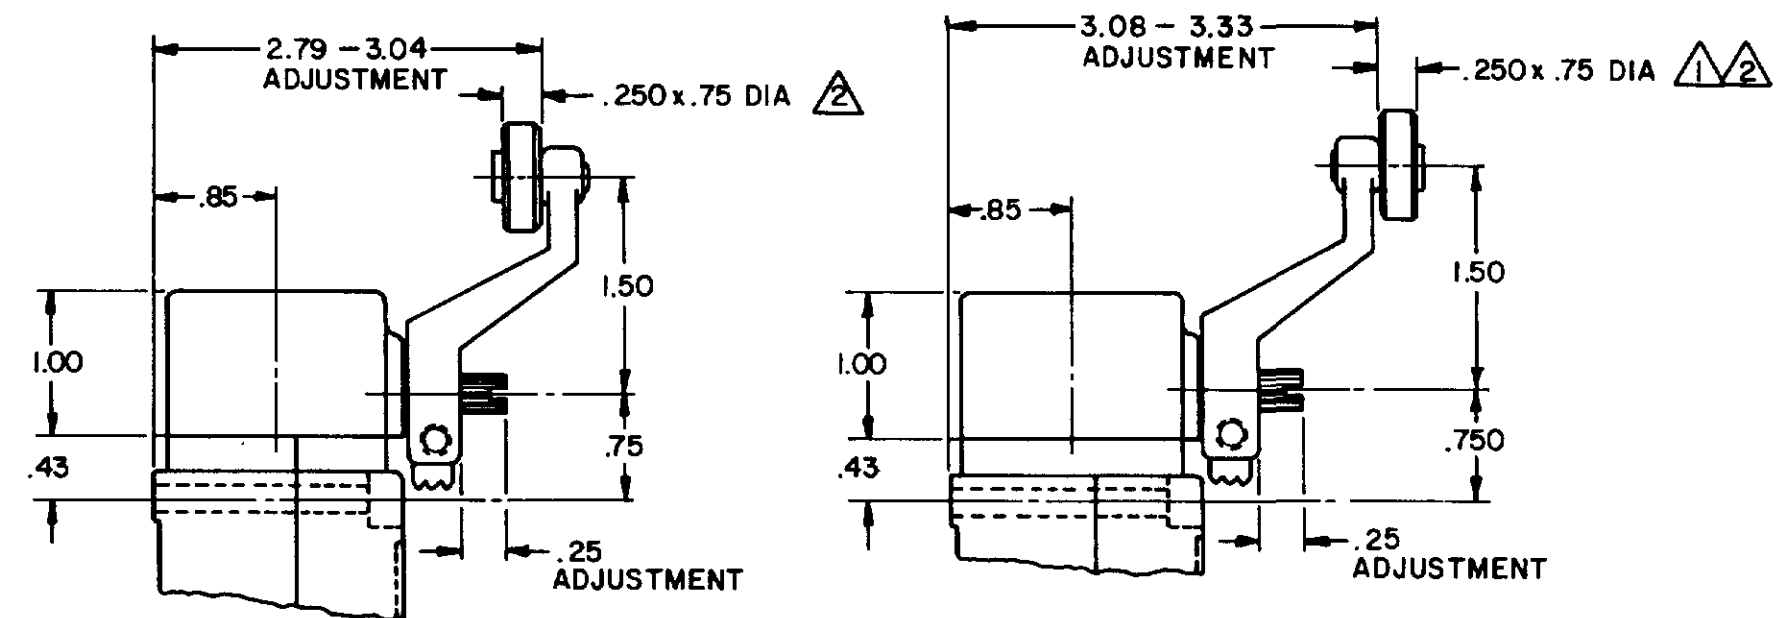


LSZ55 TYPE LEVERS

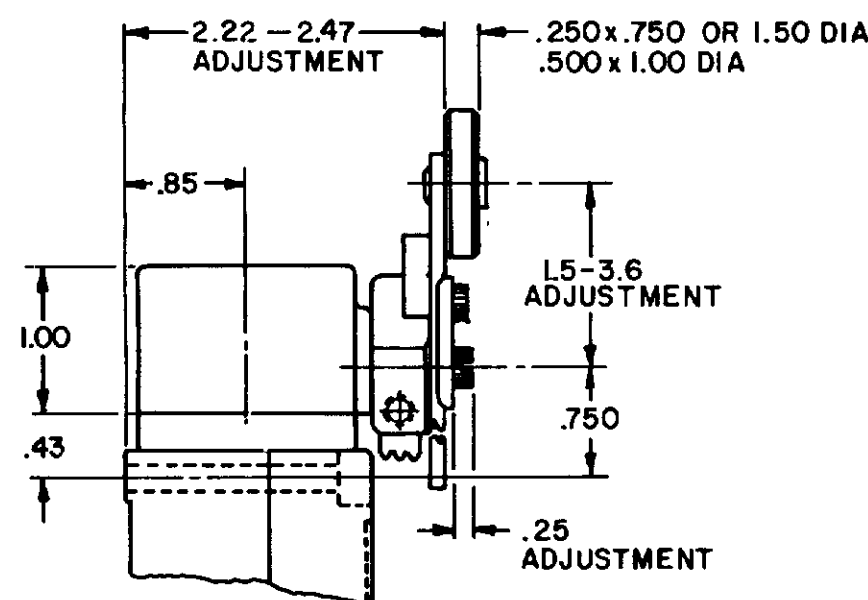


LSZ52 TYPE LEVER

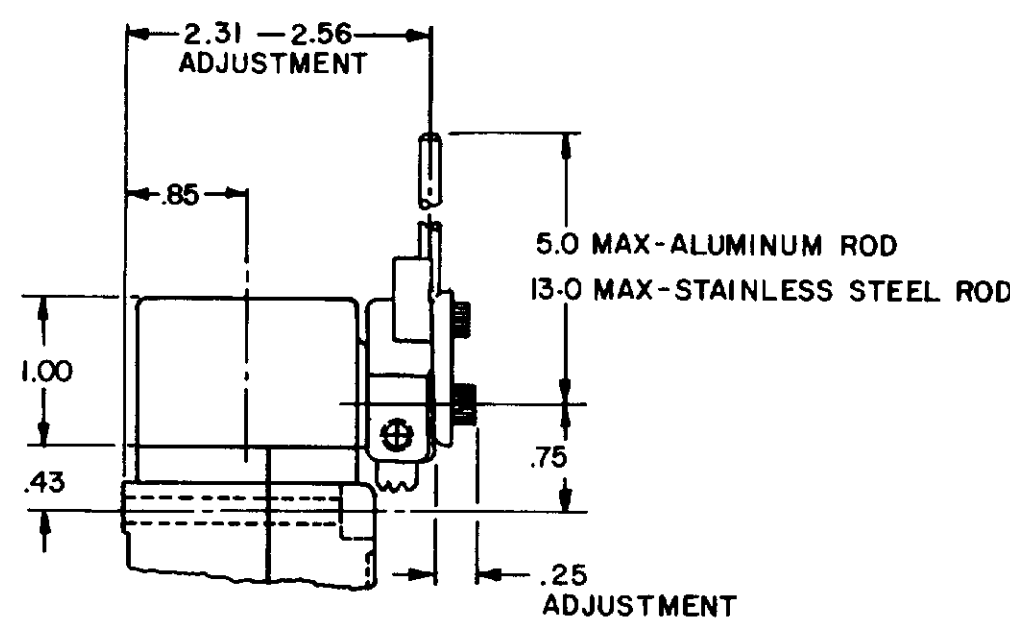

LSZ54 TYPE LEVER

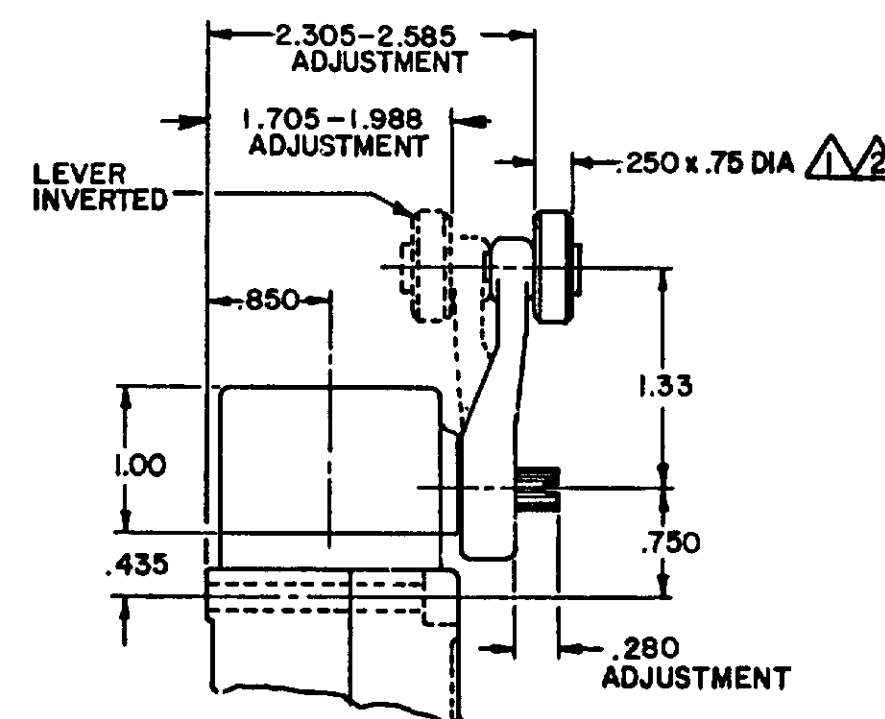

OPEN MOUNTED ROLLER

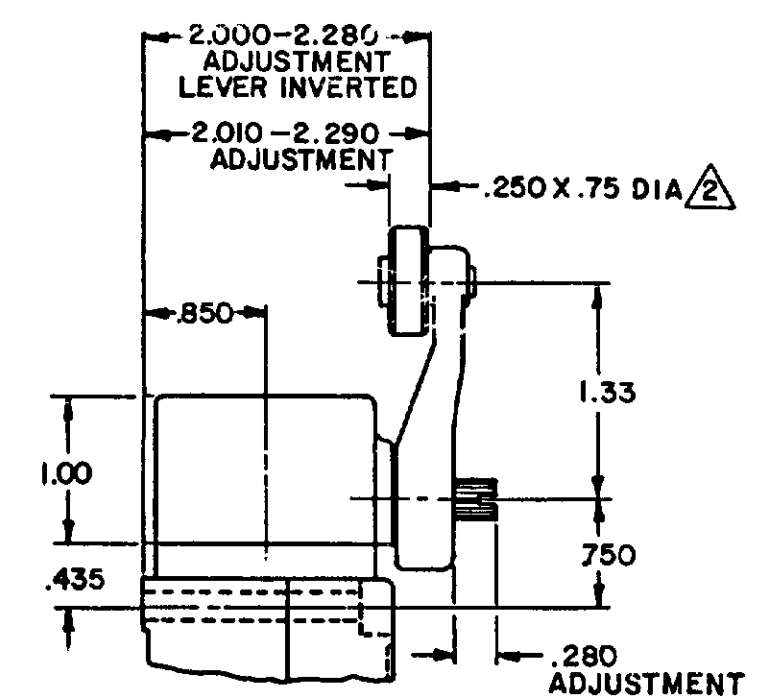

CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

- NOTES
- 1 ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT LEVER CANNOT BE INVERTED
 - 2 FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO "M" DRAWING
 - 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 "M" DRAWING

CATALOG LISTING
LSA-LSW SERIES CHART 1
PAGE 2 OF 10
REPLACES LSA-LSW SERIES
10JUL07 RELEASE NO. CO-78498
PSR
CHECK
11AUG04
AK
11JUL94
JAF
15JUN94
MAM
DRAWN
MASTER


REV	DATE	BY	CHK	DESCRIPTION
1	0031956			
2	10JUL07	BS		
3	201004	B		
4	10AUG00	C		
5	201748	C		
6	17NOV00	C		
7	202198	D		
8	20JAN01	E		
9	204871	F		
10	206581	F		
11	14OCT02	G		
12	206763	G		
13	31OCT02	H		
14	207178	H		
15	14JAN03	J		
16	207474	J		
17	18FEB03	K		
18	0006871	K		

THIRD ANGLE PROJECTION			
SCALE NONE			
DO NOT SCALE PRINT			
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
ONE PLACE	(0)	±.030	
TWO PLACES	(.00)	±.015	
THREE PLACES	(.000)	±.005	
ANGLES		±	
WEIGHT			

TOP ROTARY

SINGLE POLE

DOUBLE POLE

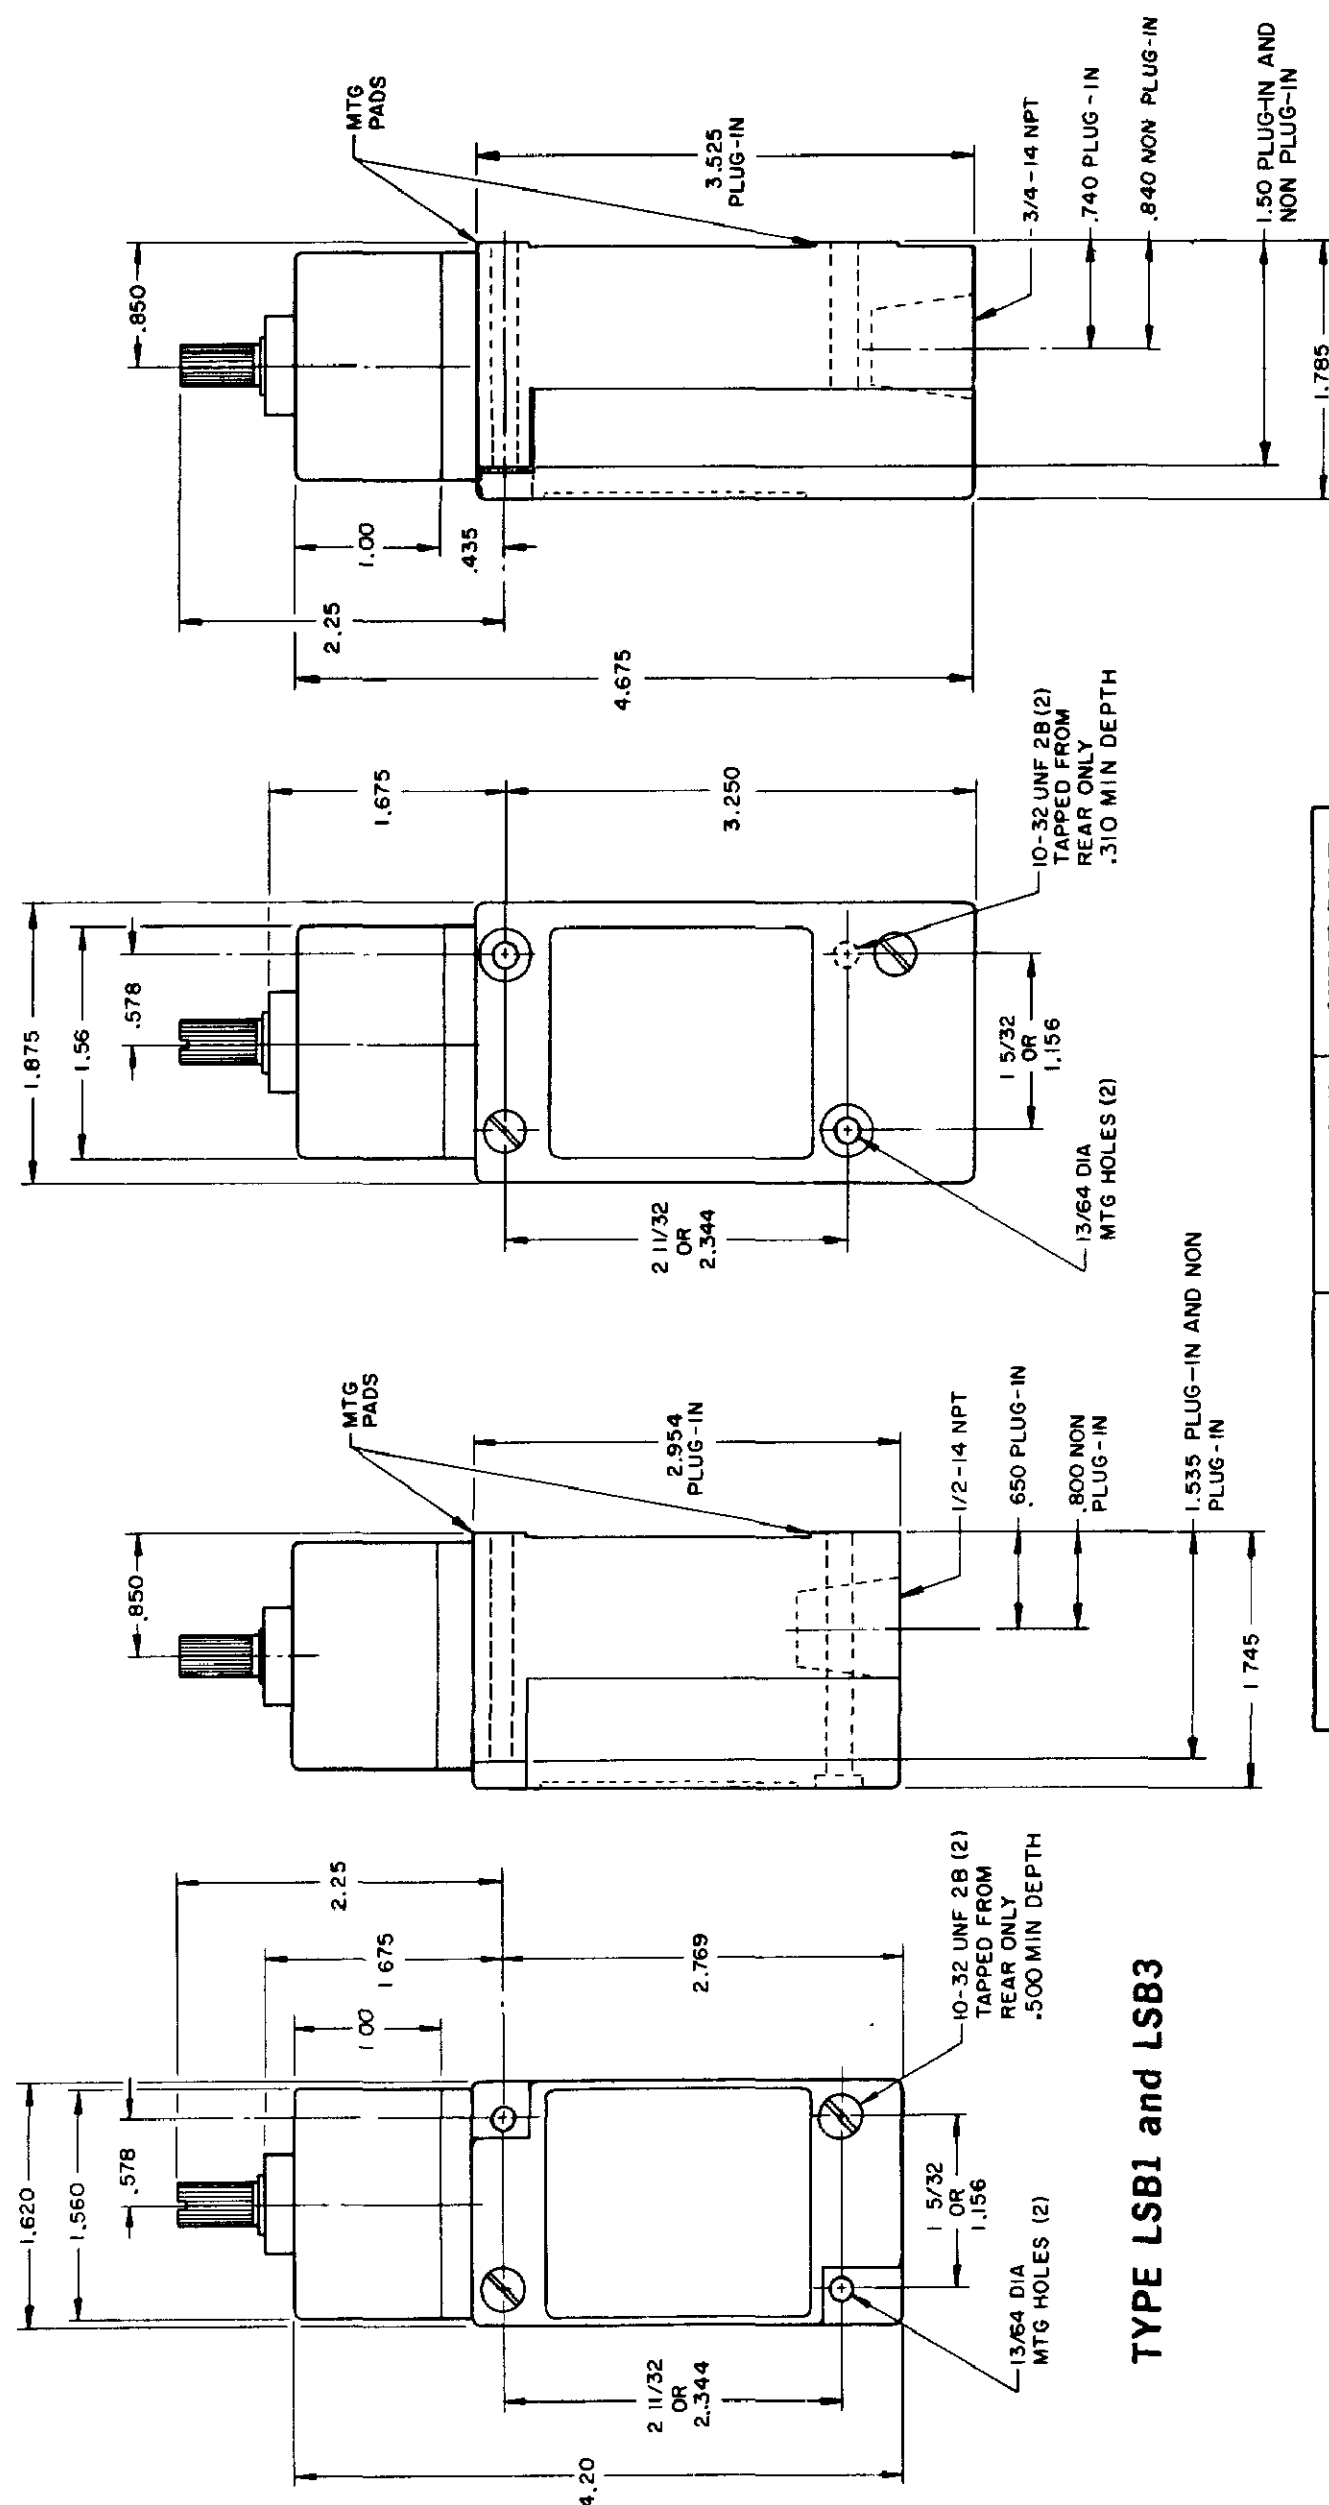

TYPE LSB1 and LSB3

**TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2" - 14 NPT
CONDUIT HOLE**

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

10 AMP CONT.	A.C. VOLTAGE	AMPS AT 35 POWER FACTOR			
		SINGL POLE		DOUBLE POLE	
		MAKE	BREAK	MAKE	BREAK
	120	60	6	30	3
	240	30	3	15	1.5
	480	15	1.5	7.5	.75
	600	12	1.2	6	.6

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT


VOLTAGE	
5 AC OR DC MIN	01 AMP MIN
600 AC	720 VA
240 DC	30 WATT

**DIRECT ACTING (ALSO RATED AT A. C. 10
AMP CONT.)**


D. C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

**WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)**


DOUBLE POLE

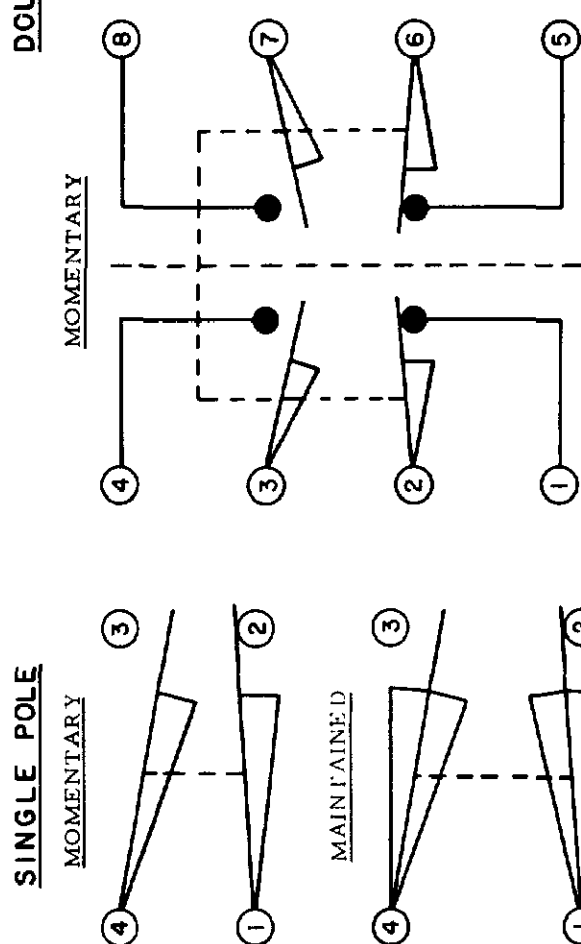


SINGLE POLE

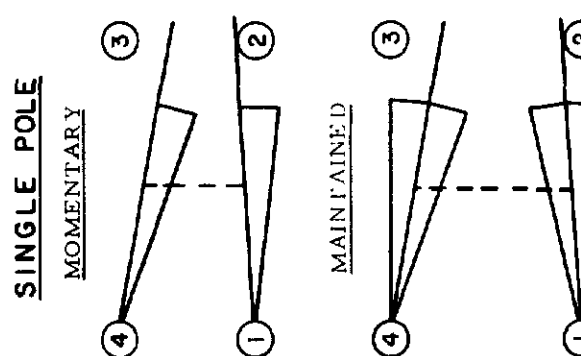

SINGLE POLE

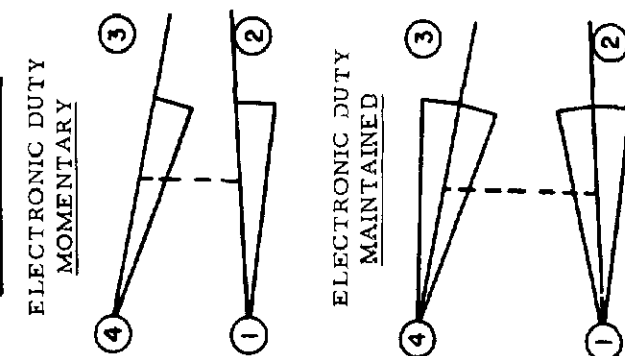


ELECTRONIC DUTY

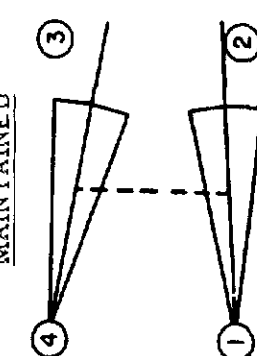

DIRECT ACTING




SINGLE POLE

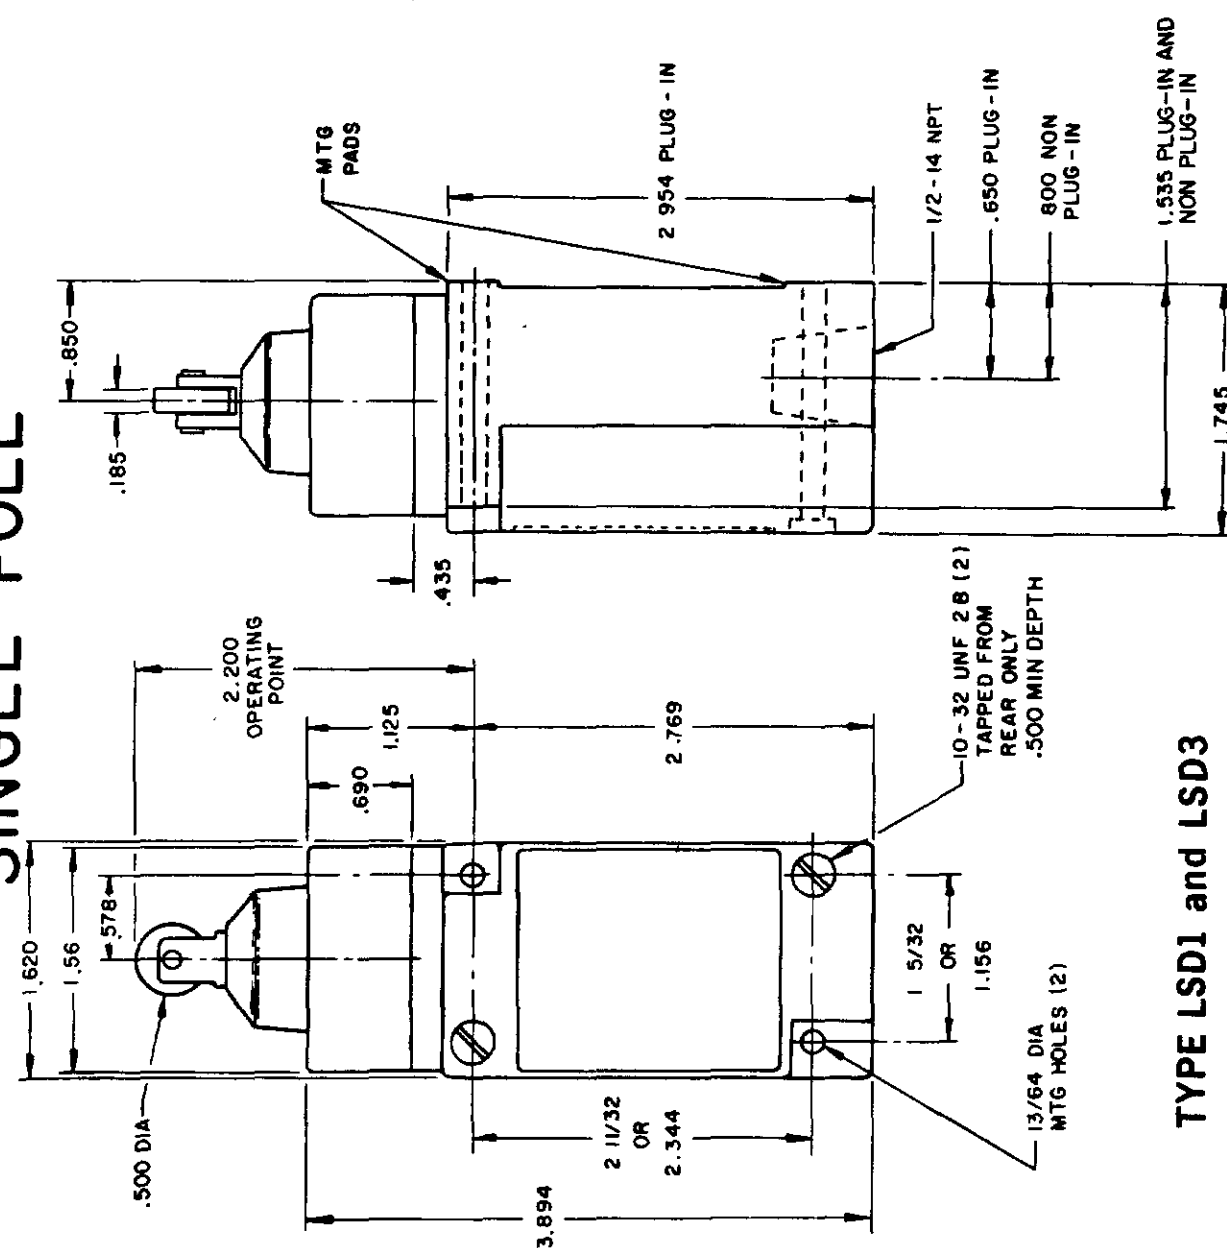


TYPE LSD1 and LSD3

DOUBLE POLE

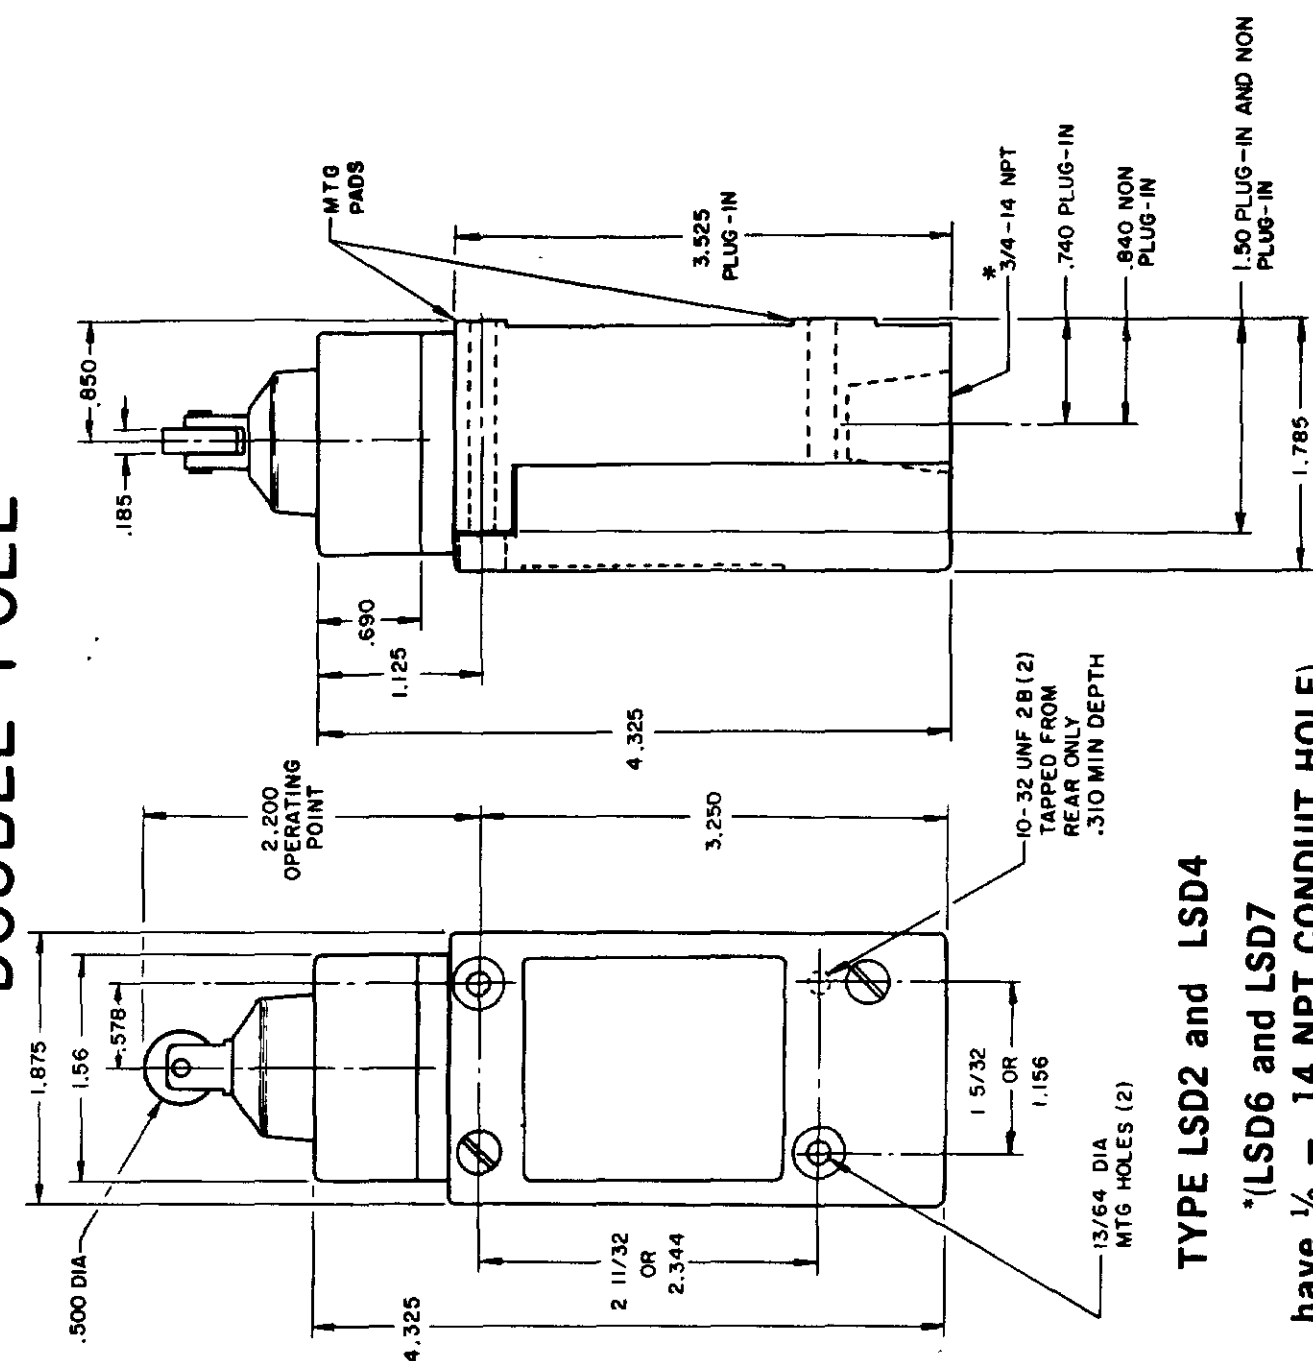


TYPE LSD2 and LSD4


*(LSD6 and LSD7 have 1/2 - 14 NPT CON

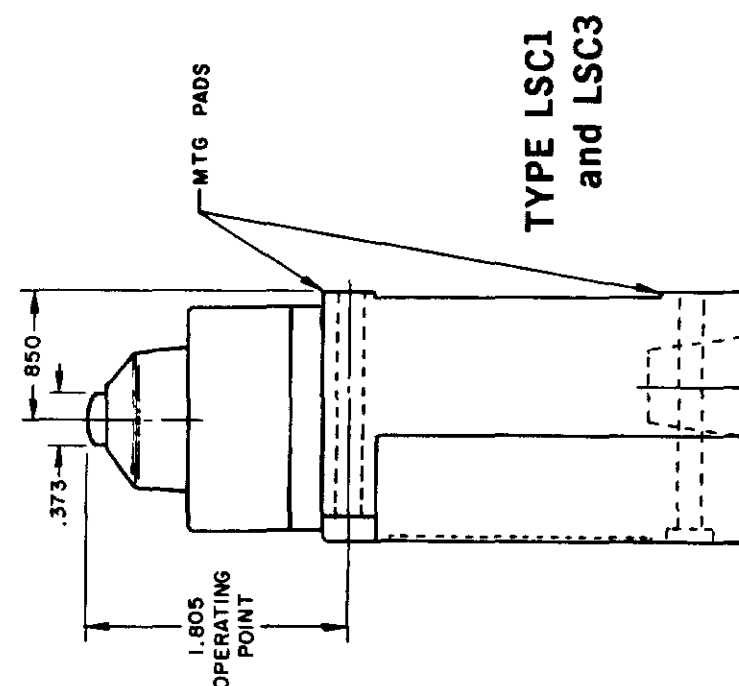

TYPE LSC1 and LSC3

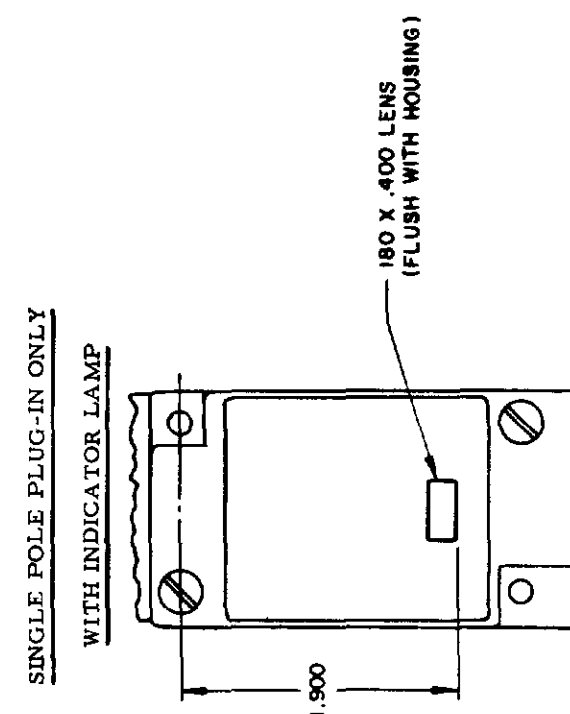


**TYPE LSC2
and LSC4**

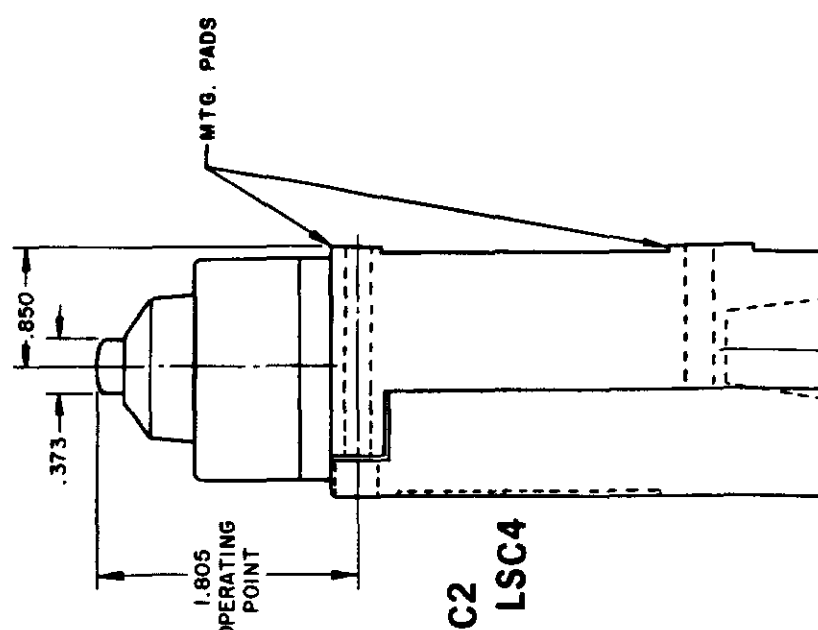


120 LAMP VOLTAGE -
TYPE LSC5, LSD5 or LSV5


240 LAMP VOLTAGE .
TYPE LSC8, LSD8 or LSV8

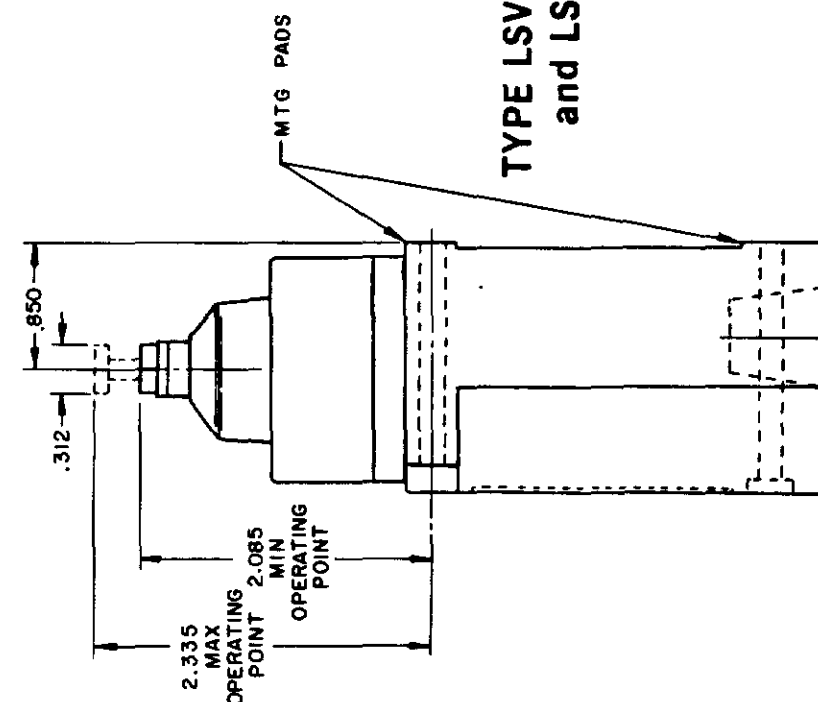

**TYPE LSV1
and LSV3**

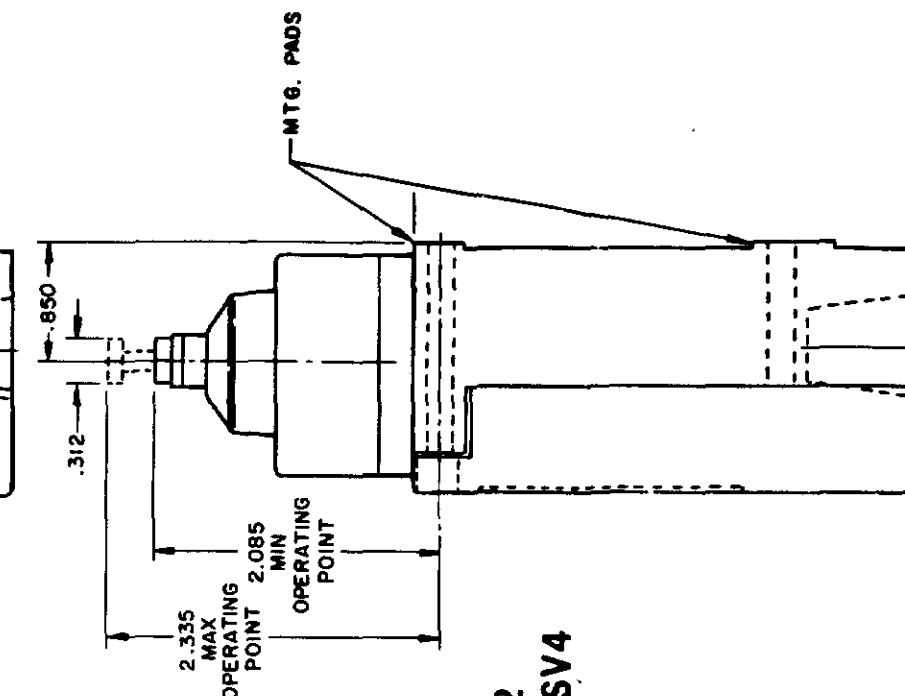

**TYPE LSV2
and LSV4**

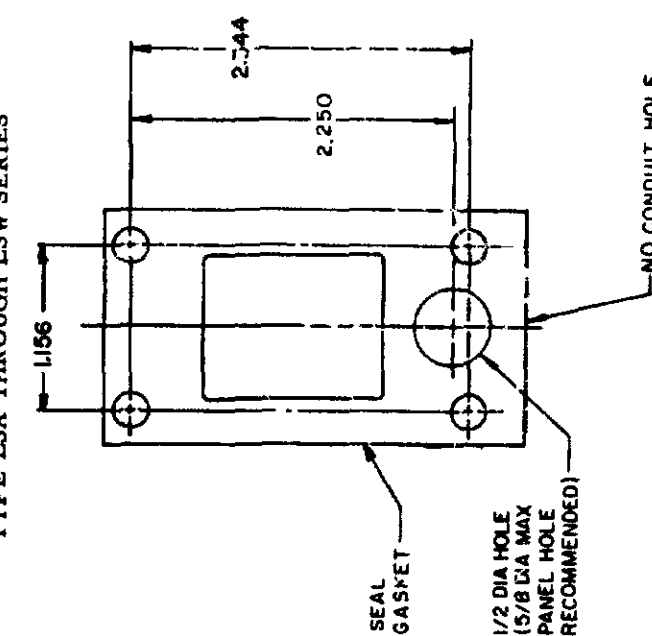

PAGE 4 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING




LSA-LSW SERIES

CHART 1

SCALE NONE

NO-NOT-SCALE-PRINT

SINGLE POLE DOUBLE POLE

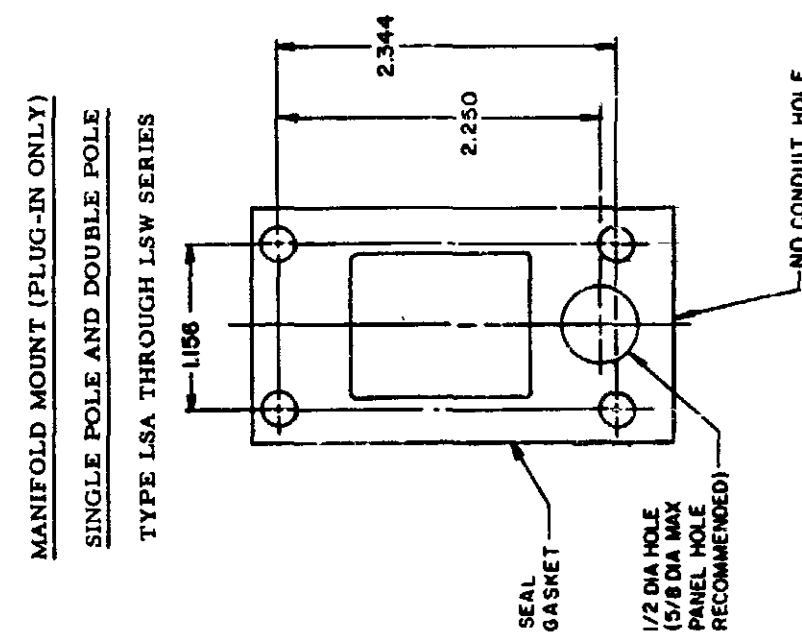


FED MFG CODE 91929

CATALOG LISTING
LSA-LSW SERIES
CHART 1

SCALE NONE

DO NOT SCALE PRINT

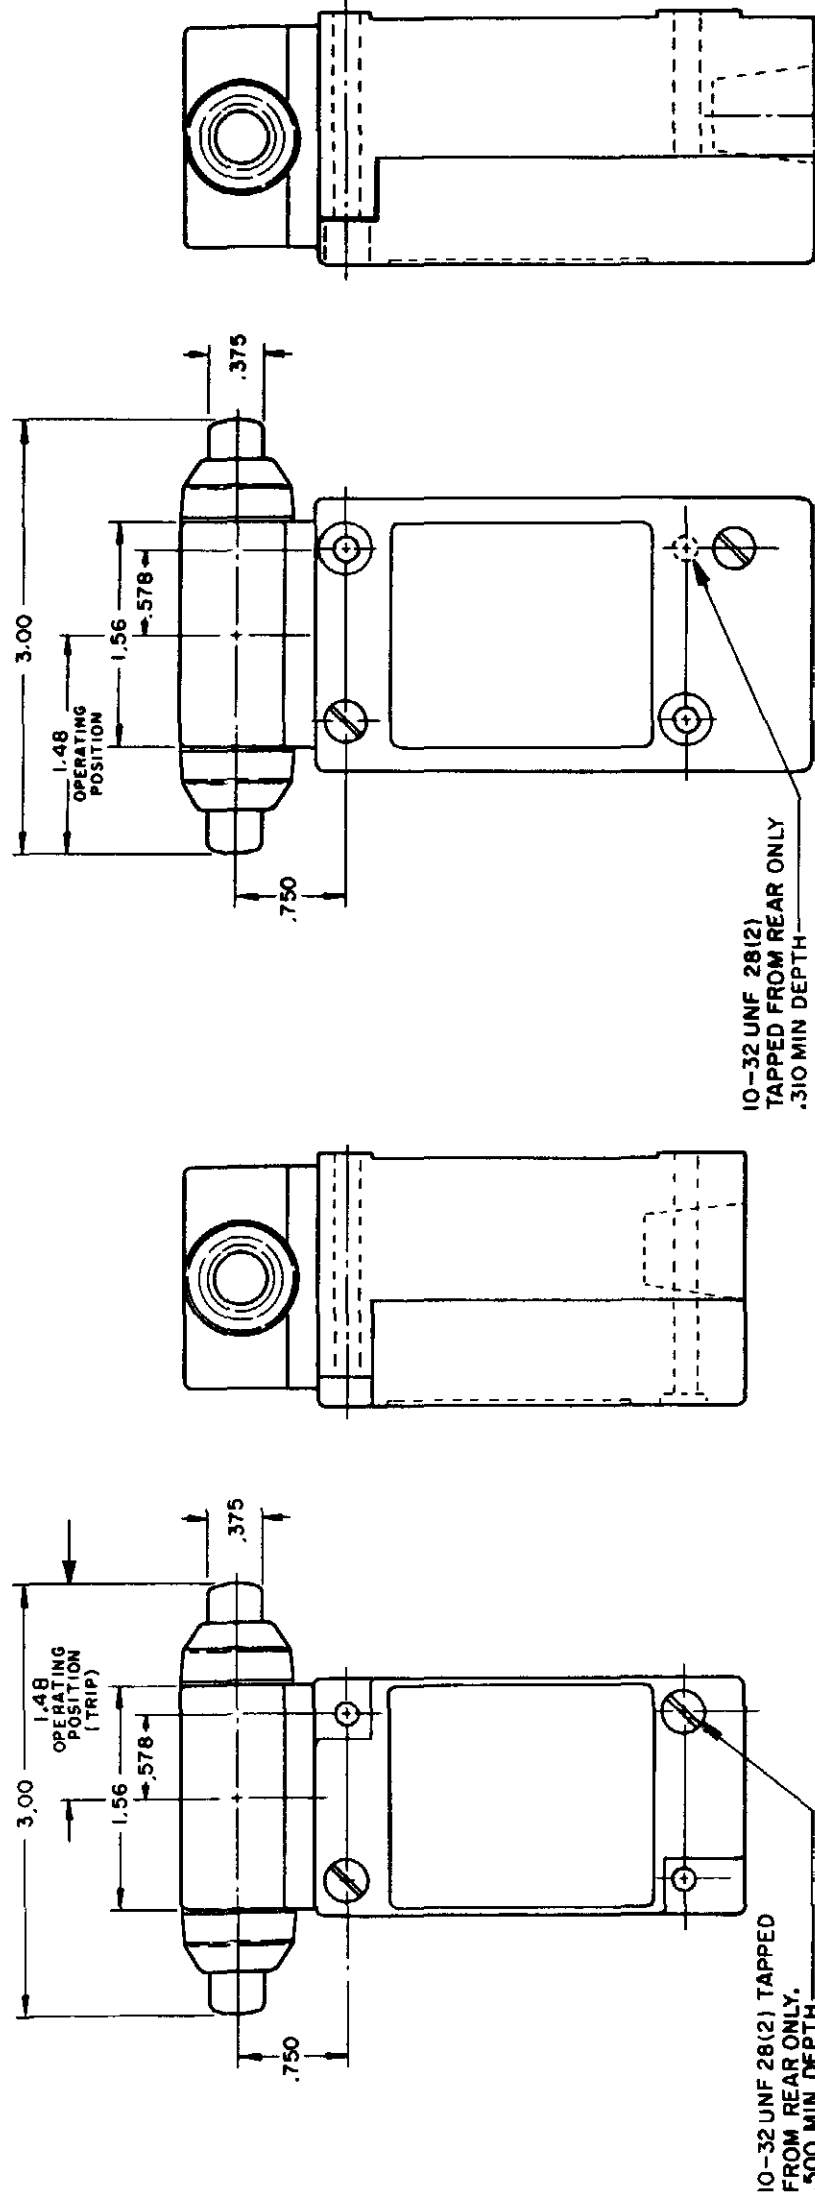

TYPE LSG1 and LSG2

TYPE LSG2 and LSG4

INITIAL POSITION —
(FREE POSITION) } PRETRAVEL
OPERATING POINT } DIFFERENTIAL TRAVEL
FULL TRAVEL — } OVERTRAVEL

TOP PLUNGER TYPES

CHARACTERISTICS	LSC PLUNGER	LSD ROLLER PLUNGER	LSV ADJ PLUNGER	SEQUENCE BASIC		
				LSC	LSD	LSV
PRETRAVEL (MAX)	.070	.070	.070	1ST STEP .070		
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE .015 DOUBLE POLE .020	SINGLE POLE .015 DOUBLE POLE .020	SINGLE POLE .015 DOUBLE POLE .020	2ND STEP .016 MIN ADD'L		
OVERTRAVEL (MIN)	.190	.190	.190	.015 EACH STEP		
OPERATING FORCE (MAX)	4 LBS	4 LBS	4 LBS	.170		
OPERATING POINT	1.805 ± .030	2.200 ± .040	2.085 MIN	1ST STEP 1.815±.030 2.210±.040 2.095 MIN / 2.345 MAX		
FULL OVERTRAVEL FORCE (MAX)	7 LBS	7 LBS	7 LBS	7 LBS		

SIDE PLUNGER TYPES

CHARACTERISTICS	LSE PLUNGER	LSF ROLLER PLUNGER	LSW ADJ PLUNGER	LSG PLUNGER MAINTAINED	SEQUENCE BASIC		
					LSE	LSF	LSW
PRETRAVEL (MAX)	.100	.100	.100	.170	1ST STEP .100		
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.045	.090	2ND STEP .020 MIN ADD'L		
OVERTRAVEL (MIN)	.190	.190	.190	.080	.025 EACH STEP		
OPERATING FORCE (MAX)	6 LBS	6 LBS	6 LBS	10 LBS	.170		
OPERATING POINT	1.300 ± .030	1.735 ± .040	ADJUSTABLE FROM 1.615 MIN 1.865 MAX	1.480 ± .030	1ST STEP 1.310±.030 1.745±.040 1.625 MIN / 1.875 MAX		
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	6 LBS	10 LBS	6 LBS		

REVISIONS	BS	10 JUL 07	
	B	201004	
C	10 AUG 00		
	C	201748	
D	17 NOV 00		
	D	202198	
E	23 JAN 01		
	E	204871	
F	14 FEB 02		
	F	206581	
G	14 OCT 02		
	G	206763	
H	31 OCT 02		
	H	207179	
J	14 JAN 03		
	J	207474	
K	18 FEB 03		
	K	0006871	
MAM	15 JUN 94		
	MAM	11 AUG 94	

ISSUE	12	PSR	10 JUL 07	CHECK	AK	11 AUG 04	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES
LSA-LSW SERIES CHART 1										
PAGE 7 OF 10										

CATALOG LISTING

LSA-LSW SERIES CHART 1

LSA-LSW SERIES

RASTER
DRAWN

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

10 JUL 07

CHECK

AK

11 AUG 04

RELEASE NO


CO-78498

REPLACES

LSA-LSW SERIES

12

PSR

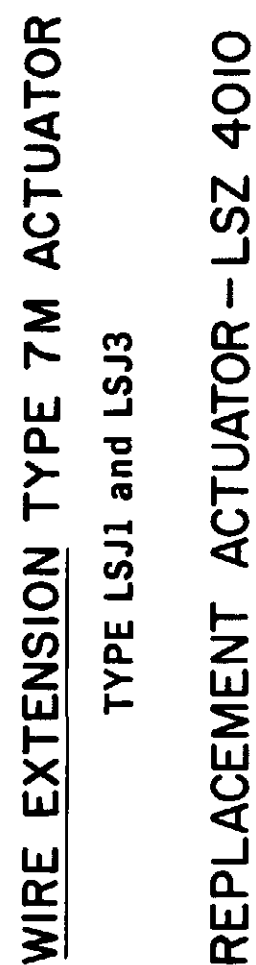

SINGLE POLE




	CAT WHISKER		WOBBLE STICK			
	5 1/2" COIL	5 1/2" WIRE	7 1/8" WIRE	ROD	CABLE	WIRE
PRETRAVEL (APPROX) IN. RADIUS	2	2	4.5	1.0	1.5	4.0
OPERATING FORCE- OZ (MAX)	7.0	5.0	3.0	10.0	7.0	5.0

CONVERSION BASES


**SINGLE POLE
(SIDE ROTARY)
LSZ 4003**

**DOUBLE POLE
(SIDE ROTARY)
LSZ4004**

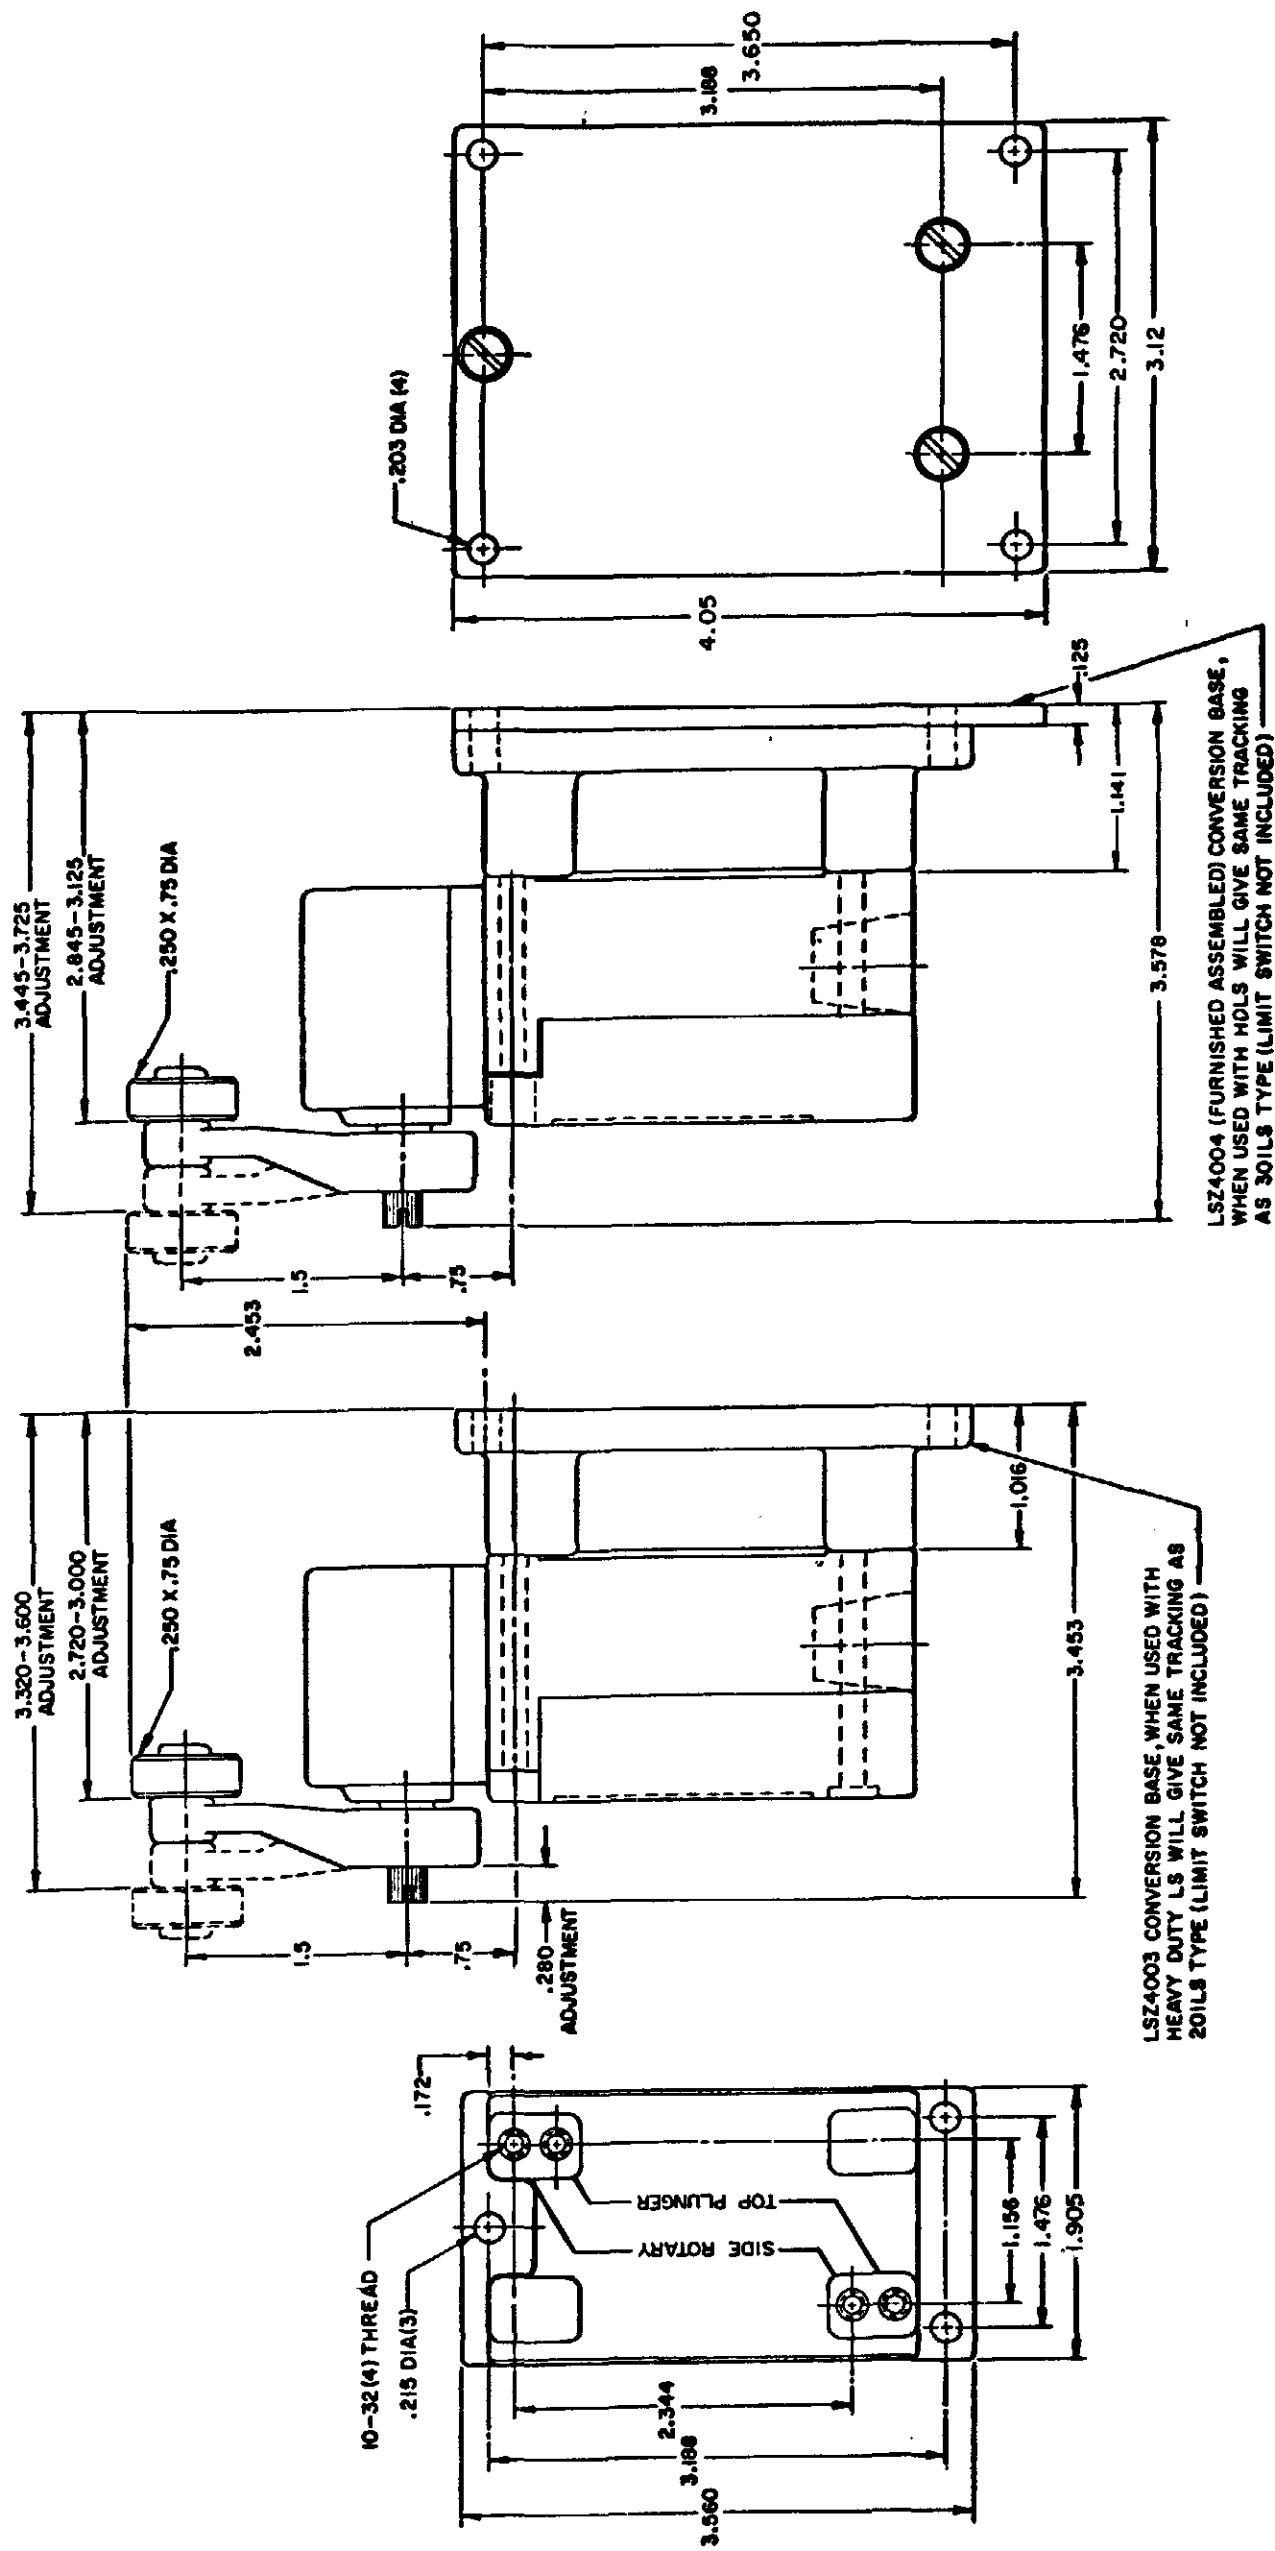

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE TOP PLUNGER LSZ4003

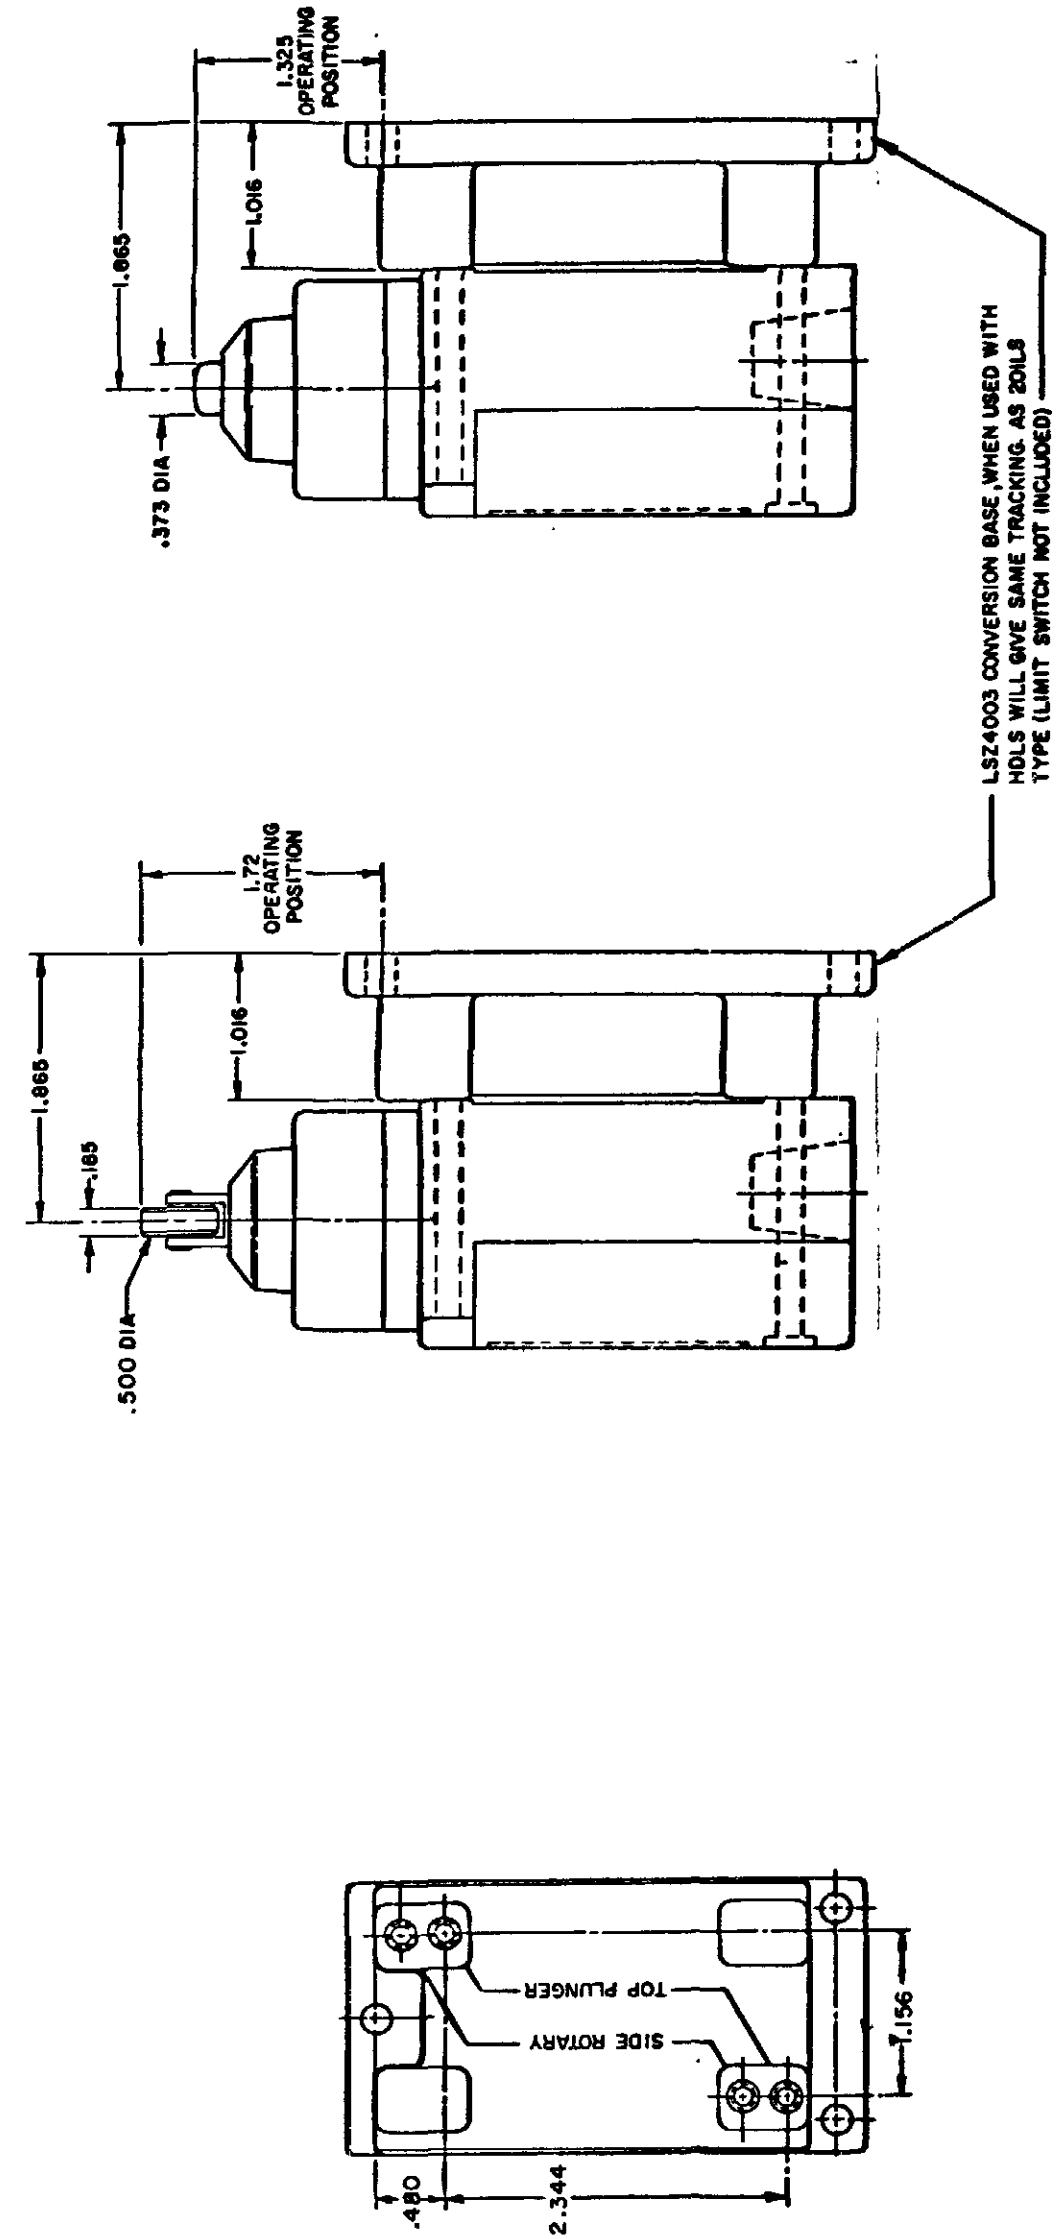

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF
LIMIT SWITCH

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
MICRO SWITCH a Honeywell Division FED MFG CODE 91029	SWITCH - ENCLOSED	CATALOG LISTING
		LSA-LSW SERIES CHART 1

SCALE FULL
DO NOT SCALE PRINT

HEAD TYPE	CELLULOSE	DETERGENT	5 STAR	ASTM #1	ASTM #2	ASTM #3	ASTM #4	HOUGHTON SAFE 271	HOUGHTON SAFE 820	HOUGHTON SAFE 1010	MINERAL OIL	PETROL OIL	SILICON CR & OIL	SUNSAFE	BEER	STODDARD SOLV.	CHLORINATED SOLVENTS	CITRIC ACID	DI-ESTER SYN. LUBRICANTS	OZONE	HYDRAUL	PROGUARD	PETROL BASE HYDRAULIC OIL	LARD OIL	SILICATE ESTERS
LSA	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSB	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSC	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSD	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSE	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSF	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	2	4	4	2	2	2		
LSG	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSH	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSJ	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSK	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSL	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSM	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSN	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSP	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSR	4	1	1	1	1	2	1	4	1	1	1	1	1	1	4	1	2	4	4	4	1	1	2		
LSV	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	3	4	4	2	2	2		
LSW	4	2	2	1	2	4	4	2	4	2	1	2	1	2	4	1	4	2	4	4	2	2	2		
LST	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																								
LSS	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																								

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331