

# LY R976

## CHIPLED® 0805



### Applications

- Electronic Equipment
- Gaming, Amusement, Gambling
- White Goods

### Features:

- Package: SMT package 0805, colorless diffused resin
- Chip technology: InGaAlP
- Typ. Radiation: 150°
- Color:  $\lambda_{\text{dom}} = 588.0 \text{ nm}$  (● yellow)
- Optical efficacy: 11 lm/W
- Corrosion Robustness Class: 3B
- ESD: 2 kV acc. to ANSI/ESDA/JEDEC JS-001 (HBM)

---

## Ordering Information

| Type          | Luminous Intensity <sup>1)</sup><br>$I_F = 20 \text{ mA}$<br>$I_v$ | Ordering Code |
|---------------|--------------------------------------------------------------------|---------------|
| LY R976-PS-36 | 45 ... 280 mcd                                                     | Q62702P5177   |

---

## Maximum Ratings

| Parameter                                                                            | Symbol    |      | Values |
|--------------------------------------------------------------------------------------|-----------|------|--------|
| Operating Temperature                                                                | $T_{op}$  | min. | -30 °C |
|                                                                                      |           | max. | 85 °C  |
| Storage Temperature                                                                  | $T_{stg}$ | min. | -40 °C |
|                                                                                      |           | max. | 85 °C  |
| Junction Temperature                                                                 | $T_j$     | max. | 95 °C  |
| Forward current<br>$T_A = 25\text{ °C}$                                              | $I_F$     | max. | 25 mA  |
| Surge Current<br>$t \leq 10\text{ }\mu\text{s}$ ; $D = 0.005$ ; $T_A = 25\text{ °C}$ | $I_{FS}$  | max. | 100 mA |
| Reverse voltage <sup>2)</sup><br>$T_A = 25\text{ °C}$                                | $V_R$     | max. | 12 V   |
| ESD withstand voltage<br>acc. to ANSI/ESDA/JEDEC JS-001 (HBM)                        | $V_{ESD}$ |      | 2 kV   |

## Characteristics

$I_F = 20 \text{ mA}$ ;  $T_A = 25 \text{ °C}$

| Parameter                                                  | Symbol                       |      | Values             |
|------------------------------------------------------------|------------------------------|------|--------------------|
| Peak Wavelength <sup>3)</sup>                              | $\lambda_{\text{peak}}$      | typ. | 591.0 nm           |
| Dominant Wavelength <sup>3)</sup>                          | $\lambda_{\text{dom}}$       | min. | 584.5 nm           |
|                                                            |                              | typ. | 588.0 nm           |
|                                                            |                              | max. | 594.5 nm           |
| Spectral Bandwidth at 50% $I_{\text{rel,max}}$             | $\Delta\lambda$              | typ. | 15.0 nm            |
| Viewing angle at 50 % $I_V$                                | $2\phi$                      | typ. | 160 °              |
| Forward Voltage <sup>4)</sup><br>$I_F = 20 \text{ mA}$     | $V_F$                        | typ. | 2.00 V             |
|                                                            |                              | max. | 2.50 V             |
| Reverse current <sup>2)</sup><br>$V_R = 12 \text{ V}$      | $I_R$                        | typ. | 0.01 $\mu\text{A}$ |
|                                                            |                              | max. | 10 $\mu\text{A}$   |
| Temperature Coefficient of Peak Wavelength                 | $TC_{\lambda_{\text{peak}}}$ | typ. | 0.13 nm / K        |
| Temperature Coefficient of Dominant Wavelength             | $TC_{\lambda_{\text{dom}}}$  | typ. | 0.1 nm / K         |
| Temperature Coefficient of Forward Voltage                 | $TC_{V_F}$                   | typ. | -2.5 mV / K        |
| Real thermal resistance junction/ambient <sup>5)6)</sup>   | $R_{\text{thJA real}}$       | max. | 800 K / W          |
| Real thermal resistance junction/solderpoint <sup>5)</sup> | $R_{\text{thJS real}}$       | max. | 450 K / W          |

## Brightness Groups

| Group | Luminous Intensity <sup>1)</sup><br>$I_F = 20 \text{ mA}$<br>min.<br>$I_v$ | Luminous Intensity <sup>1)</sup><br>$I_F = 20 \text{ mA}$<br>max.<br>$I_v$ | Luminous Flux <sup>7)</sup><br>$I_F = 20 \text{ mA}$<br>typ.<br>$\Phi_v$ |
|-------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------------------------------------------------------|
| P     | 45 mcd                                                                     | 71 mcd                                                                     | 180 mlm                                                                  |
| Q     | 71 mcd                                                                     | 112 mcd                                                                    | 290 mlm                                                                  |
| R     | 112 mcd                                                                    | 180 mcd                                                                    | 460 mlm                                                                  |
| S     | 180 mcd                                                                    | 280 mcd                                                                    | 720 mlm                                                                  |

## Wavelength Groups

| Group | Dominant Wavelength <sup>3)</sup><br>min.<br>$\lambda_{\text{dom}}$ | Dominant Wavelength <sup>3)</sup><br>max.<br>$\lambda_{\text{dom}}$ |
|-------|---------------------------------------------------------------------|---------------------------------------------------------------------|
| 3     | 584.5 nm                                                            | 587.0 nm                                                            |
| 4     | 587.0 nm                                                            | 589.5 nm                                                            |
| 5     | 589.5 nm                                                            | 592.0 nm                                                            |
| 6     | 592.0 nm                                                            | 594.5 nm                                                            |


## Group Name on Label

### Example: P-3

| Brightness | Wavelength |
|------------|------------|
| P          | 3          |


## Relative Spectral Emission <sup>7)</sup>

$$I_{\text{rel}} = f(\lambda); I_F = 20 \text{ mA}; T_A = 25^\circ\text{C}$$

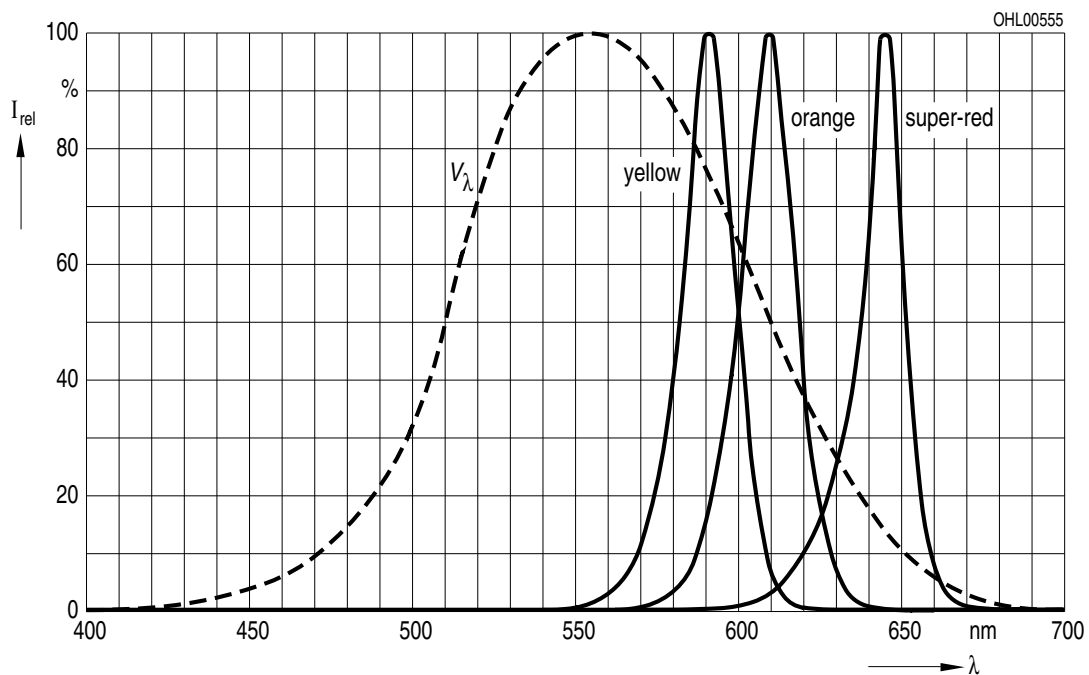


## Radiation Characteristics <sup>7)</sup>

$$I_{\text{rel}} = f(\phi); T_A = 25^\circ\text{C}$$

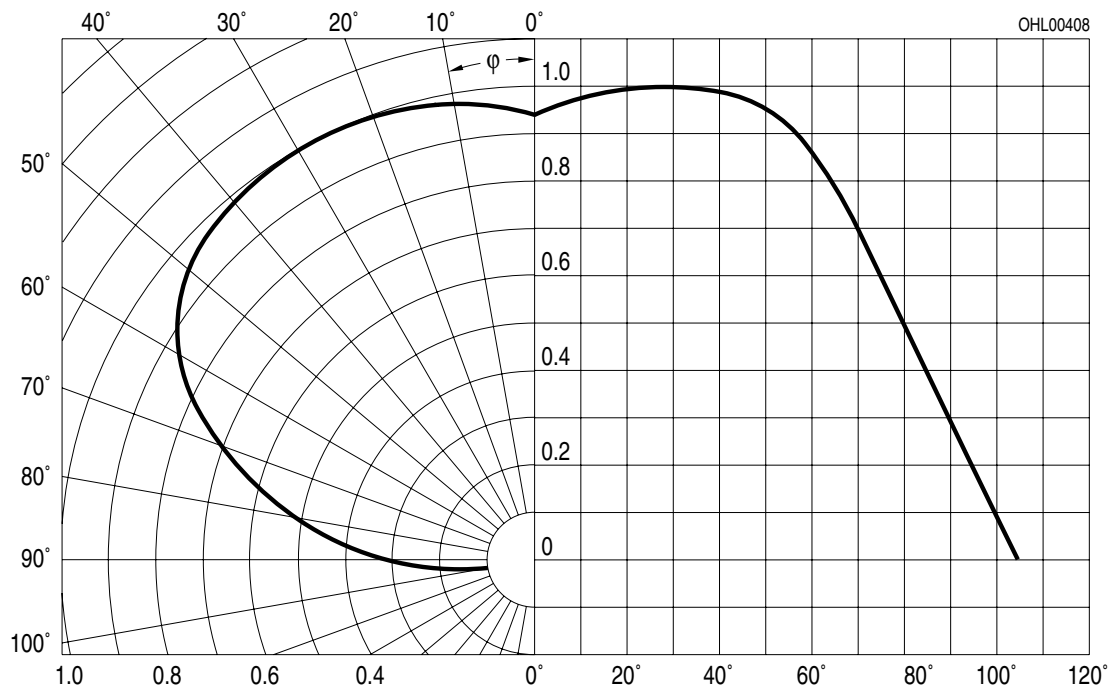


**Forward current** <sup>7)</sup>


$$I_F = f(V_F); T_A = 25\text{ °C}$$

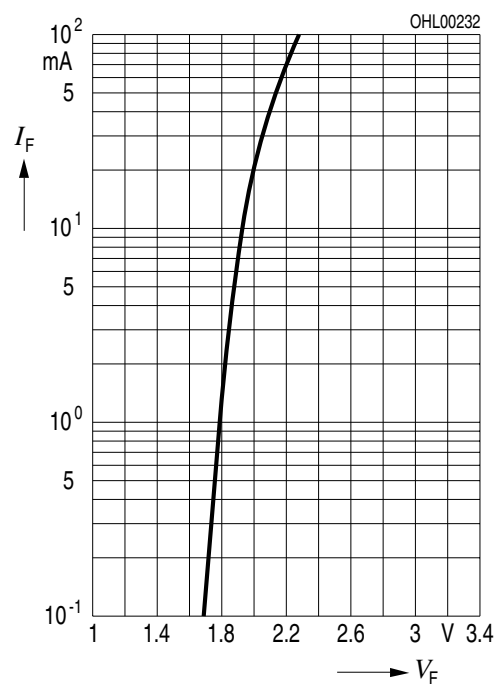**Relative Luminous Intensity** <sup>7), 8)</sup>

$$I_V/I_V(20\text{ mA}) = f(I_F); T_A = 25\text{ °C}$$

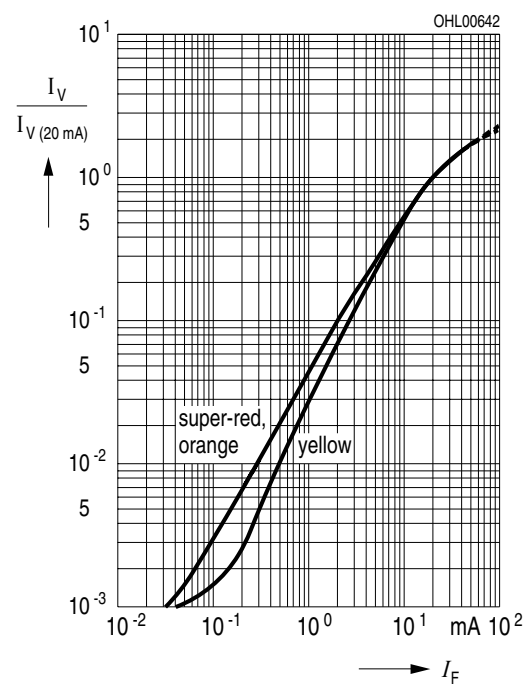
**Relative Luminous Intensity** <sup>7)</sup>

$$I_V/I_V(25\text{ °C}) = f(T_j); I_F = 20\text{ mA}$$

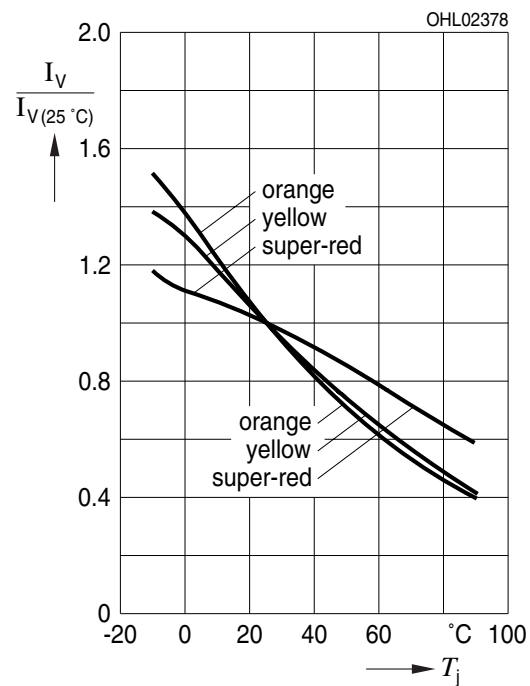


## Max. Permissible Forward Current

$$I_F = f(T)$$

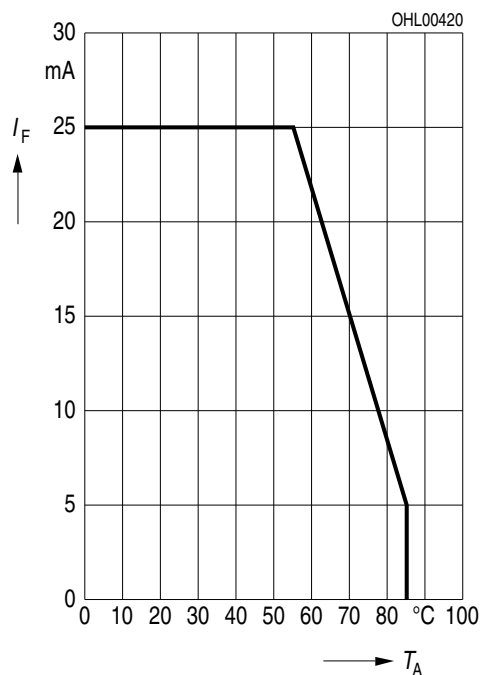


## Permissible Pulse Handling Capability

$$I_F = f(t_p); D: \text{Duty cycle}; T_A = 25^\circ\text{C}$$

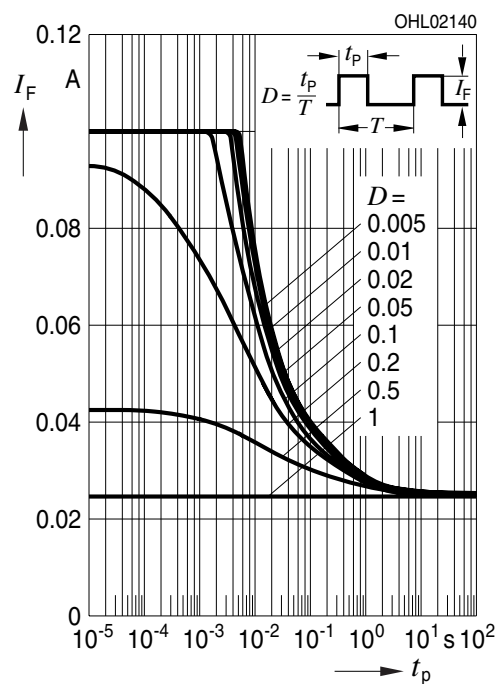


## Permissible Pulse Handling Capability

$$I_F = f(t_p); D: \text{Duty cycle}; T_A = 85^\circ\text{C}$$

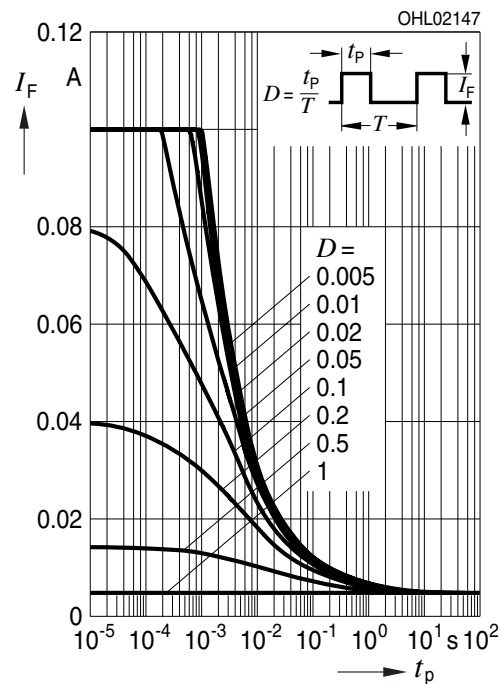




## Dimensional Drawing <sup>9)</sup>

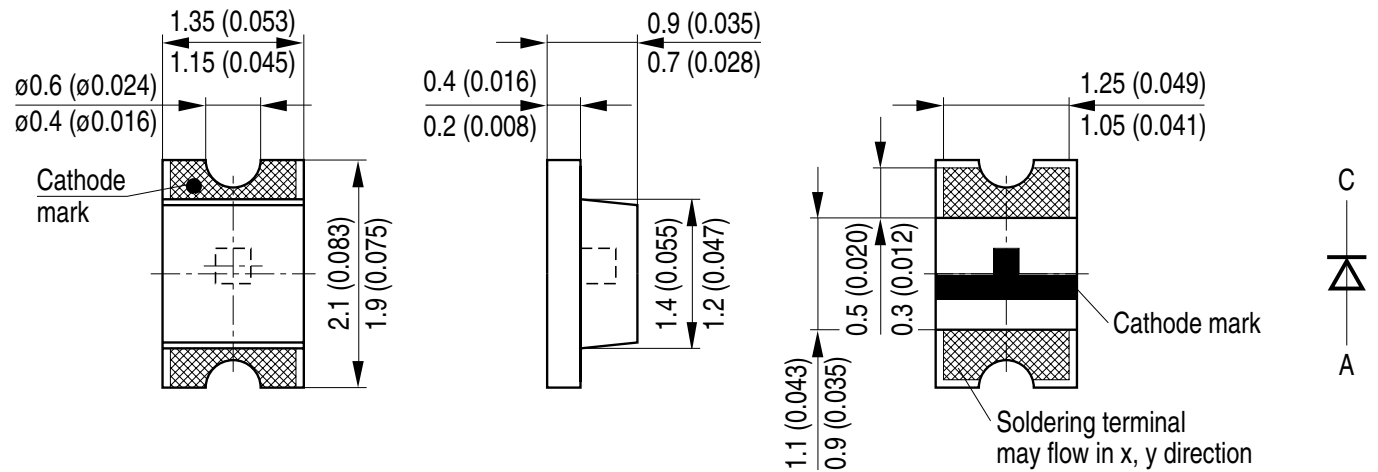

GEOY6024

**Approximate Weight:** 3.0 mg


**Corrosion test:** Class: 3B  
 Test condition: 40°C / 90 % RH / 15 ppm H<sub>2</sub>S / 14 days (stricter than IEC 60068-2-43)

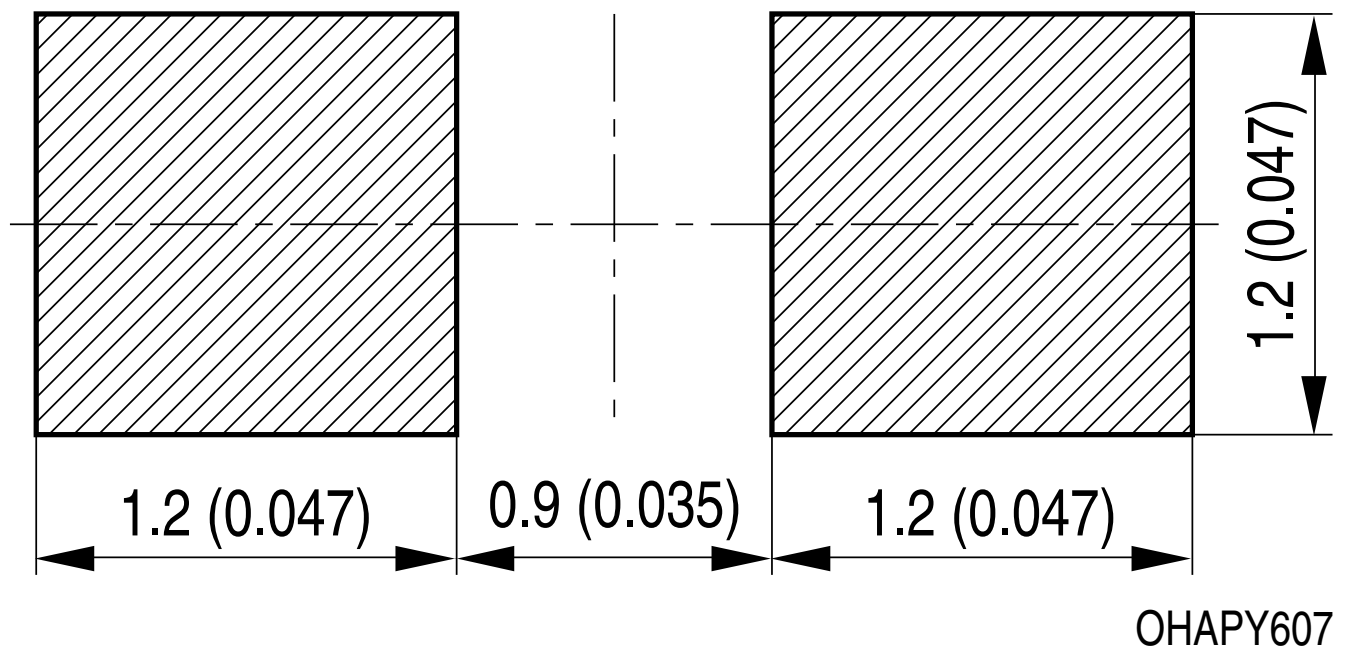**Recommended Solder Pad** <sup>9)</sup>

For superior solder joint connectivity results we recommend soldering under standard nitrogen atmosphere. Package not suitable for ultra sonic cleaning.

## Reflow Soldering Profile


Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

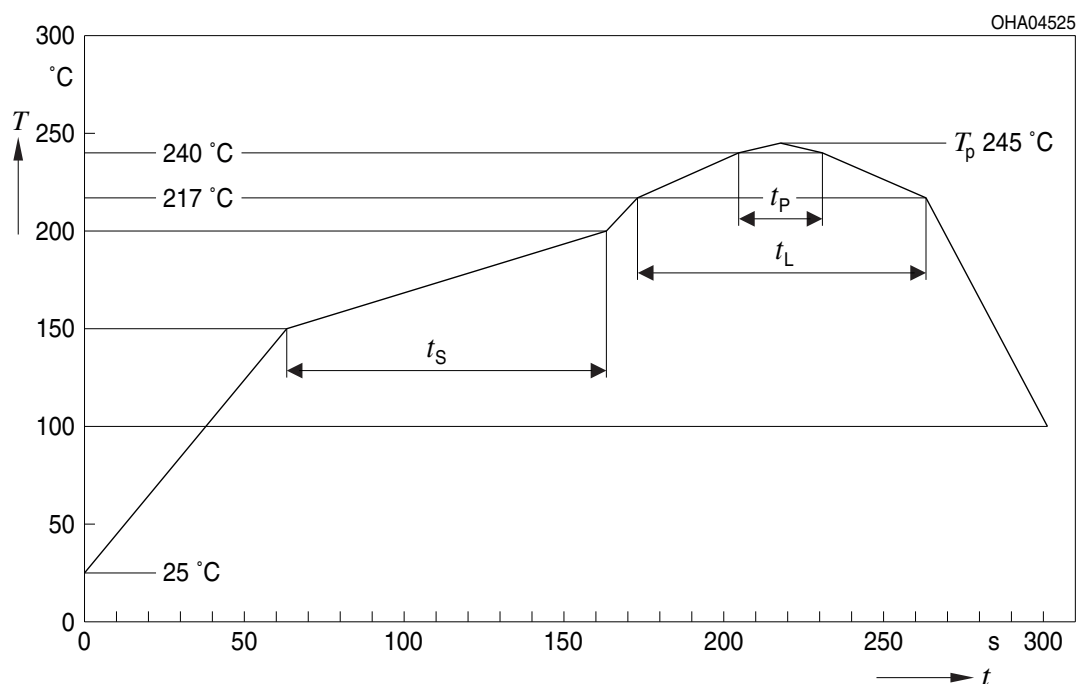

| Profile Feature                                                          | Symbol | Pb-Free (SnAgCu) Assembly |                |         | Unit |
|--------------------------------------------------------------------------|--------|---------------------------|----------------|---------|------|
|                                                                          |        | Minimum                   | Recommendation | Maximum |      |
| Ramp-up rate to preheat <sup>*)</sup><br>25 °C to 150 °C                 |        |                           | 2              | 3       | K/s  |
| Time $t_s$<br>$T_{Smin}$ to $T_{Smax}$                                   | $t_s$  | 60                        | 100            | 120     | s    |
| Ramp-up rate to peak <sup>*)</sup><br>$T_{Smax}$ to $T_p$                |        |                           | 2              | 3       | K/s  |
| Liquidus temperature                                                     | $T_L$  |                           | 217            |         | °C   |
| Time above liquidus temperature                                          | $t_L$  |                           | 80             | 100     | s    |
| Peak temperature                                                         | $T_p$  |                           | 245            | 260     | °C   |
| Time within 5 °C of the specified peak<br>temperature $T_p - 5\text{ K}$ | $t_p$  | 10                        | 20             | 30      | s    |
| Ramp-down rate*<br>$T_p$ to 100 °C                                       |        |                           | 3              | 6       | K/s  |
| Time<br>25 °C to $T_p$                                                   |        |                           |                | 480     | s    |


All temperatures refer to the center of the package, measured on the top of the component

\* slope calculation  $DT/Dt$ :  $Dt$  max. 5 s; fulfillment for the whole T-range

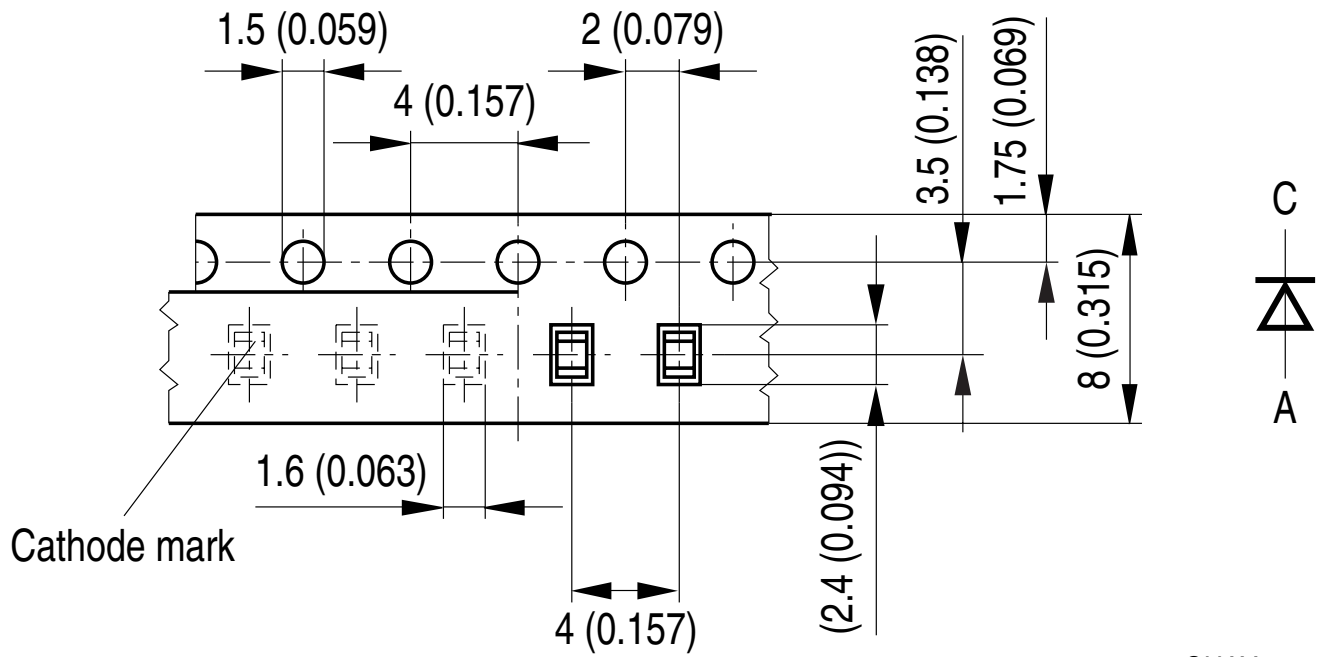**Taping** <sup>9)</sup>

OHAY0530

## Tape and Reel <sup>10)</sup>

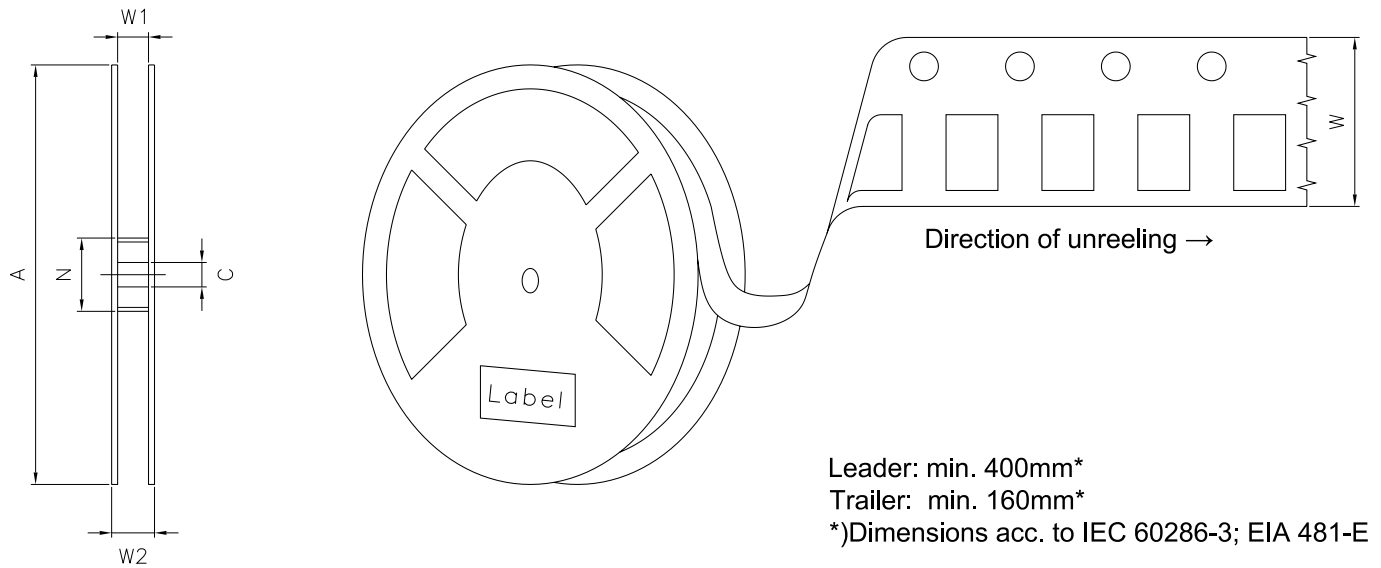

### Reel dimensions [mm]

| A      | W               | N <sub>min</sub> | W <sub>1</sub> | W <sub>2 max</sub> | Pieces per PU |
|--------|-----------------|------------------|----------------|--------------------|---------------|
| 180 mm | 8 + 0.3 / - 0.1 | 60               | 8.4 + 2        | 14.4               | 4000          |

## Barcode-Product-Label (BPL)

**OSRAM Opto Semiconductors**

LX XXXX BIN1: XX-XX-X-XXX-X

RoHS Compliant

(6P) BATCH NO: 1234567890

(1T) LOT NO: 1234567890 (9D) D/C: 1234


(X) PROD NO: 123456789 (Q) QTY: 9999 (G) GROUP: XX-XX-X-X

ML Temp ST  
X XXX °C X

Pack: RXX  
DEMY XXX  
X\_X123\_1234.1234 X


OHA04563

## Dry Packing Process and Materials <sup>9)</sup>

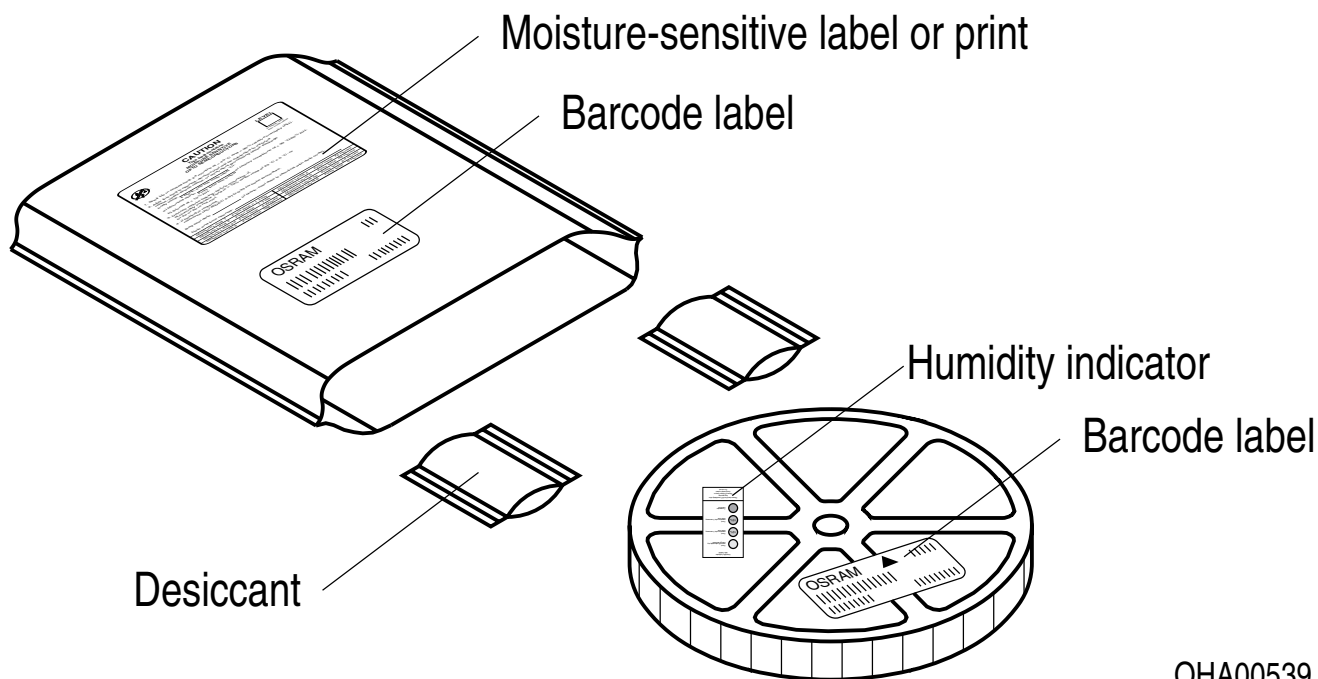

Moisture-sensitive product is packed in a dry bag containing desiccant and a humidity card according JEDEC-STD-033.

Transportation Packing and Materials <sup>9)</sup>

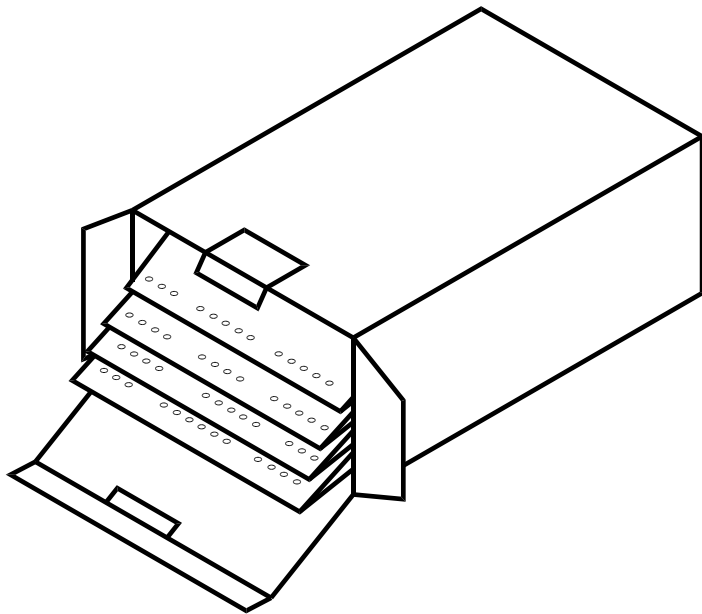


C63062-A3437-X121-01

Dimensions of transportation box in mm

| Width      | Length     | Height    |
|------------|------------|-----------|
| 260 ± 5 mm | 230 ± 5 mm | 85 ± 5 mm |

## Type Designation System

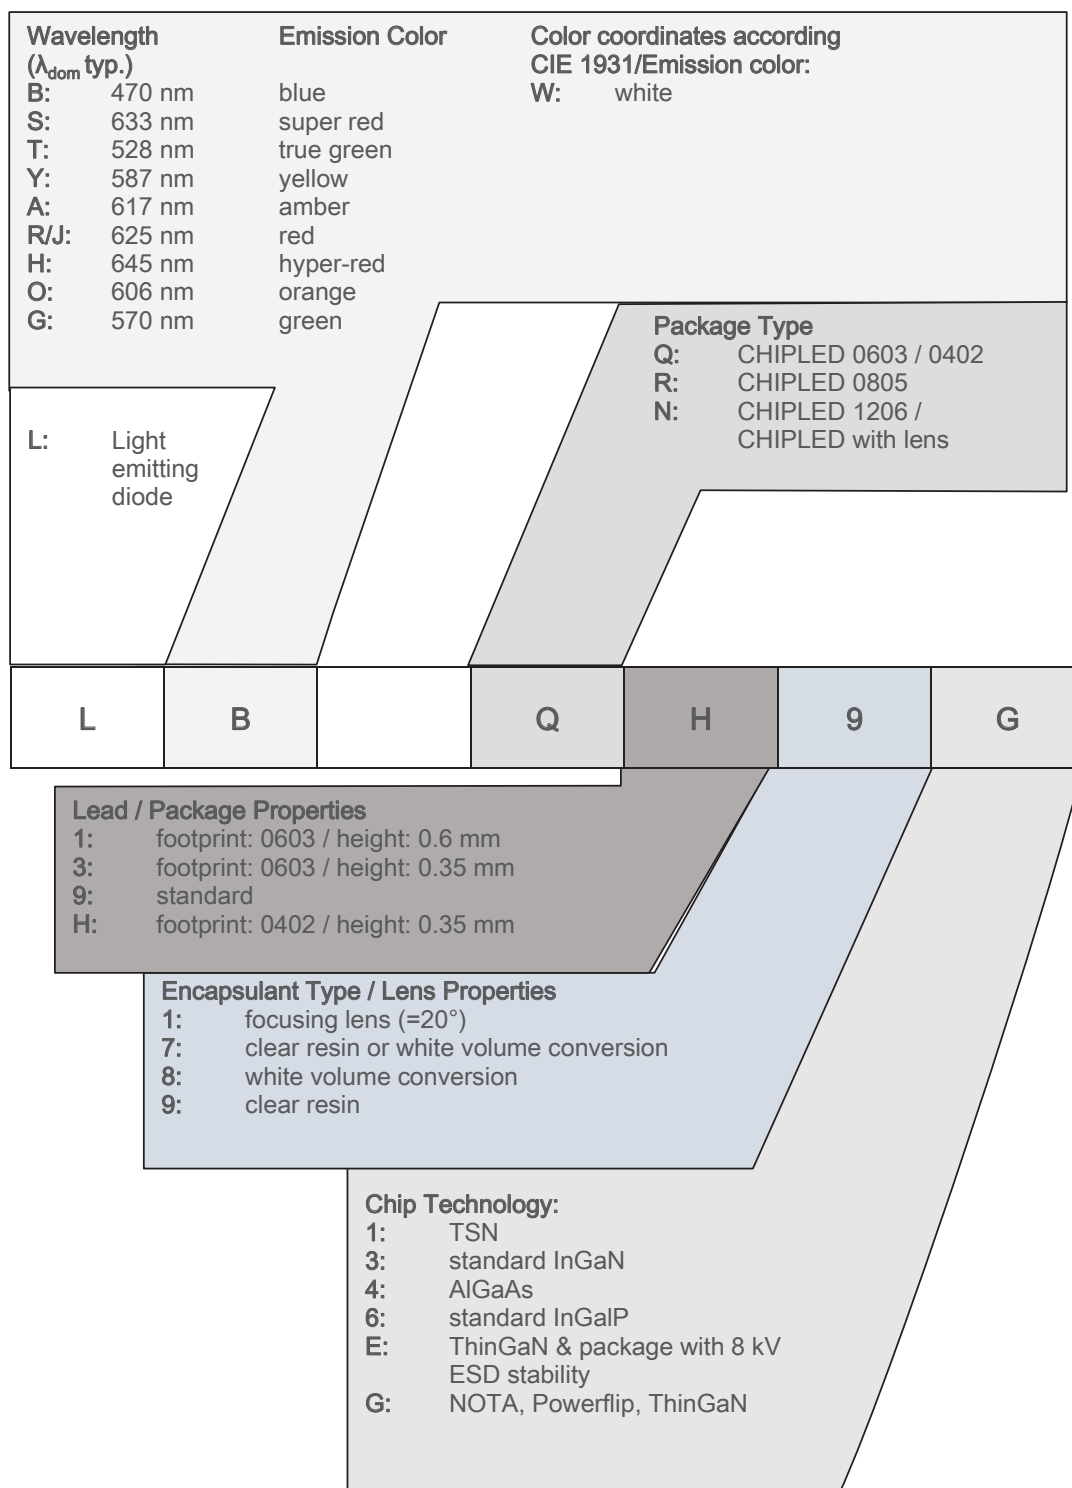



---

## Notes

The evaluation of eye safety occurs according to the standard IEC 62471:2006 (photo biological safety of lamps and lamp systems). Within the risk grouping system of this IEC standard, the device specified in this data sheet falls into the class **exempt group (exposure time 10000 s)**. Under real circumstances (for exposure time, conditions of the eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. When looking at bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment, and even accidents, depending on the situation.

Subcomponents of this device contain, in addition to other substances, metal filled materials including silver. Metal filled materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers minimize device exposure to aggressive substances during storage, production, and use. Devices that showed visible discoloration when tested using the described tests above did show no performance deviations within failure limits during the stated test duration. Respective failure limits are described in the IEC60810.

For further application related informations please visit [www.osram-os.com/appnotes](http://www.osram-os.com/appnotes)

## Disclaimer

### Disclaimer

Language english will prevail in case of any discrepancies or deviations between the two language wordings.

### Attention please!

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version on the OSRAM OS website.

### Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office.

By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

### Product safety devices/applications or medical devices/applications

OSRAM OS components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices.

In case Buyer – or Customer supplied by Buyer– considers using OSRAM OS components in product safety devices/applications or medical devices/applications, Buyer and/or Customer has to inform the local sales partner of OSRAM OS immediately and OSRAM OS and Buyer and /or Customer will analyze and coordinate the customer-specific request between OSRAM OS and Buyer and/or Customer.

---

## Glossary

- 1) **Brightness:** Brightness groups are tested at a current pulse duration of 25 ms and a tolerance of  $\pm 11\%$ .
- 2) **Reverse Operation:** Reverse Operation of 10 hours is permissible in total. Continuous reverse operation is not allowed.
- 3) **Wavelength:** Wavelengths are tested at a current pulse duration of 25 ms and a tolerance of  $\pm 1$  nm.
- 4) **Forward Voltage:** Forward voltages are tested at a current pulse duration of 1 ms and a tolerance of  $\pm 0.1$  V.
- 5) **Thermal Resistance:**  $R_{th\ max}$  is based on statistic values ( $6\sigma$ ).
- 6) **Thermal Resistance:**  $R_{thJA}$  results from mounting on PC board FR 4 (pad size  $\geq 5\text{ mm}^2$  per pad)
- 7) **Typical Values:** Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- 8) **Characteristic curve:** In the range where the line of the graph is broken, you must expect higher differences between single devices within one packing unit.
- 9) **Tolerance of Measure:** Unless otherwise noted in drawing, tolerances are specified with  $\pm 0.1$  and dimensions are specified in mm.
- 10) **Tape and Reel:** All dimensions and tolerances are specified acc. IEC 60286-3 and specified in mm.

**Published by OSRAM Opto Semiconductors GmbH** EU RoHS and China RoHS compliant product  
**Leibnizstraße 4, D-93055 Regensburg**  
**www.osram-os.com © All Rights Reserved.**



此产品符合欧盟 RoHS 指令的要求；  
按照中国的相关法规和标准，不含有毒有害物质或元素。



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331