


ALUMINUM ELECTROLYTIC CAPACITORS


nichicon

BX series

High Temperature Range, For +150°C Use


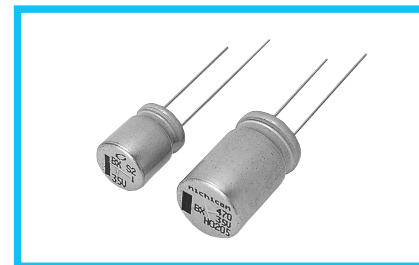


- Laminated case series.
- Suited for automobile electronics where heavy duty services are indispensable.
- Compliant to the RoHS directive (2011/65/EU).




Item	Performance Characteristics														
Category Temperature Range	-55 to +150°C (10 to 100V), -40 to +150°C (160 · 200V), -25 to +150°C (350 · 400V)														
Rated Voltage Range	10 to 400V														
Rated Capacitance Range	1 to 4700μF														
Capacitance Tolerance	±20% at 120Hz, 20°C														
Leakage Current	Rated Voltage (V)	10 to 100								160 to 400					
	Leakage current	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.								CV ≤ 1000 : I = 0.1CV+40 (μA) max. CV > 1000 : I = 0.04CV+100 (μA) max.					
Tangent of loss angle (tan δ)	Rated voltage (V)	10	16	25	35	50	63	80	100	160·200	350·400	120Hz 20°C			
	tan δ (MAX.)	0.20	0.16	0.14	0.12	0.10	0.10	0.08	0.08	0.20	0.24				
	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.														
Stability at Low Temperature	Rated voltage (V)				10	16	25	35	50	63	80	100	160·200	350·400	120Hz
	Impedance ratio		Z-25°C / Z+20°C		3	2	2	2	2	2	2	2	3	6	
	ZT / Z20 (MAX.)		Z-40°C / Z+20°C		4	4	4	4	4	4	4	4	6	-	
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 2000 hours (1000 hours for φD=10 and 12.5) at 150°C, the peak voltage shall not exceed the rated voltage.														
	Capacitance change		Within ±30% of the initial capacitance value (10 to 100V) Within ±20% of the initial capacitance value (160 to 400V)												
	tan δ		300% or less than the initial specified value (10 to 100V) 200% or less than the initial specified value(160 to 400V)												
Marking	Black print on the case top.														
	Leakage current														

Radial Lead Type

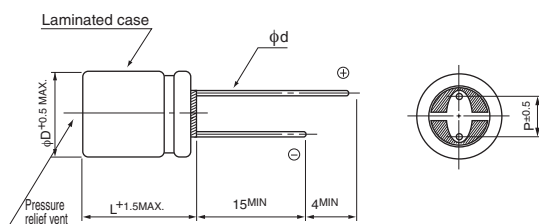

	(mm)			
φD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
φd	0.6	0.6	0.8	0.8

Type numbering system (Example : 10V 3300μF)

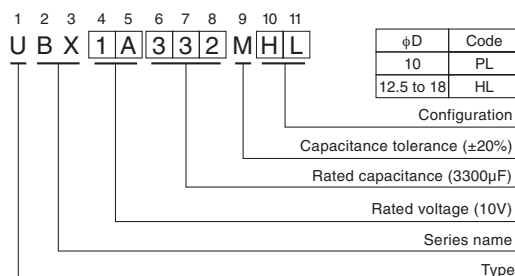

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

CAT.8100D

■ Dimensions

Cap. (μF)	V (Code) Code	10		16		25		35	
		1A		1C		1E		1V	
1	010							10 × 12.5	35
2.2	2R2							10 × 12.5	50
3.3	3R3							10 × 12.5	60
4.7	4R7							10 × 12.5	85
10	100							10 × 12.5	175
22	220							10 × 12.5	200
33	330							10 × 12.5	225
47	470							10 × 12.5	250
100	101					10 × 12.5	250	10 × 20	400
220	221			10 × 16	300	12.5 × 20	500	12.5 × 25	600
330	331	10 × 16	300	10 × 20	400	12.5 × 25	600	16 × 25	800
470	471	10 × 20	400	12.5 × 20	600	16 × 25	800	16 × 31.5	1000
1000	102	12.5 × 25	600	16 × 25	800	16 × 31.5	1000	18 × 40	1300
2200	222	16 × 31.5	1000	18 × 35.5	1200				
3300	332	18 × 35.5	1200	18 × 40	1300				
4700	472	18 × 40	1300					Case size φ D × L (mm)	Rated ripple

Cap. (μF)	V (Code) Code	50		63		80		100	
		1H		1J		1K		2A	
22	220							10 × 12.5	390
33	330					10 × 12.5	420	10 × 16	510
47	470					10 × 16	550	10 × 20	640
56	560			10 × 12.5	430	10 × 20	690	10 × 20	640
68	680			10 × 16	560	10 × 20	690	12.5 × 20	760
100	101	10 × 12.5	380	10 × 20	710	12.5 × 20	820	12.5 × 25	950
220	221	10 × 20	640	12.5 × 25	1040	16 × 25	1250	16 × 31.5	1380
330	331	12.5 × 20	770	12.5 × 31.5	1170	16 × 31.5	1480	18 × 31.5	1430
470	471	12.5 × 25	960	16 × 25	1280	18 × 31.5	1530		
560	561	12.5 × 31.5	1080	16 × 31.5	1520				
680	681	16 × 25	1190	16 × 35.5	1520				
1000	102	16 × 31.5	1420					Case size φ D × L (mm)	Rated ripple

● Frequency coefficient of rated ripple current

Rated ripple current (mA_{rms}) at 150°C 100kHz

V	CV	Frequency	120Hz	300Hz	1kHz	10kHz or more
10 to 100	1000 > CV		0.50	0.64	0.83	1.00
		1000 ≤ CV	0.67	0.79	0.91	1.00
	1000 ≤ CV		0.67	0.79	0.91	1.00

Cap. (μF)	V (Code) Code	160		200		350		400	
		2C		2D		2V		2G	
4.7	4R7					10 × 16	77	10 × 20	83
6.8	6R8			10 × 12.5	83	10 × 20	110	12.5 × 20	88
10	100	10 × 12.5	110	10 × 12.5	83	12.5 × 20	120	12.5 × 25	105
15	150	10 × 12.5	110	10 × 16	130	12.5 × 25	130	12.5 × 25	105
22	220	10 × 16	160	10 × 20	170				
33	330	12.5 × 20	230	12.5 × 20	210				
47	470	12.5 × 20	250	12.5 × 25	250				
56	560	12.5 × 25	270	16 × 20	270				
68	680	16 × 20	290	16 × 25	290				
100	101	16 × 25	300					Case size φ D × L (mm)	Rated ripple

Rated ripple current (mA_{rms}) at 150°C 120Hz

● Frequency coefficient of rated ripple current

V	Cap. (μF)	Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	100kHz or more
160 to 400	4.7 to 33		0.75	1.00	1.25	1.50	1.75	1.80
		47 to 100	0.80	1.00	1.15	1.30	1.40	1.50
	47 to 100		0.80	1.00	1.15	1.30	1.40	1.50



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331