

SIDE ROTARY

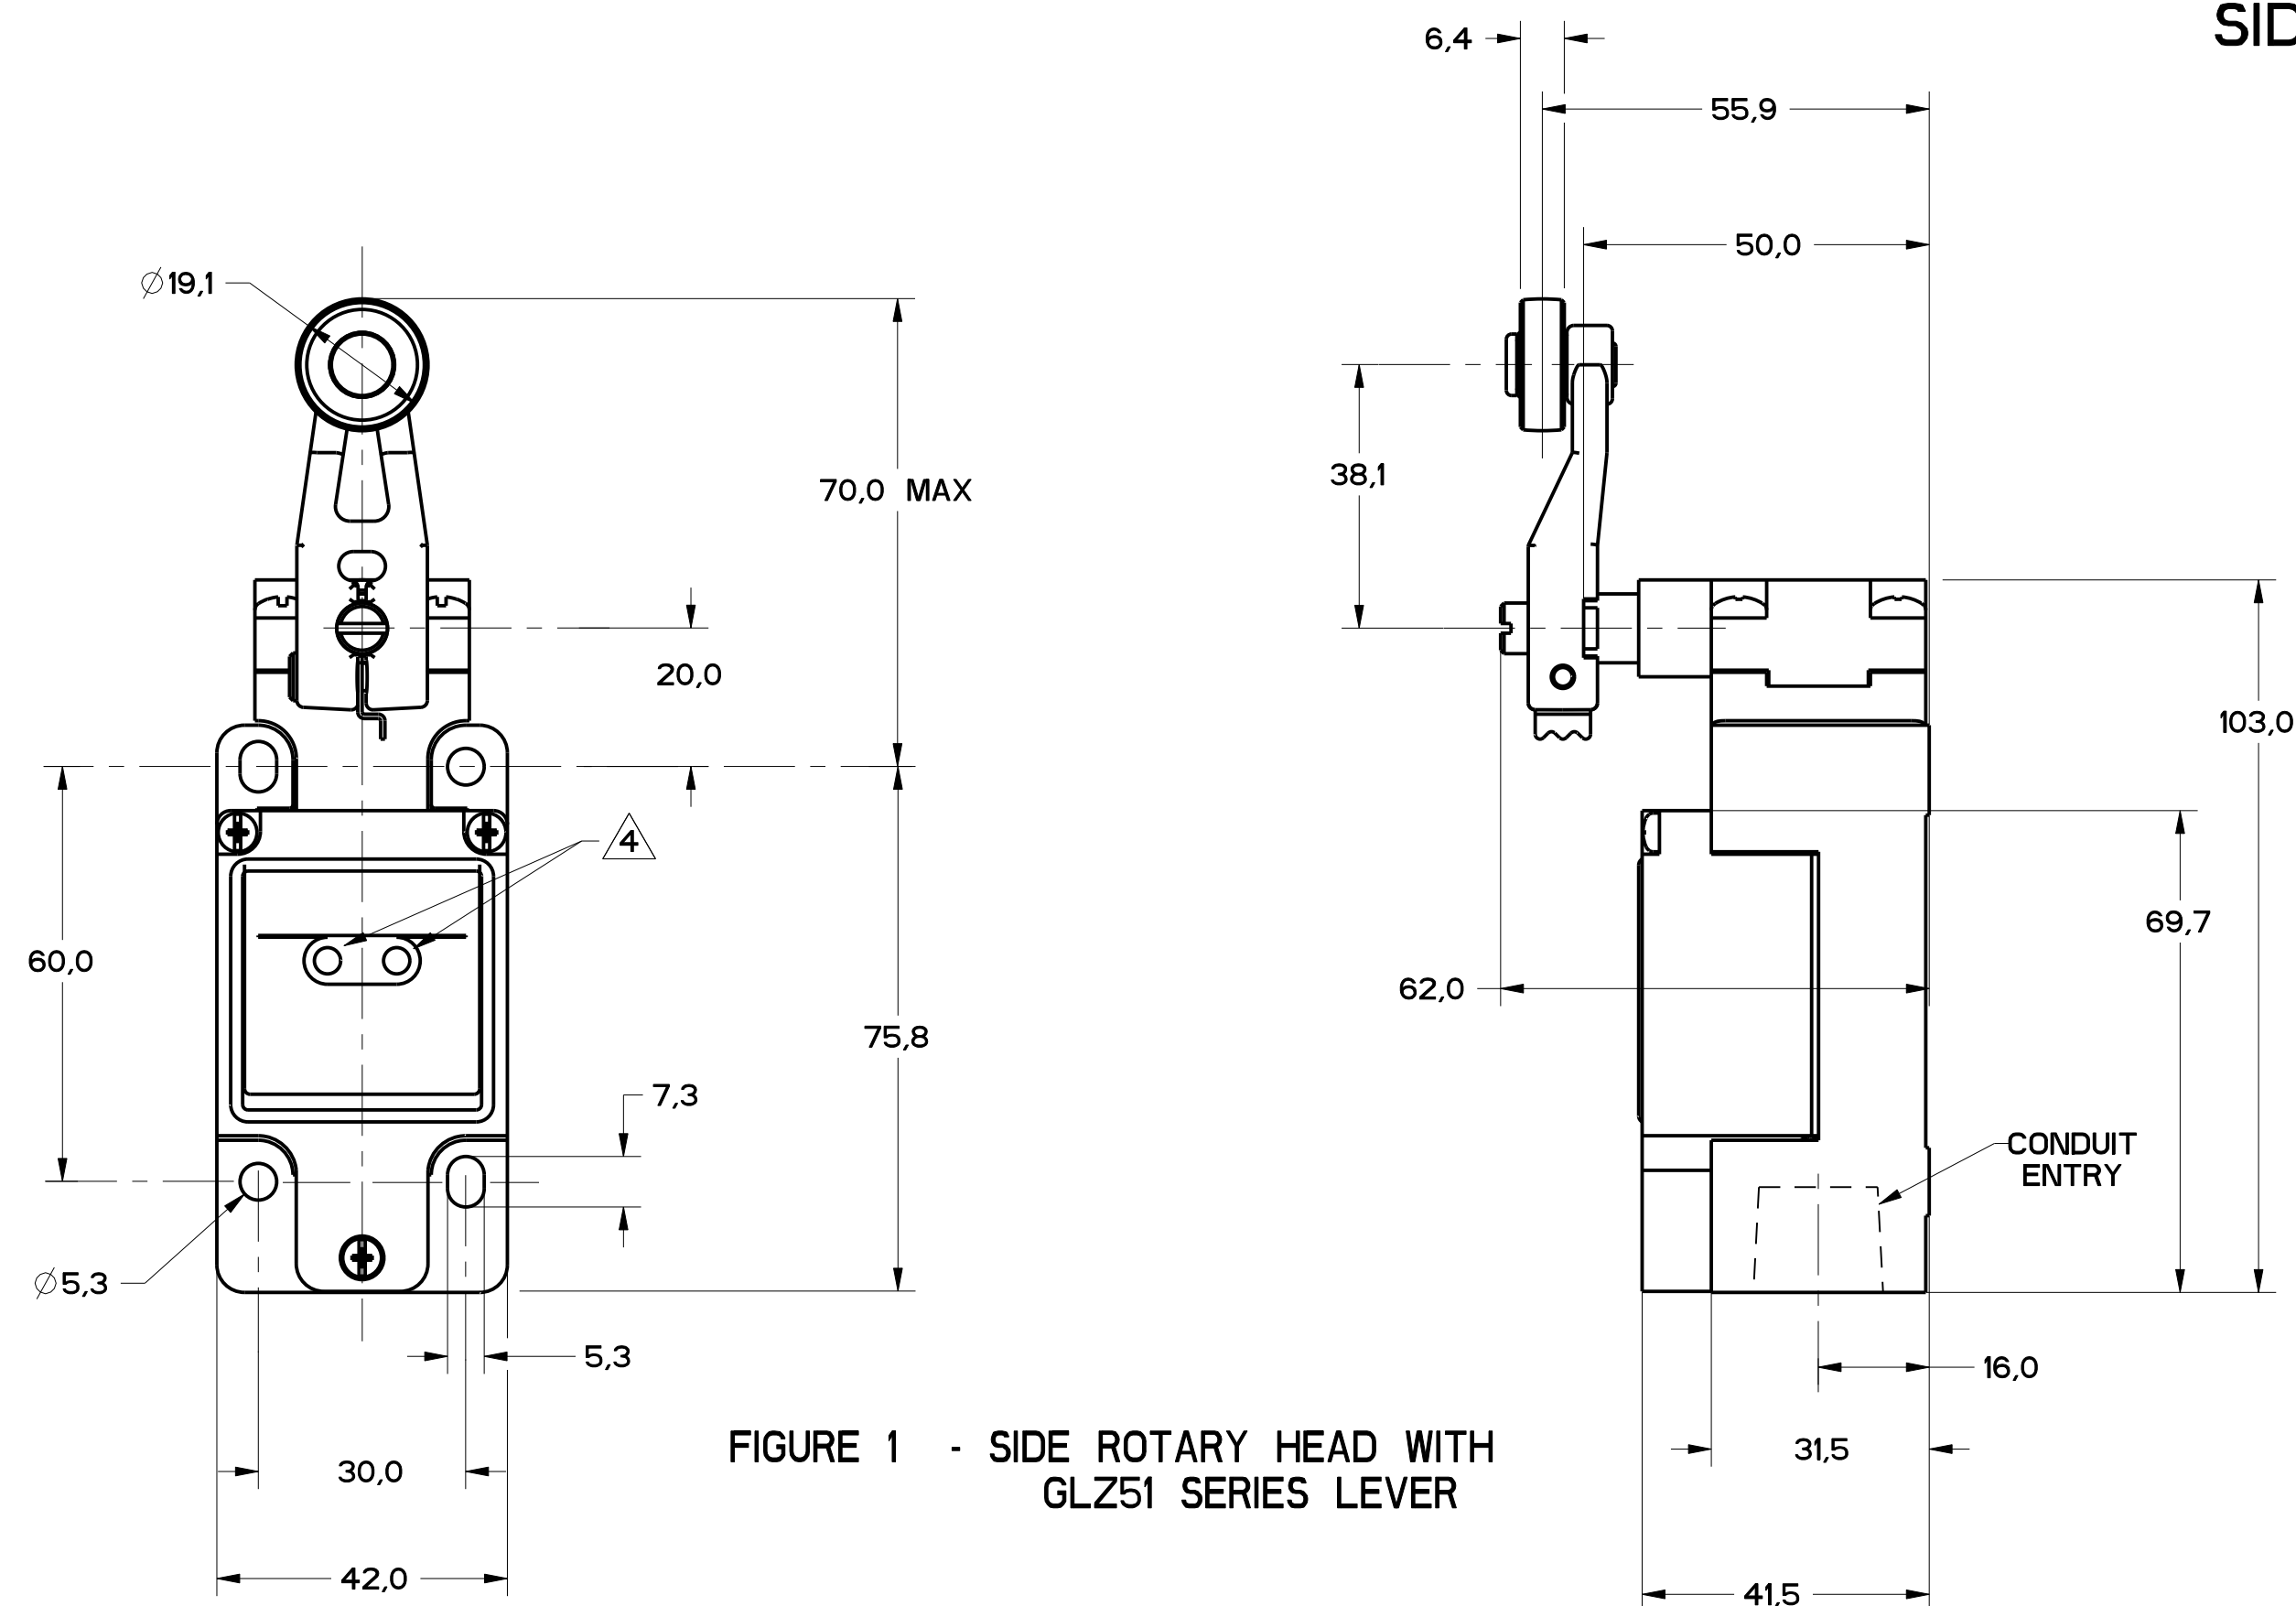


FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

ALUMINUM ROD
GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
STAINLESS STEEL ROD
GLZ54N: 318.00 / 12.490 MAX

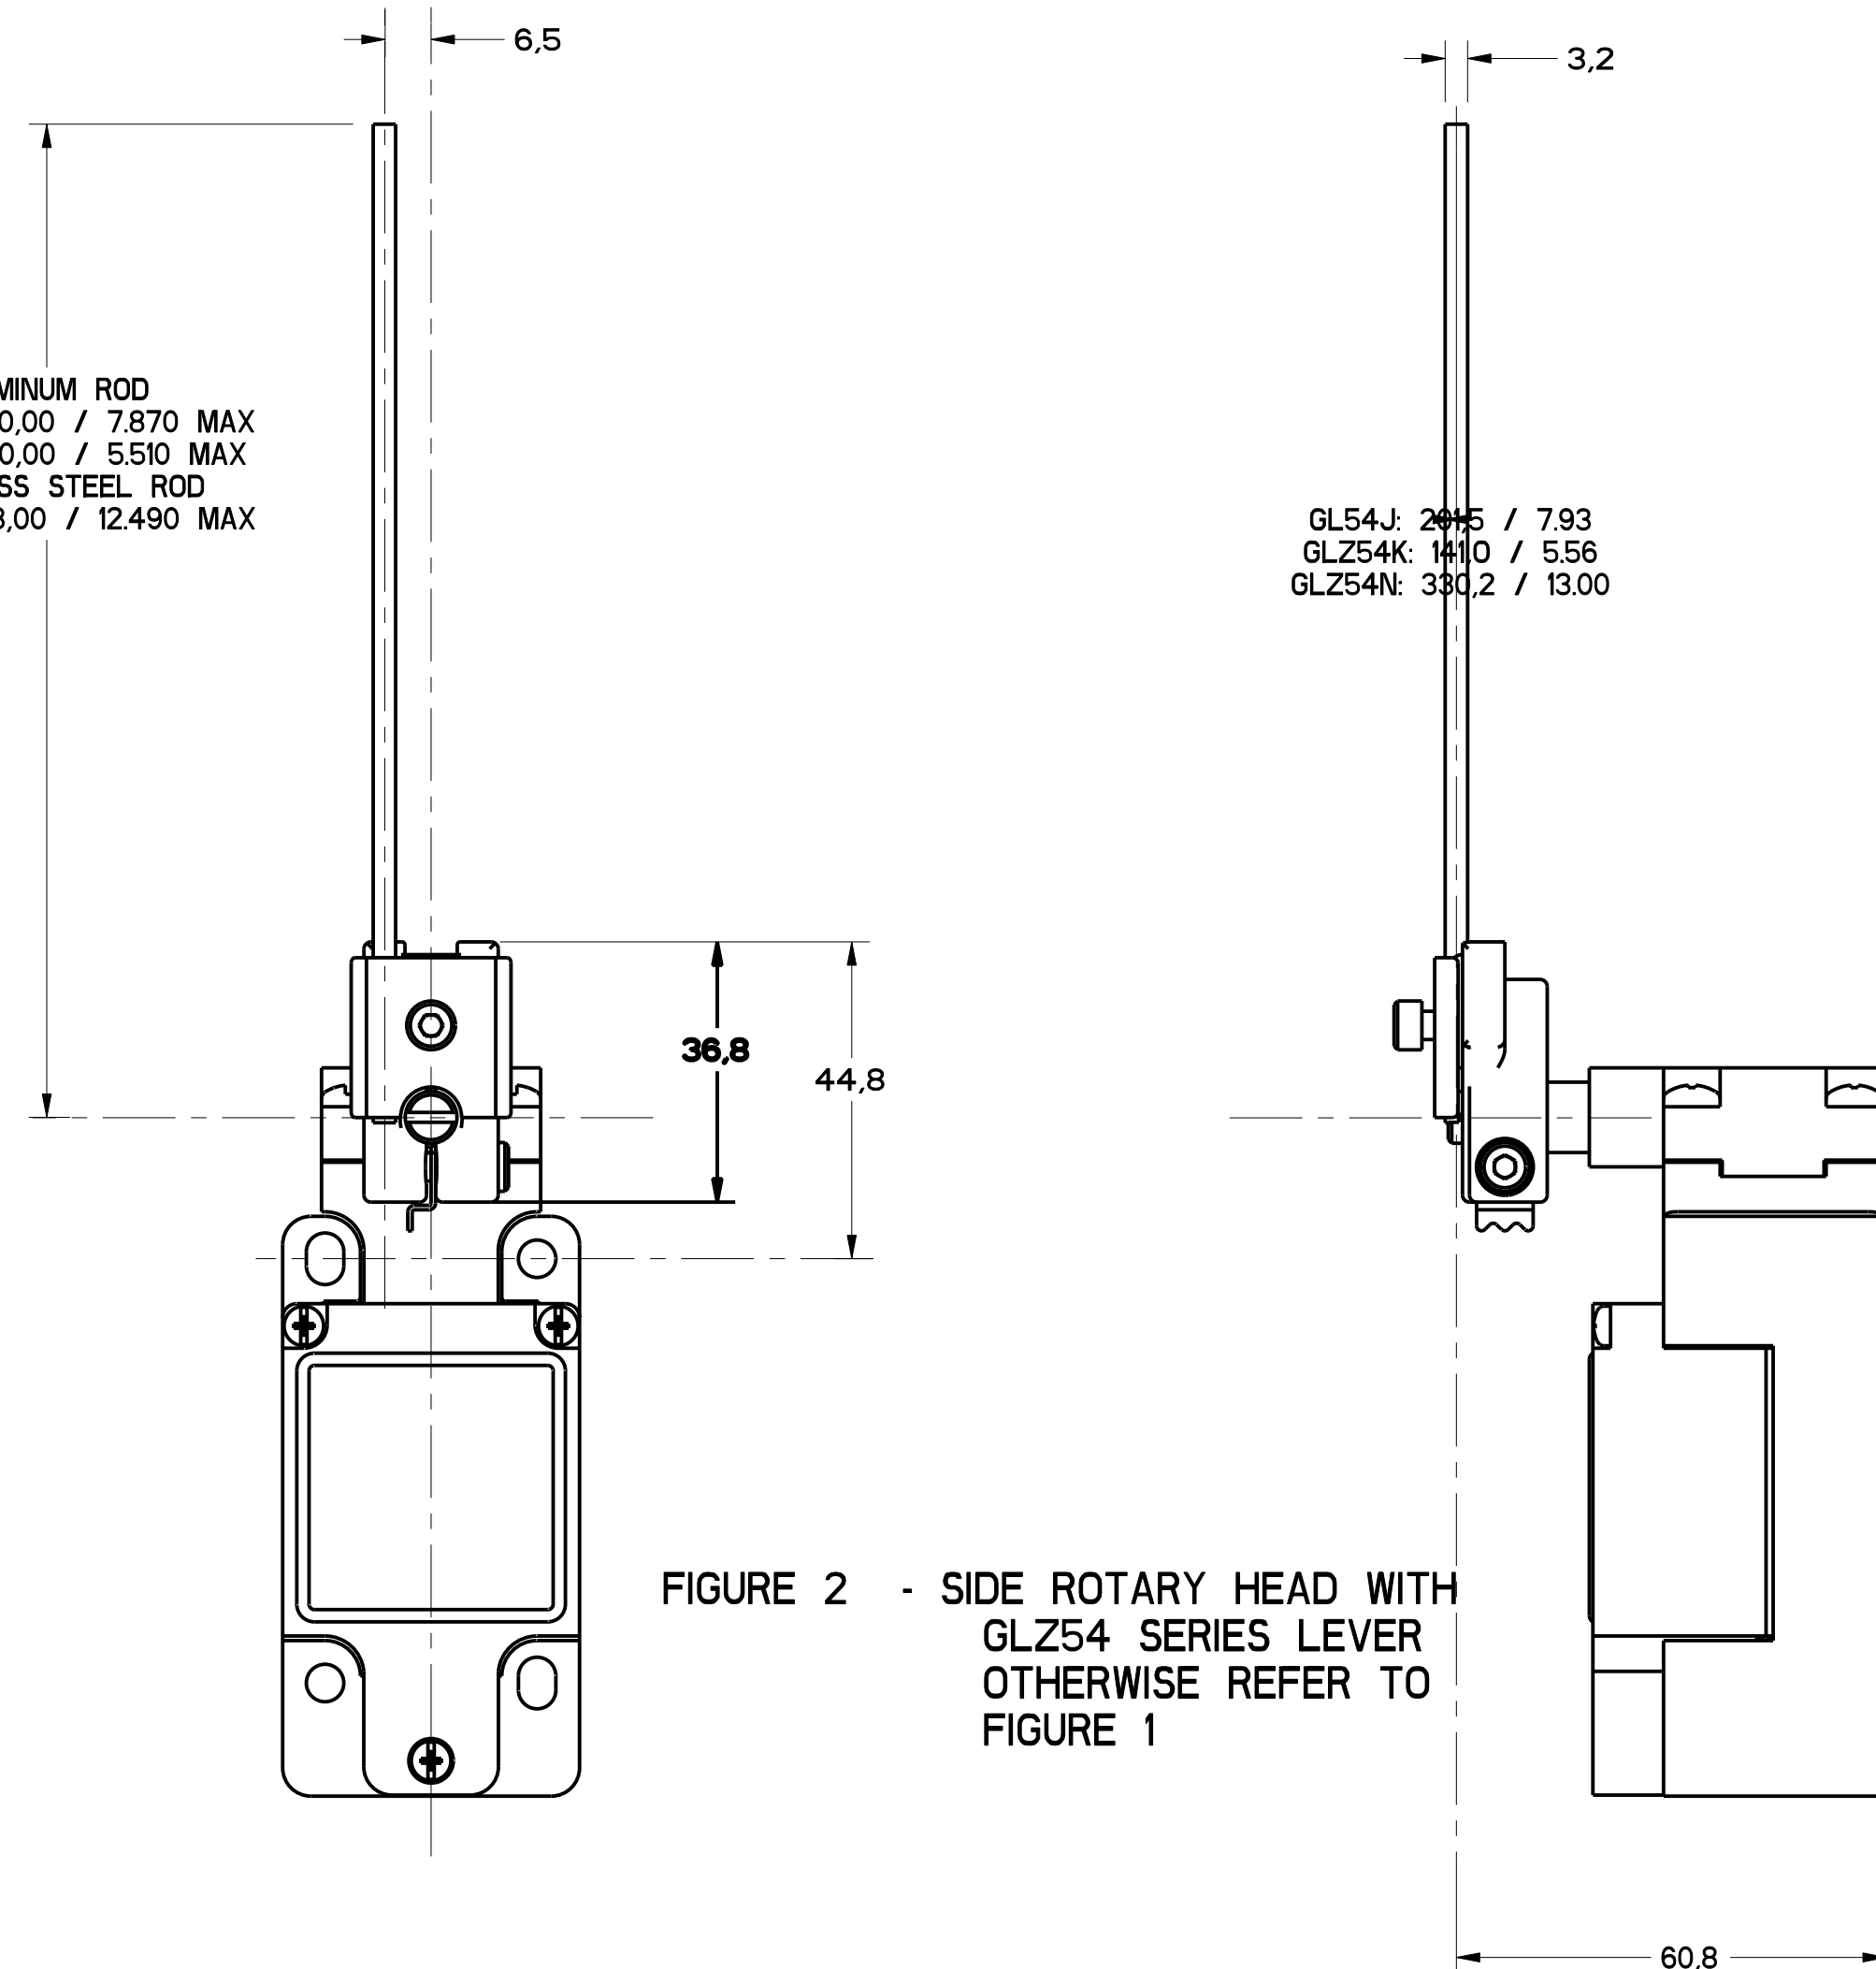


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING $\Delta 5$			
AC		DC	
A600 Ue	AC15 Ie	Q300 Ue	DC13 Ie
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)
120	6	24	2.8
240	3	125	.55
380	1.9	250	.27
480	1.5		
500	1.4		
600	1.2		

ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13


NOTES

- HEADS MAY BE INDEXED IN 90° INCREMENTS.
- LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
- THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
- THE MAXIMUM VOLTAGE, V_e OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
- FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
- CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50
- TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLB***	I	N/A	N/A
GLG***	I	N/A	N/A
GLJ***	I	N/A	N/A
GLA***	1A	N/A	N/A
GLB***	1B	N/A	N/A
GLC***	1C	N/A	N/A
GLD***	1D	N/A	N/A
GL***A1*	I	8	
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	12
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15

FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.5	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.9 2.0	71.5 2.81	12.7 .5

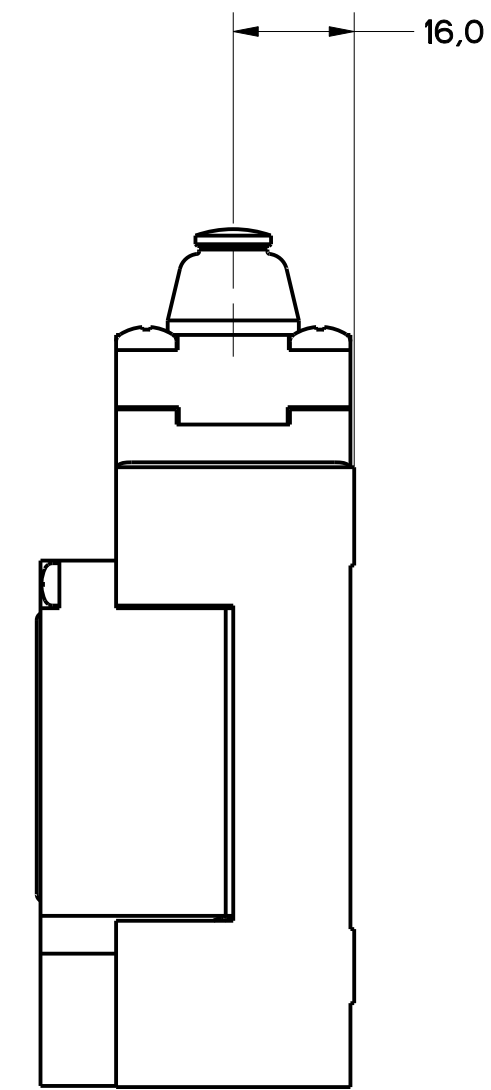


STEEL ROLLER


Ø 12,4

50,5

Technical drawing of a lamp head (Fig. 1) showing a cross-section. The drawing includes two dimensions: 4,7 and 16,0. The 4,7 dimension indicates the height of the upper section, and the 16,0 dimension indicates the total height of the lamp head assembly.

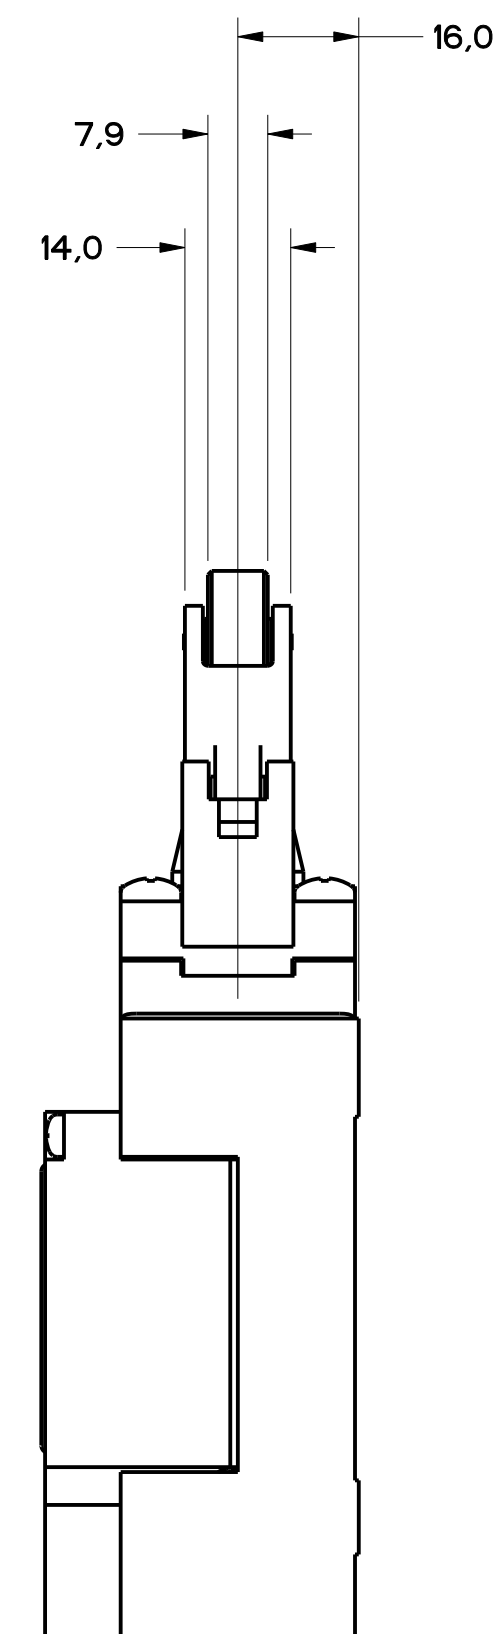

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <td>DIM</td> <td>TOL</td> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>INCHES</td> <td>FRACTIONS</td> <td>INCHES</td> <td>FRACTIONS</td> </tr> <tr> <td>NO PLACES</td> <td>0</td> <td>1/16</td> <td>0.0010</td> </tr> <tr> <td>ONE PLACE</td> <td>0.4/0.016</td> <td>1/32</td> <td>0.0010</td> </tr> <tr> <td>TWO PLACES</td> <td>0.15/0.008</td> <td>1/64</td> <td>0.0010</td> </tr> <tr> <td>THREE PLACES</td> <td>0.0010</td> <td>1/128</td> <td>0.0010</td> </tr> <tr> <td>ANGLES</td> <td>± 2</td> <td></td> <td></td> </tr> </table>		DIM	TOL	DIM	TOL	INCHES	FRACTIONS	INCHES	FRACTIONS	NO PLACES	0	1/16	0.0010	ONE PLACE	0.4/0.016	1/32	0.0010	TWO PLACES	0.15/0.008	1/64	0.0010	THREE PLACES	0.0010	1/128	0.0010	ANGLES	± 2		
DIM	TOL	DIM	TOL																												
INCHES	FRACTIONS	INCHES	FRACTIONS																												
NO PLACES	0	1/16	0.0010																												
ONE PLACE	0.4/0.016	1/32	0.0010																												
TWO PLACES	0.15/0.008	1/64	0.0010																												
THREE PLACES	0.0010	1/128	0.0010																												
ANGLES	± 2																														
FED. MFG. CODE 91929	CATALOG LISTING																														
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED		GL SERIES CHART 2																												
			DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY ☐																												
			WEIGHT																												

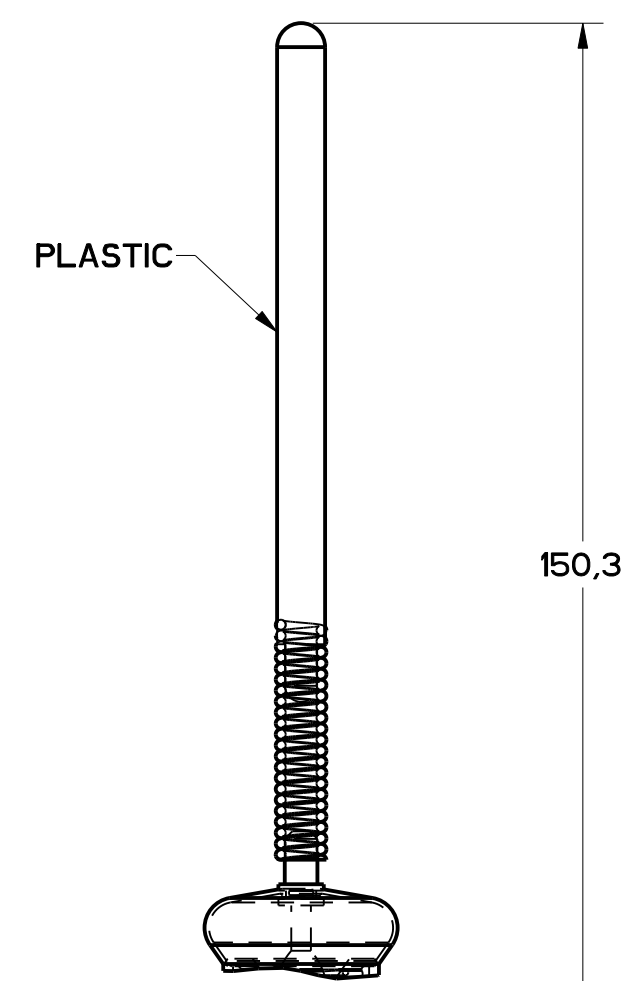

Technical drawing of a vertical rod. The rod has a base with a flared bottom and a threaded section. A dimension line indicates a length of 165,1. A small detail view shows a cross-section of the rod with a diameter of $\varnothing 1,3$.

Technical drawing of a screwdriver. A dimension line on the right indicates a length of 139.7 units, measured from the base of the handle to the tip of the shaft.

Technical drawing of a screwdriver. The drawing shows a side view of the tool. The handle is at the bottom, followed by a threaded section, and then a long, thin shaft. The shaft has a diameter of $\varnothing 1,2$ and a length of 190,5. The drawing is a line drawing with no shading.

FIGURE 7 - WOBBLE HEAD, AND CAT WHISKER HEAD
COIL ACTUATOR,
OTHERWISE REFER TO
FIGURE 1

THIRD ANGLE PROJECTION	
	
SCALE	FULL
DO NOT SCALE PRINT	
TOLERANCES	
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :	



CAM ACTUATION PER EN50041, FIGURES 8 AND 9 							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	 NOMINAL TRAVELS AND RELATED TERMINALS  CONTACT CLOSED,  CONTACT OPEN,  CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE  LB	MAXIMUM DISCONNECT FORCE  LB	MAX OPERATE VEL  in/s **	MIN OPERATE VEL  in/s **	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	021-2213-14 020 56** > < 12 DIFFERENTIAL TRAVEL	9.7 2.2	11.4 2.6	.85 33.5	8.5 .33	250

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table><tr><td>DIM mm</td><td>TOL mm (+/-)</td><td>DIM in</td><td>TOL in (+/-)</td></tr><tr><td>NO PLACES</td><td>X</td><td>1/32</td><td>0.0031</td></tr><tr><td>ONE PLACE</td><td>X, X</td><td>0.4/0.016</td><td>0.016/0.015</td></tr><tr><td>TWO PLACES</td><td>X, X</td><td>0.15/0.008</td><td>0.008/0.005</td></tr><tr><td>THREE PLACES</td><td></td><td></td><td></td></tr><tr><td>ANGLES</td><td></td><td>± 2°</td><td>0.15/0.005</td></tr></table>		DIM mm	TOL mm (+/-)	DIM in	TOL in (+/-)	NO PLACES	X	1/32	0.0031	ONE PLACE	X, X	0.4/0.016	0.016/0.015	TWO PLACES	X, X	0.15/0.008	0.008/0.005	THREE PLACES				ANGLES		± 2°	0.15/0.005
DIM mm	TOL mm (+/-)	DIM in	TOL in (+/-)																								
NO PLACES	X	1/32	0.0031																								
ONE PLACE	X, X	0.4/0.016	0.016/0.015																								
TWO PLACES	X, X	0.15/0.008	0.008/0.005																								
THREE PLACES																											
ANGLES		± 2°	0.15/0.005																								
FED. MFG. CODE 91929	CATALOG LISTING																										
 MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	GL SERIES CHART 2	<table><tr><td>SI METRIC</td><td>US CUSTOMARY</td></tr><tr><td>DESIGN UNITS</td><td>☒</td></tr></table>	SI METRIC	US CUSTOMARY	DESIGN UNITS	☒																				
		SI METRIC	US CUSTOMARY																								
		DESIGN UNITS	☒																								
WEIGHT																											



FIGURE 12



FIGURE 12. WOBBLE HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{MM}{S}$ $\frac{IN}{S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{2.5}{0.6}$	N/A	$\frac{.5}{19.7}$	$\frac{.11}{.43}$	100

Technical drawing of a Honeywell Micro Switch, Enclosed. The drawing includes a front view and a side view. The front view shows a rectangular component with a central circular feature. The side view shows the profile of the component. Dimensions are provided for various features, including overall length, width, and mounting hole positions. Tolerances are specified for different features. The drawing is labeled with 'MICRO SWITCH' and 'Honeywell Division'.

REVISIONS		
A	CO	78529
B	CS	81101
B	CO	93188
C	CO	93188
C	CO	93188
D	CO	93188
E	CO	93188

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL M/S in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 0.9 DIFFERENTIAL TRAVEL	16 3.6	27 6.0	0.1 3.9	1.0 .04	250

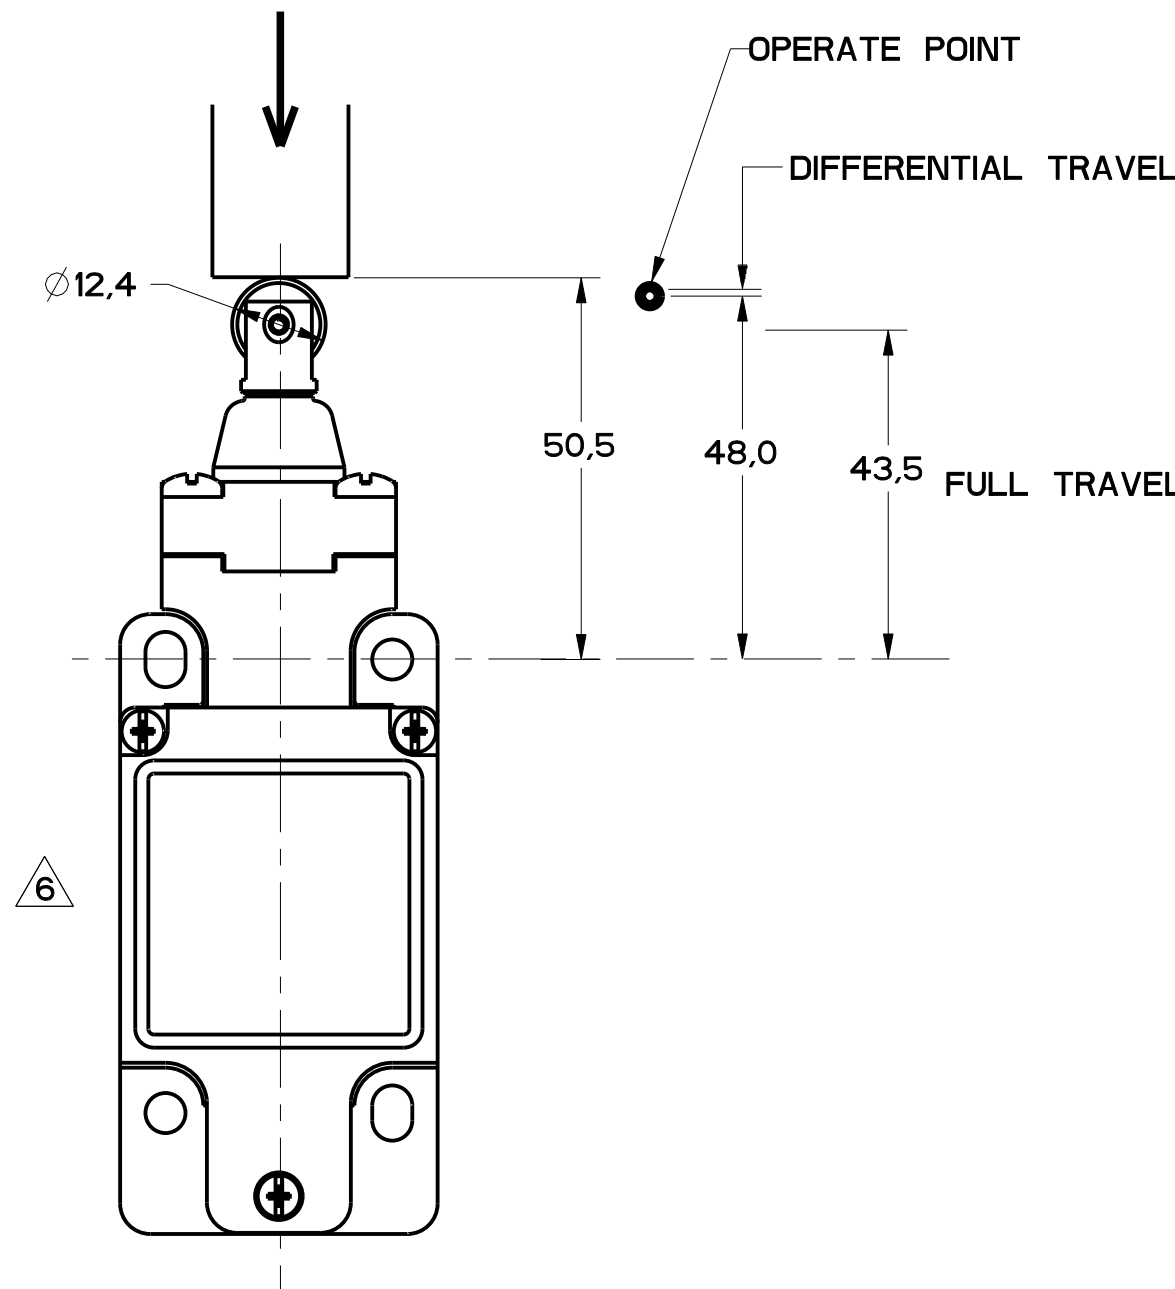


FIGURE 13A

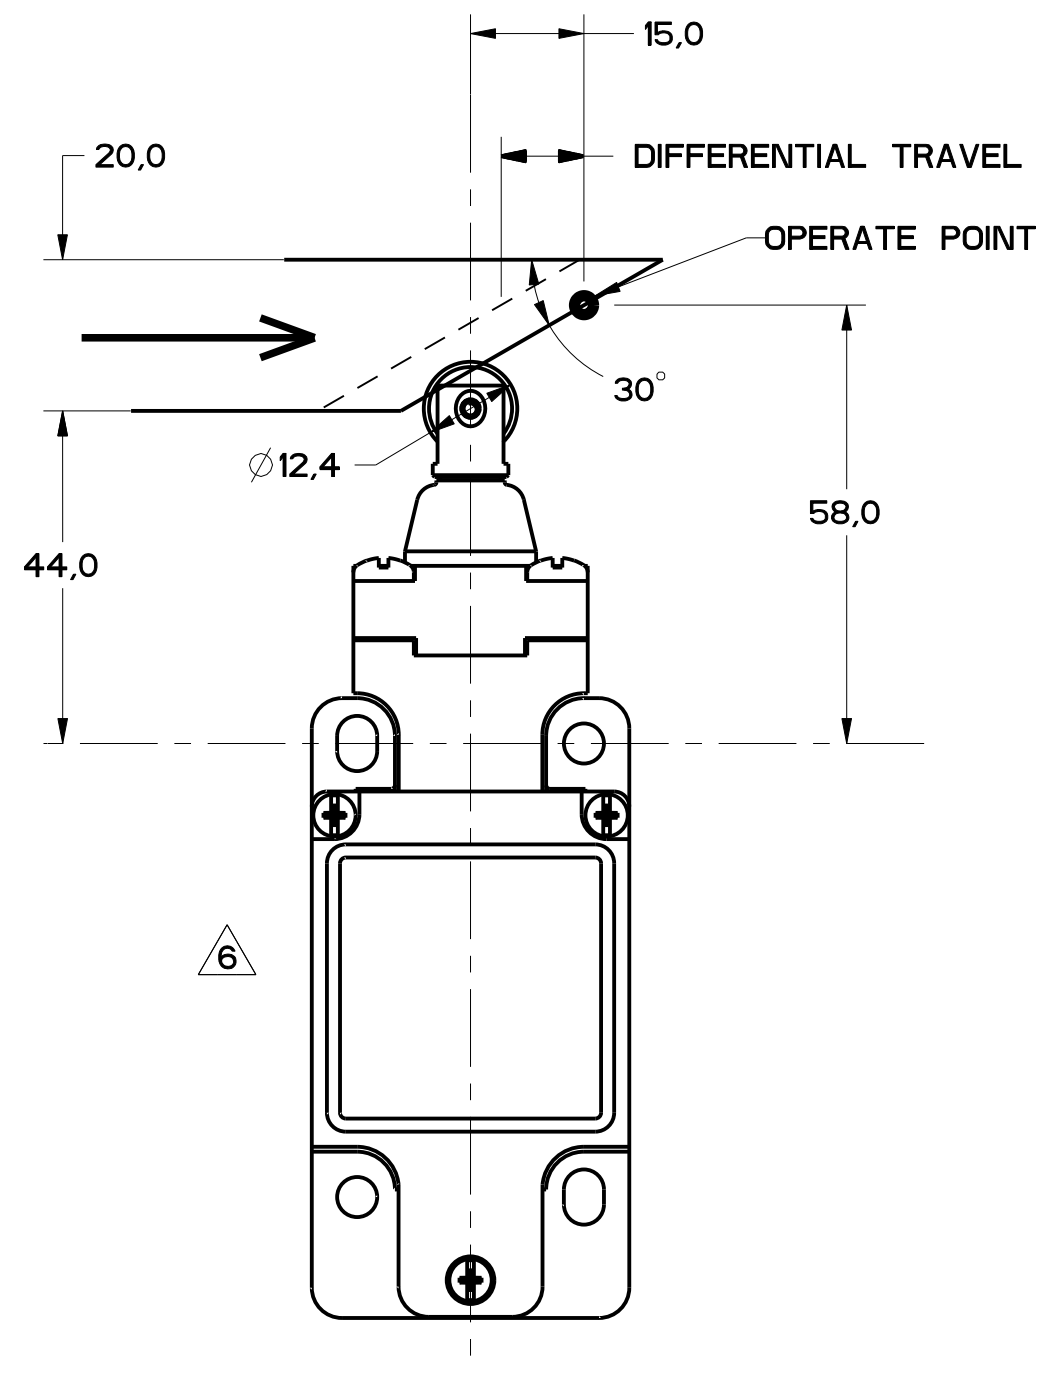


FIGURE 13B

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL M/S in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 1.8 DIFFERENTIAL TRAVEL	9.3 2.1	15.6 3.5	0.17 6.7	1.7 .067	250

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

	IN	TOL	MM	TOL
NO PLACES	X	1/16	1.0	0.13
ONE PLACE	X.X	0.0156	0.4	0.10
TWO PLACES	X.XX	0.0031	0.1	0.05
THREE PLACES	X.XXX	0.0008	0.025	0.013

DESIGN UNITS: SI METRIC [X] US CUSTOMARY []

REVISIONS	DATE	BY	CHKD	APPD
A	12/20/92	WLS	MDM	
B	01/20/94	WLS	MDM	
C	03/03/98	WLS	MDM	
D	03/03/98	WLS	MDM	
E	03/03/98	WLS	MDM	
F	03/03/98	WLS	MDM	
G	03/03/98	WLS	MDM	
H	03/03/98	WLS	MDM	
I	03/03/98	WLS	MDM	
J	03/03/98	WLS	MDM	
K	03/03/98	WLS	MDM	
L	03/03/98	WLS	MDM	
M	03/03/98	WLS	MDM	
N	03/03/98	WLS	MDM	
O	03/03/98	WLS	MDM	
P	03/03/98	WLS	MDM	
Q	03/03/98	WLS	MDM	
R	03/03/98	WLS	MDM	
S	03/03/98	WLS	MDM	
T	03/03/98	WLS	MDM	
U	03/03/98	WLS	MDM	
V	03/03/98	WLS	MDM	
W	03/03/98	WLS	MDM	
X	03/03/98	WLS	MDM	
Y	03/03/98	WLS	MDM	
Z	03/03/98	WLS	MDM	

FIGURE 14A, TOP ROLLER LEVER HEAD WITH PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 1.7 DIFFERENTIAL TRAVEL	9.5 2.1	12 2.7	0.17 6.7	1.7 .067	250

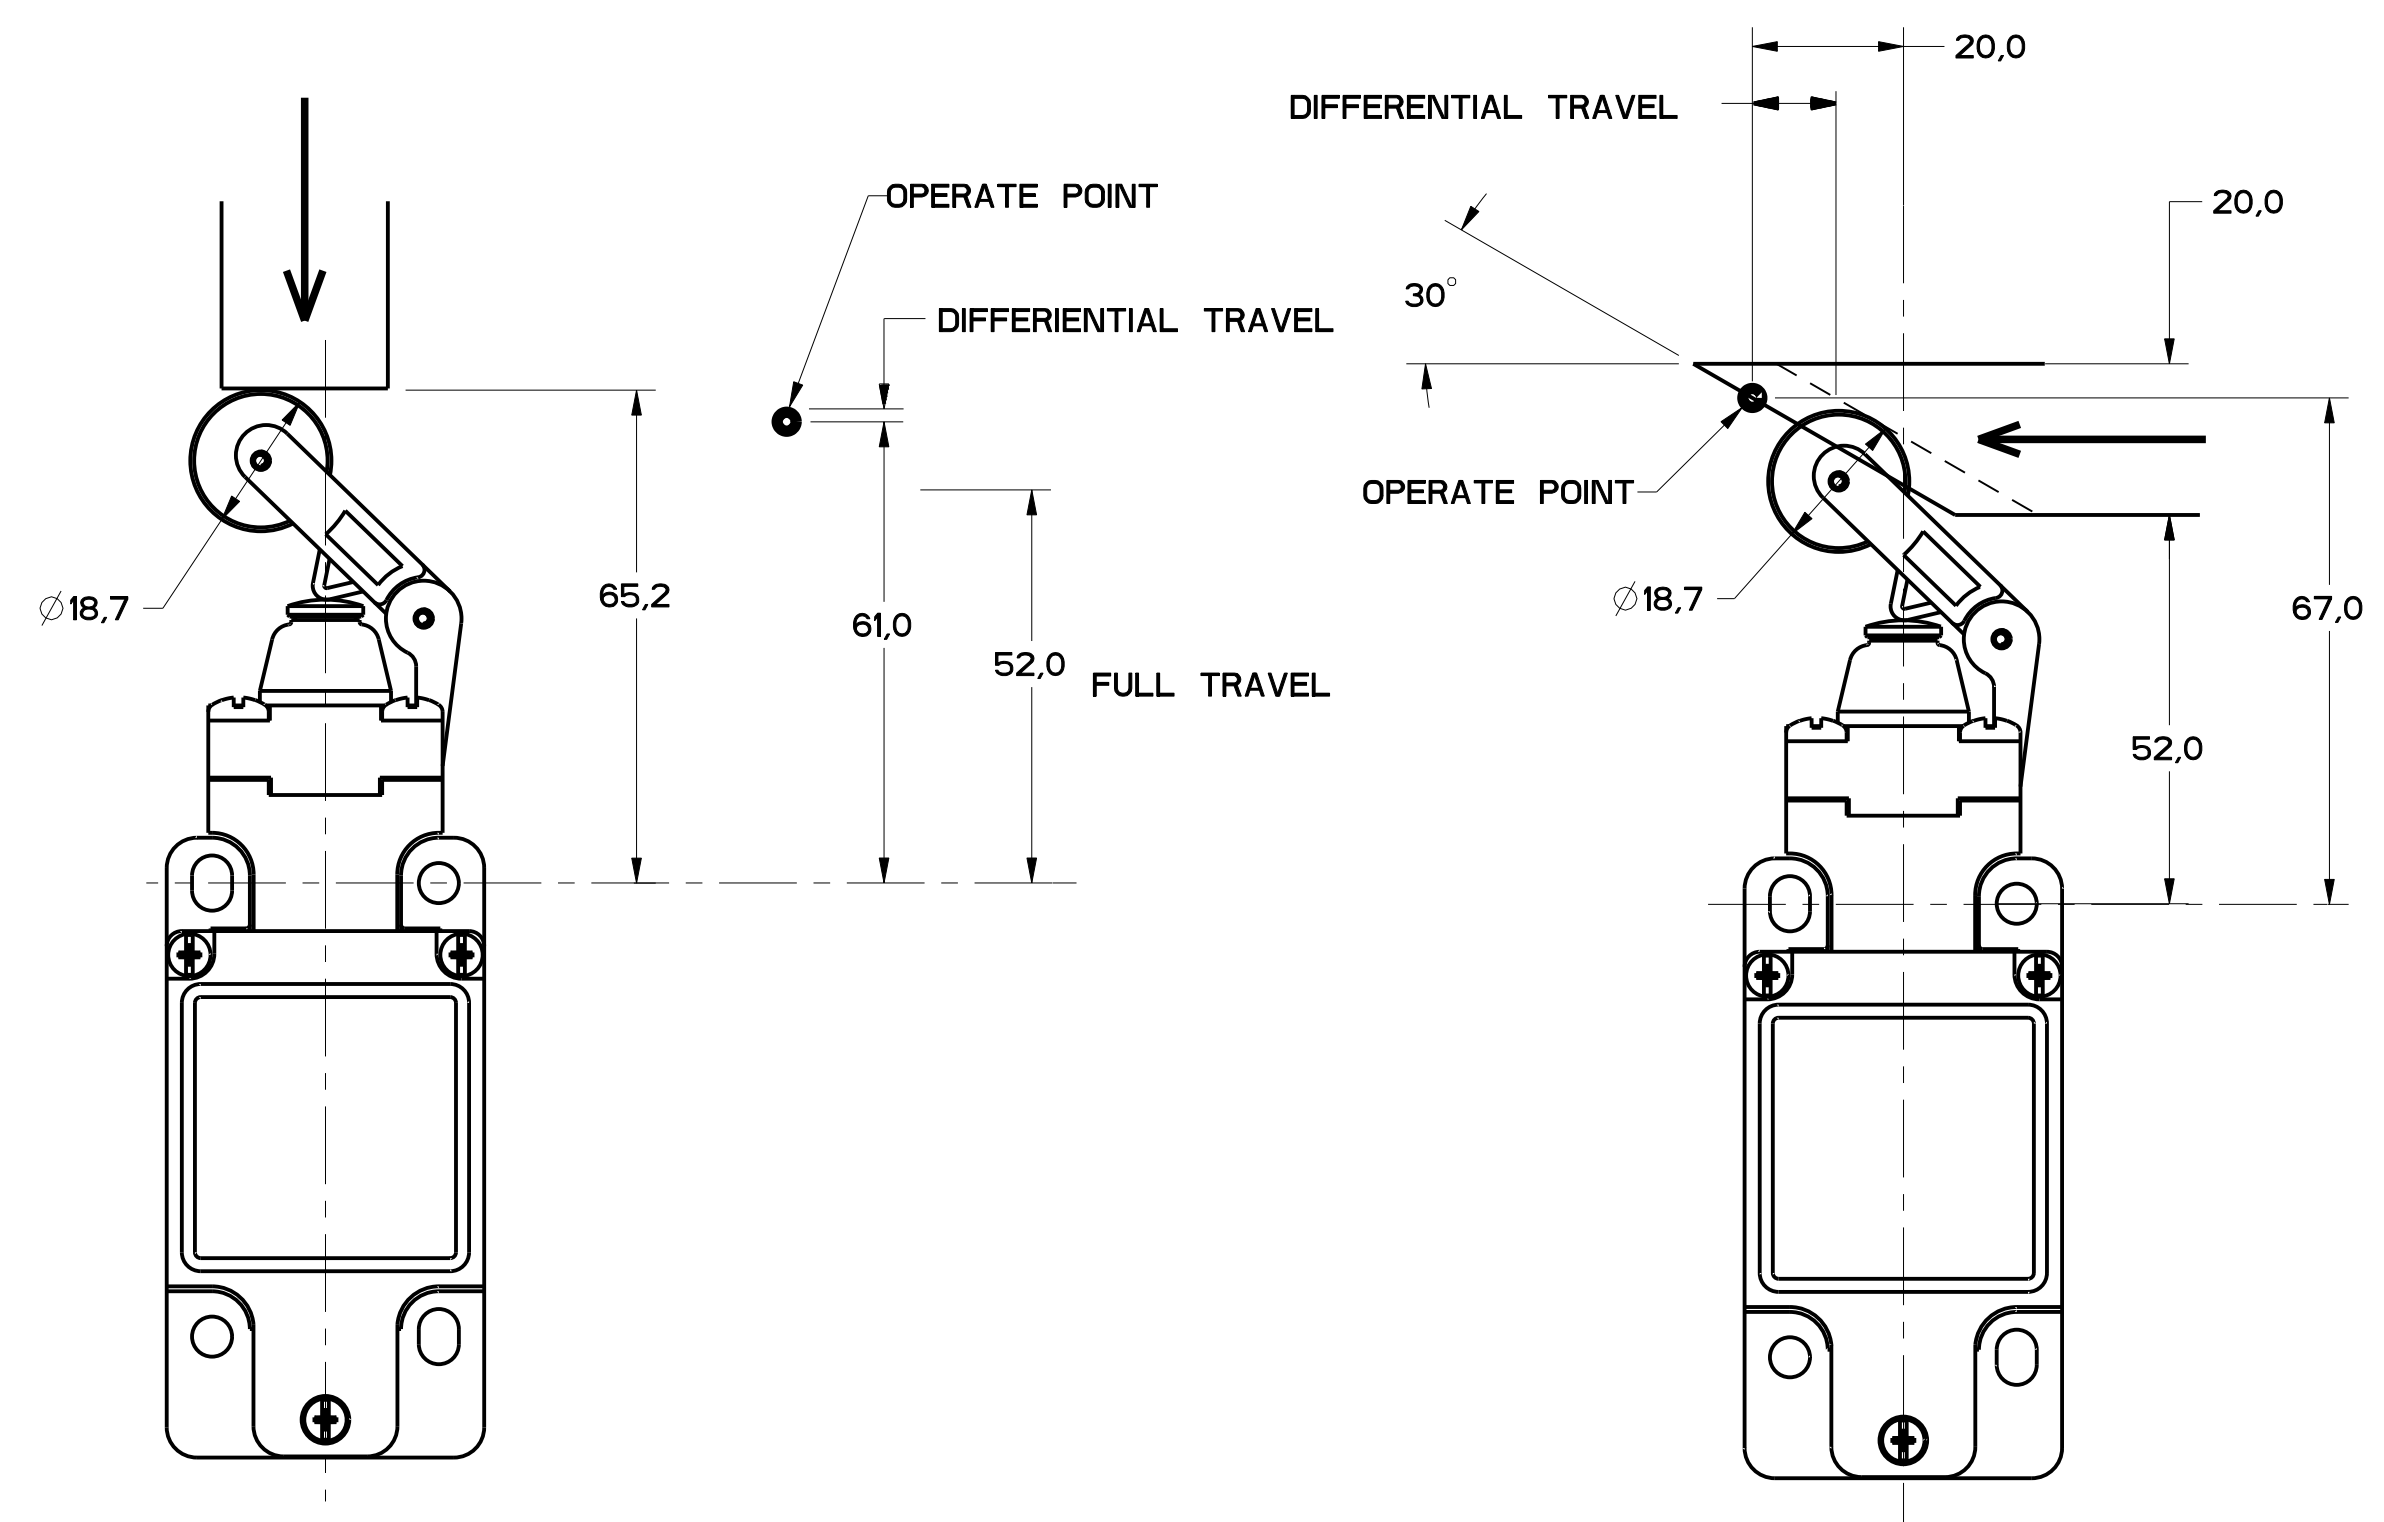


FIGURE 14A

FIGURE 14B

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 4.1 DIFFERENTIAL TRAVEL	5.5 1.2	7.0 1.6	0.29 11.4	2.9 .11	250

THIRD ANGLE PROJECTION

SCALE: FULL

DO NOT SCALE PRINT

TOLERANCES:
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

	DIM	TOL	DIM	TOL
NO PLACES	X	1/100	2.X	0.01/0.05
ONE PLACE	X.X	0.01/0.05	2.XX	0.001/0.05
TWO PLACES	X.XX	0.001/0.05	2.XXX	0.0001/0.05
THREE PLACES	X.XXX	0.0001/0.05		

DESIGN UNITS: SI METRIC [X] US CUSTOMARY []

WEIGHT

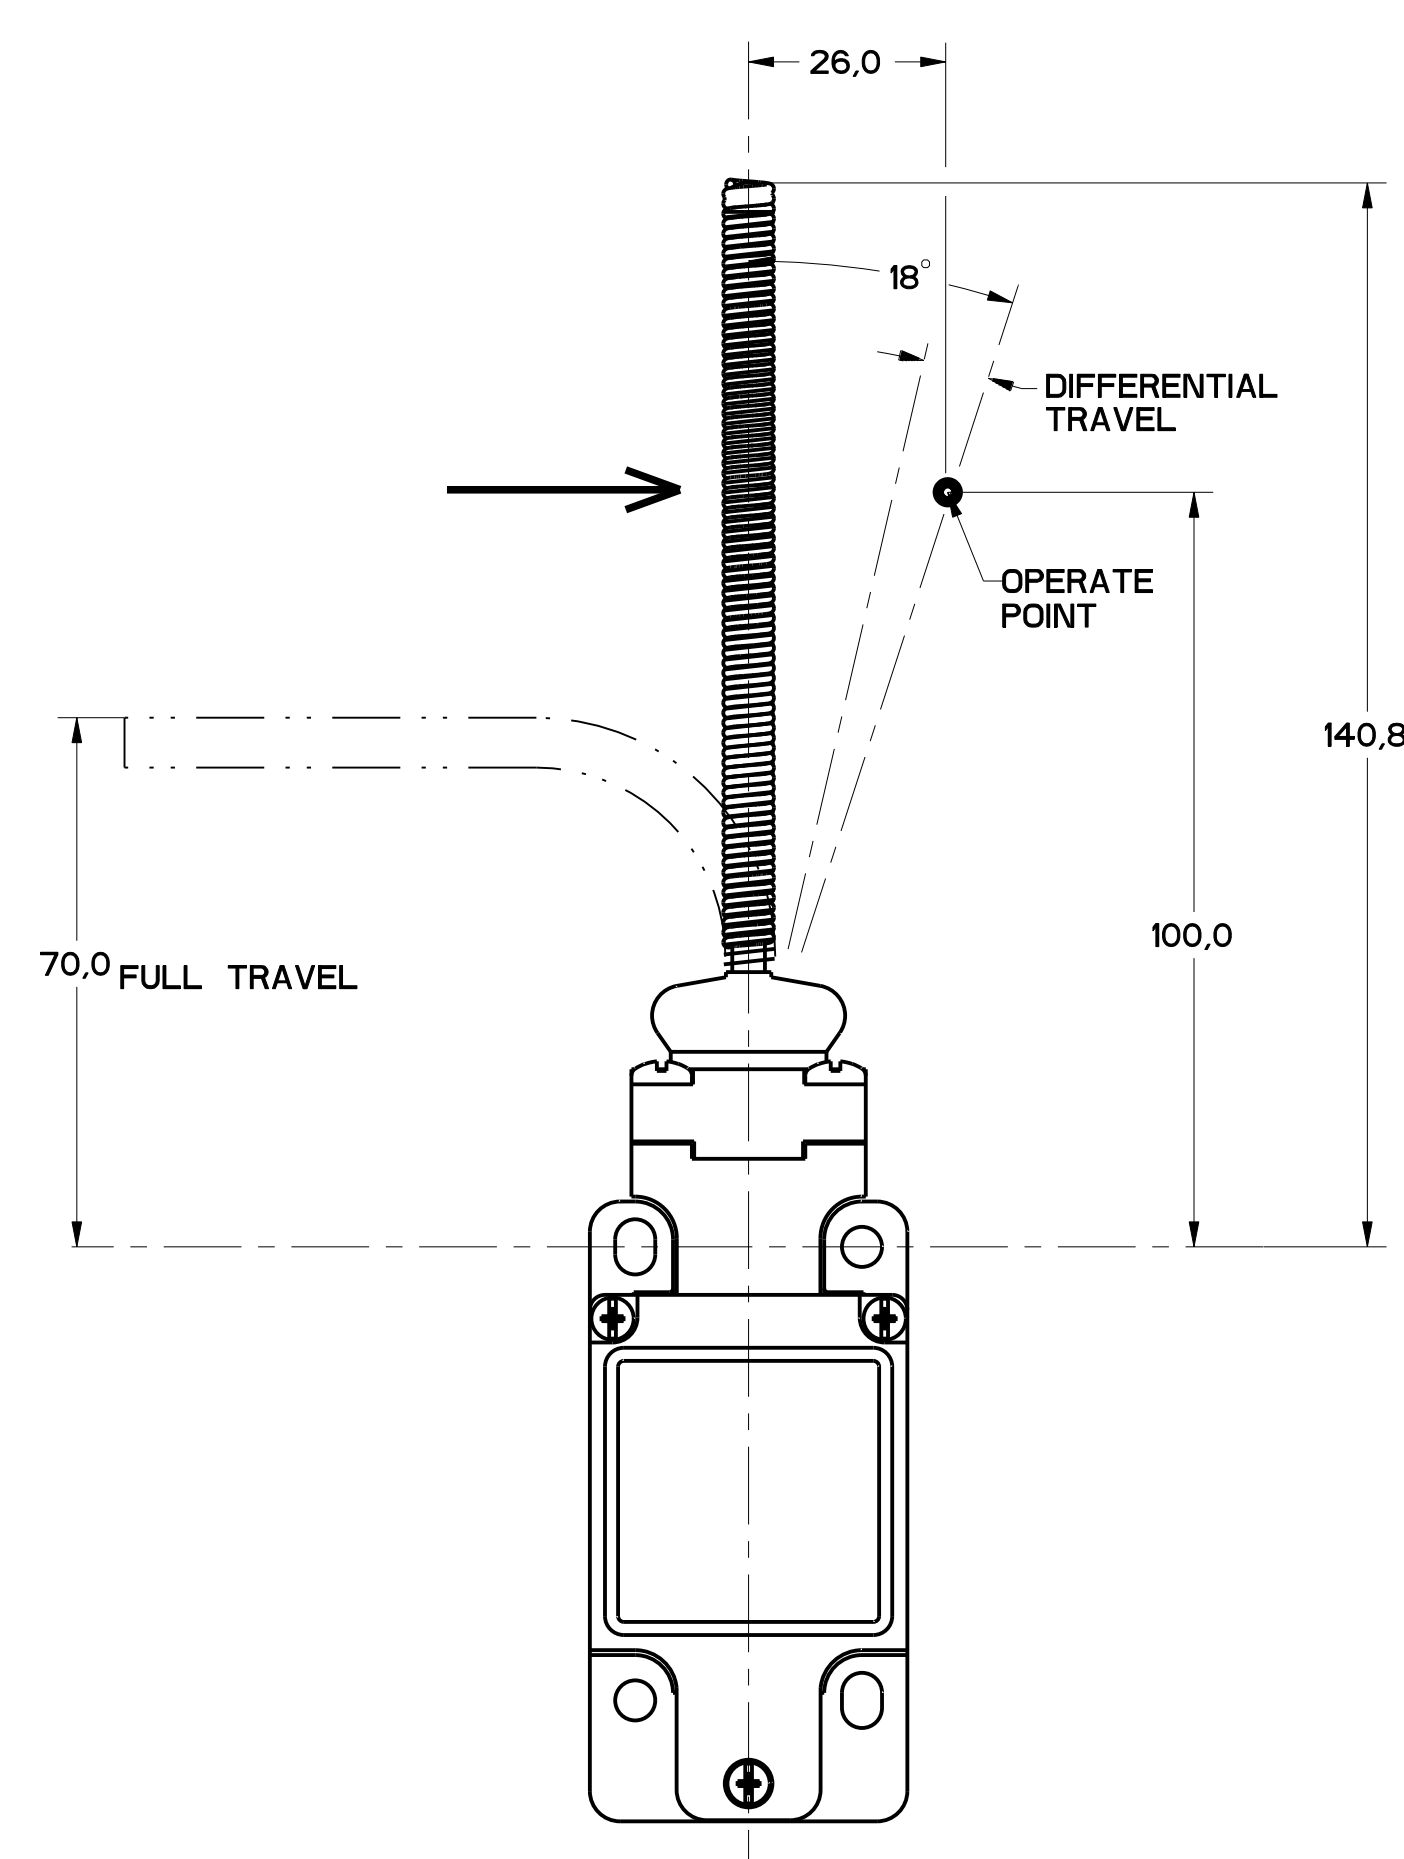


FIGURE 15

FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE LB-IN	MAXIMUM DISCONNECT TORQUE LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 13-14 18° 8° DIFFERENTIAL TRAVEL	0.1 .9	N/A	360	8

FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE LB	MAXIMUM DISCONNECT FORCE LB	MAX OPERATE VEL IN/S	MIN OPERATE VEL IN/S
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 13-14 26 12 DIFFERENTIAL TRAVEL	1.3 .3	N/A	.5 19.7	11 .43



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331