SIDE ROTARY

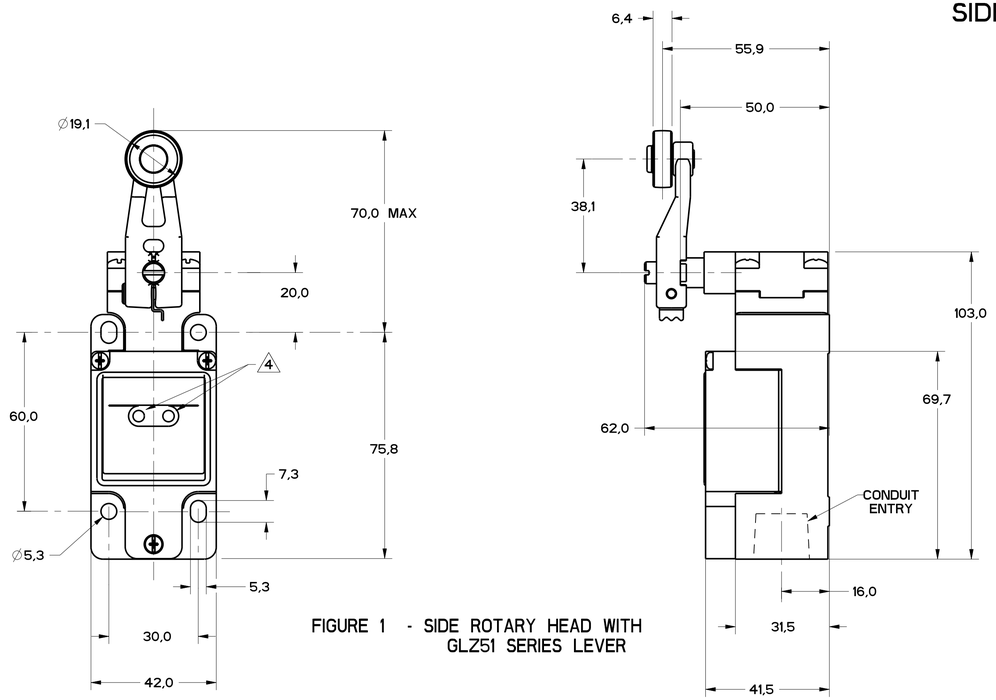

FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

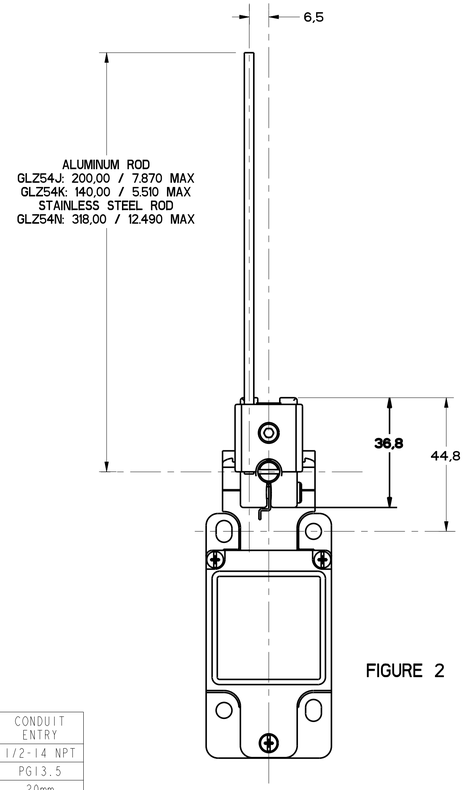

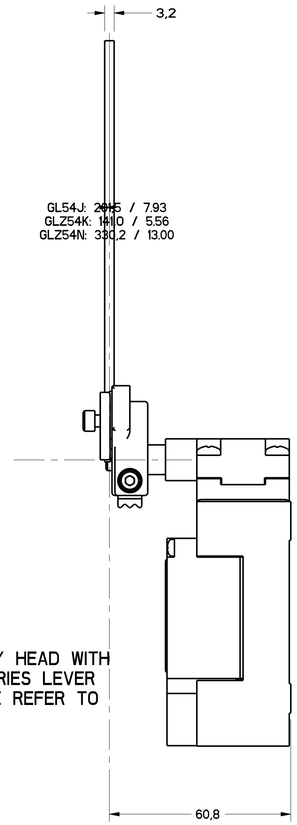

FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

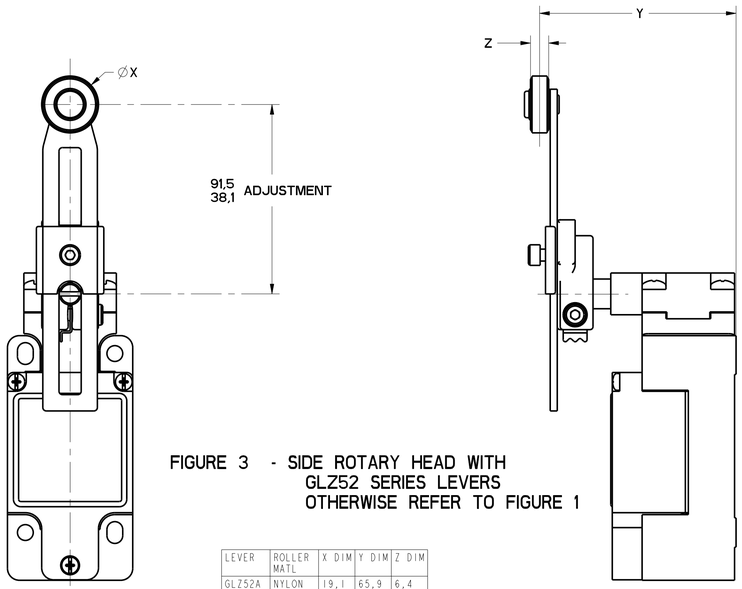

FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19,1 .75	65,9 2.59	6,4 .25
GLZ52B	STEEL	19,1 .75	65,9 2.59	6,4 .25
GLZ52D	NYLON	38,1 1.5	65,9 2.59	6,4 .25
GLZ52E	NYLON	19,1 .75	79,37 3.125	33,07 1.300
GLZ52W	RUBBER	40,0 1.5	71,5 2.81	12,7 .5
GLZ52Y	RUBBER	50,9 2.0	71,5 2.81	12,7 .5

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING 5			
AC		DC	
A600 Ue	AC15 Ie	Q300 Ue	DC13 Ie
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)
120	6	24	2.8
240	3	125	.55
380	1.9	250	.27
480	1.5		
500	1.4		
600	1.2		

ENVIRONMENTAL RATING
IP67 NEMA/UL TYPES 1, 4, 12, 13

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLB****	1	N/A	N/A
GLG****	1	N/A	N/A
GLJ****	1	N/A	N/A
GL*A***	1A	N/A	N/A
GL*B***	1B	N/A	N/A
GL*C***	1C	N/A	N/A
GL*D***	1D	N/A	N/A
GL****A1*	1	1	8
GL****A2*	1	3	9
GL****A4*	1	2	10
GL****A5*	1		8
GL****B	1	4	11
GL****C	1	5	13A, 13B
GL****D	1	6	14A, 14B
GL****E7A	1	7A	12
GL****E7B	1	7	12
GL****E7C	1	7E	12
GL****E7D	1	7B	12
GL****K8A	1	7C	15
GL****K8B	1	7D	15
GL****K8C	1	7	15

NOTES
1 - HEADS MAY BE INDEXED IN 90° INCREMENTS
2 - LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
3 - FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
4 THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
5 THE MAXIMUM VOLTAGE, Ve OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
6 FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
7 CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38,1 / 1.50
8 TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929
MICRO SWITCH a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING
GL SERIES CHART 2

THIRD ANGLE PROJECTION
SCALE FULL
DO NOT SCALE PRINT
TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/±	DIM. in	TOL. inch/±
NO PLACES	X	1/.04	X.X	0.8/.03
ONE PLACE	X.X	0.4/.016	X.XX	0.38/.015
TWO PLACES	X.XX	0.15/.006	X.XXX	0.13/.005
THREE PLACES		±0°		
ANGLES				

SI METRIC ☒ US CUSTOMARY ☐
DESIGN UNITS
WEIGHT

PTC/CAD DRAWN S A V 28MAR96
M GL SERIES CHART 2 DRAWING NUMBER 11 ISSUE MDM CHECK RJ CHECK
RELEASE NO. PR-20782 PAGE 1 OF 8 REPLACES
REVISIONS
A PR-21403 1 A Y 28 MARCH 96
B PR-21578 2 A Y 2 APR 96
C PR-21557 SKV 1 MAY 96
D PR-22833 GLW 5 JUL 97
E CO-93789 KED 4 JUN98
F 0000401 GLW 7 JUN03
G 0002986 AC 20JAN04
H 0017532 RJ 02DEC05

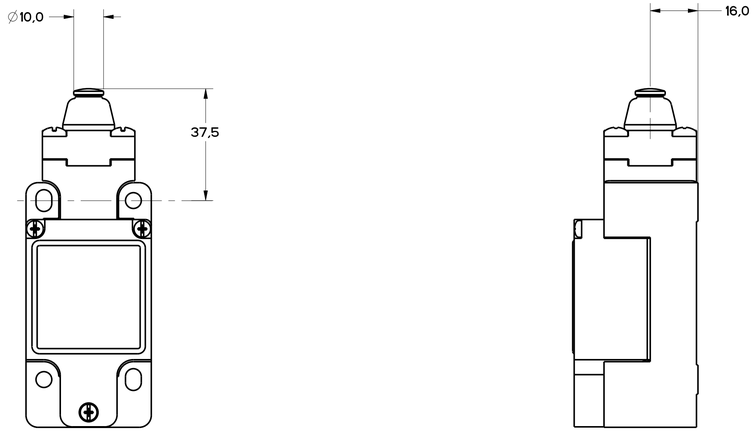

FIGURE 4 - TOP PIN PLUNGER HEAD OTHERWISE REFER TO FIGURE 1

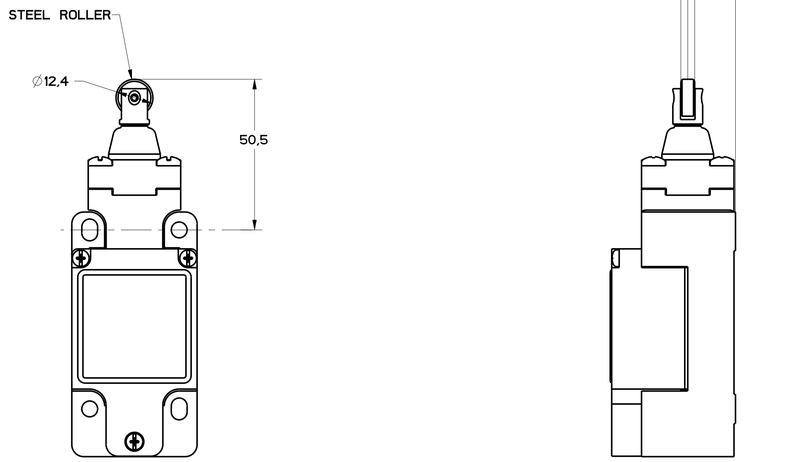

FIGURE 5 - TOP ROLLER PLUNGER HEAD OTHERWISE REFER TO FIGURE 1

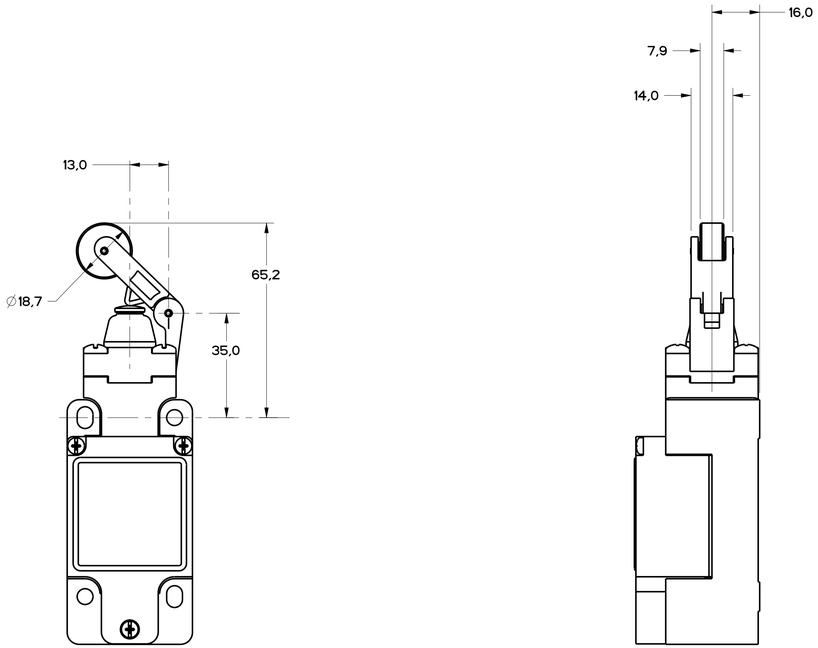

FIGURE 6 - TOP LEVER HEAD, OTHERWISE REFER TO FIGURE 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929
MICRO SWITCH a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING
GL SERIES CHART 2

THIRD ANGLE PROJECTION
SCALE FULL
DO NOT SCALE PRINT
TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM mm	TOL mm±	DIM in	TOL in±
NO PLACES	X	0,4	X	0,01/.03
ONE PLACE	X,X	0,1/.04	X.X	0,01/.015
TWO PLACES	X,XX	0,13/.005	X.XX	0,13/.005
THREE PLACES			X.XXX	
ANGLES		±2°		

DESIGN UNITS SI METRIC [X] US CUSTOMARY [ ]
WEIGHT

ANSI Y14.5M-1982 APPLIES

M GL SERIES CHART 2 | PAGE 1 OF 8 | RELEASE NO. PR-20782 | REPLACES
DRAWING NUMBER 11 | ISSUE | M.D.M | CHECK
REVISIONS
A CO-93389 KED 6NOV94
B 0008401 GLH 4JUN03
C 0002986 RG 10JAN14
D 0017532 TDP 02DEC05
02DEC05 | CHECK | RJ
10DEC93 | CHECK | GLH
10DEC93 | CHECK | W.L.S
PTC/CAD DRAWN

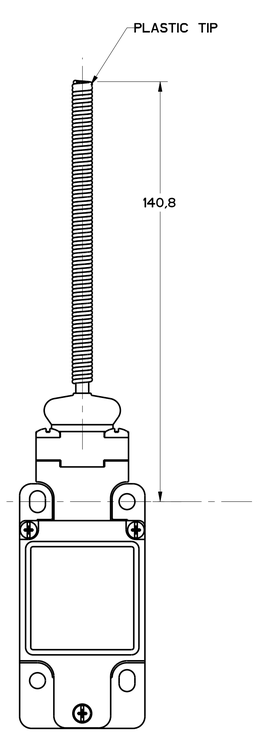

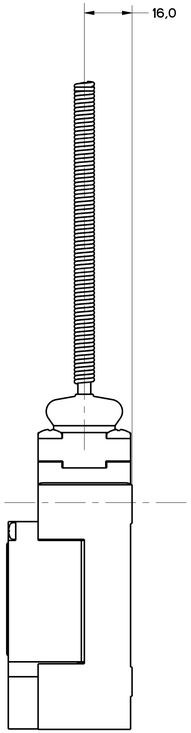

FIGURE 7 - WOBBLE HEAD, AND CAT WHISKER HEAD COIL ACTUATOR, OTHERWISE REFER TO FIGURE 1

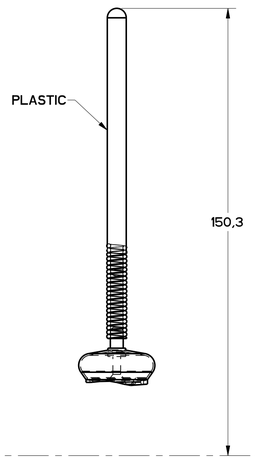

FIGURE 7A - WOBBLE HEAD, PLASTIC ACTUATOR, OTHERWISE SAME AS FIGURE 7

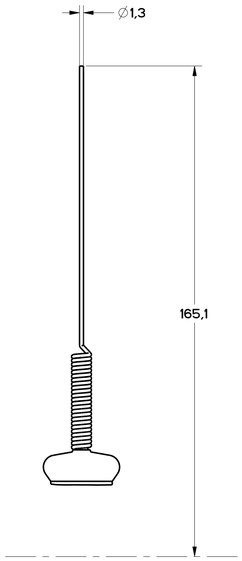

FIGURE 7B - WOBBLE HEAD STAINLESS STEEL SPRING ACTUATOR, OTHERWISE SAME AS FIGURE 7

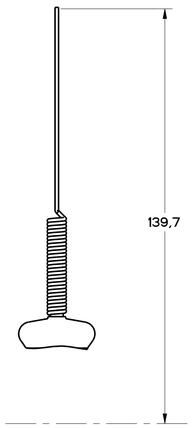

FIGURE 7C - CAT WHISKER ACTUATOR STAINLESS STEEL SPRING OTHERWISE SAME AS FIGURE 7

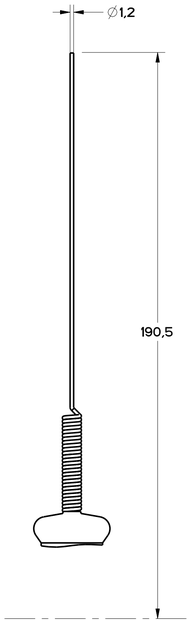

FIGURE 7D - CAT WHISKER ACTUATOR, STAINLESS STEEL SPRING, OTHERWISE SAME AS FIGURE 7

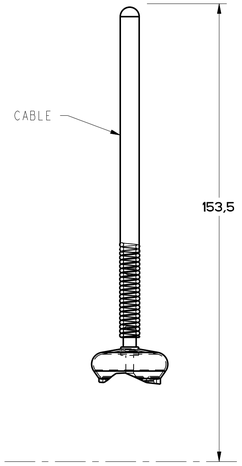

FIGURE 7E - CABLE WOBBLE ACTUATOR OTHERWISE SAME AS FIGURE 7

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929
MICRO SWITCH a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING
GL SERIES CHART 2

THIRD ANGLE PROJECTION
SCALE FULL
DO NOT SCALE PRINT
TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM mm	TOL mm±	DIM in	TOL in±
NO PLACES	X	0,4	X	1/64
ONE PLACE	X,X	0,13	X,X	0,01/.005
TWO PLACES	X,XX	0,13/.005	X,XX	0,13/.005
THREE PLACES				
ANGLES		±2°		

DESIGN UNITS SI METRIC ☒ US CUSTOMARY ☐
WEIGHT

ANSI Y14.5M-1982 APPLIES

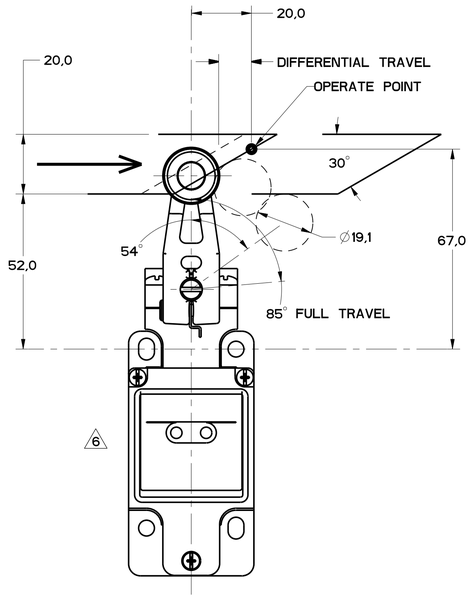

FIGURE 8

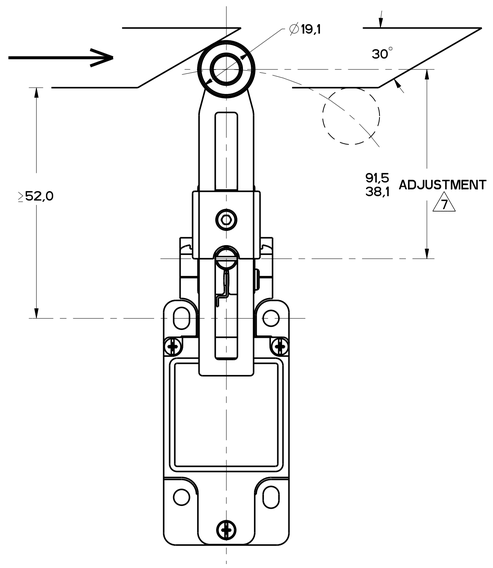

FIGURE 9

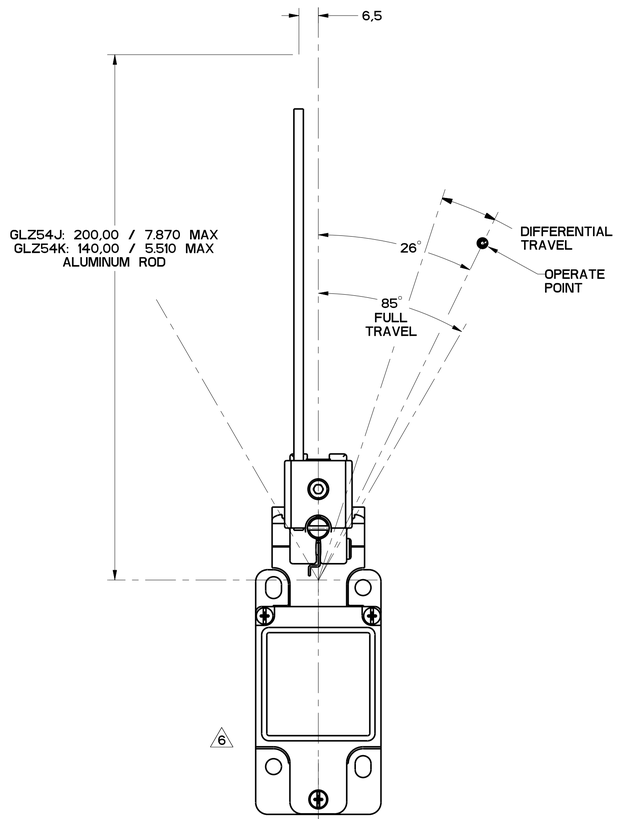

FIGURE 10

FIGURES 8, 9, 10 ANGULAR ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS — CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING TORQUE N·m / LB-IN	MAXIMUM DISCONNECT TORQUE N·m / LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE DEGREE/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE Zb	26° 55**° 85° 21-22 / 13-14 12° DIFFERENTIAL TRAVEL	.330 / 2.9	.385 / 3.4	1290	13	250

CAM ACTUATION PER EN50041, FIGURES 8 AND 9 △7

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS — CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE N / LB	MAXIMUM DISCONNECT FORCE N / LB	MAX OPERATE VEL m/s / in/S	MIN OPERATE VEL mm/s / in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE Zb	0 20 56** 21-22 / 13-14 12 DIFFERENTIAL TRAVEL	9.7 / 2.2	11.4 / 2.6	.85 / 33.5	8.5 / .33	250

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING: GL SERIES CHART 2

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM	TOL mm	TOL mm/s	DIM in	TOL in/S
NO PLACES	X	±1.06	X.X	±.06/.03
ONE PLACE	X.X	±.4/.016	X.XX	±.38/.015
TWO PLACES	X.XX	±.15/.006	X.XXX	±.13/.005
THREE PLACES				
ANGLES		±2°		

SI METRIC ☒ DESIGN UNITS ☐ US CUSTOMARY

WEIGHT

ANSI Y14.5M-1982 APPLIES

PTC/CAD DRAWN S A V 28MAR96 CHECK RJ 020EC05

M GL SERIES CHART 2 DRAWING NUMBER 11 ISSUE MDM CHECK 4 OF 8 PAGE PR-20782 RELEASE NO. REPLACES

REVISIONS

A	PR-21403	S A V 28MAR96
B	CO-93769	KED 6NOV98
C	0000401	GLW 2JUN03
D	0002986	RK 20JAN04
E	0017532	TJO 02DEC05

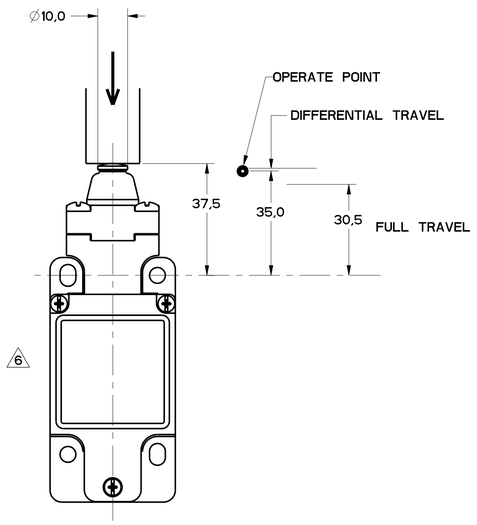

FIGURE 11

FIGURES 11, PIN PLUNGER HEAD, LINEAR ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ CONTACT CLOSED, □ CONTACT OPEN, ▨ CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N / LB	MAXIMUM DISCONNECT FORCE N / LB	MAX OPERATE VEL M/S / in/S	MIN OPERATE VEL mm/S / in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02B	SNAP - ACTION CONTACTS SINGLE POLE Zb	37.5 35 33** 30.5 21-22 >, 13-14 < 0.9 DIFFERENTIAL TRAVEL	16 / 3.6	27 / 6.0	0.1 / 3.9	1.0 / .04	250

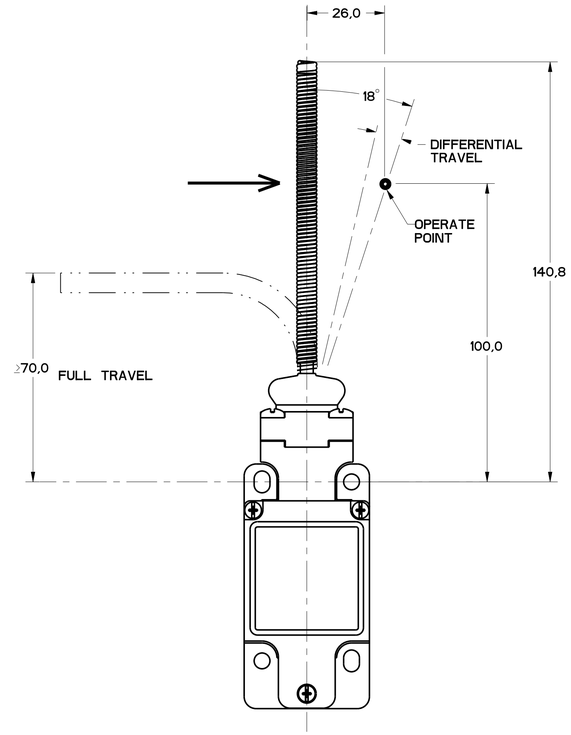

FIGURE 12

FIGURE 12, WOBBLE HEAD, ANGULAR ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ CONTACT CLOSED, □ CONTACT OPEN, ▨ CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING TORQUE N·m / LB/in	MAXIMUM DISCONNECT TORQUE N·m / LB/in	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE Zb	18° 21-22 >, 13-14 < 8° DIFFERENTIAL TRAVEL	0.2 / 1.8	N/A	360	8	100

FIGURE 12, WOBBLE HEAD, SIDE ACTUATION AT 100mm

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ CONTACT CLOSED, □ CONTACT OPEN, ▨ CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N / LB	MAXIMUM DISCONNECT FORCE N / LB	MAX OPERATE VEL M/S / in/S	MIN OPERATE VEL mm/S / in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE Zb	26 21-22 >, 13-14 < 12 DIFFERENTIAL TRAVEL	2.5 / 0.6	N/A	.5 / 19.7	11 / .43	100

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929
MICRO SWITCH a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING
GL SERIES CHART 2

THIRD ANGLE PROJECTION
SCALE FULL
DO NOT SCALE PRINT
TOLERANCES
APPLY TO DESIGN UNITS, CONVERSIONS ARE ONLY FOR REFERENCE, UNLESS NOTED, TOLERANCES ARE ±

	DIM mm	TOL mm/±	DIM in	TOL inch/±
NO PLACES	X.	1/2	X.X	0.01/.03
ONE PLACE	X.X	0.1	X.XX	0.005/.015
TWO PLACES	X.XX	0.13/.508	X.XXX	0.13/.005
THREE PLACES				
ANGLES		±2°		

DESIGN UNITS SI METRIC [X] US CUSTOMARY [ ]
WEIGHT

ANSI Y14.5M-1982 APPLIES

M GL SERIES CHART 2 | PAGE 5 OF 8 | RELEASE NO. PR-20782 | REPLACES
DRAWING NUMBER 11 | ISSUE | M/M | CHECK
REVISIONS
A TCO 78092 GLH 20 SEP 94 | 02DEC05 | MJM
B CO-93789 RLO 4NOV98 | 0000401 | GLH 4JUN03 | RJ
C 0002986 RS 20JAN04 | 0017532 | CHECK
D TCO 02DEC05 | 5JAN94 | MAM | CHECK
10DEC93 | CHECK
PTC/CAD | DRAWN | W.L.S

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS — CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N / LB	MAXIMUM DISCONNECT FORCE N / LB	MAX OPERATE VEL mm/S / in/S	MIN OPERATE VEL mm/S / in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 		16 / 3.6	27 / 6.0	0.1 / 3.9	1.0 / .04	250

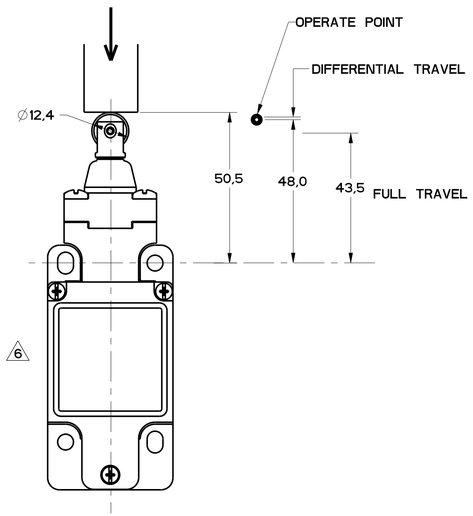

FIGURE 13A

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS — CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N / LB	MAXIMUM DISCONNECT FORCE N / LB	MAX OPERATE VEL mm/S / in/S	MIN OPERATE VEL mm/S / in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 		9.3 / 2.1	15.6 / 3.5	0.17 / 6.7	1.7 / .067	250

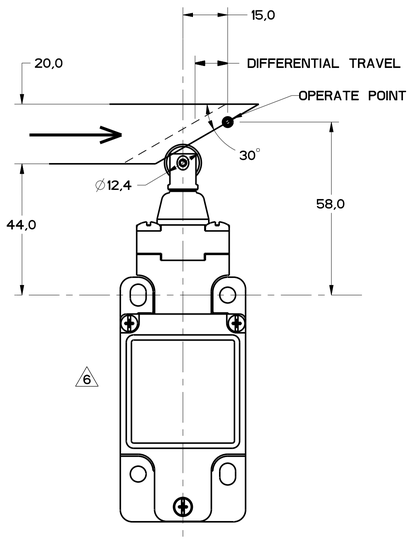

FIGURE 13B

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING: GL SERIES CHART 2

ANSI Y14.5M-1982 APPLIES

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM mm	TOL mm±	DIM in	TOL mm±
NO PLACES	X	1/64	X.X	0.81/.03
ONE PLACE	X.X	0.41/.016	X.XX	0.38/.015
TWO PLACES	X.XX	0.15/.006	X.XXX	0.13/.005
THREE PLACES				
ANGLES		±2		

SI METRIC [X] DESIGN UNITS

US CUSTOMARY [ ]

WEIGHT

PTC/CAD | DRAWN: WLS 10DEC93 | CHECK: MAM 5JAN94 | CHECK: RJ 02DEC05 | CHECK: MDM | ISSUE 11 | DRAWING NUMBER | RELEASE NO. PR-20182 | PAGE 6 OF 8 | REPLACES

REVISIONS
A CO-78092 GLH 20 SEP 94 02DEC05
B CO-93789 KED 4NOV98
C 0000401 GLH 2JUN03
D 0002986 RK 20JAN04
E 0017532 CO-020EC05

FIGURE 14A, TOP ROLLER LEVER HEAD WITH PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS — CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED; DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N / LB	MAXIMUM DISCONNECT FORCE N / LB	MAX OPERATE VEL M/S / in/S	MIN OPERATE VEL mm/S / in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 		9.5 / 2.1	12 / 2.7	0.17 / 6.7	1.7 / .067	250

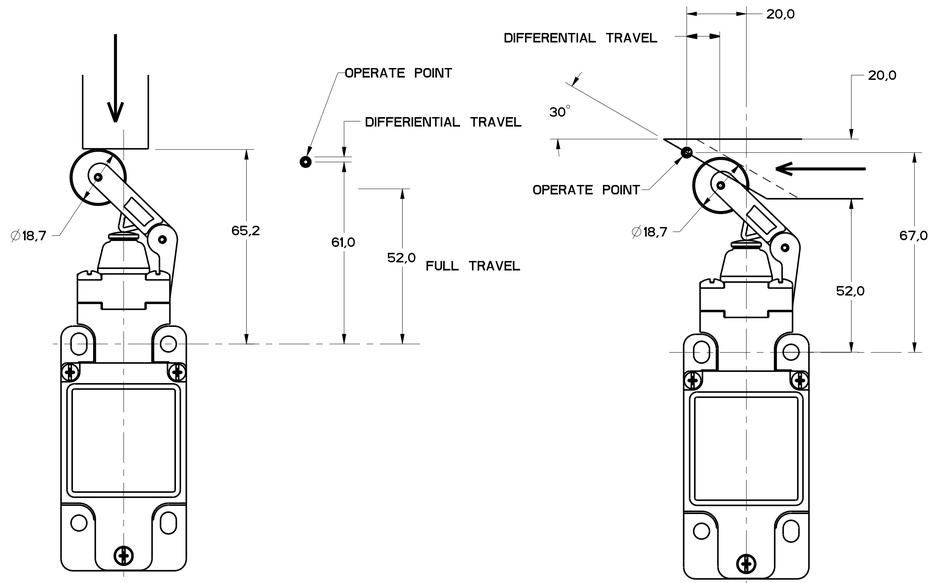

FIGURE 14A

FIGURE 14B

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS — CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED; DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N / LB	MAXIMUM DISCONNECT FORCE N / LB	MAX OPERATE VEL M/S / in/S	MIN OPERATE VEL mm/S / in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 		5.5 / 1.2	7.0 / 1.6	0.29 / 11.4	2.9 / .11	250

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING: GL SERIES CHART 2

ANSI Y14.5M-1982 APPLIES

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	SI mm	SI TOL mm/±	US in	US TOL in/±
NO PLACES	X	1/.04	X.X	0.8/.03
ONE PLACE	X.X	0.4/.016	X.XX	0.38/.015
TWO PLACES	X.XX	0.15/.006	X.XXX	0.13/.005
THREE PLACES				
ANGLES		±2°		

DESIGN UNITS: SI METRIC [X] US CUSTOMARY [ ]

WEIGHT

M GL SERIES CHART 2 — PAGE 7 OF 8 — RELEASE NO. PR-20782 — REPLACES

DRAWING NUMBER 11 — ISSUE — MDM — CHECK

REVISIONS

A	TAO 78092	GLW 20 SEP 94	02DEC05
B	CO-93389	KED 4NOV96	
C	0000401	GLW 3JUN03	RJ
D	0002986	KS 30JAN04	CHECK
E	0017532	TAO 02DEC05	

5JAN94 — MAM — CHECK

PTC/CAD — DRAWN WLS — 10DEC93 — CHECK

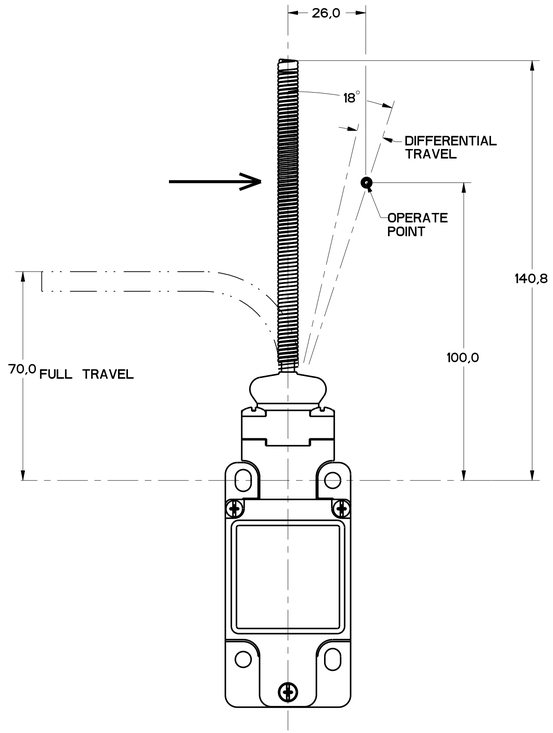

FIGURE 15

FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS — CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED — DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE N·m / LB-IN	MAXIMUM DISCONNECT TORQUE N·m / LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 		.1 / .9	N/A	360	8	100

FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS — CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED — DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE N / LB	MAXIMUM DISCONNECT FORCE N / LB	MAX OPERATE VEL mm/S / in/S	MIN OPERATE VEL mm/S / in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE		1.3 / .3	N/A	.5 / 19.7	11 / .43	100

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING

GL SERIES CHART 2

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM mm	TOL mm/±	DIM in	TOL in/±
NO PLACES	X	1/.04	X	0.4/.03
ONE PLACE	X.X	0.4/.016	X.XX	0.381/.015
TWO PLACES	X.XX	0.13/.005	X.XXX	0.127/.005
THREE PLACES				
ANGLES		±2°		

SI METRIC [X] US CUSTOMARY [ ]

DESIGN UNITS

WEIGHT

ANSI Y14.5M-1982 APPLIES

M GL SERIES CHART 2 — PAGE 8 OF 8 — RELEASE NO. PR-20782 — REPLACES

DRAWING NUMBER

ISSUE 11

REVISIONS					
		ISSUE	CHECK		
A	TSO T8092	GLW 20 SEP 94	MDM	02DEC05	
B	CO-93789	WED ANSWAR			
C	0000401	GLW 3JUN03	RJ		
D	0002986	BS 30JAN04	CHECK		
E	0017532	TSO 02DEC05			

DRAWN	PTC/CAD			
WLS	10 DEC 93	CHECK		
		MAM	5JAN94	
		CHECK		

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург, Промышленная ул, дом № 19, литера Н, помещение 100-Н Офис 331