

SIDE ROTARY

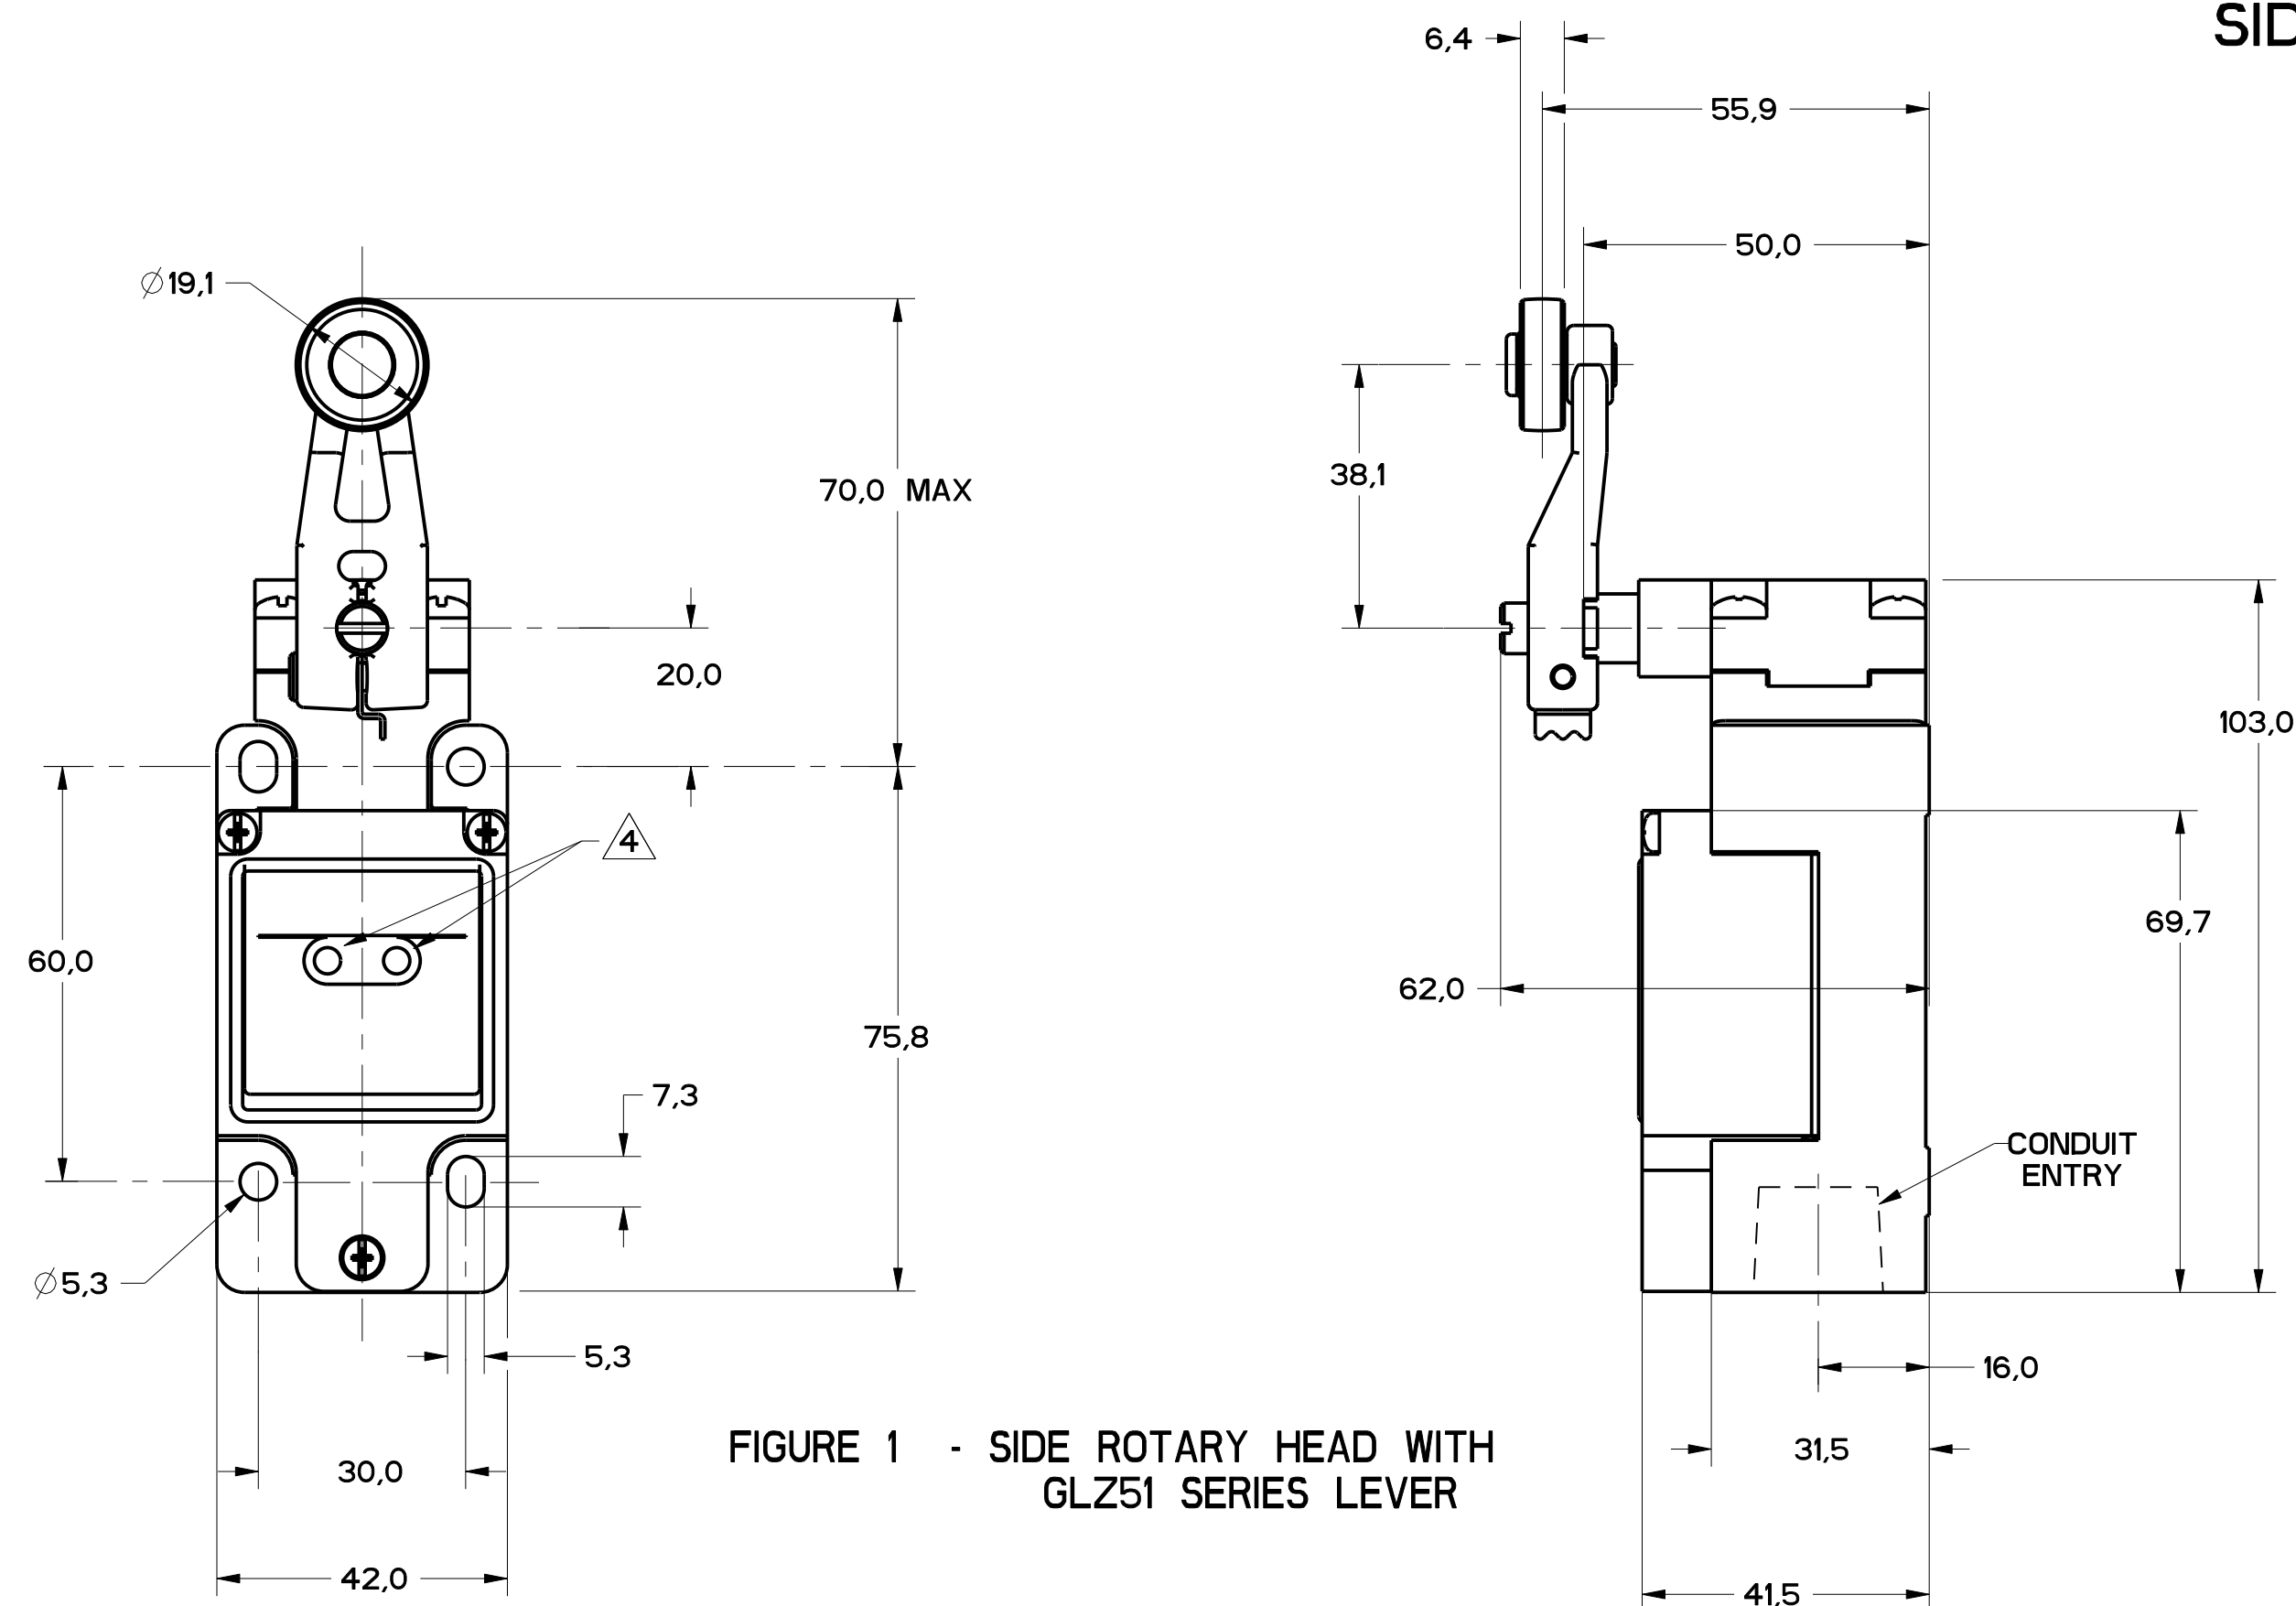


FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

ALUMINUM ROD
GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
STAINLESS STEEL ROD
GLZ54N: 318.00 / 12.490 MAX

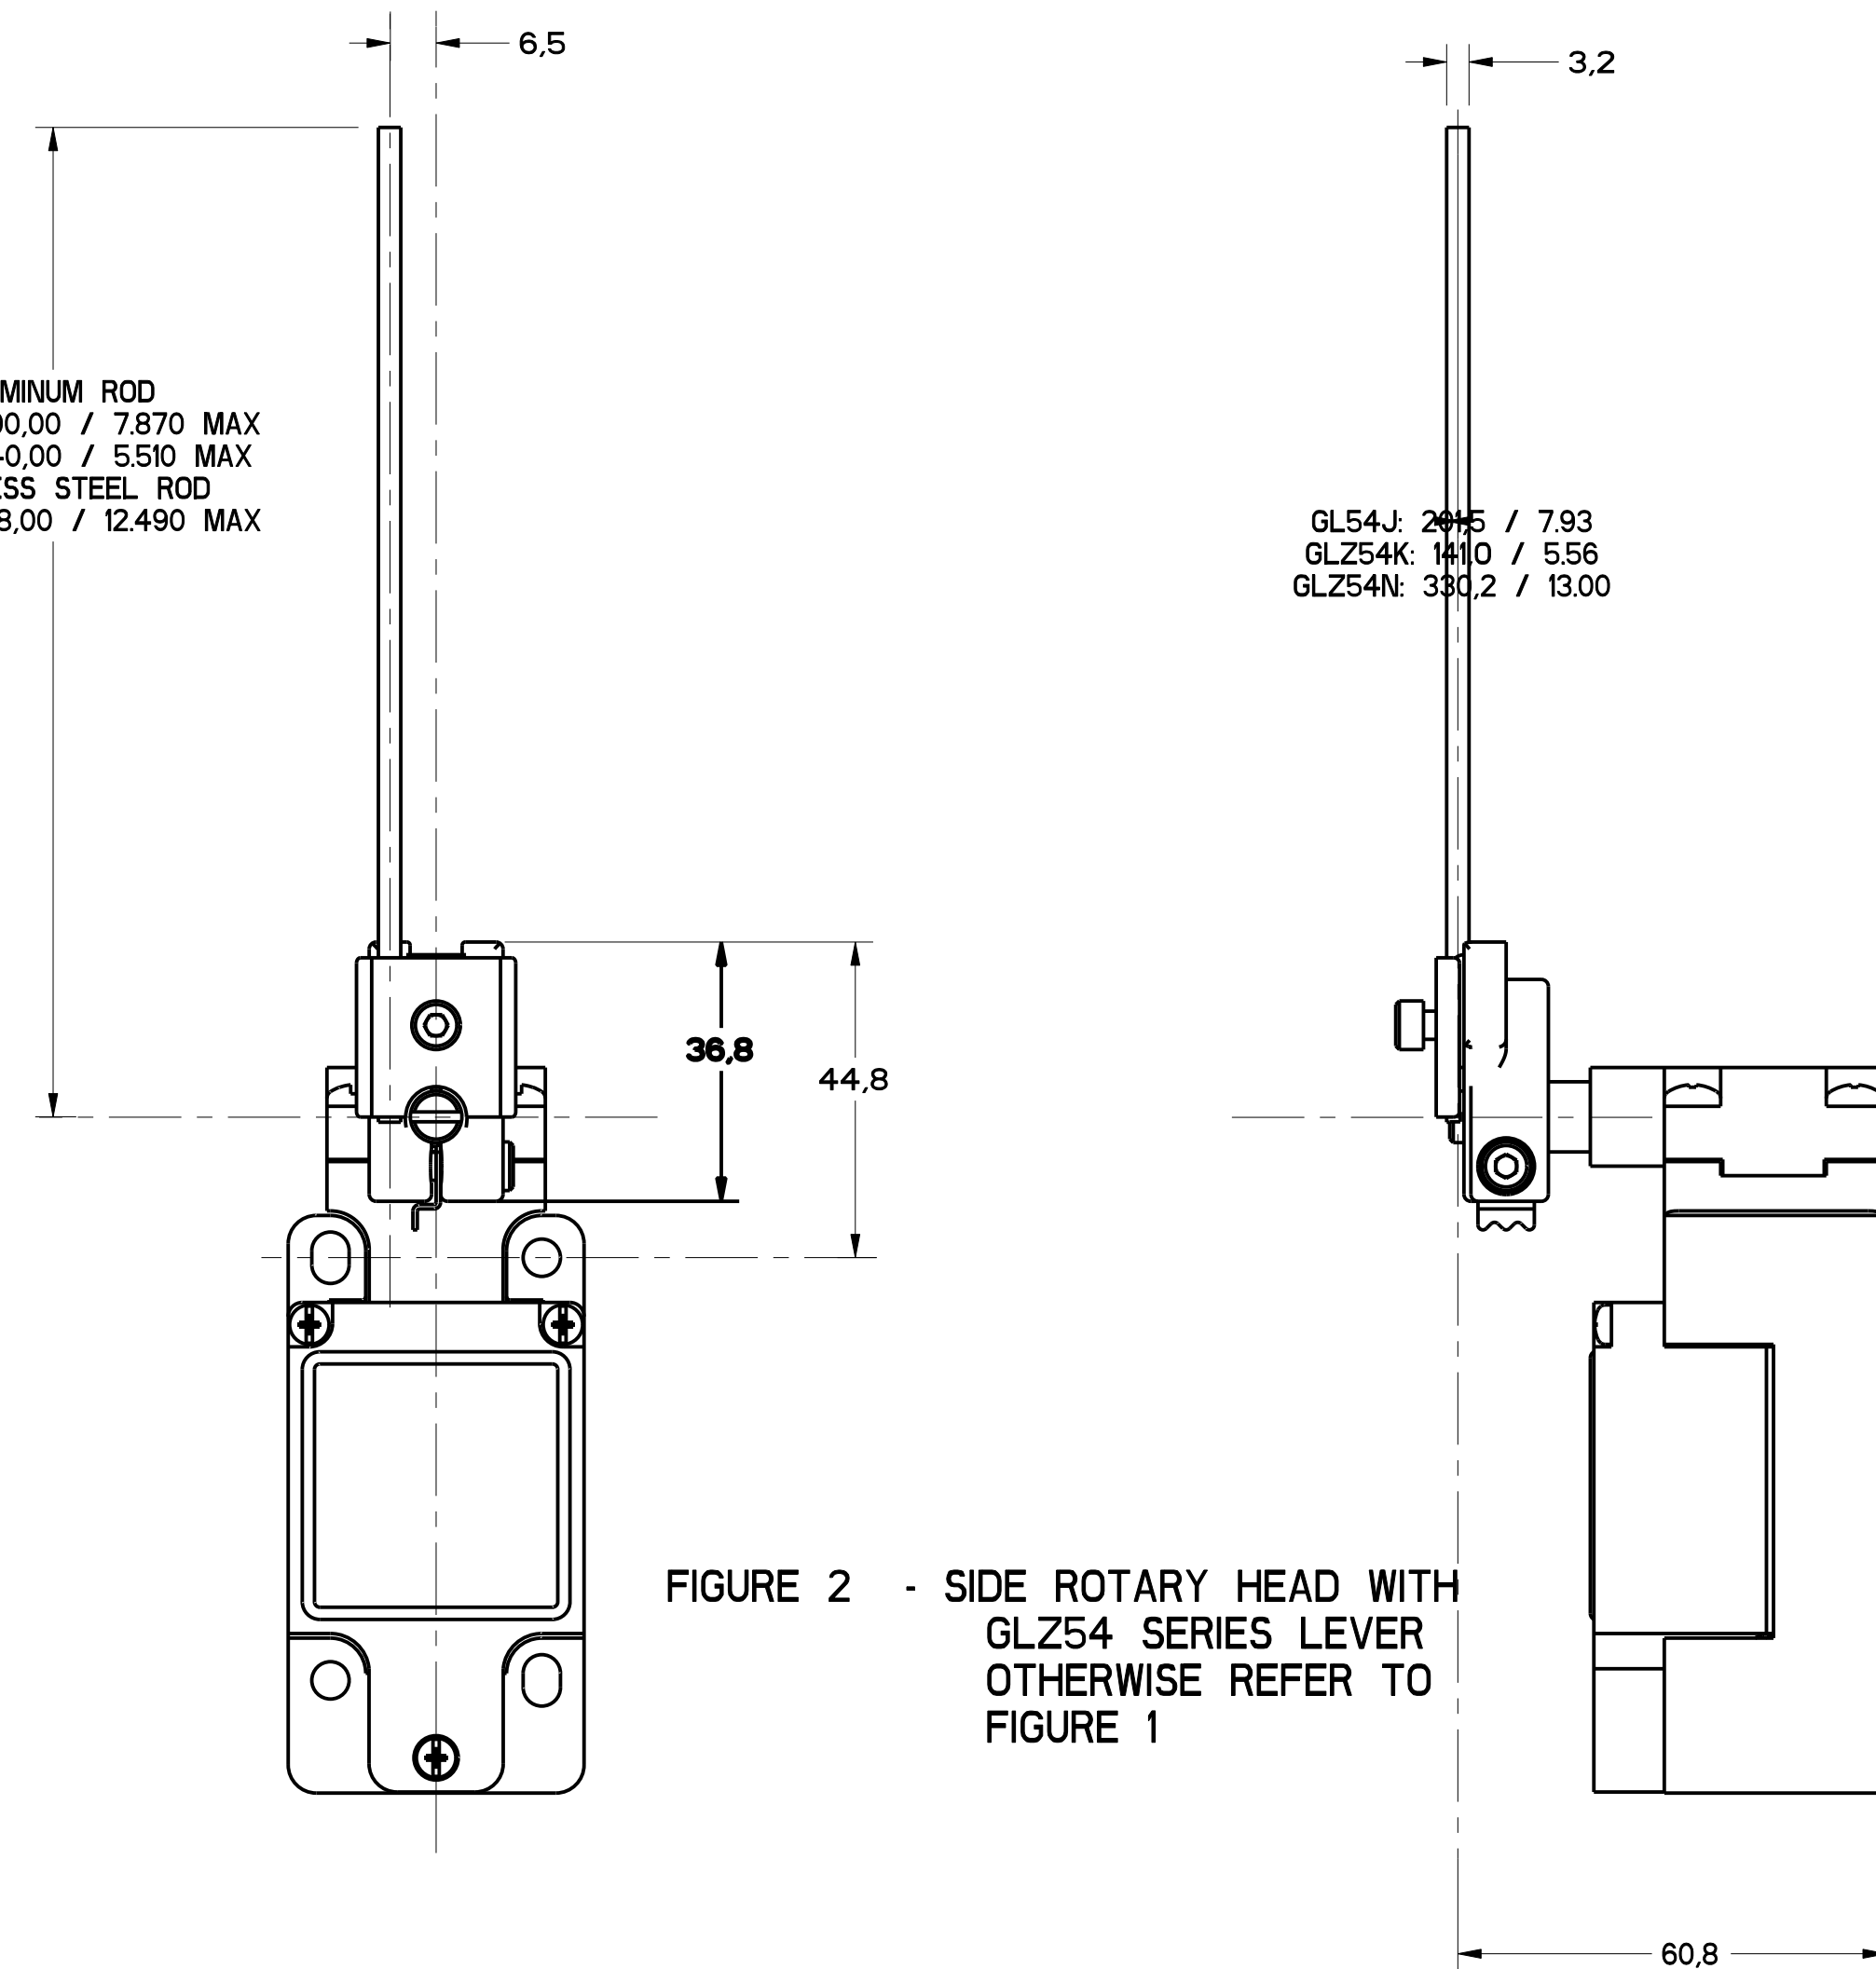


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING $\Delta 5$			
AC		DC	
Ue	Ie	Ue	Ie
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)
120	6	24	2.8
240	3	125	.55
380	1.9	250	.27
480	1.5		
500	1.4		
600	1.2		

ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13


NOTES

- HEADS MAY BE INDEXED IN 90° INCREMENTS.
- LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
- THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
- THE MAXIMUM VOLTAGE, V_e OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
- FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
- CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50
- TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F


CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLB***	I	N/A	N/A
GLG***	I	N/A	N/A
GLJ***	I	N/A	N/A
GLA***	1A	N/A	N/A
GLB***	1B	N/A	N/A
GLC***	1C	N/A	N/A
GLD***	1D	N/A	N/A
GL***A1*	I	8	
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	12
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15

FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.5	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.9 2.0	71.5 2.81	12.7 .5

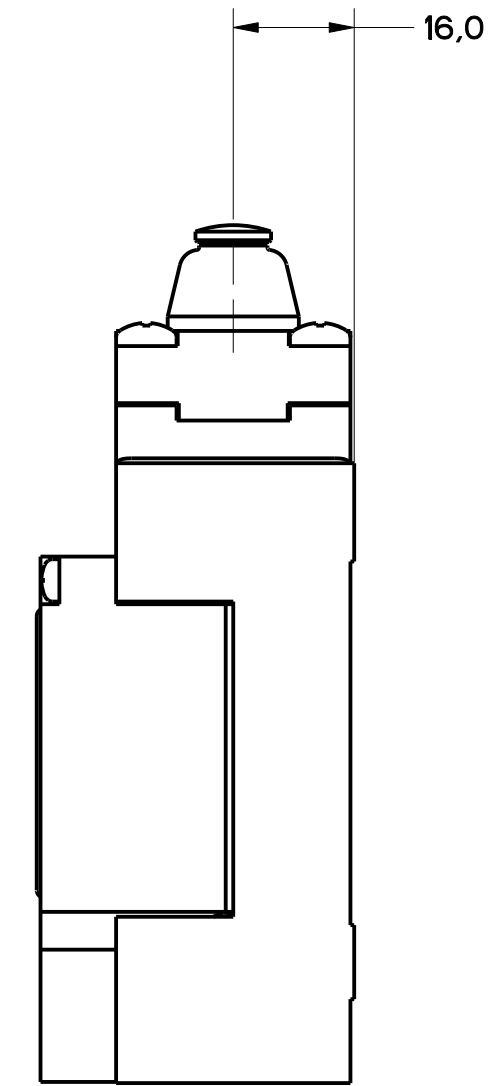

Technical drawing of a lamp head (Lampenkopf) showing a side view. The drawing includes two dimensions: 4,7 (width of the base) and 16,0 (width of the top section).

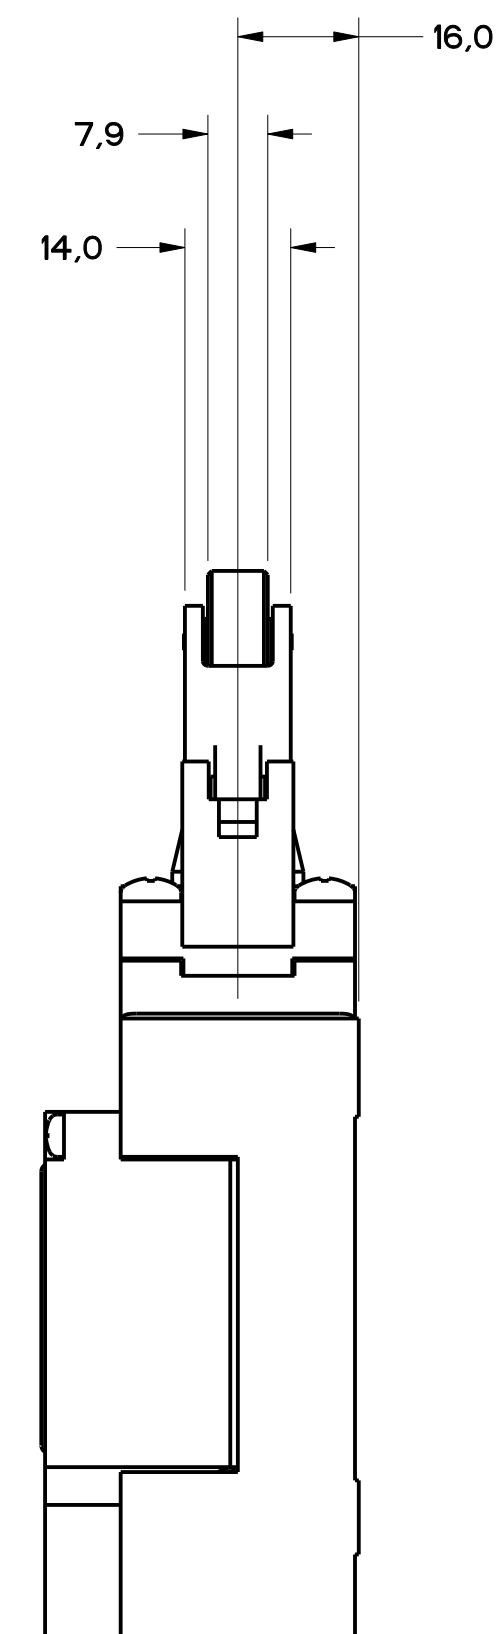

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <td>DIM</td> <td>TOL</td> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>1</td> <td>1/16"</td> <td>2.1</td> <td>0.01-0.1</td> </tr> <tr> <td>2</td> <td>0.01-0.016</td> <td>2.2</td> <td>0.00-0.03</td> </tr> <tr> <td>3</td> <td>0.151-0.06</td> <td>2.3</td> <td>0.131-0.05</td> </tr> </table>		DIM	TOL	DIM	TOL	1	1/16"	2.1	0.01-0.1	2	0.01-0.016	2.2	0.00-0.03	3	0.151-0.06	2.3	0.131-0.05									
DIM	TOL	DIM	TOL																									
1	1/16"	2.1	0.01-0.1																									
2	0.01-0.016	2.2	0.00-0.03																									
3	0.151-0.06	2.3	0.131-0.05																									
FED. MFG. CODE 91929	CATALOG LISTING	<table border="1"> <tr> <td>NO PLACES</td> <td>1</td> <td>1/16"</td> <td>2.1</td> <td>0.01-0.1</td> </tr> <tr> <td>ONE PLACE</td> <td>2</td> <td>0.01-0.016</td> <td>2.2</td> <td>0.00-0.03</td> </tr> <tr> <td>TWO PLACES</td> <td>3</td> <td>0.151-0.06</td> <td>2.3</td> <td>0.131-0.05</td> </tr> <tr> <td>THREE PLACES</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>ANGLES</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		NO PLACES	1	1/16"	2.1	0.01-0.1	ONE PLACE	2	0.01-0.016	2.2	0.00-0.03	TWO PLACES	3	0.151-0.06	2.3	0.131-0.05	THREE PLACES					ANGLES				
NO PLACES	1	1/16"	2.1	0.01-0.1																								
ONE PLACE	2	0.01-0.016	2.2	0.00-0.03																								
TWO PLACES	3	0.151-0.06	2.3	0.131-0.05																								
THREE PLACES																												
ANGLES																												
 MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	GL SERIES CHART 2																										
		<table border="1"> <tr> <td>SI METRIC</td> <td>☒</td> <td>US CUSTOMARY</td> <td>☐</td> </tr> <tr> <td>DESIGN UNITS</td> <td></td> <td></td> <td></td> </tr> </table>		SI METRIC	☒	US CUSTOMARY	☐	DESIGN UNITS																				
SI METRIC	☒	US CUSTOMARY	☐																									
DESIGN UNITS																												

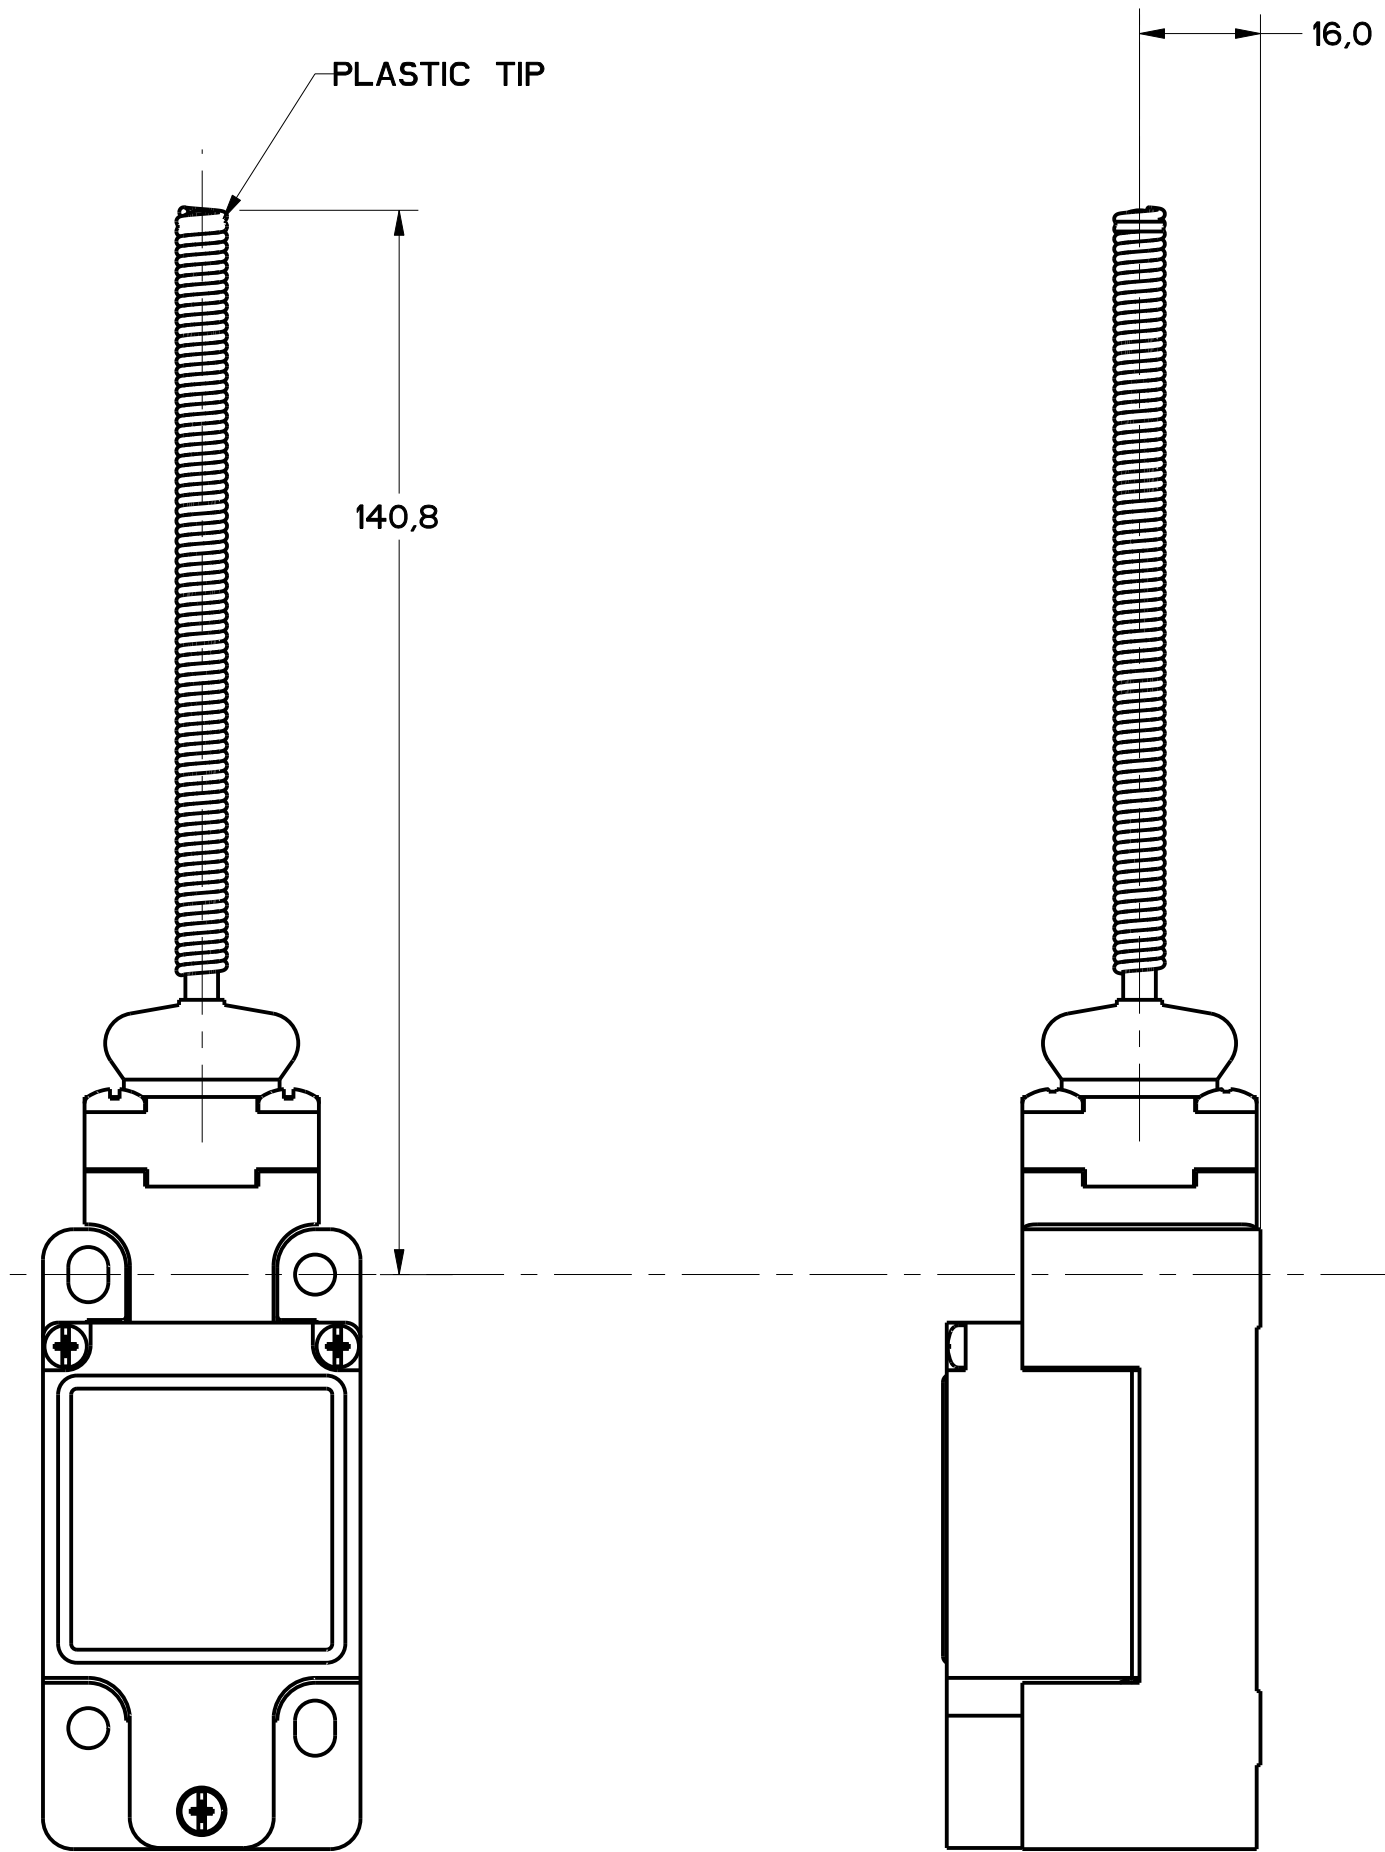


FIGURE 7 - WOBBLE HEAD, AND CAT WHISKER HEAD
COIL ACTUATOR,
OTHERWISE REFER TO
FIGURE 1

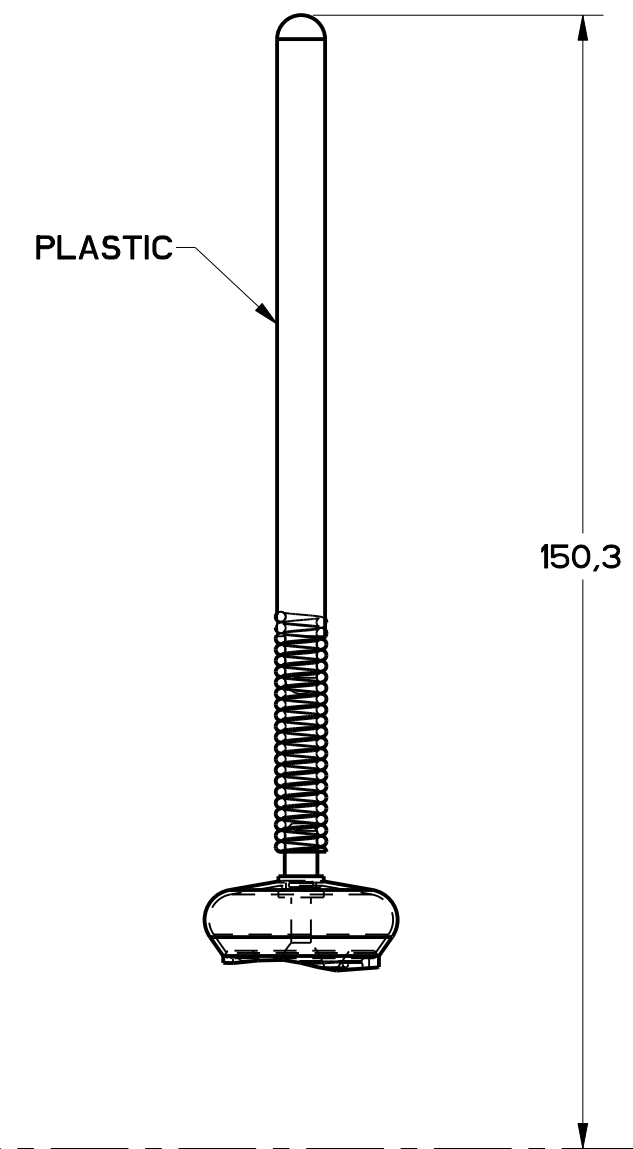


FIGURE 7A -
WOBBLE HEAD,
PLASTIC ACTUATOR,
OTHERWISE SAME AS FIGURE 7

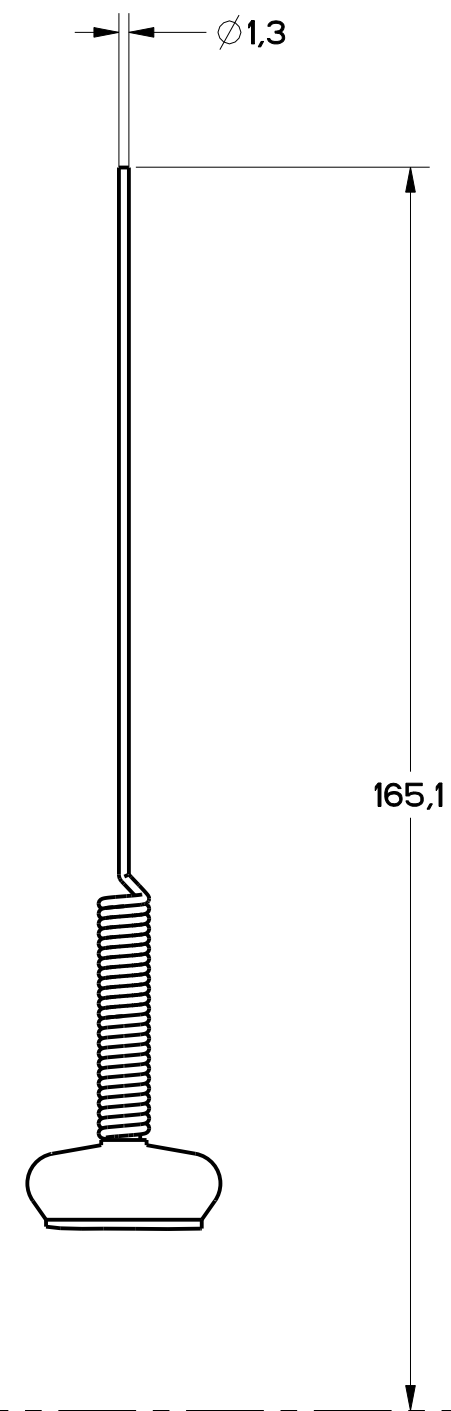


FIGURE 7B -
WOBBLE HEAD
STAINLESS STEEL SPRING
ACTUATOR, OTHERWISE
SAME AS FIGURE 7

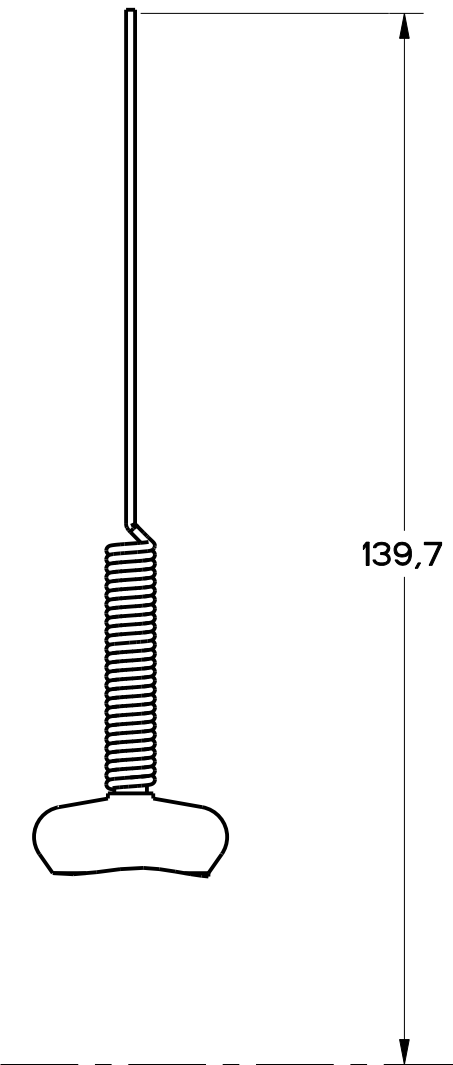


FIGURE 7C -
CAT WHISKER
ACTUATOR STAINLESS
STEEL SPRING
OTHERWISE SAME AS
FIGURE 7

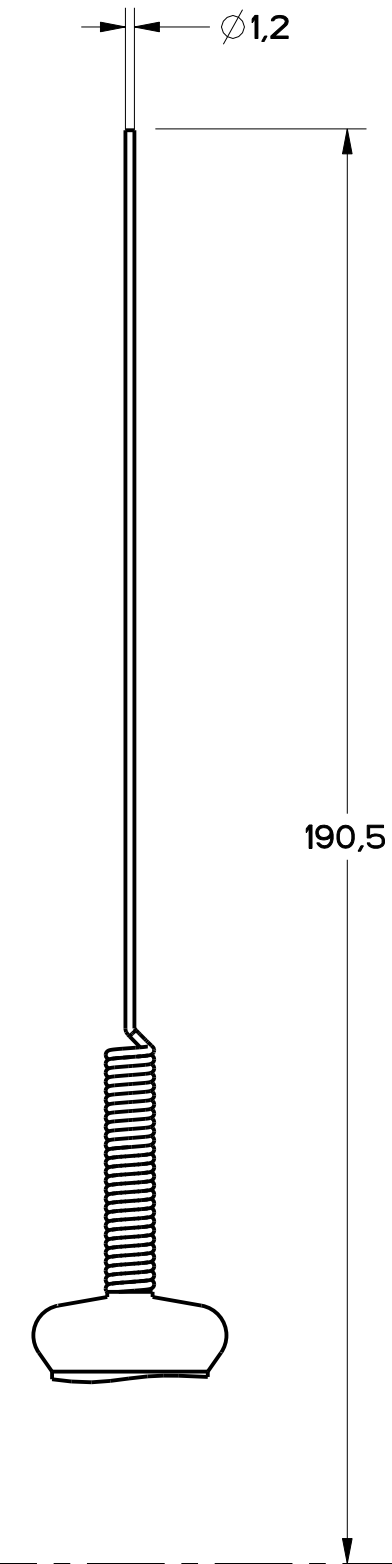


FIGURE 7D -
CAT WHISKER
ACTUATOR, STAINLESS
STEEL SPRING,
OTHERWISE SAME
AS FIGURE 7

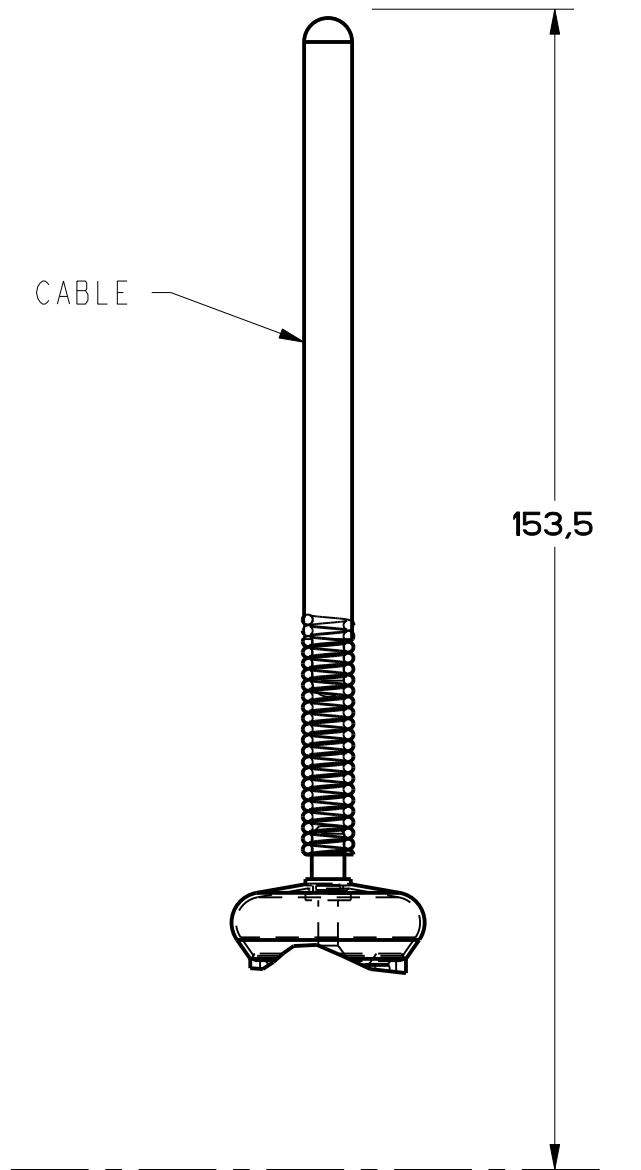


FIGURE 7E -
CABLE WOBBLE
ACTUATOR
OTHERWISE SAME
AS FIGURE 7

PTC/CAD		DRAWN		M		GL SERIES CHART 2	
				DRAWING NUMBER		PAGE 3 OF 8	
				ISSUE 11			
				REVISIONS			
		A		21557			
		B		A V			
		C		CO			
		D		21558			
		E		0017532			
		F		02DEC05			
		G		0000286			
		H		21JUN03			
		I		0000401			
		J		0000401			
		K		0000401			
		L		0000401			
		M		0000401			
		N		0000401			
		O		0000401			
		P		0000401			
		Q		0000401			
		R		0000401			
		S		0000401			
		T		0000401			
		U		0000401			
		V		0000401			
		W		0000401			
		X		0000401			
		Y		0000401			
		Z		0000401			
		AA		0000401			
		AB		0000401			
		AC		0000401			
		AD		0000401			
		AE		0000401			
		AF		0000401			
		AG		0000401			
		AH		0000401			
		AI		0000401			
		AJ		0000401			
		AK		0000401			
		AL		0000401			
		AM		0000401			
		AN		0000401			
		AO		0000401			
		AP		0000401			
		AQ		0000401			
		AR		0000401			
		AS		0000401			
		AT		0000401			
		AU		0000401			
		AV		0000401			
		AW		0000401			
		AX		0000401			
		AY		0000401			
		AZ		0000401			
		BA		0000401			
		BB		0000401			
		BC		0000401			
		BD		0000401			
		BE		0000401			
		BF		0000401			
		BG		0000401			
		BH		0000401			
		BI		0000401			
		BJ		0000401			
		BK		0000401			
		BL		0000401			
		BM		0000401			
		BN		0000401			
		BO		0000401			
		BP		0000401			
		BQ		0000401			
		BR		0000401			
		BS		0000401			
		BT		0000401			
		BU		0000401			
		BV		0000401			
		BW		0000401			
		BX		0000401			
		BY		0000401			
		BZ		0000401			
		CA		0000401			
		CB		0000401			

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		DIM mm TOL mm/1/2 DIM in TOL mil/1/2	
FED. MFG. CODE 91929	CATALOG LISTING	NO PLACES 3 ONE PLACE X X TWO PLACES X X THREE PLACES X X ANGLES ±.02 SI METRIC ☒ US CUSTOMARY ☐	
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	GL SERIES CHART 2	
DESIGN UNITS		WEIGHT	

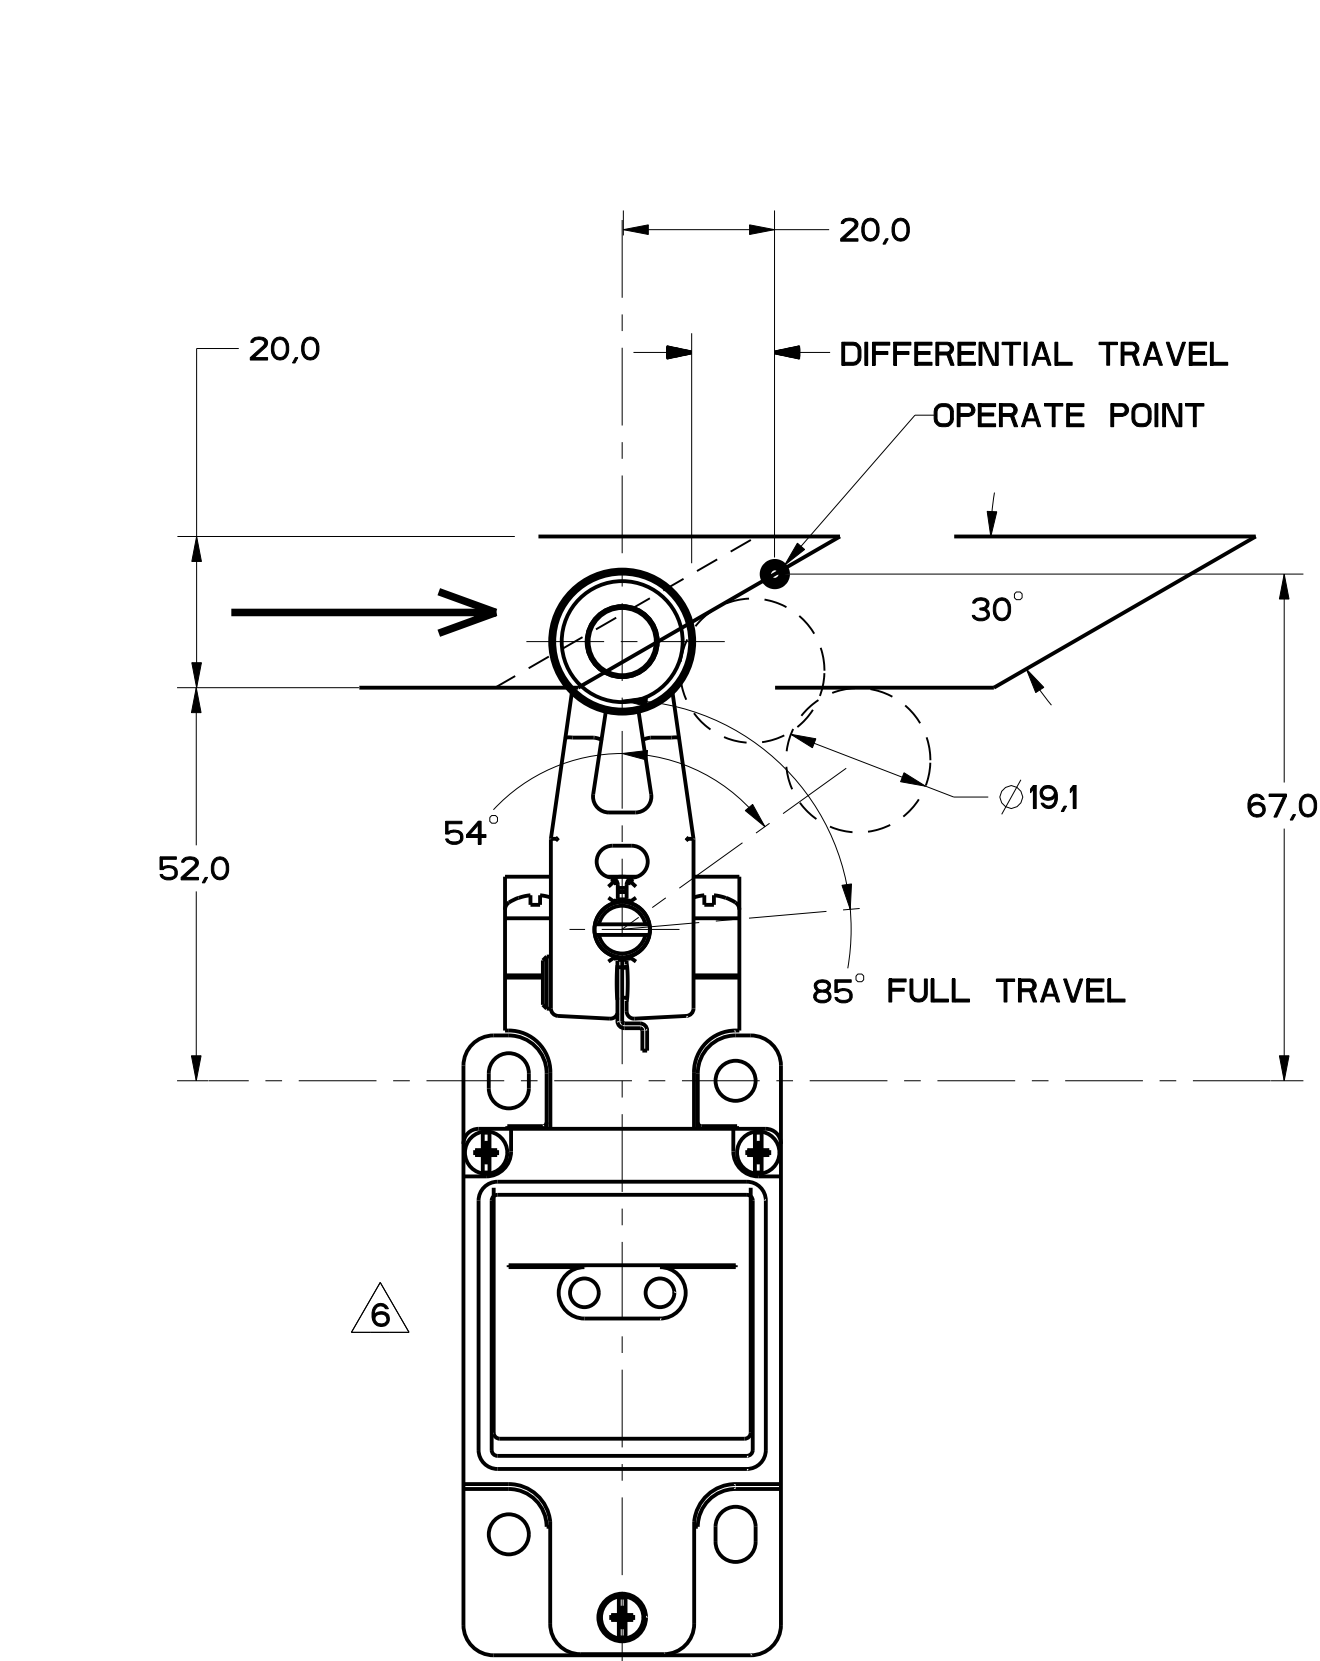


FIGURE 8

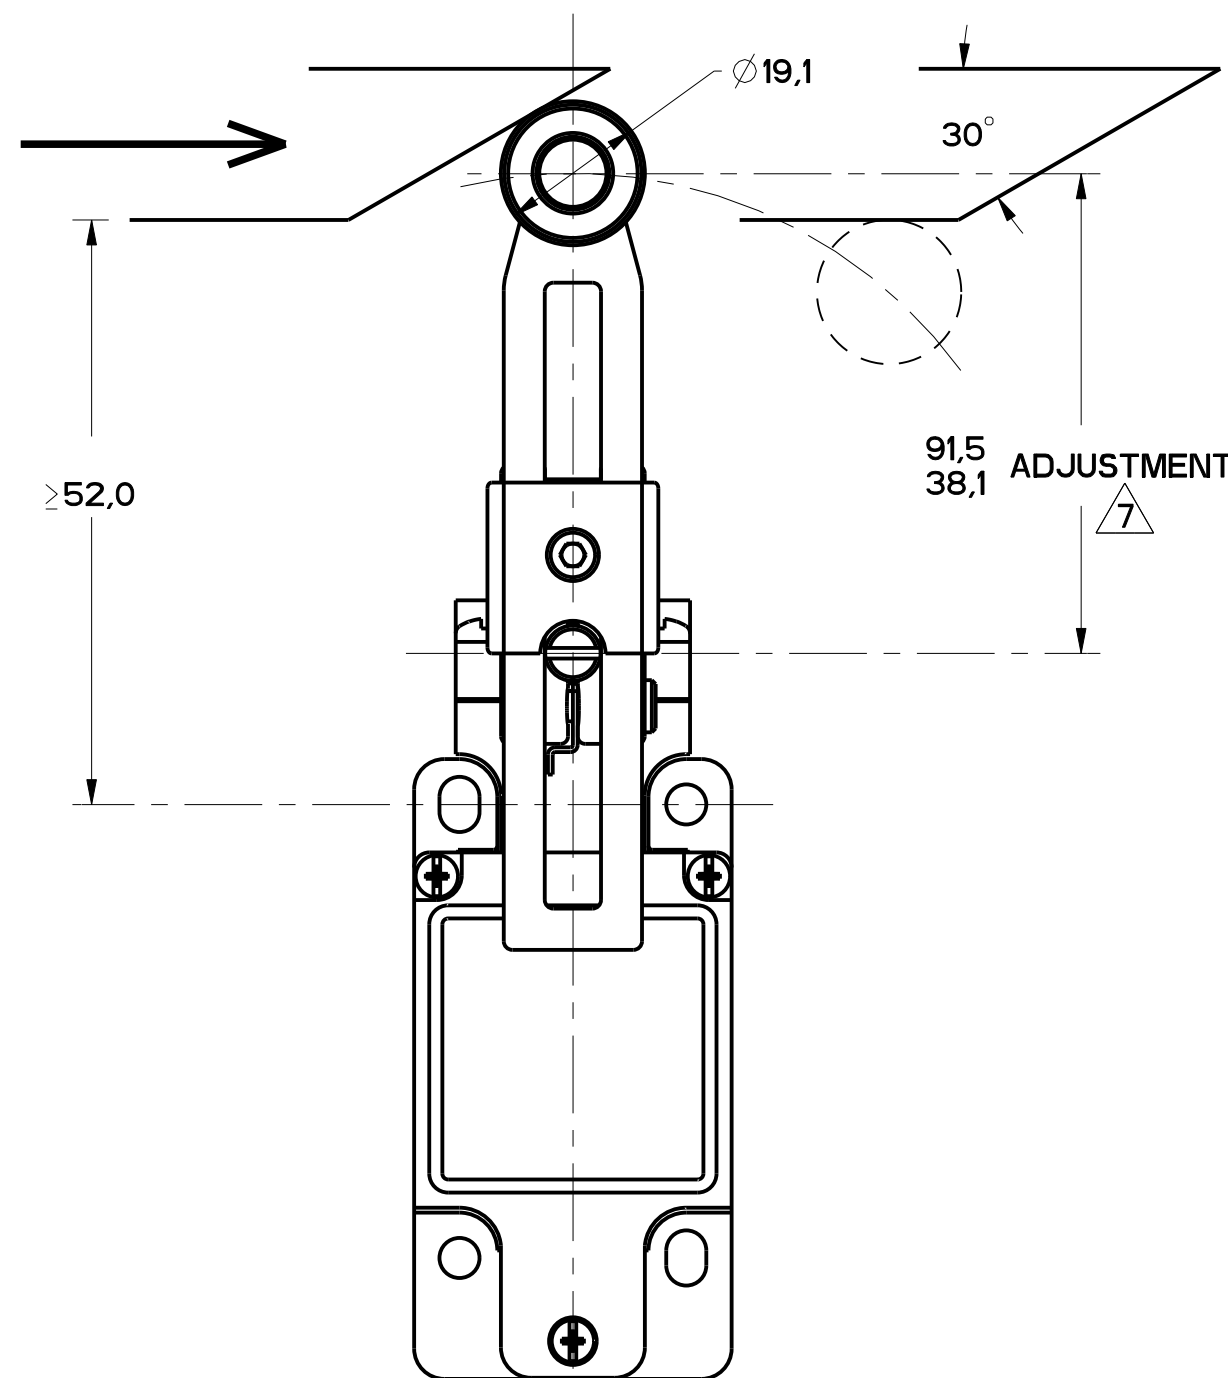


FIGURE 9

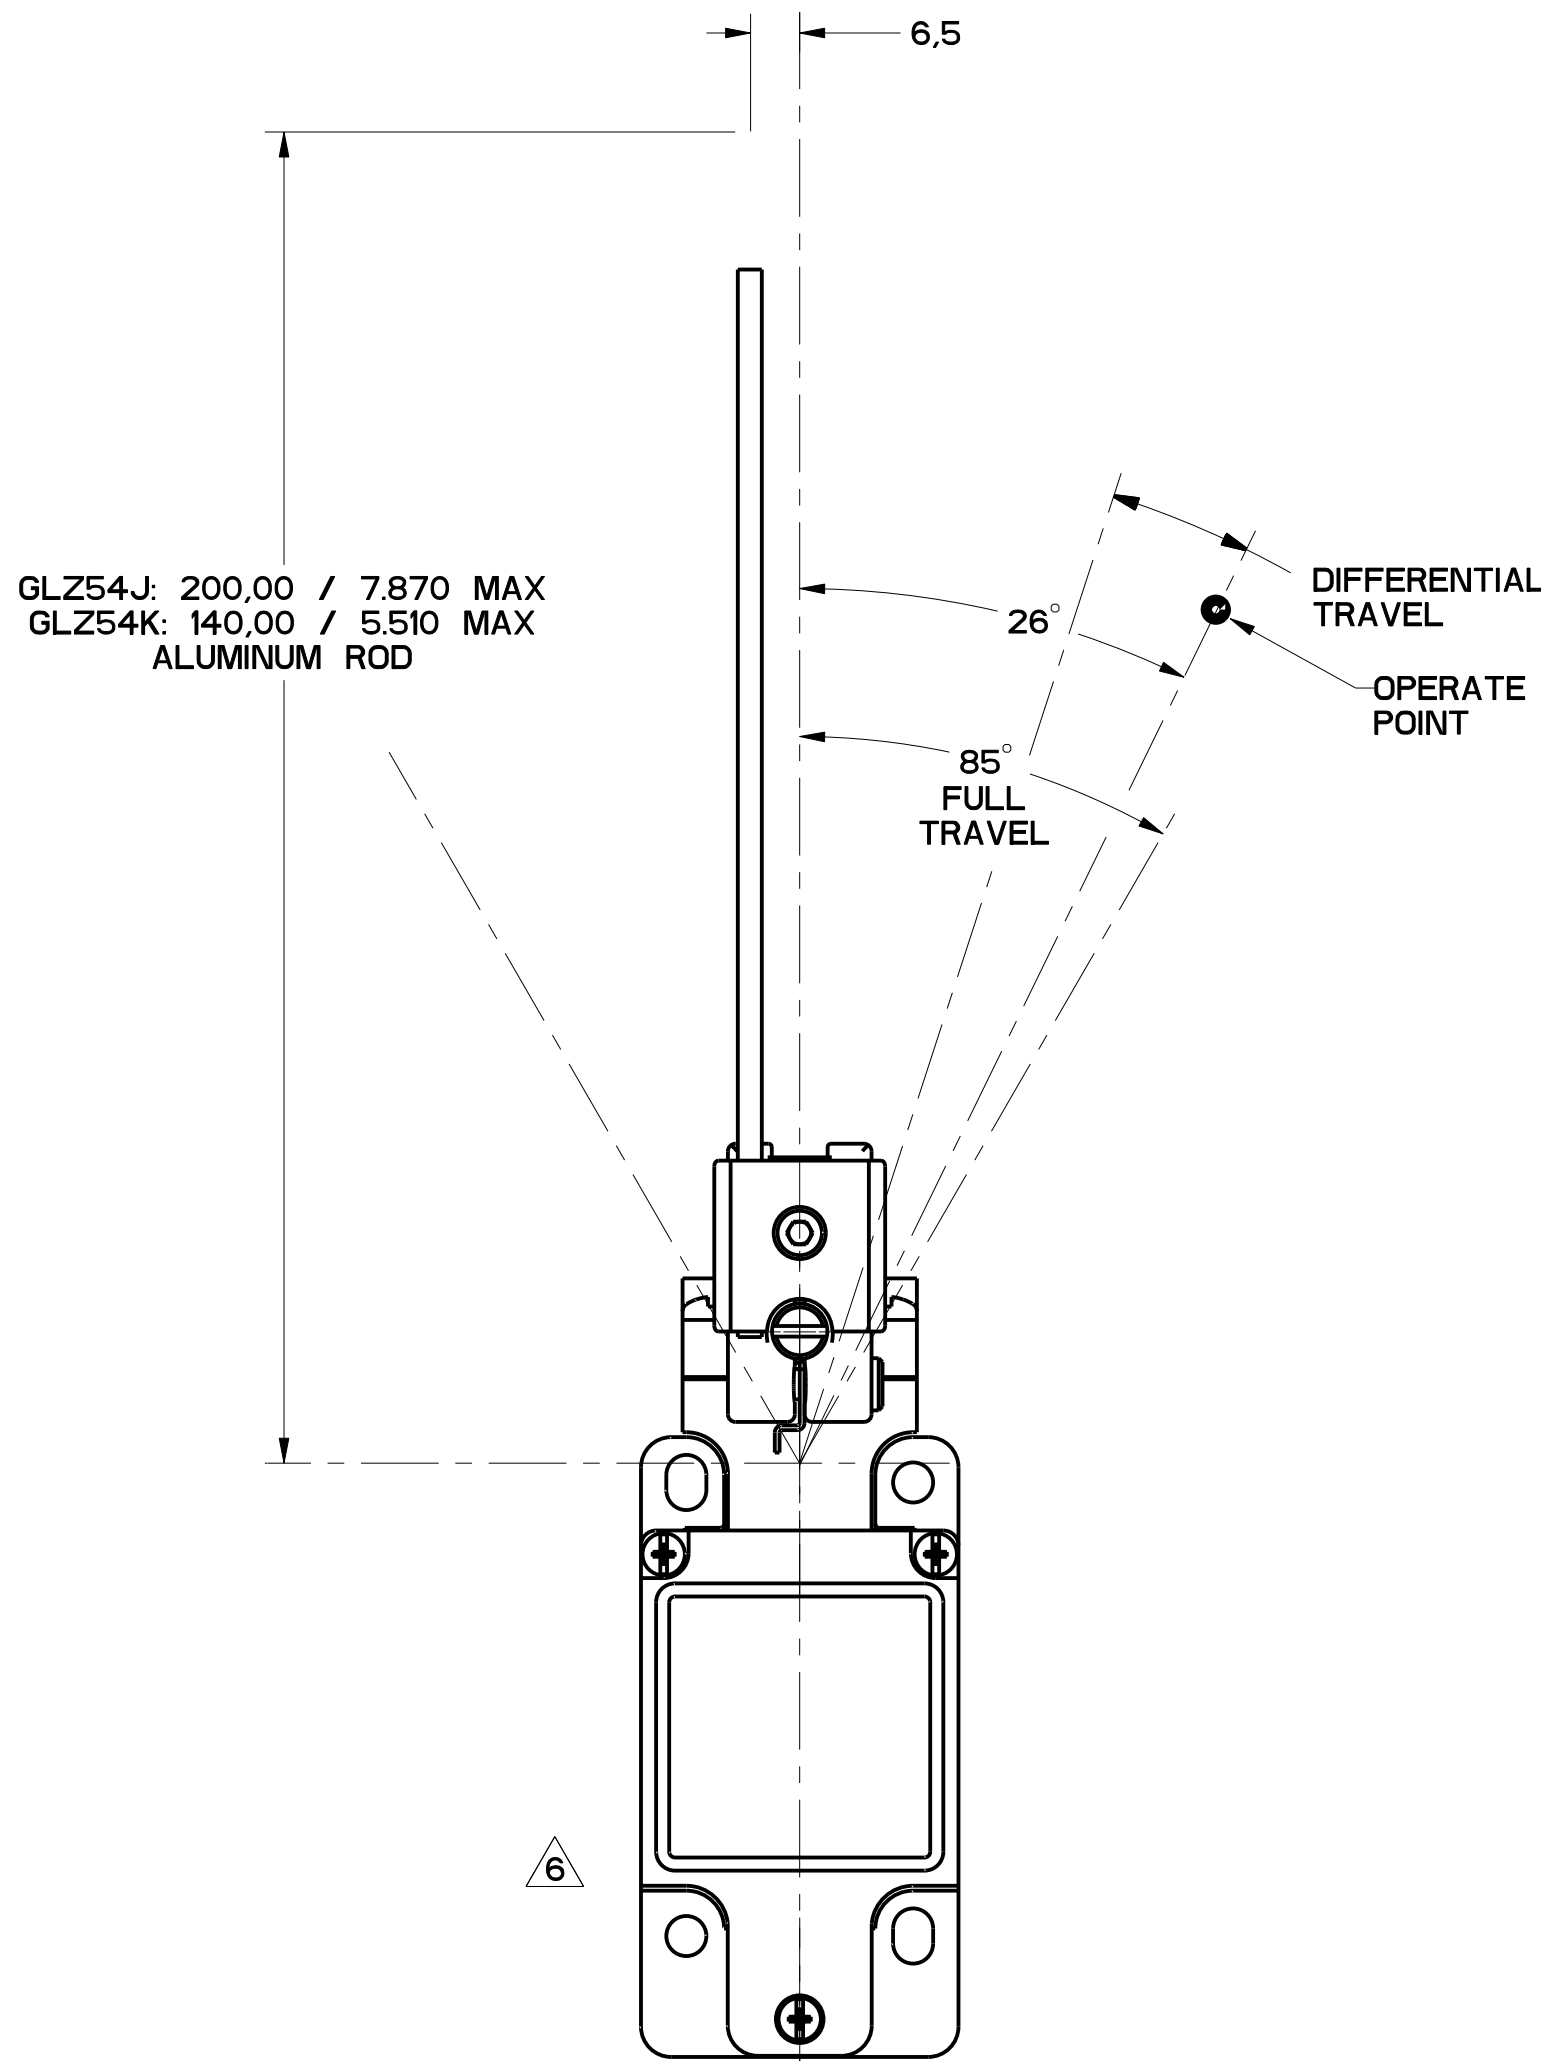


FIGURE 10

FIGURES 8, 9, 10 ANGULAR ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING TORQUE $\frac{N}{LB-IN}$	MAXIMUM DISCONNECT TORQUE $\frac{N}{LB-IN}$	MAX OPERATE DEGREE/S	MIN OPERATE DEGREE/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 26° 55**° 85° 13-14 12° DIFFERENTIAL TRAVEL	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250


CAM ACTUATION PER EN50041, FIGURES 8 AND 9

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 0 20 56** 13-14 12 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250



FIGURE 12



FIGURE 12, WOBBLE HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{IN/S}$	MIN OPERATE VEL $\frac{MM/S}{IN/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{2.5}{0.6}$	N/A	$\frac{5}{19.7}$	$\frac{11}{.43}$	100

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :

	IN	MM	IN	MM
NO PLACES	0.1	0.1	0.1	0.1
ONE PLACE	0.01	0.01	0.01	0.01
TWO PLACES	0.001	0.001	0.001	0.001
THREE PLACES	0.0001	0.0001	0.0001	0.0001
ANGLES	± 0.1°	± 0.1°	± 0.1°	± 0.1°

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED



CATALOG LISTING
GL SERIES CHART 2

SI METRIC ☒ US CUSTOMARY ☐

DESIGN UNITS ☒

REVISIONS		
A	CO	78529
B	CS	81101
C	CO	93188
D	CO	93188
E	CO	93188
F	CO	93188
G	CO	93188
H	CO	93188
I	CO	93188
J	CO	93188
K	CO	93188
L	CO	93188
M	CO	93188
N	CO	93188
O	CO	93188
P	CO	93188
Q	CO	93188
R	CO	93188
S	CO	93188
T	CO	93188
U	CO	93188
V	CO	93188
W	CO	93188
X	CO	93188
Y	CO	93188
Z	CO	93188

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION

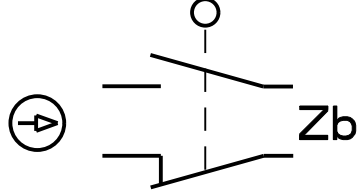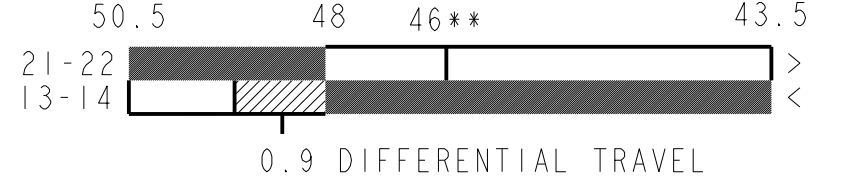CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL M/S in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 0.9 DIFFERENTIAL TRAVEL	16 3.6	27 6.0	0.1 3.9	1.0 .04	250

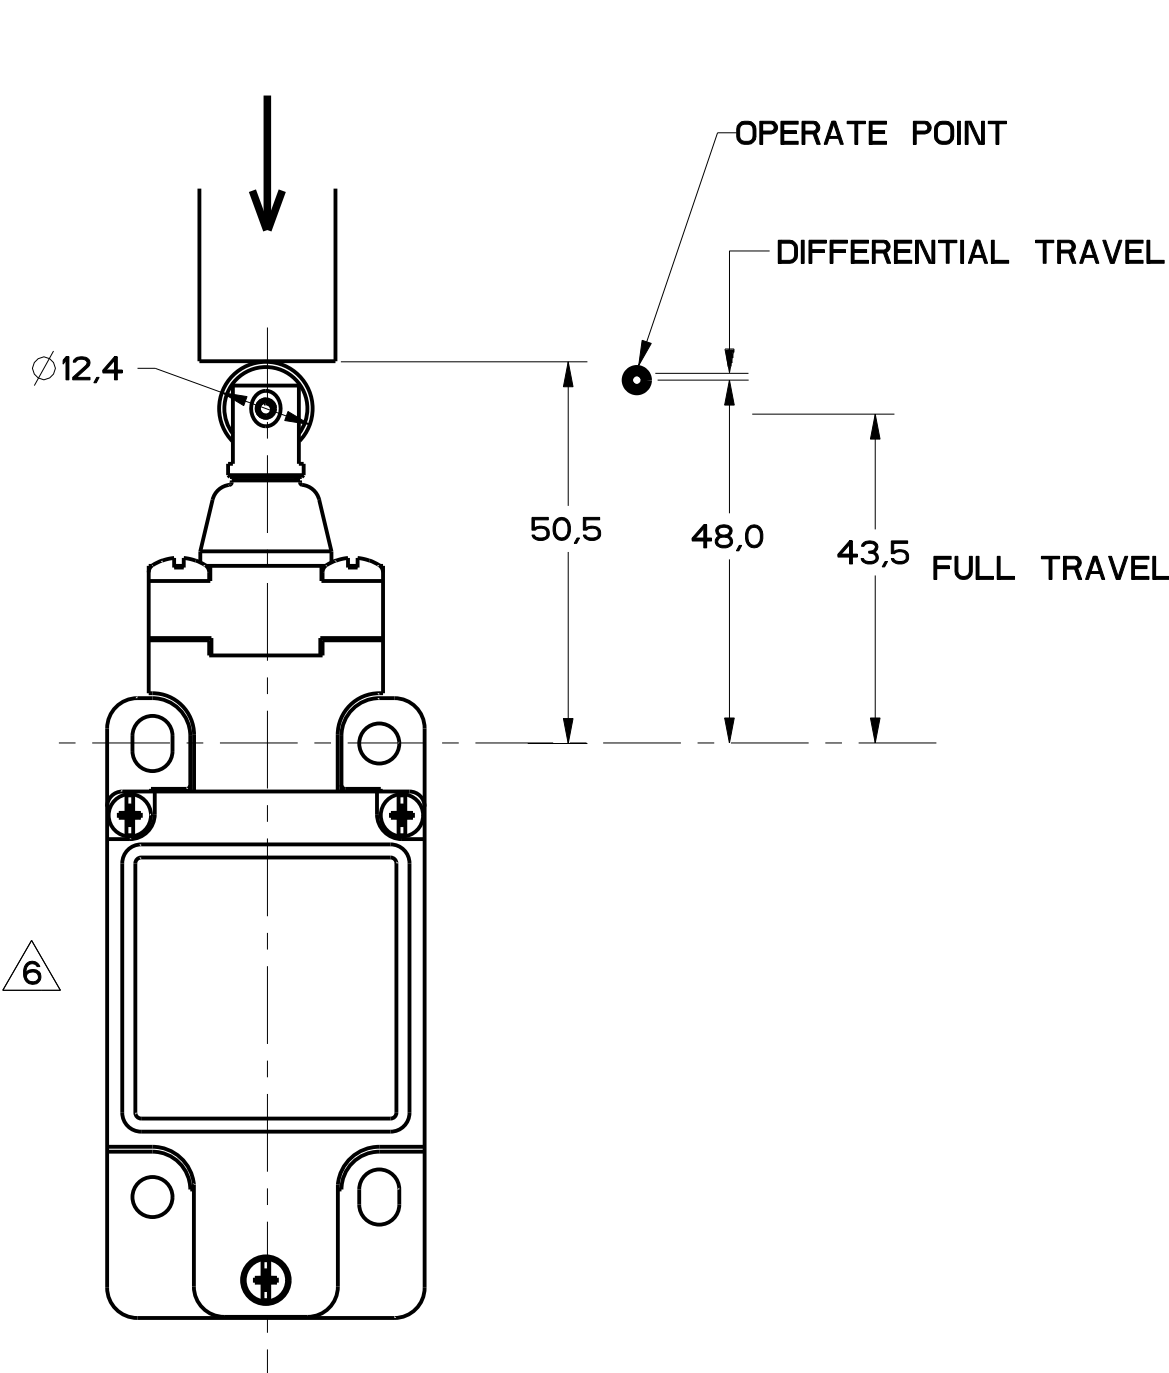


FIGURE 13A

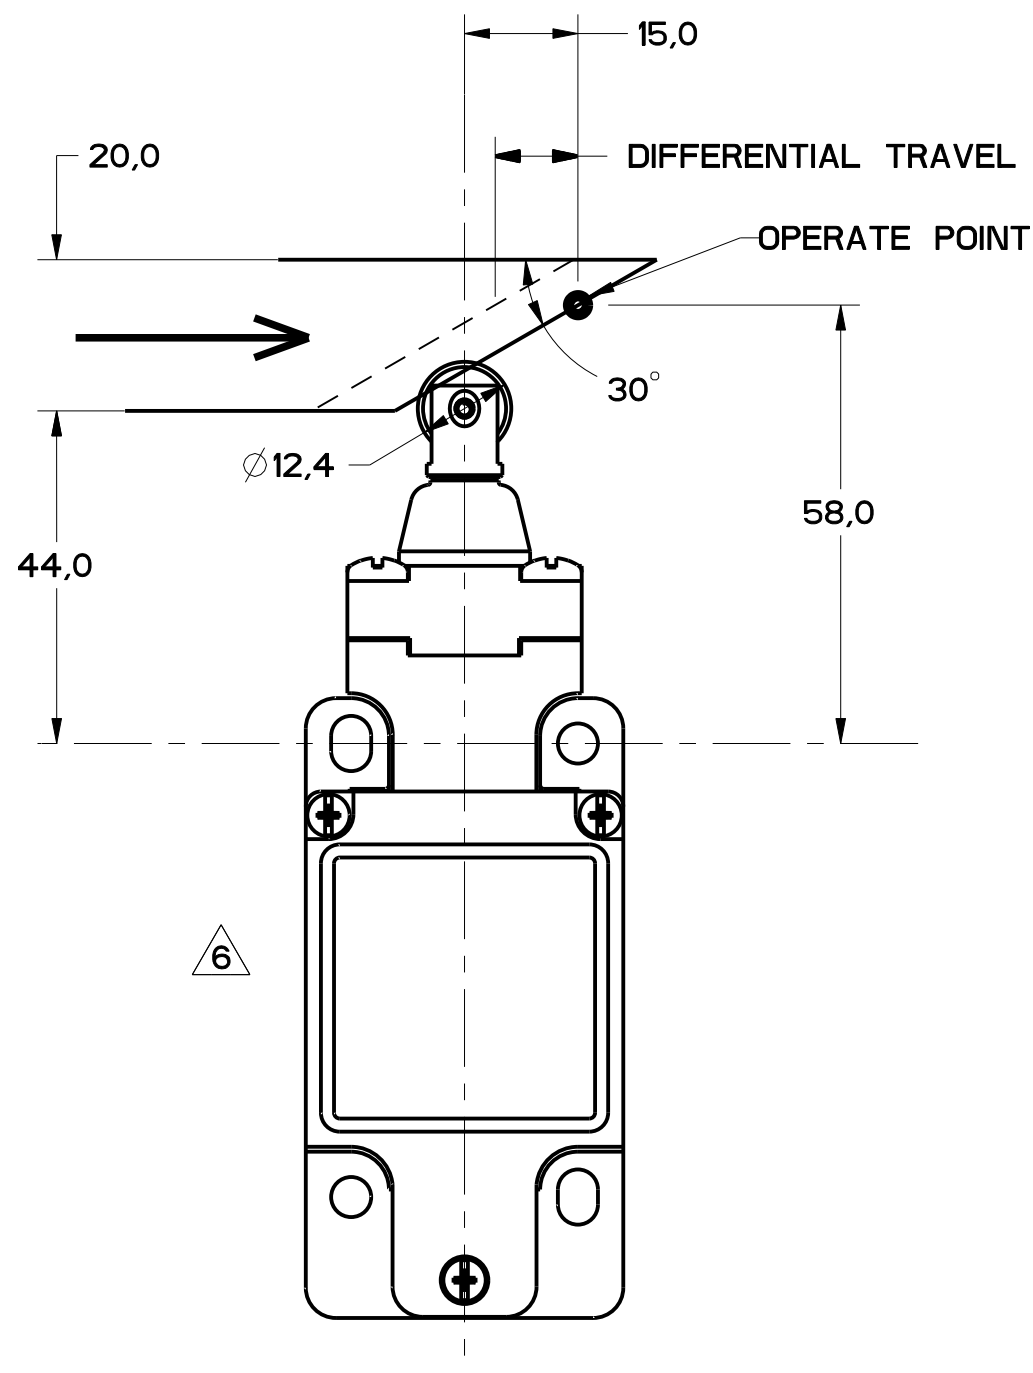
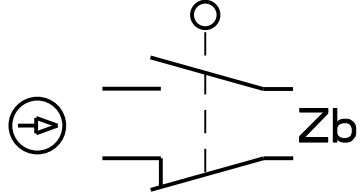
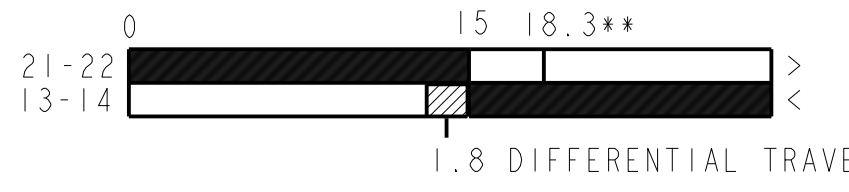



FIGURE 13B

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL M/S in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 1.8 DIFFERENTIAL TRAVEL	9.3 2.1	15.6 3.5	0.17 6.7	1.7 .067	250

THIRD ANGLE PROJECTION			
			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	1/16	1/32	1/64
ONE PLACE	1/16	1/32	1/64
TWO PLACES	1/16	1/32	1/64
THREE PLACES	1/16	1/32	1/64
ANGLES	1/16	1/32	1/64
DESIGN UNITS	SI METRIC	US CUSTOMARY	
WEIGHT			

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		GL SERIES CHART 2	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	

REVISIONS	
A	188092
B	188092
C	188092
D	188092
E	188092
F	188092
G	188092
H	188092
I	188092
J	188092
K	188092
L	188092
M	188092
N	188092
O	188092
P	188092
Q	188092
R	188092
S	188092
T	188092
U	188092
V	188092
W	188092
X	188092
Y	188092
Z	188092

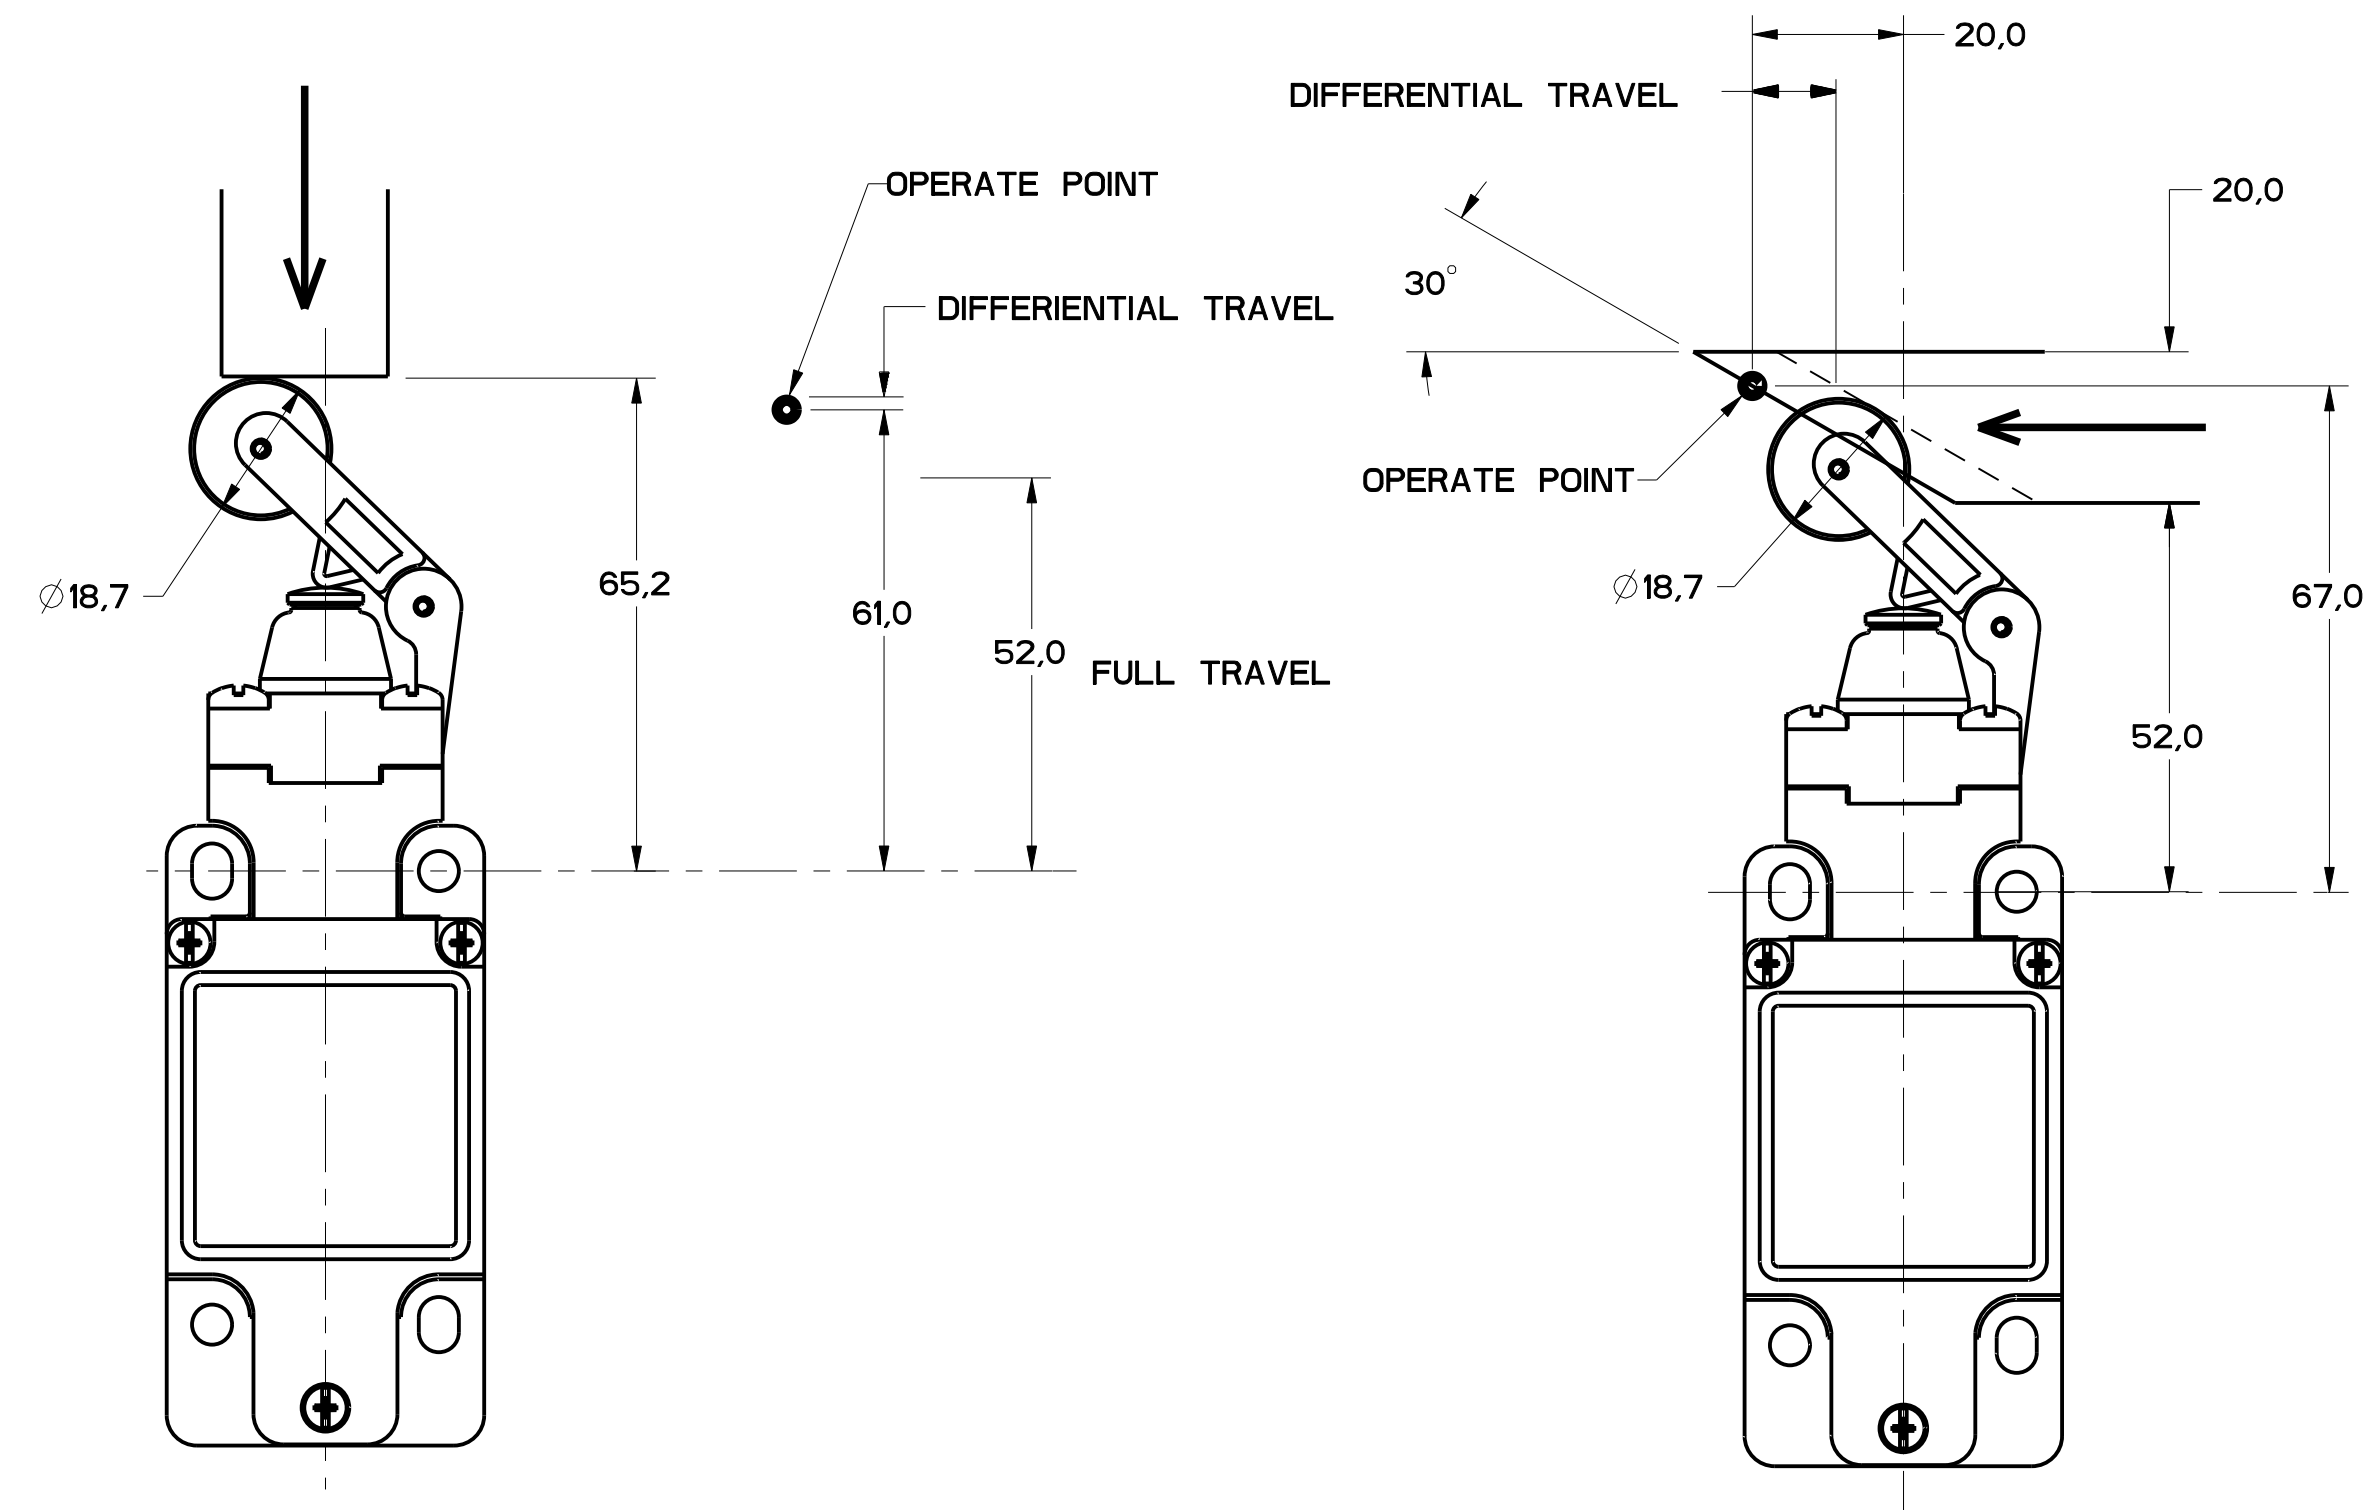


FIGURE 14A

FIGURE 14B

FIGURE 14A, TOP ROLLER LEVER HEAD WITH PIN ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 1.7 DIFFERENTIAL TRAVEL	9.5 2.1	12 2.7	0.17 6.7	0.067 1.7

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 4.1 DIFFERENTIAL TRAVEL	5.5 1.2	7.0 1.6	0.29 11.4	2.9 1.1

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

	DIM	TOL	DIM	TOL
NO PLACES	X	1/16	2.X	0.015
ONE PLACE	X.X	0.015	2.XX	0.005
TWO PLACES	X.XX	0.005	2.XXX	0.0005
THREE PLACES	X.XXX	0.0005		

DESIGN UNITS: SI METRIC [X] US CUSTOMARY []

WEIGHT

FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE m LB-IN	MAXIMUM DISCONNECT TORQUE m LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	 8° DIFFERENTIAL TRAVEL	$\frac{0.1}{.9}$	N/A	360	8	100

FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE m LB	MAXIMUM DISCONNECT FORCE m LB	MAX OPERATE VEL m/s IN/S	MIN OPERATE VEL m/s IN/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	 12 DIFFERENTIAL TRAVEL	$\frac{1.3}{.3}$	N/A	$\frac{.5}{19.7}$	$\frac{.1}{.43}$	100

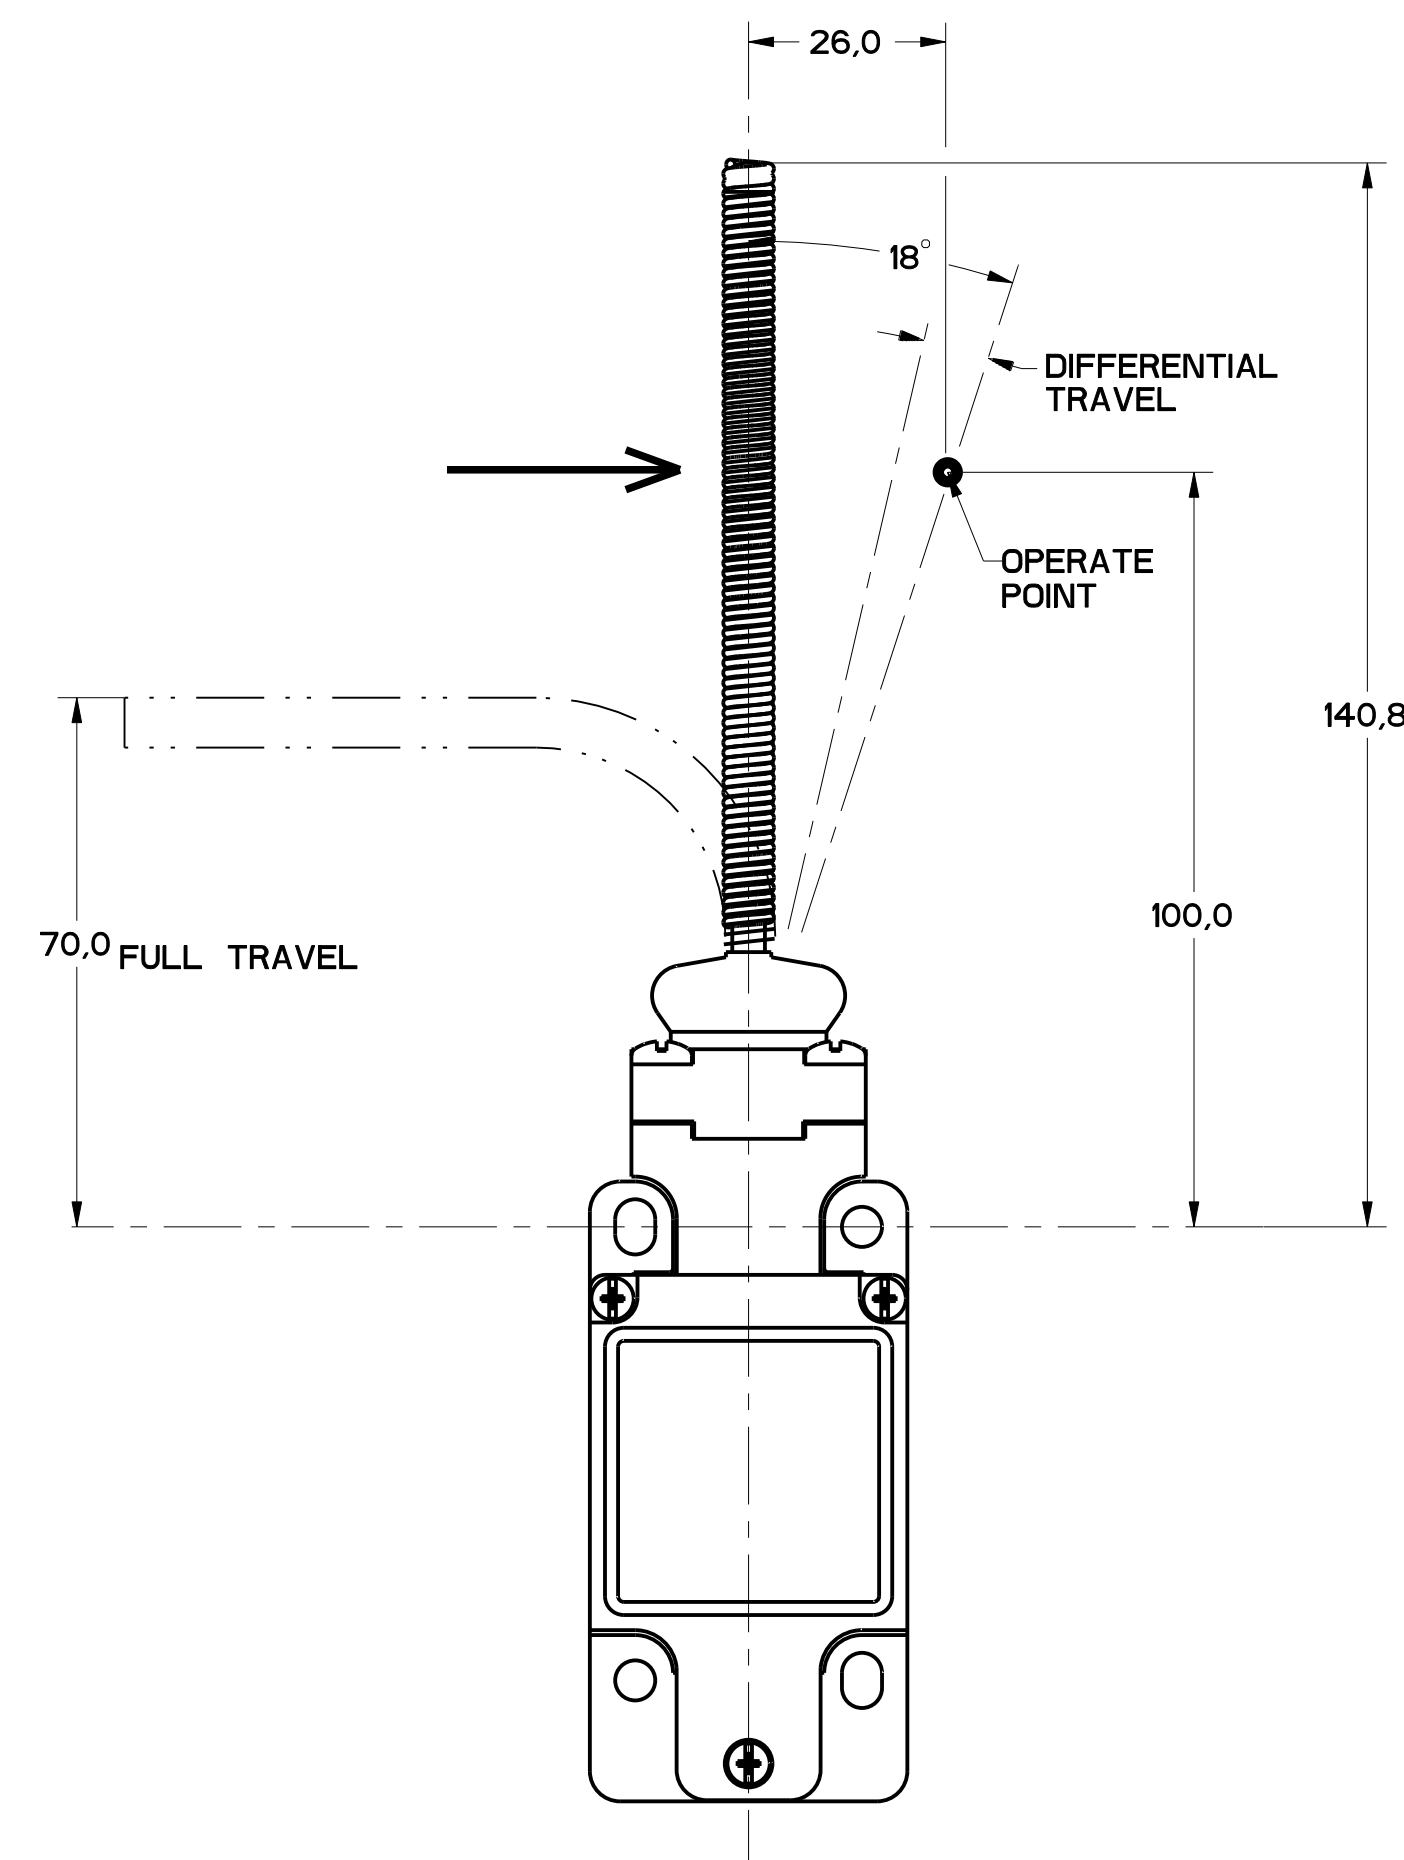


FIGURE 15



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331