

SIDE ROTARY

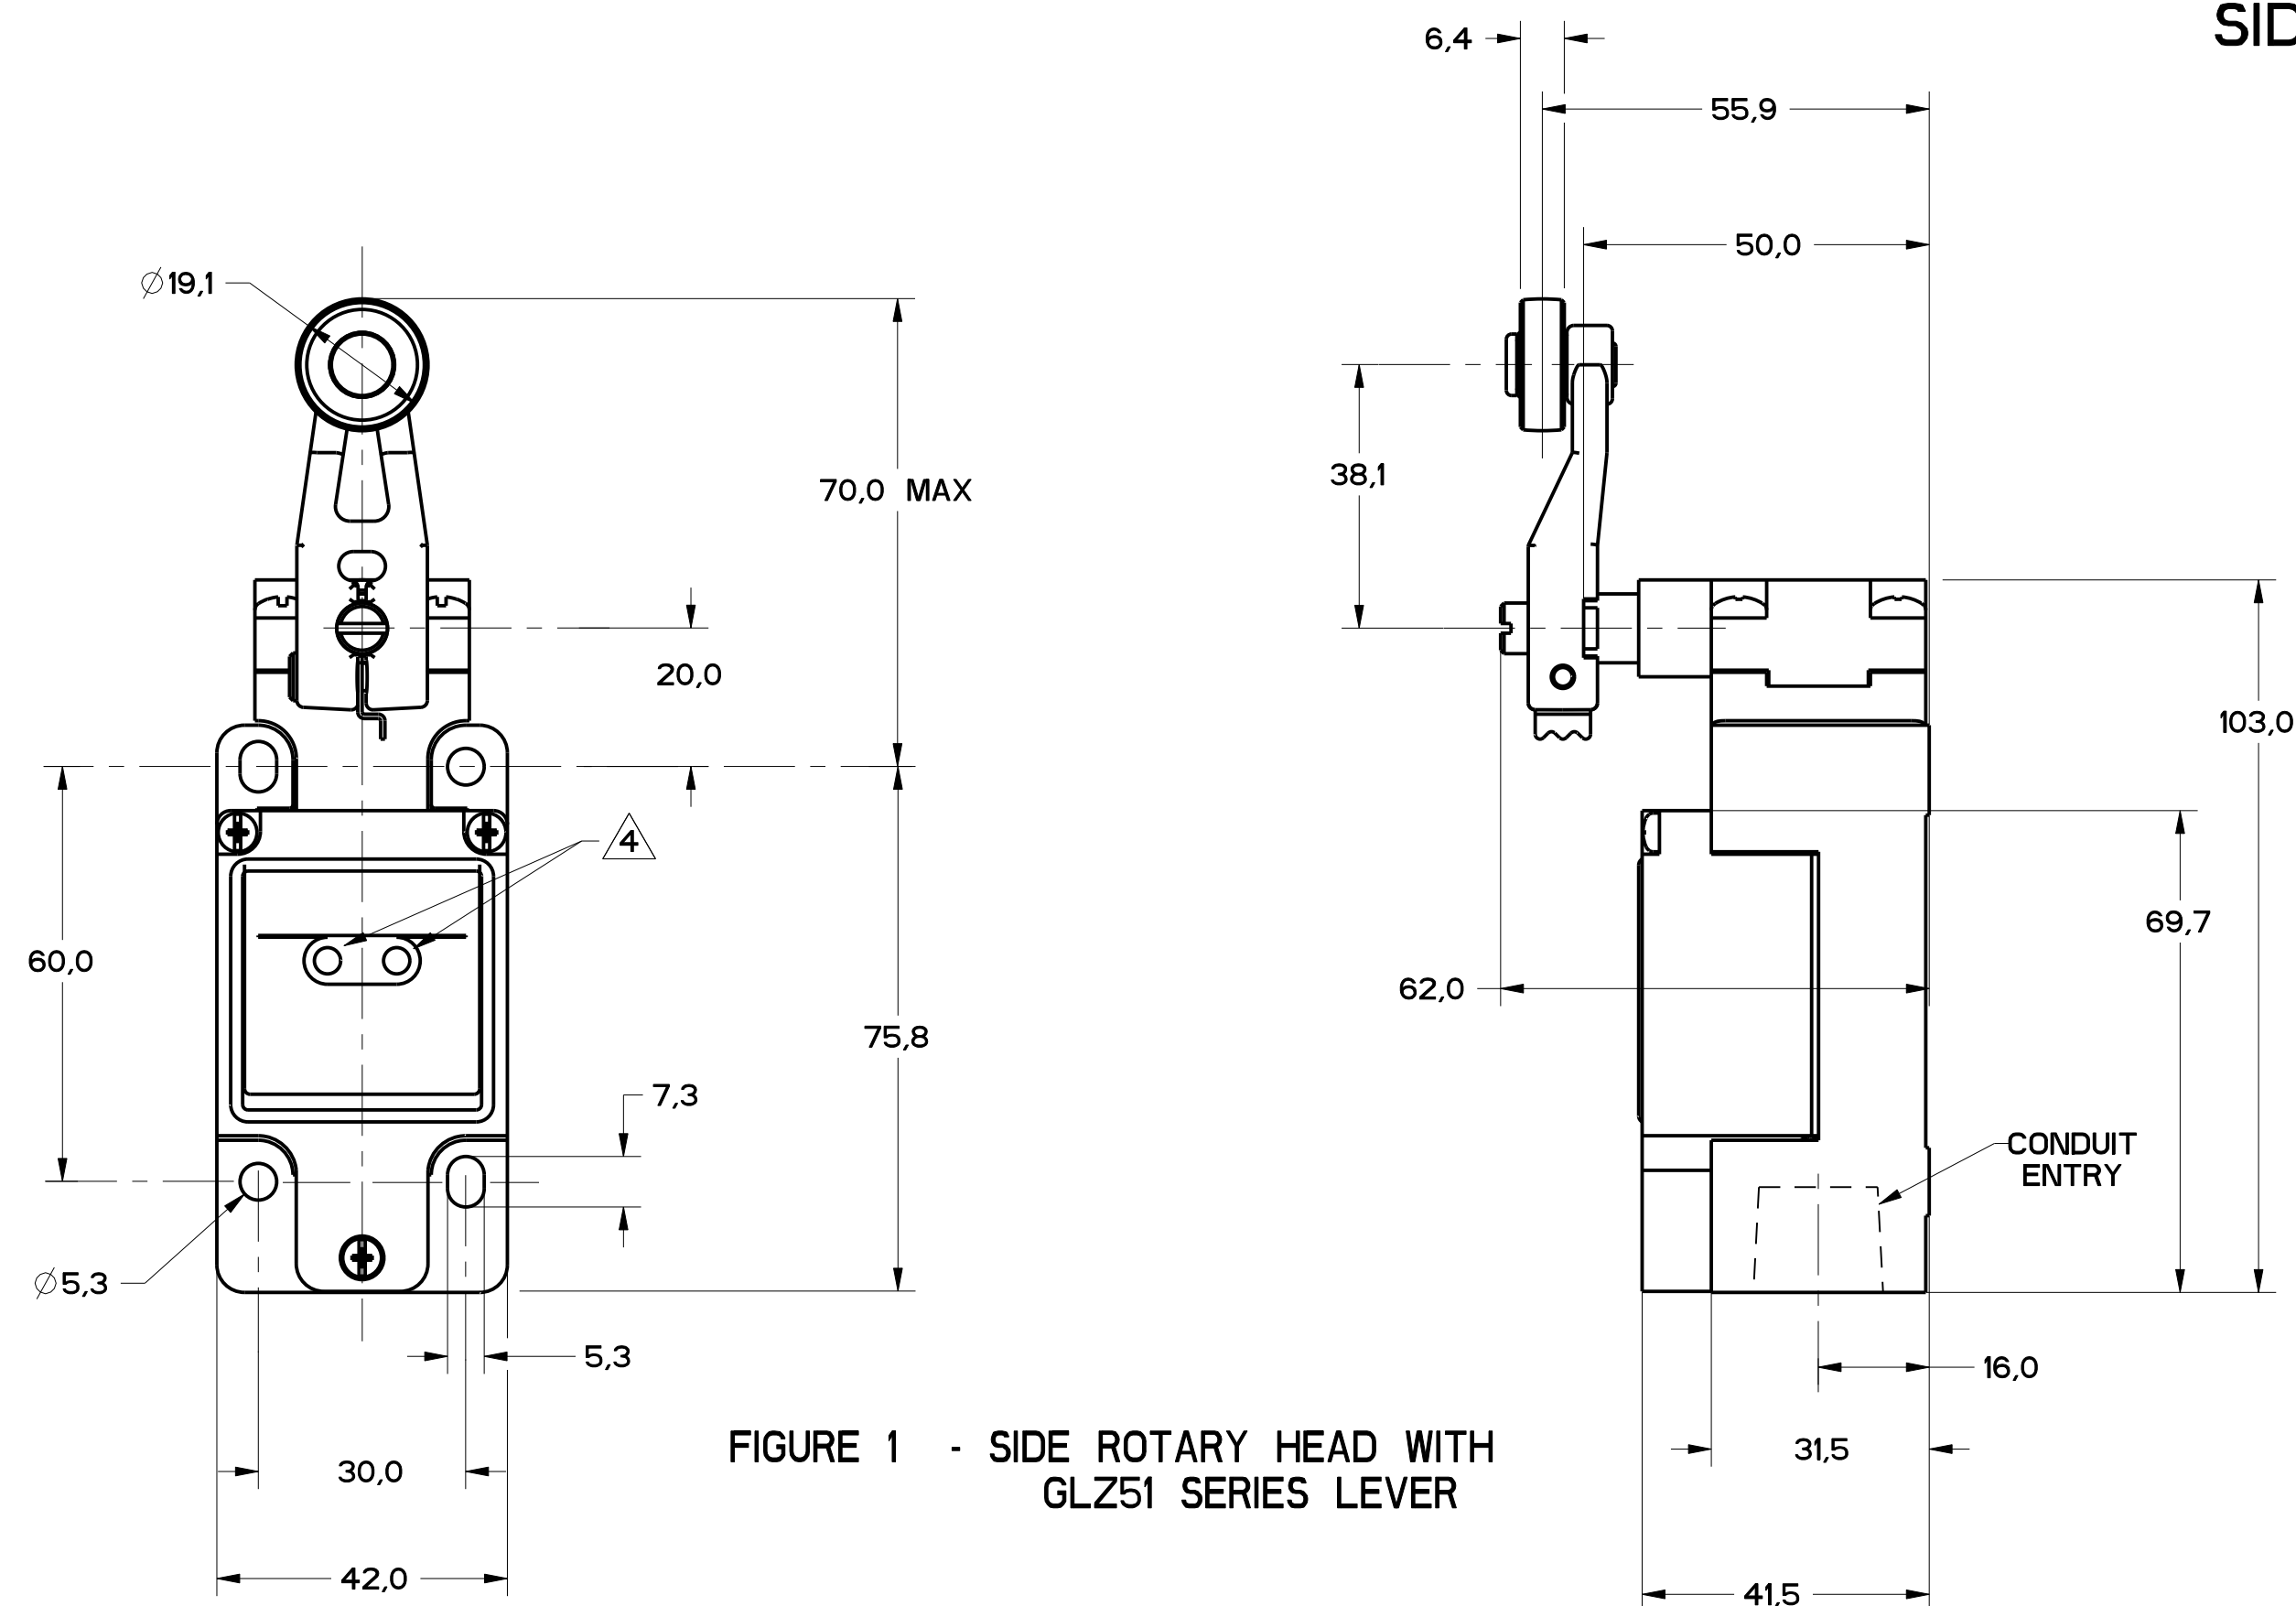


FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

ALUMINUM ROD
GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
STAINLESS STEEL ROD
GLZ54N: 318.00 / 12.490 MAX

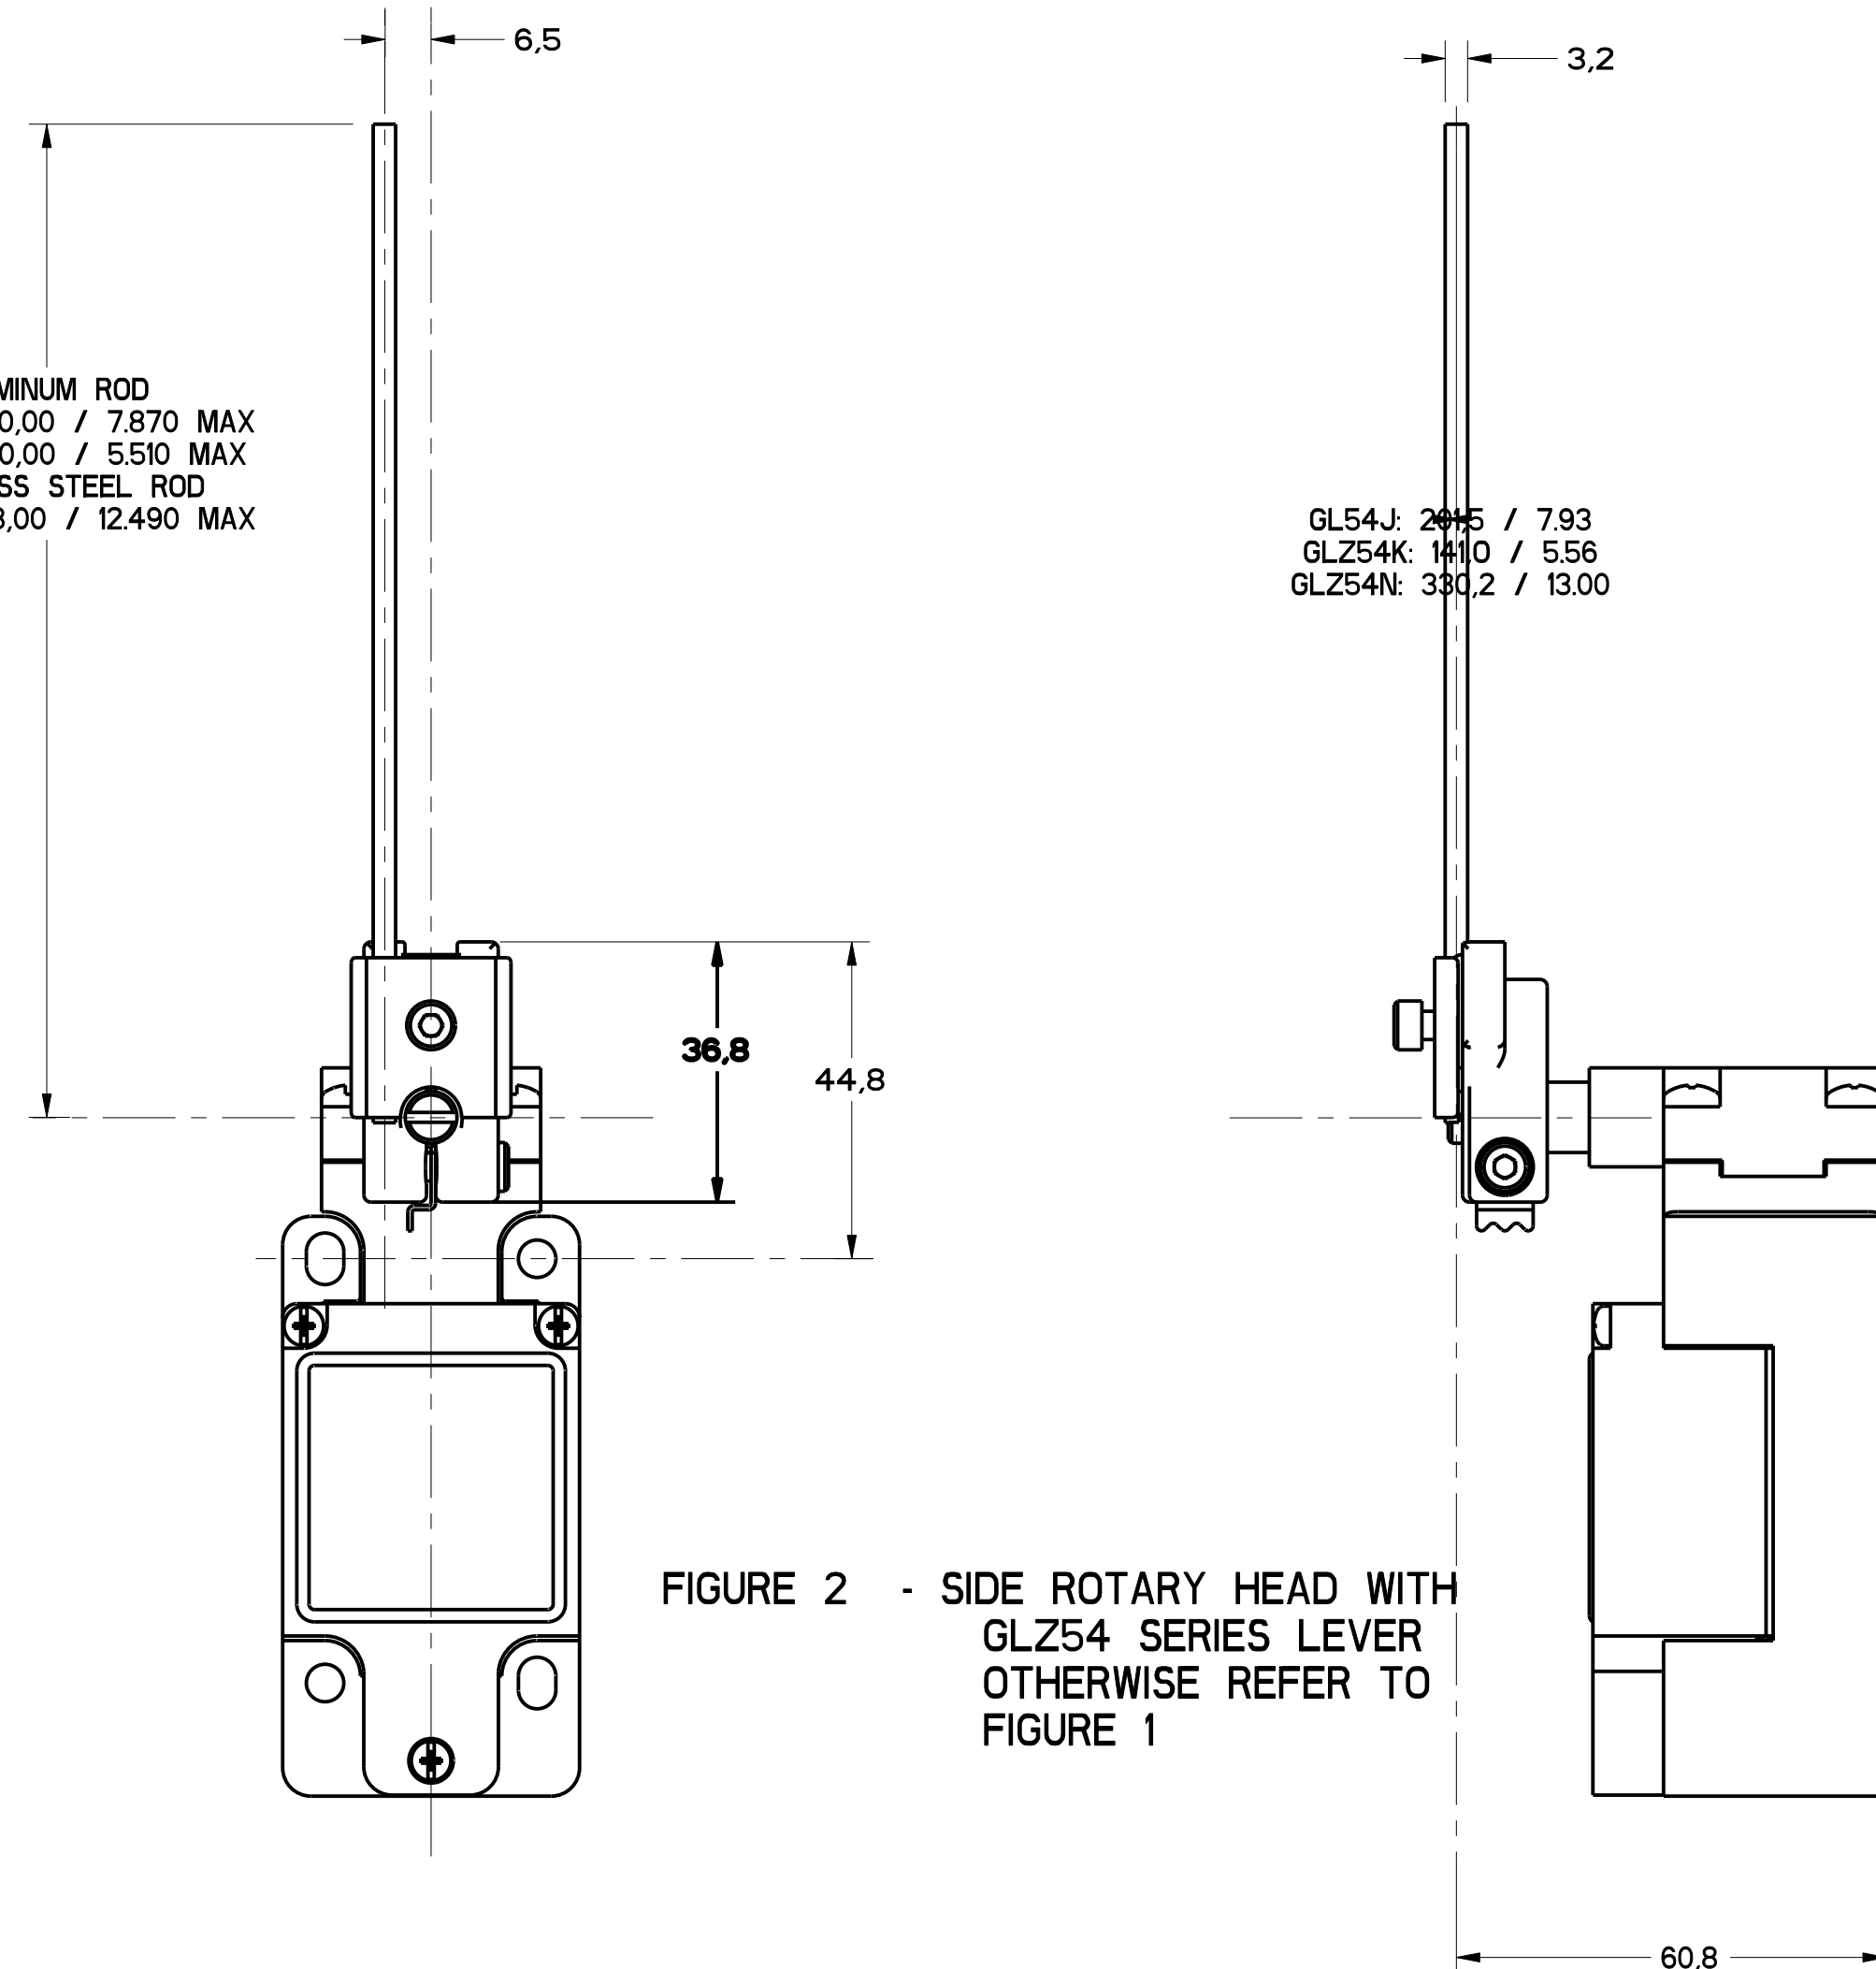


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING $\Delta 5$			
AC		DC	
A600 Ue	AC15 Ie	Q300 Ue	DC13 Ie
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)
120	6	24	2.8
240	3	125	.55
380	1.9	250	.27
480	1.5		
500	1.4		
600	1.2		

ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13

NOTES

- HEADS MAY BE INDEXED IN 90° INCREMENTS.
- LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
- THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
- THE MAXIMUM VOLTAGE, V_e OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
- FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
- CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50
- TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

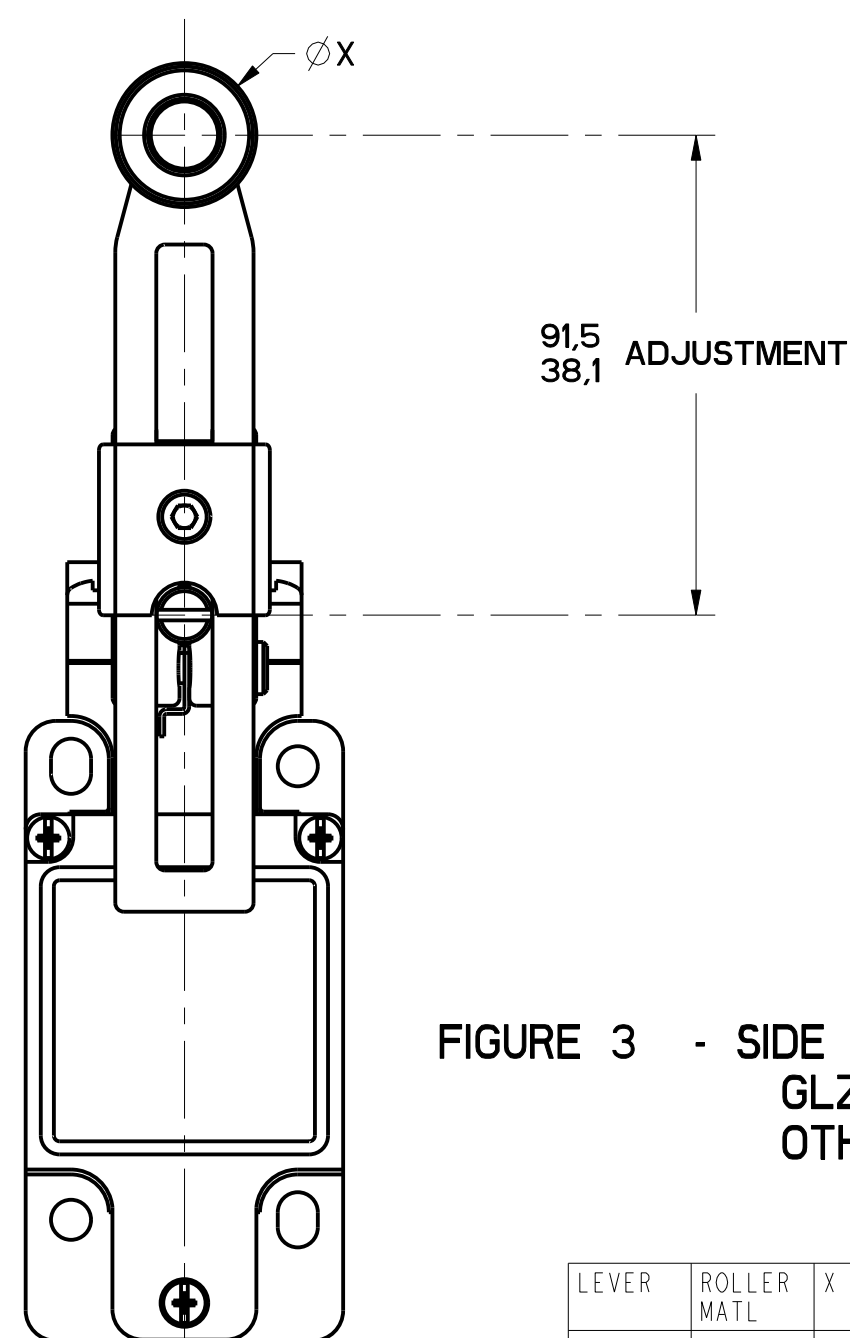



FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.5	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.9 2.0	71.5 2.81	12.7 .5


CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLB***	I	N/A	N/A
GLG***	I	N/A	N/A
GLJ***	I	N/A	N/A
GLA***	1A	N/A	N/A
GLB***	1B	N/A	N/A
GLC***	1C	N/A	N/A
GLD***	1D	N/A	N/A
GL***A1*	I	8	
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	12
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		SI METRIC ☒ US CUSTOMARY ☐	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	
		GL SERIES CHART 2	
DESIGN UNITS		WEIGHT	

THIRD ANGLE PROJECTION			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	1/16	1/32	1/64
ONE PLACE	1/8	1/16	1/32
TWO PLACES	1/4	1/8	1/16
THREE PLACES	1/2	1/4	1/8
ANGLES	1/16	1/32	1/64

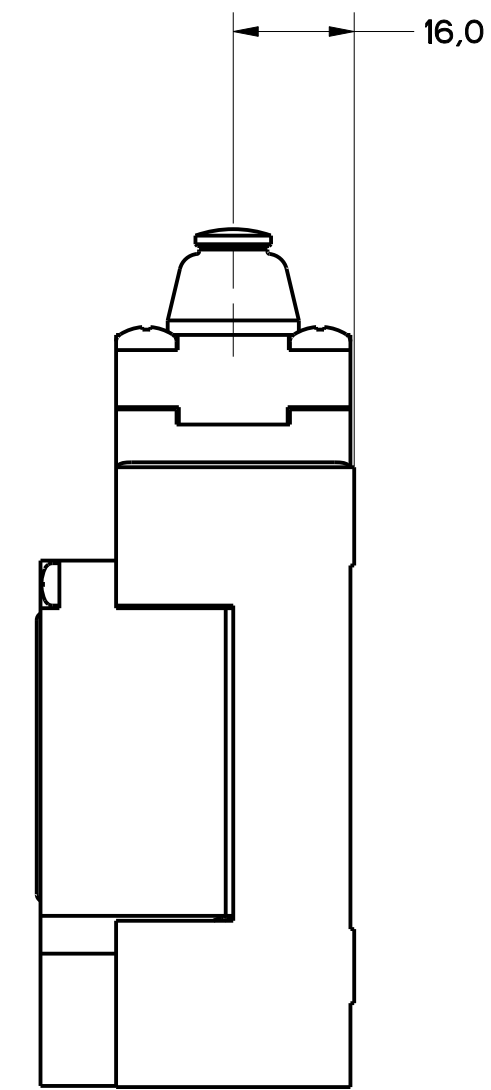

Technical drawing of a vertical component, likely a valve or actuator. The drawing shows a cross-section of the component. At the top, there is a small rectangular feature with a central slot. Below this is a larger, rounded section. The drawing includes two dimension lines: one indicating a width of 4,7 and another indicating a total width of 16,0. The component is shown in a simplified, schematic style.

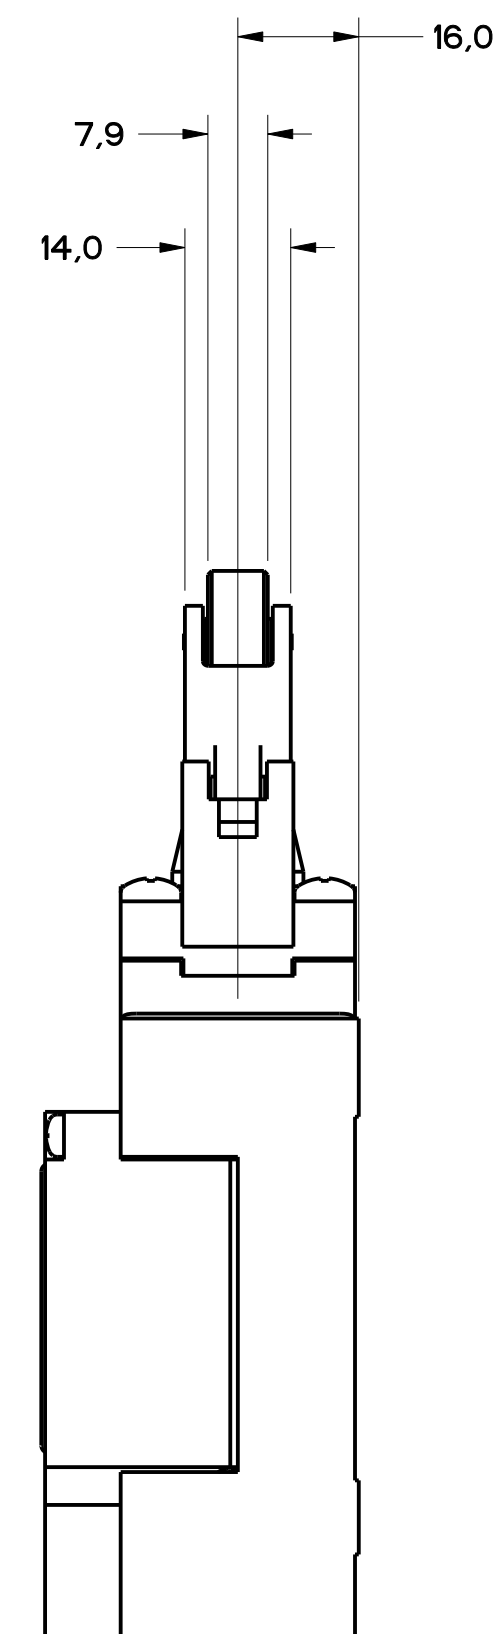

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <td>DIM</td> <td>TOL</td> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>INCHES</td> <td>FRACTIONS</td> <td>INCHES</td> <td>FRACTIONS</td> </tr> <tr> <td>NO PLACES</td> <td>0</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>ONE PLACE</td> <td>0.4</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>TWO PLACES</td> <td>0.004</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>THREE PLACES</td> <td>0.0004</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>ANGLES</td> <td>± 1</td> <td></td> <td></td> </tr> </table>		DIM	TOL	DIM	TOL	INCHES	FRACTIONS	INCHES	FRACTIONS	NO PLACES	0	0.01	0.01	ONE PLACE	0.4	0.01	0.01	TWO PLACES	0.004	0.01	0.01	THREE PLACES	0.0004	0.01	0.01	ANGLES	± 1		
DIM	TOL	DIM	TOL																												
INCHES	FRACTIONS	INCHES	FRACTIONS																												
NO PLACES	0	0.01	0.01																												
ONE PLACE	0.4	0.01	0.01																												
TWO PLACES	0.004	0.01	0.01																												
THREE PLACES	0.0004	0.01	0.01																												
ANGLES	± 1																														
FED. MFG. CODE 91929		CATALOG LISTING																													
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED																													
		GL SERIES CHART 2																													
		<table border="1"> <tr> <td>DESIGN UNITS</td> <td> ☒ SI METRIC </td> <td> ☐ US CUSTOMARY </td> </tr> </table>		DESIGN UNITS	☒ SI METRIC	☐ US CUSTOMARY																									
DESIGN UNITS	☒ SI METRIC	☐ US CUSTOMARY																													
		WEIGHT																													

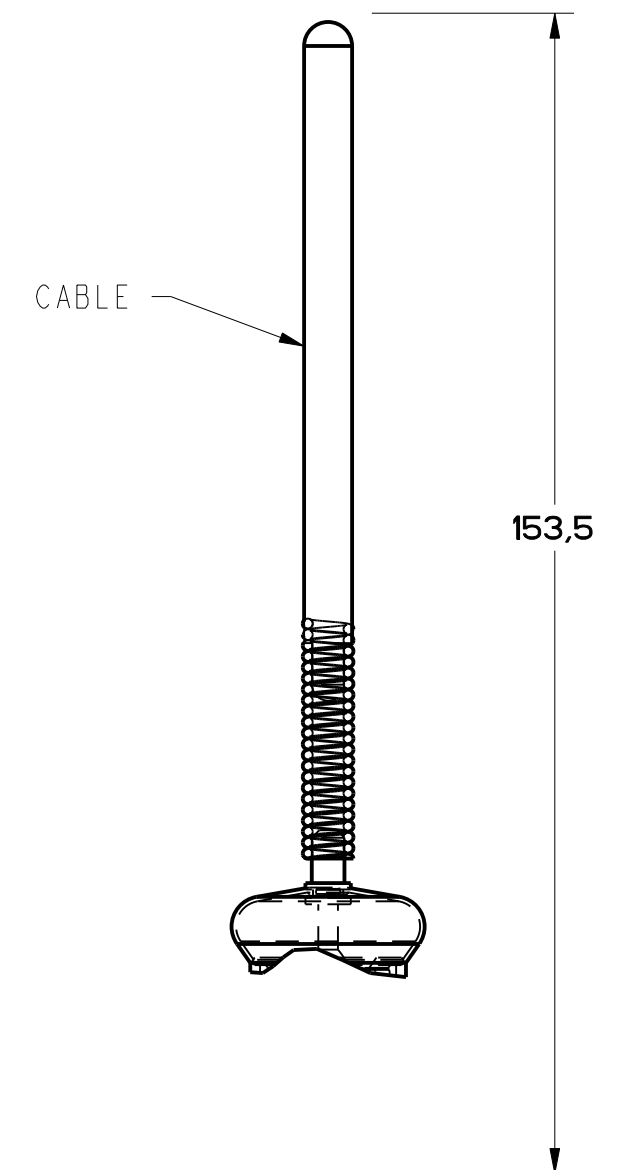
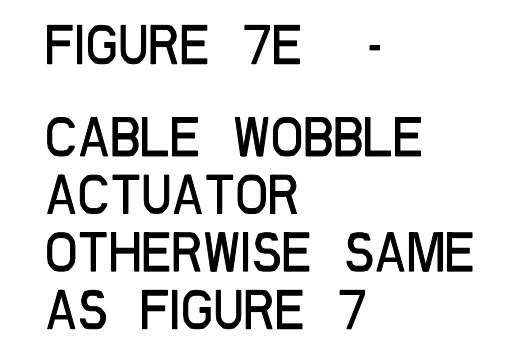
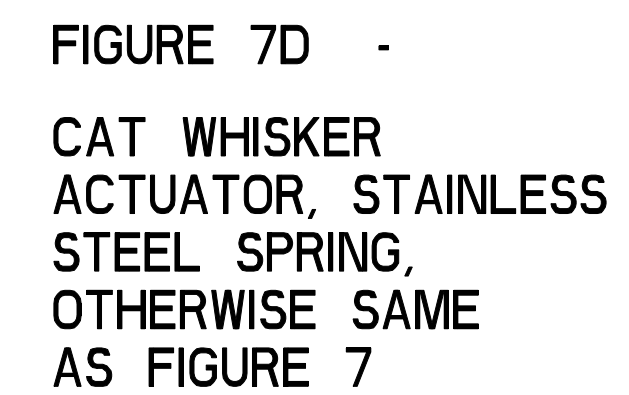
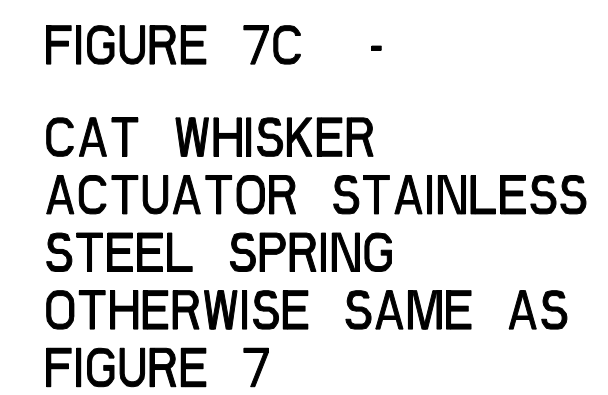
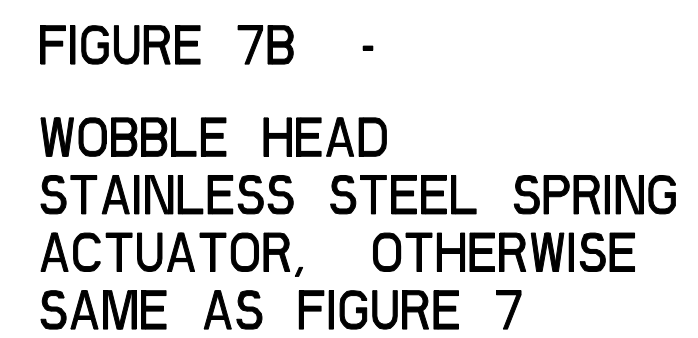
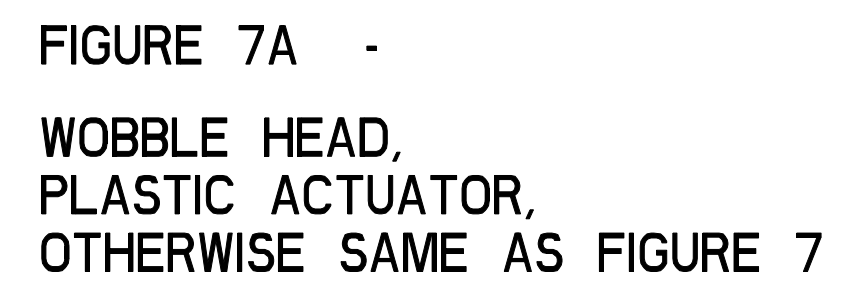


FIGURE 7 - WOBBLE HEAD, AND CAT WHISKER HEAD
COIL ACTUATOR,
OTHERWISE REFER TO
FIGURE 1

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

CATALOG LISTING

GL SERIES CHART 2

THIRD ANGLE PROJECTION			
			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS, CONVERSIONS ARE ONLY FOR REFERENCE, UNLESS NOTED, TOLERANCES ARE:			
	DIM inch	TOL mm	DIM mm
NO PLACES	X	1/16, 1/8, 1/4	0.01, 0.03
ONE PLACE	X.1	0.4, 0.9, 1.6	0.05, 0.15
TWO PLACES	X.01	0.0075, 0.015, 0.03	0.001, 0.0025
THREE PLACES	X.001	0.0005, 0.001, 0.002	0.0001, 0.00025
FOUR PLACES	X.0001	0.00005, 0.0001, 0.0002	0.00001, 0.000025
DESIGN UNITS US CUSTOMARY			
☒ METRIC		☐ US	
WEIGHT		WEIGHT	

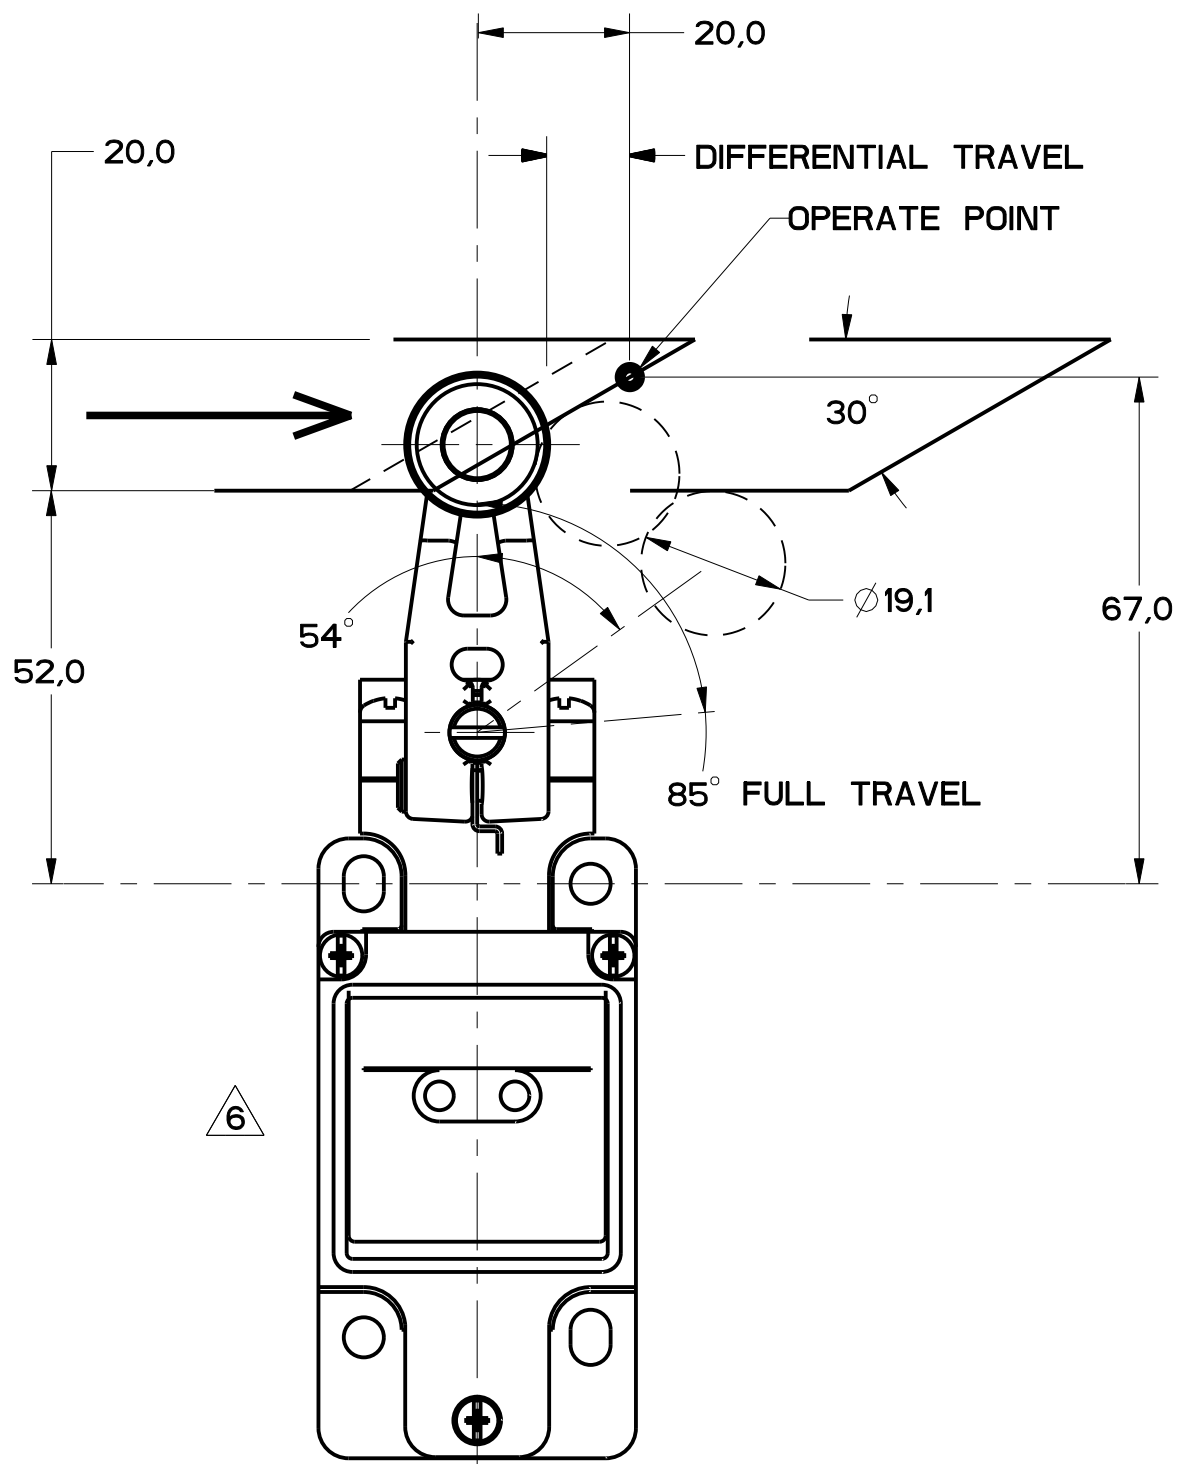


FIGURE 8

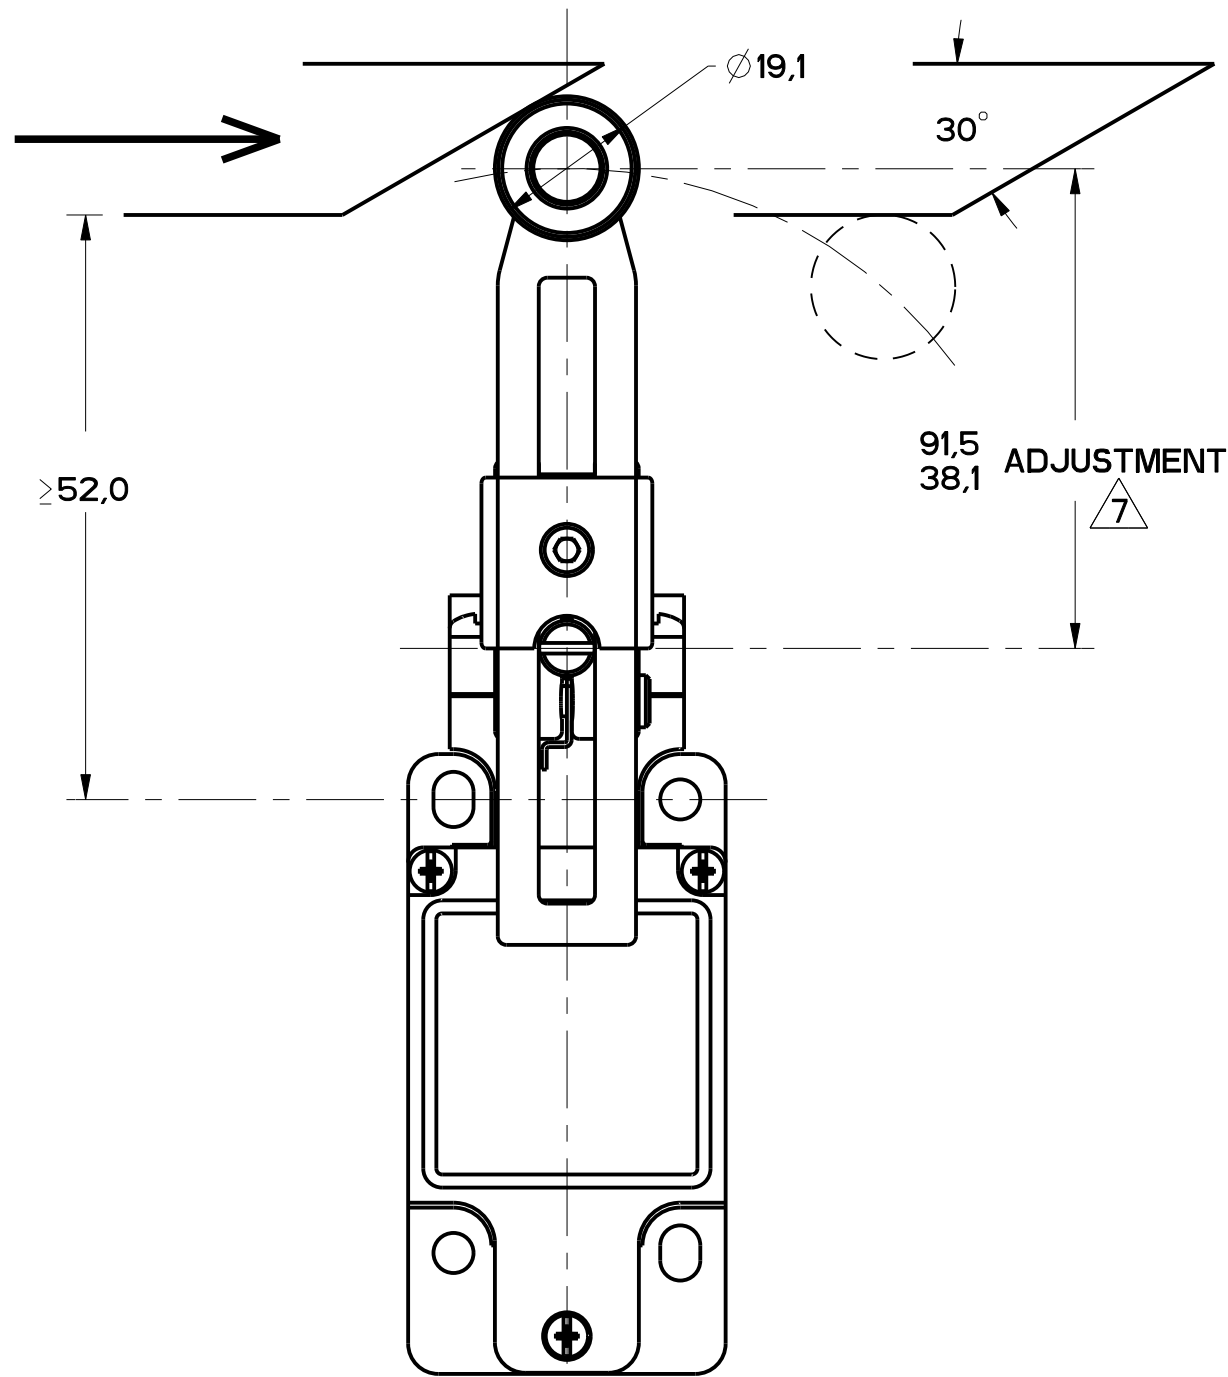


FIGURE 9

GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
ALUMINUM ROD

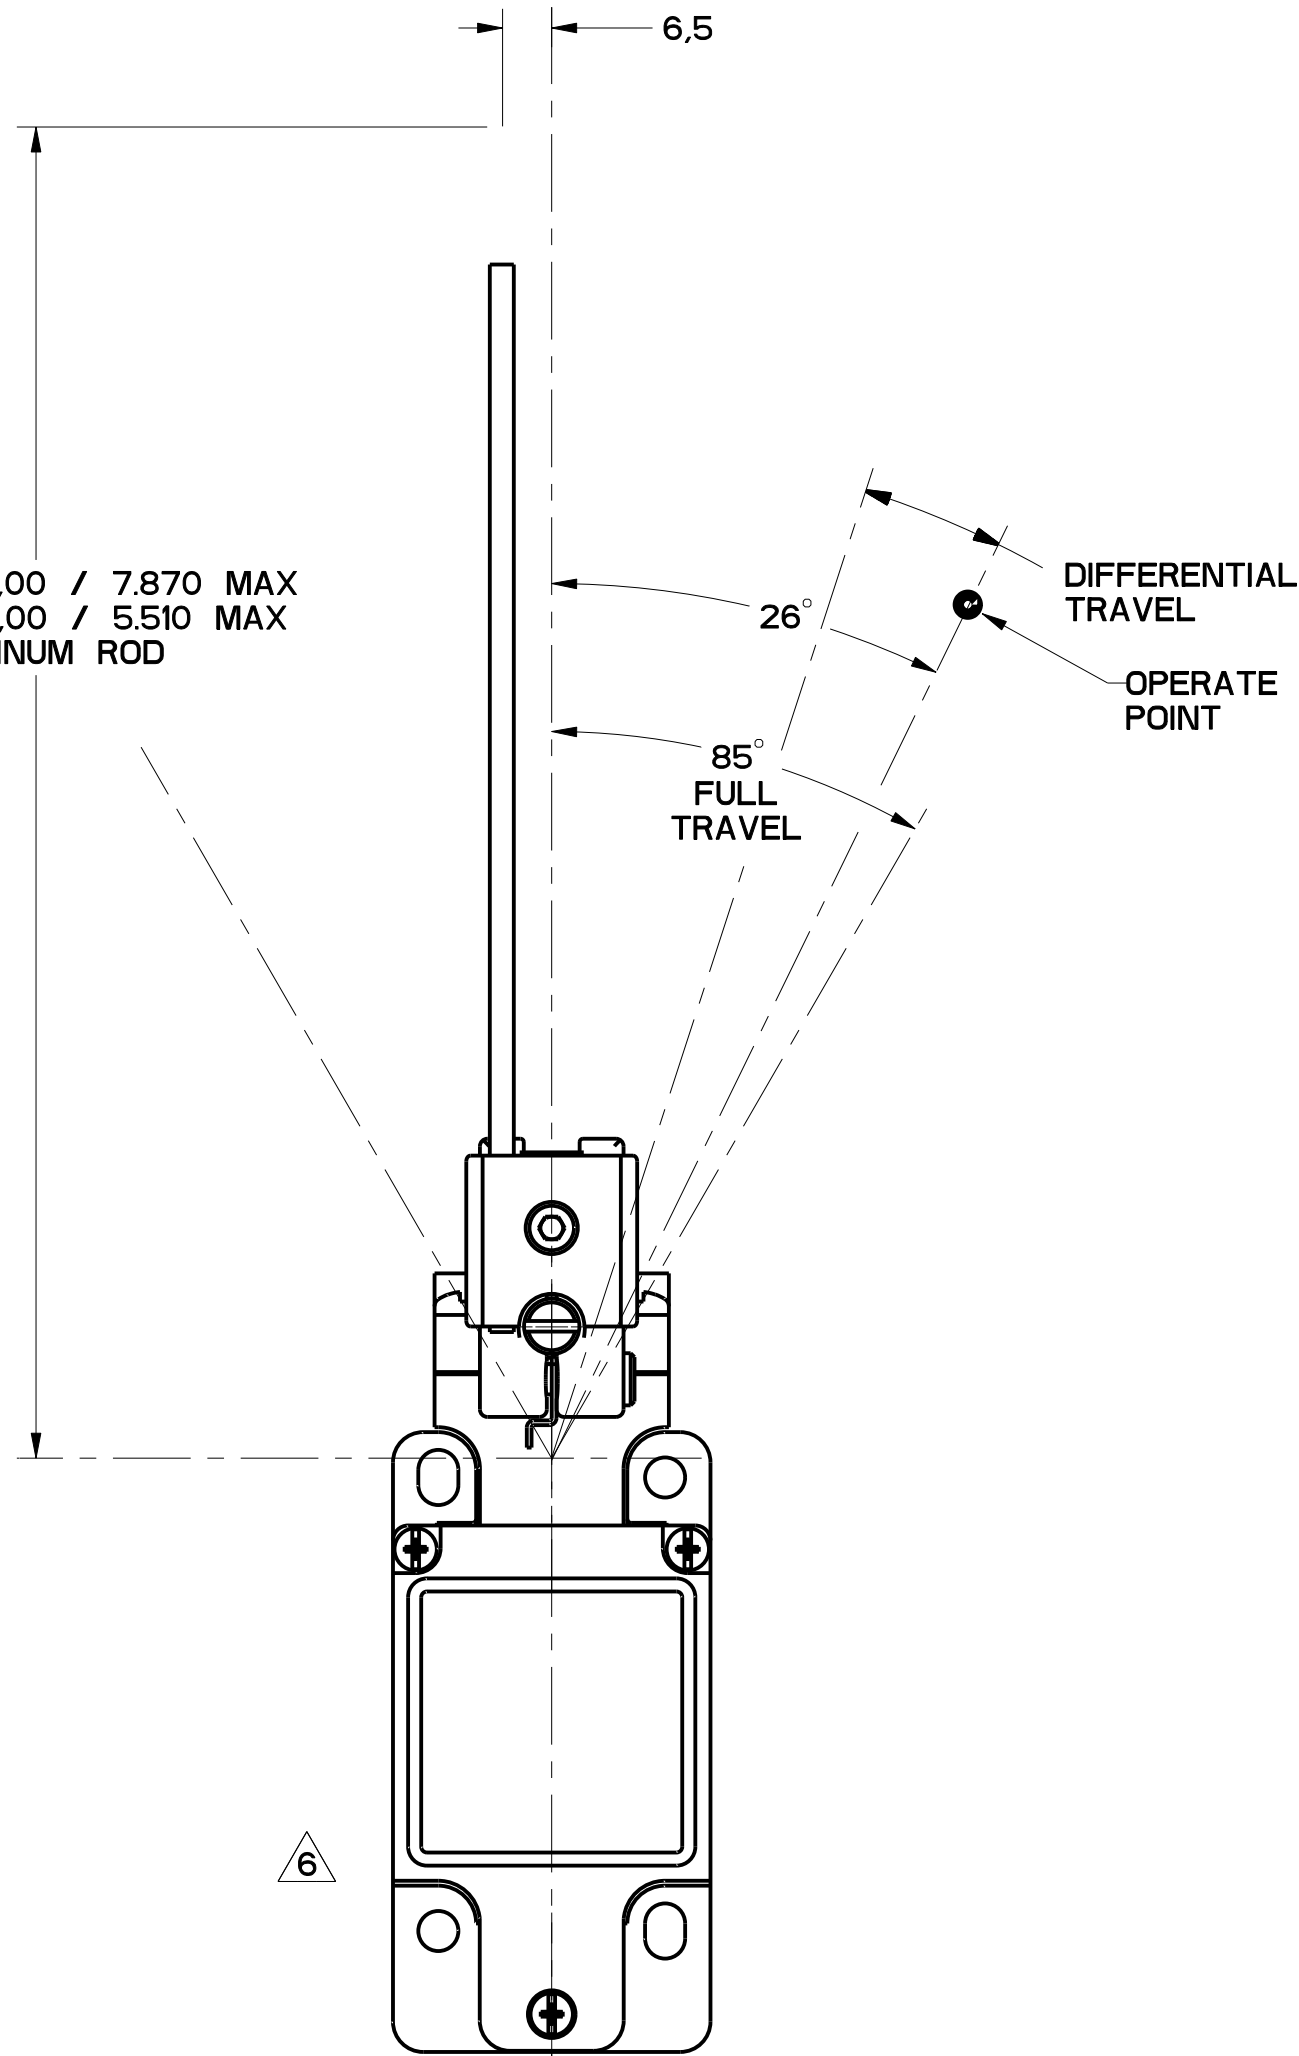


FIGURE 10

FIGURES 8, 9, 10 ANGULAR ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING TORQUE $\frac{N}{LB-IN}$	MAXIMUM DISCONNECT TORQUE $\frac{N}{LB-IN}$	MAX OPERATE DEGREE/S	MIN OPERATE DEGREE/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 13-14 12° DIFFERENTIAL TRAVEL	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250

CAM ACTUATION PER EN50041, FIGURES 8 AND 9

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{IN/S}$	MIN OPERATE VEL $\frac{M/S}{IN/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 13-14 12 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250




FIGURE 12



MAXIMUM OPERATING FORCE — N lbf	MAXIMUM DISCONNECT FORCE — N lbf	MAX OPERATE VEL — M/S in/s	MIN OPERATE VEL — mm/s in/s	MAX OPERATE FREQUENCY OPS/MIN
--	---	-------------------------------------	--------------------------------------	--

GL**02B	SNAP - ACTION CONTACTS SINGLE POLE		$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
---------	---	--	------------------	------------------	-------------------	-------------------	-----

MAXIMUM OPERATING TORQUE - N·m 18.1 kg	MAXIMUM DISCONNECT TORQUE - N·m 18.1 kg	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
---	--	----------------------------	--	--------------------------------------

GL**02E			$\frac{0.2}{1.8}$	N/A	360	8	100
---------	---	---	-------------------	-----	-----	---	-----

MAXIMUM OPERATING FORCE	MAXIMUM DISCONNECT FORCE	MAX OPERATE VEL	MIN OPERATE VEL	MAX OPERATE FREQUENCY
$\frac{N}{100}$	$\frac{N}{100}$	$\frac{M/S}{100}$	$\frac{mm/S}{100}$	OPS/MIN

GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{2.5}{0.6}$	N/A	$\frac{5}{19.7}$	$\frac{11}{.43}$	100
---------	---	--	-------------------	-----	------------------	------------------	-----

REVISIONS		
A	CO	78529
B	CS	81101
C	CO	93188
D	CO	93188
E	CO	93188
F	CO	93188
G	CO	93188
H	CO	93188
I	CO	93188
J	CO	93188
K	CO	93188
L	CO	93188
M	CO	93188
N	CO	93188
O	CO	93188
P	CO	93188
Q	CO	93188
R	CO	93188
S	CO	93188
T	CO	93188
U	CO	93188
V	CO	93188
W	CO	93188
X	CO	93188
Y	CO	93188
Z	CO	93188

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL M/S in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 0.9 DIFFERENTIAL TRAVEL	16 3.6	27 6.0	0.1 3.9	1.0 .04	250

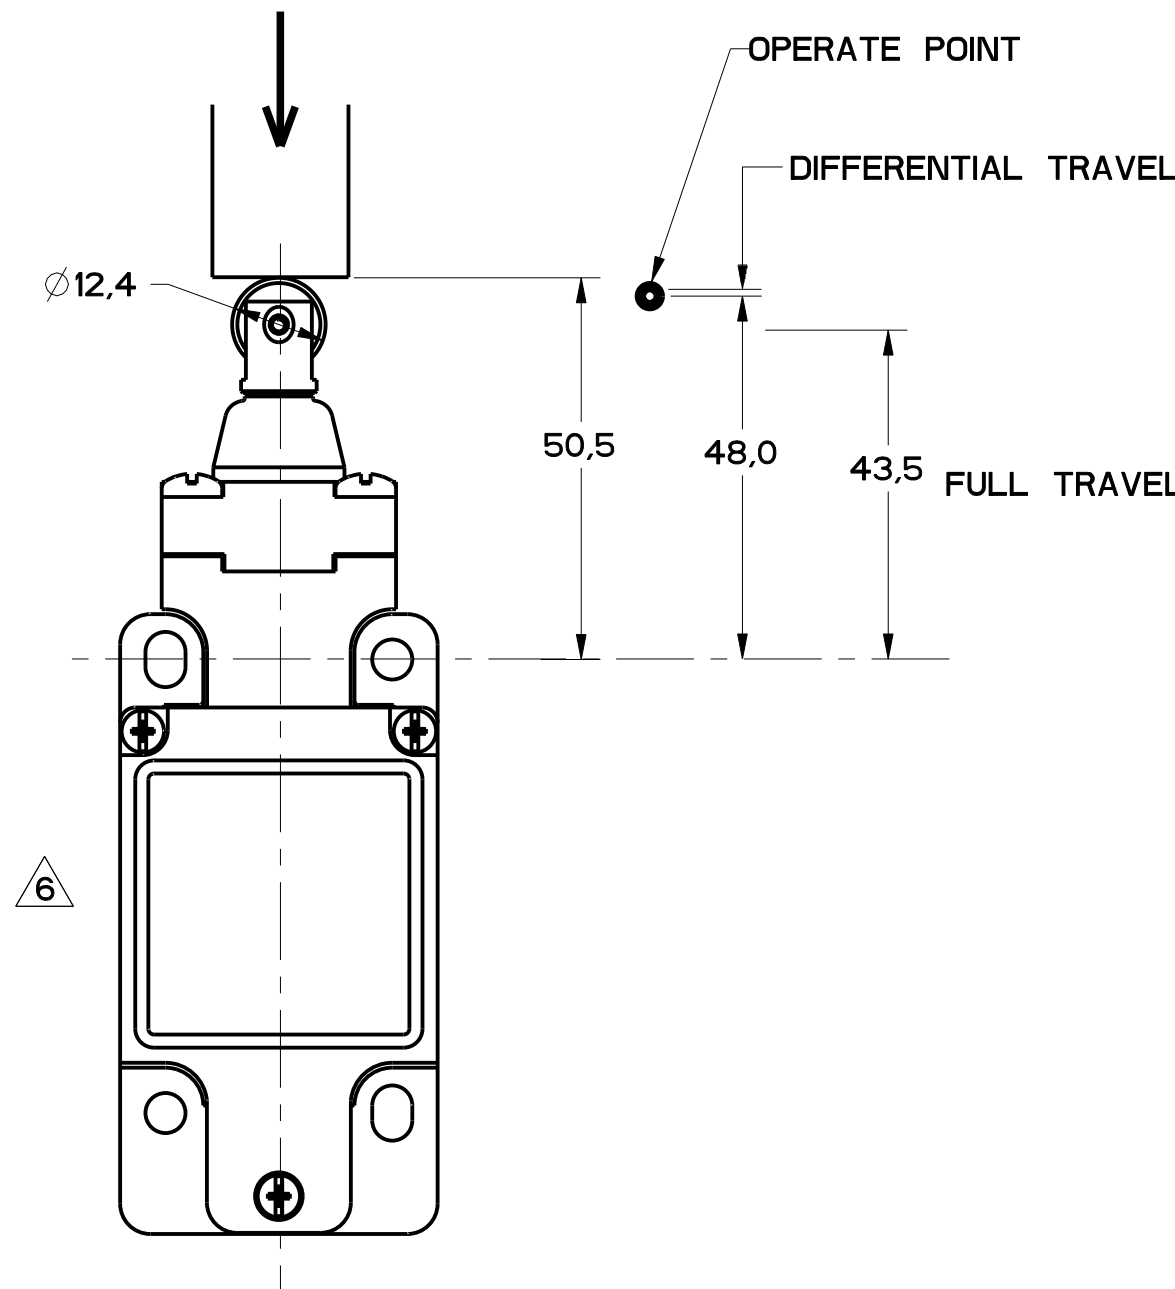


FIGURE 13A

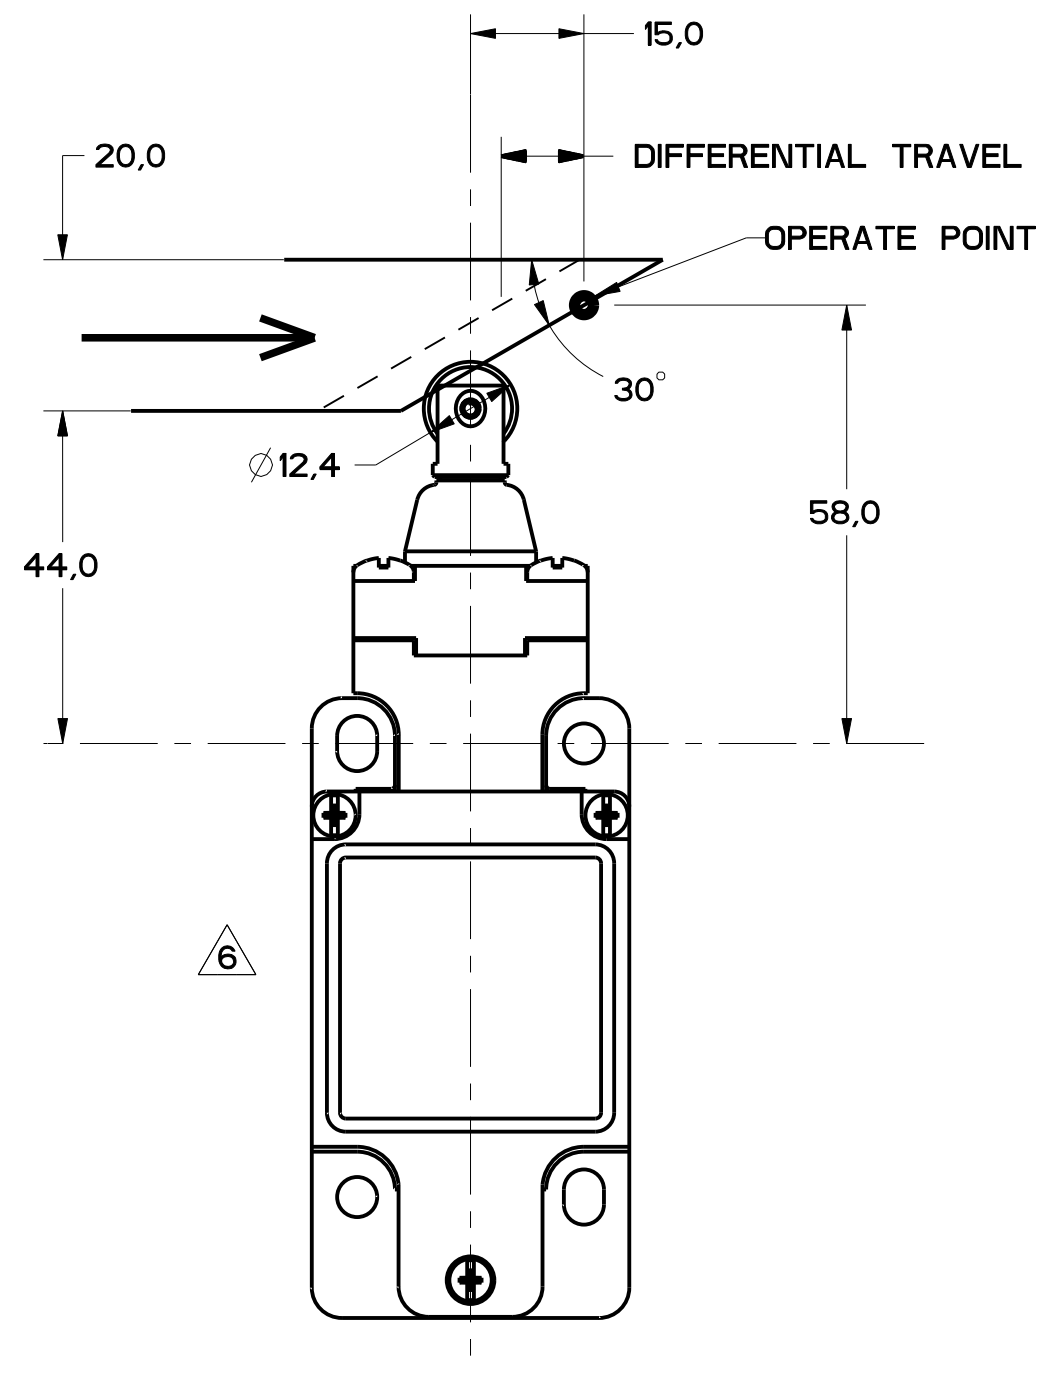


FIGURE 13B

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL M/S in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 1.8 DIFFERENTIAL TRAVEL	9.3 2.1	15.6 3.5	0.17 6.7	1.7 .067	250

THIRD ANGLE PROJECTION			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1			
NO PLACES	1	0.04	0.0015
ONE PLACE	0.1	0.0015	0.0005
TWO PLACES	0.01	0.0005	0.0001
THREE PLACES	0.001	0.0001	0.00005
ANGLES	±	±	±
DESIGN UNITS	SI METRIC	US CUSTOMARY	
WEIGHT			

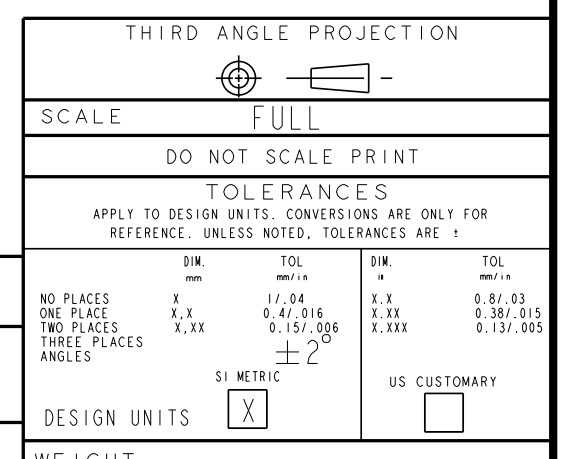


FIGURE 14B

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{in/S}$	MIN OPERATE VEL $\frac{M/S}{in/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{in/S}$	MIN OPERATE VEL $\frac{mm/S}{in/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{111}$	250



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING

GL SERIES CHART 2

ANSI Y14.5M-1982 APPLIES

DRAWING NUMBER		ISSUE		CHECK		REVISIONS	
11				MDM		A	
						B	
						C	
						D	
						E	
						F	
						G	
						H	
						I	
						J	
						K	
						L	
						M	
						N	
						O	
						P	
						Q	
						R	
						S	
						T	
						U	
						V	
						W	
						X	
						Y	
						Z	
						AA	
						AB	
						AC	
						AD	
						AE	
						AF	
						AG	
						AH	
						AI	
						AJ	
						AK	
						AL	
						AM	
						AN	
						AO	
						AP	
						AQ	
						AR	
						AS	
						AT	
						AU	
						AV	
						AW	
						AX	
						AY	
						AZ	
						BA	
						BB	
						BC	
						BD	
						BE	
						BF	
						BG	
						BH	
						BI	
						BJ	
						BK	
						BL	
						BM	
						BN	
						BO	
						BP	
						BQ	
						BR	
						BS	
						BT	
						BU	
						BV	
						BW	
						BX	
						BY	
						BZ	
						CA	
						CB	
						CC	
						CD	
						CE	
						CF	
						CG	
						CH	
						CI	
						CJ	
						CK	
						CL	
						CM	
						CN	
						CO	
						CP	
						CQ	
						CR	
						CS	
						CT	
						CU	
						CV	
						CW	
						CX	
						CY	
						CZ	
						DA	
						DB	
						DC	
						DD	
						DE	
						DF	
						DG	
						DH	
						DI	
						DJ	
						DK	
						DL	
						DM	
						DN	
						DO	
						DP	
						DQ	
						DR	
						DS	
						DT	
						DU	
						DV	
						DW	
						DX	
						DY	
						DZ	
						EA	
						EB	
						EC	
						ED	
						EE	
						EF	
						EG	
						EH	
						EI	
						EJ	
						EK	
						EL	
						EM	
						EN	
						EO	
						EP	
						EQ	
						ER	
						ES	
						ET	
						EU	
						EV	
						EW	
						EX	
						EY	
						EZ	
						FA	
						FB	
						FC	
						FD	
						FE	
						FF	
						FG	
						FH	
						FI	
						FJ	
						FK	
						FL	
						FM	
						FN	
						FO	
						FP	
						FQ	
						FR	
						FS	
						FT	
						FU	
						FV	
						FW	
						FX	
						FY	
						FZ	
						GA	
						GB	
						GC	
						GD	
						GE	
						GF	
						GG	
						GH	
						GI	
						GJ	
						GK	
						GL	
						GM	
						GN	
						GO	
						GP	
						GQ	
						GR	
						GS	
						GT	
						GU	
						GV	
						GW	
						GX	
						GY	
						GZ	
						HA	
						HB	
						HC	
						HD	
						HE	
						HF	
						HG	
						HH	
						HI	
						HJ	
						HK	
						HL	
						HM	
						HN	
						HO	
						HP	
						HQ	
						HR	
						HS	
						HT	
						HU	
						HV	
						HW	
						HX	
						HY	
						HZ	
						IA	
						IB	
						IC	
						ID	
						IE	
						IF	
						IG	
						IH	
						II	
						IJ	
						IK	
						IL	
						IM	
						IN	
						IO	
						IP	
						IQ	
						IR	
						IS	
						IT	
						IU	
						IV	
						IW	
						IX	
						IY	
						IZ	
						JA	
						JB	
						JC	
						JD	
						JE	
						JF	
						JG	
						JH	
						JI	
						JJ	
						JK	
						JL	
						JM	
						JN	
						JO	
						JP	
						JQ	
						JR	
						JS	
						JT	
						JU	
						JV	
						JW	
						JX	
						JY	
						JZ	
						KA	
						KB	
						KC	
						KD	
						KE	
						KF	
						KG	
						KH	
						KI	
						KJ	
						KK	
						KL	
						KM	
						KN	
						KO	
						KP	
						KQ	
						KR	
						KS	
						KT	
						KU	
						KV	
						KW	
						KX	
						KY	
						KZ	
						LA	
						LB	
						LC	
						LD	
						LE	
						LF	
						LG	
						LH	
						LI	
						LJ	
						LK	
						LL	
						LM	
						LN	
						LO	
						LP	
						LQ	
						LR	
						LS	
						LT	
						LU	
						LV	
						LW	
						LX	
						LY	
						LZ	
						MA	
						MB	
						MC	
						MD	
						ME	
						MF	
						MG	
						MH	
						MI	
						MJ	
						MK	
						ML	
						MM	
						MN	
						MO	
						MP	
						MQ	
						MR	
						MS	
						MT	
						MU	
						MV	
						MW	



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331