

SIDE ROTARY



FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

ALUMINUM ROD
GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
STAINLESS STEEL ROD
GLZ54N: 318.00 / 12.490 MAX

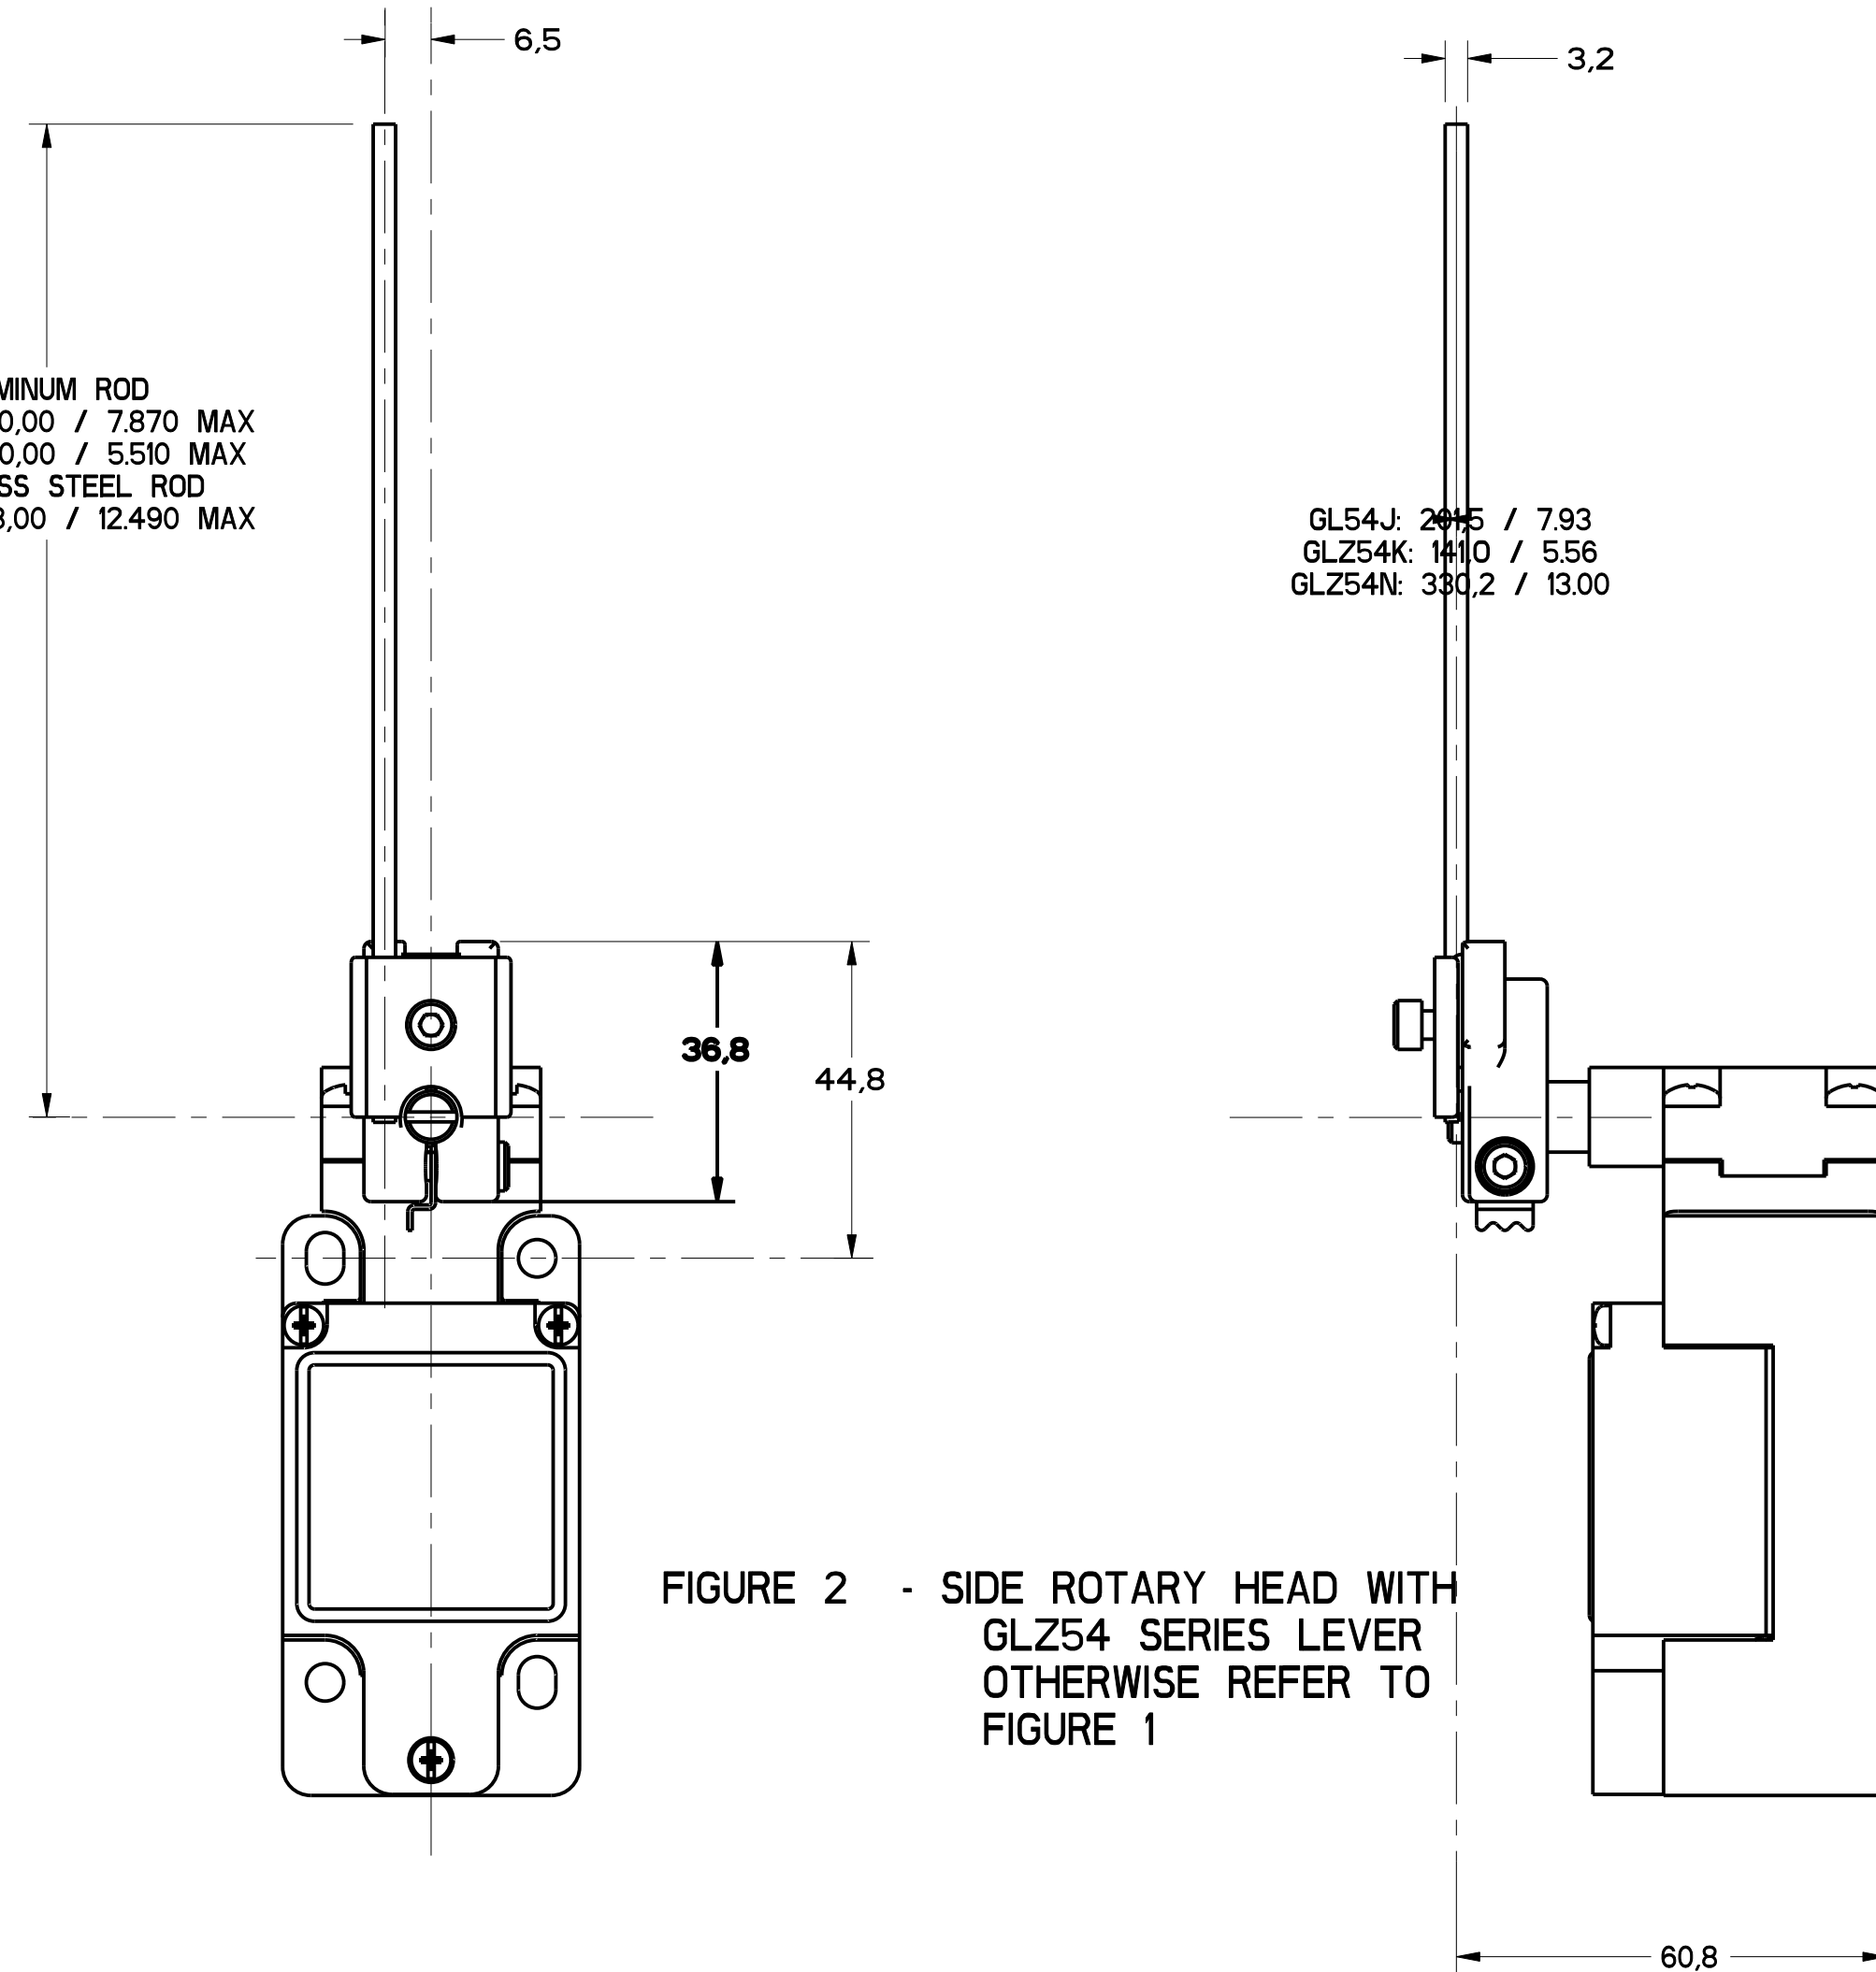


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING $\Delta 5$			
AC		DC	
A600 Ue	AC15 Ie	Q300 Ue	DC13 Ie
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)
120	6	24	2.8
240	3	125	.55
380	1.9	250	.27
480	1.5		
500	1.4		
600	1.2		

ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13

NOTES

- HEADS MAY BE INDEXED IN 90° INCREMENTS.
- LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
- THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
- THE MAXIMUM VOLTAGE, V_e OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
- FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
- CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50
- TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLB***	I	N/A	N/A
GLG***	I	N/A	N/A
GLJ***	I	N/A	N/A
GLA***	1A	N/A	N/A
GLB***	1B	N/A	N/A
GLC***	1C	N/A	N/A
GLD***	1D	N/A	N/A
GL***A1*	I	8	
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	12
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15

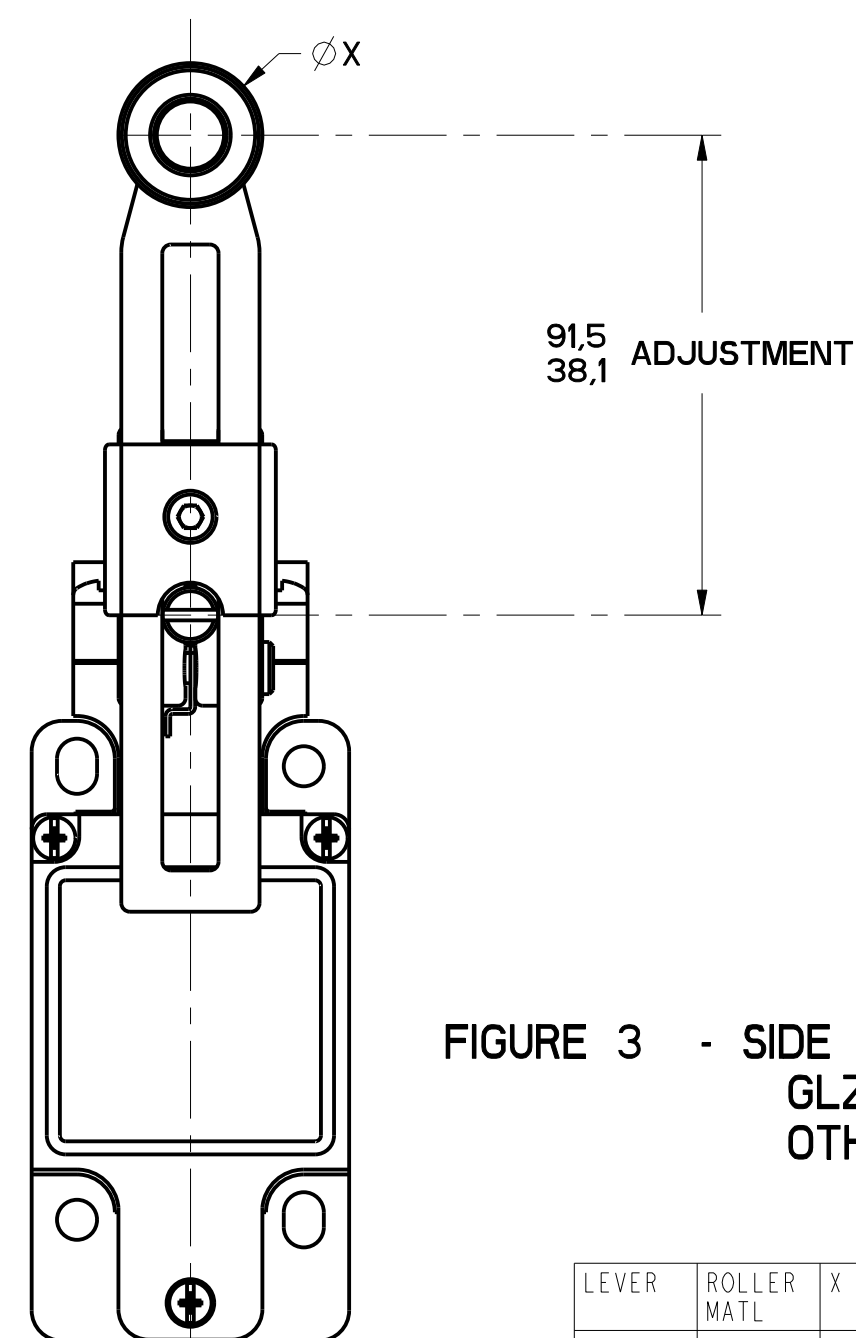


FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.5	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.9 2.0	71.5 2.81	12.7 .5


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929
MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED

GL SERIES CHART 2

THIRD ANGLE PROJECTION			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	INCH	TOL.	INCH
ONE PLACE	X.X	0.01, 0.04	0.001, 0.005
TWO PLACES	X.XX	0.001, 0.005	0.0001, 0.0005
THREE PLACES	X.XXX	0.0001, 0.0005	0.00001, 0.00005
ANGLES		±0.01°	
DESIGN UNITS		WEIGHT	
SI METRIC		US CUSTOMARY	
X		X	

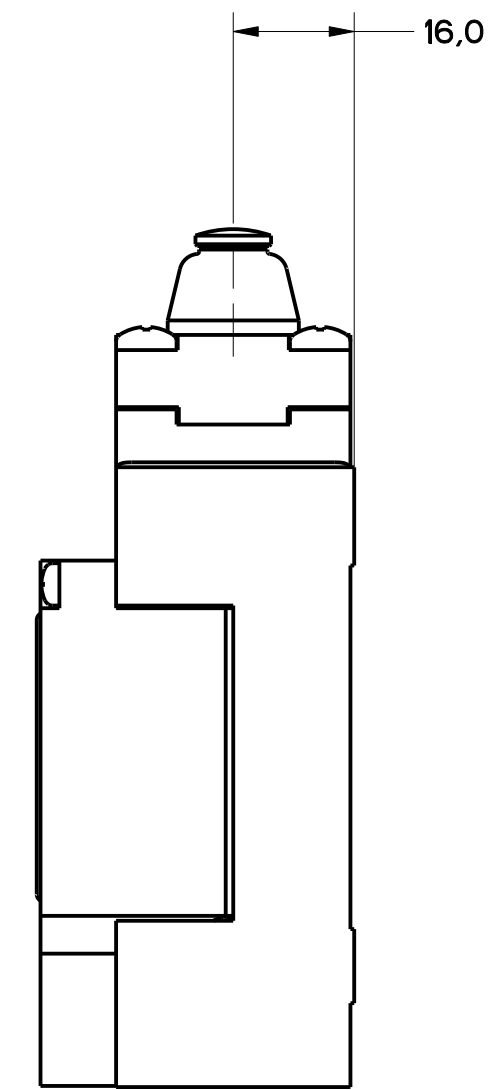


STEEL ROLLER

Ø 12,4

50,5

Technical drawing of a lamp head (Lampenkopf) showing a side view. The drawing includes two dimensions: a vertical dimension of 4,7 and a horizontal dimension of 16,0. The lamp head features a central vertical rod with a small rectangular component at the top, and a larger, flared base.

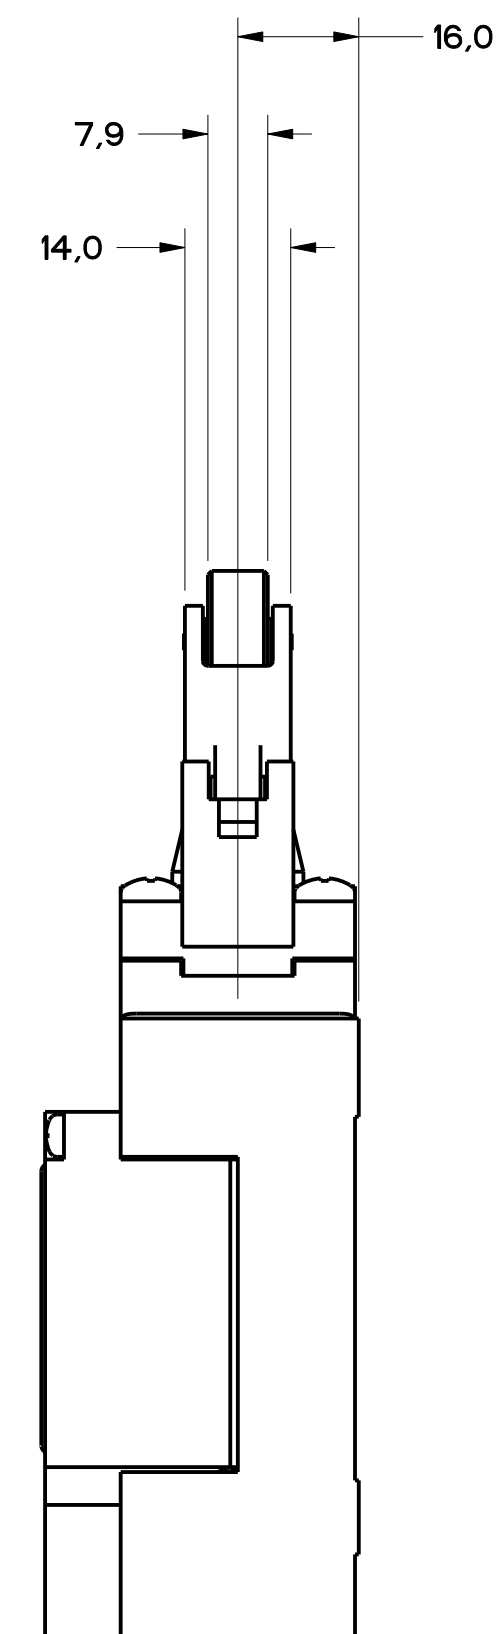

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <td>DIM</td> <td>TOL</td> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>INCHES</td> <td>FRACTIONS</td> <td>INCHES</td> <td>FRACTIONS</td> </tr> <tr> <td>NO PLACES</td> <td>0</td> <td>1</td> <td>0.001/0.01</td> </tr> <tr> <td>ONE PLACE</td> <td>0.4/0.016</td> <td>2</td> <td>0.001/0.01</td> </tr> <tr> <td>TWO PLACES</td> <td>0.15/0.008</td> <td>3</td> <td>0.001/0.01</td> </tr> <tr> <td>THREE PLACES</td> <td></td> <td>4</td> <td>0.15/0.008</td> </tr> <tr> <td>ANGLES</td> <td>± 2</td> <td></td> <td></td> </tr> </table>		DIM	TOL	DIM	TOL	INCHES	FRACTIONS	INCHES	FRACTIONS	NO PLACES	0	1	0.001/0.01	ONE PLACE	0.4/0.016	2	0.001/0.01	TWO PLACES	0.15/0.008	3	0.001/0.01	THREE PLACES		4	0.15/0.008	ANGLES	± 2		
DIM	TOL	DIM	TOL																												
INCHES	FRACTIONS	INCHES	FRACTIONS																												
NO PLACES	0	1	0.001/0.01																												
ONE PLACE	0.4/0.016	2	0.001/0.01																												
TWO PLACES	0.15/0.008	3	0.001/0.01																												
THREE PLACES		4	0.15/0.008																												
ANGLES	± 2																														
FED. MFG. CODE 91929	CATALOG LISTING																														
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED		GL SERIES CHART 2																												
			DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY ☐																												
			WEIGHT																												

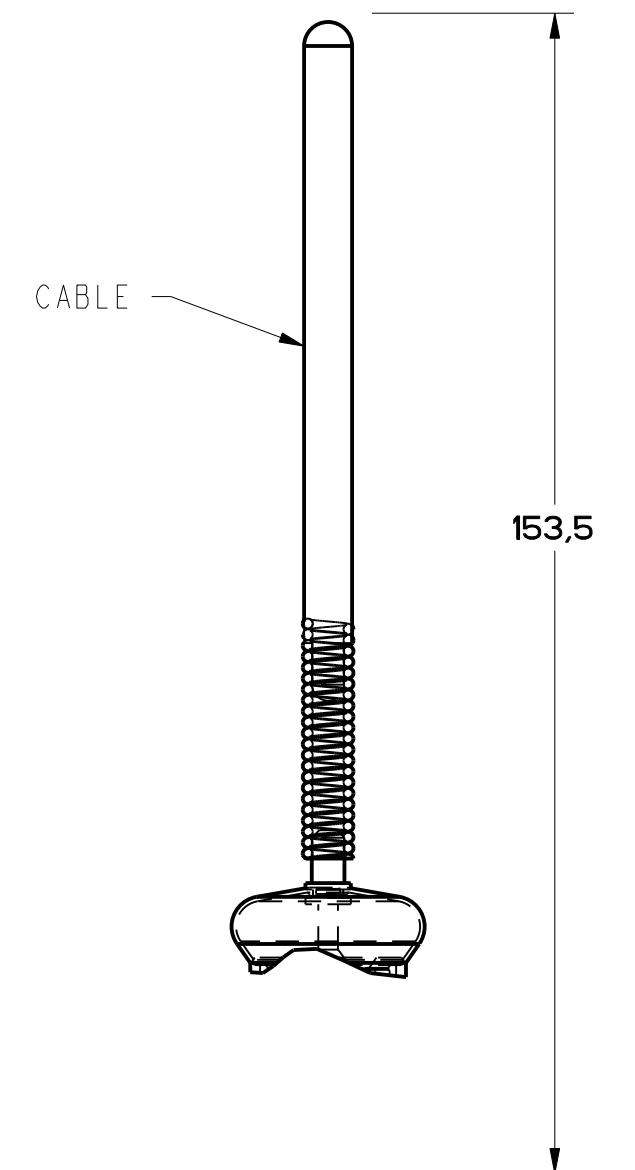
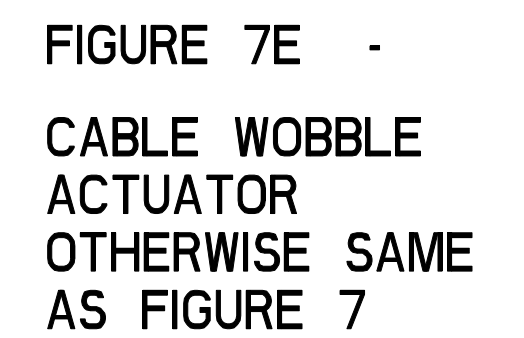
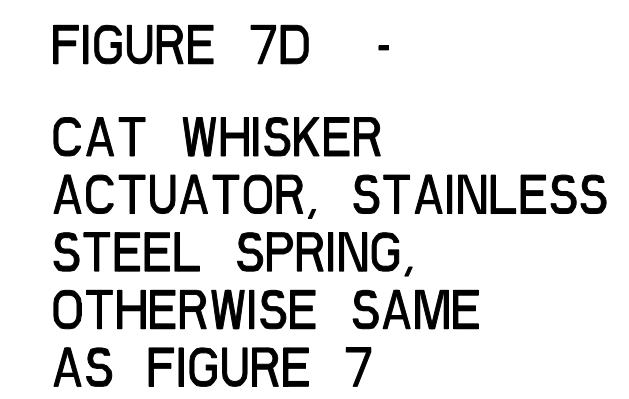
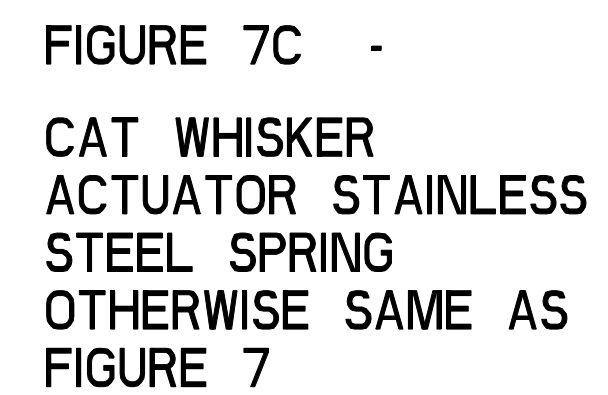
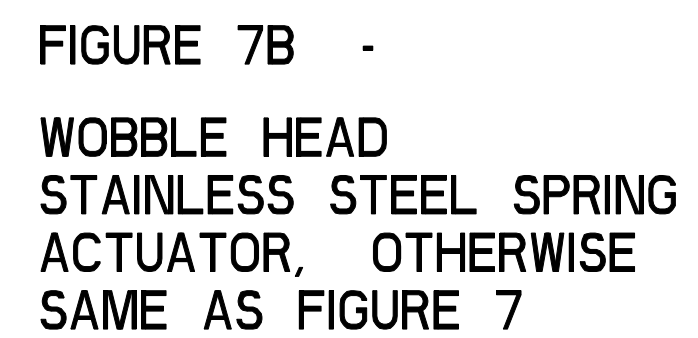
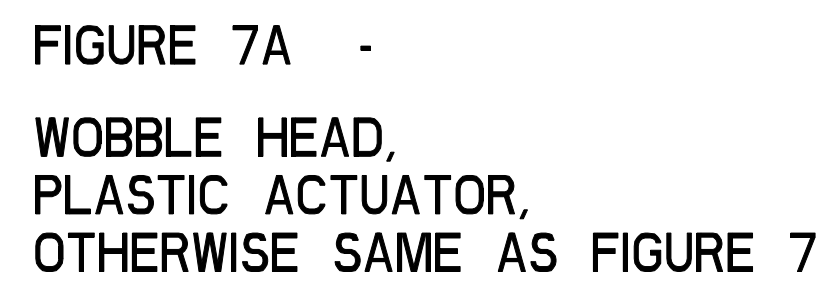



FIGURE 7 - WOBBLE HEAD, AND CAT WHISKER HEAD
COIL ACTUATOR,
OTHERWISE REFER TO
FIGURE 1

FED. MFG. CODE 91929


MICRO SWITCH
a Honeywell Division

CATALOG LISTING

GL SERIES CHART 2

THIRD ANGLE PROJECTION			
	FULL		
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS, CONVERSIONS ARE ONLY FOR REFERENCE, UNLESS NOTED, TOLERANCES ARE:			
DIM	TOL	DIM	TOL
mm	mm	in	in
NO PLACES	X 1.1	X 1.1	0.01/0.03
ONE PLACE	X 1.1	0.01/0.016	0.001/0.015
TWO PLACES	X 1.1	0.01/0.016	0.001/0.015
THREE PLACES	X 1.1	0.01/0.016	0.001/0.015
FOUR PLACES	X 1.1	0.01/0.016	0.001/0.015
SI METRIC US CUSTOMARY			
DESIGN UNITS		US CUSTOMARY	
			
WEIGHT			



CAM ACTUATION PER EN50041, FIGURES 8 AND 9 							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	 NOMINAL TRAVELS AND RELATED TERMINALS  CONTACT CLOSED,  CONTACT OPEN,  - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE  LB	MAXIMUM DISCONNECT FORCE  LB	MAX OPERATE VEL  in/s	MIN OPERATE VEL  in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.				<table><tr><td>QW</td><td>TOL</td><td>QW</td><td>TOL</td></tr><tr><td>dim</td><td>dim</td><td>"</td><td>"</td></tr><tr><td colspan="4"> </td></tr></table>				QW	TOL	QW	TOL	dim	dim	"	"																	
QW	TOL	QW	TOL																													
dim	dim	"	"																													
FED. MFG. CODE 91929		CATALOG LISTING		<table><tr><td>NO PLACES</td><td>X</td><td>1/2" (4)</td><td>1.4</td><td>0.85/0.915</td></tr><tr><td>ONE PLACE</td><td>X X</td><td>0.47/0.16</td><td>1.1X1</td><td>0.98/1.015</td></tr><tr><td>TWO PLACES</td><td>X X X</td><td>0.15/0.08</td><td>1.1X1</td><td>1.13/1.095</td></tr><tr><td>THREE PLACES</td><td></td><td></td><td></td><td></td></tr><tr><td>ANGLES</td><td></td><td>±</td><td></td><td></td></tr></table>				NO PLACES	X	1/2" (4)	1.4	0.85/0.915	ONE PLACE	X X	0.47/0.16	1.1X1	0.98/1.015	TWO PLACES	X X X	0.15/0.08	1.1X1	1.13/1.095	THREE PLACES					ANGLES		±		
NO PLACES	X	1/2" (4)	1.4	0.85/0.915																												
ONE PLACE	X X	0.47/0.16	1.1X1	0.98/1.015																												
TWO PLACES	X X X	0.15/0.08	1.1X1	1.13/1.095																												
THREE PLACES																																
ANGLES		±																														
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	GL SERIES CHART 2		<table><tr><td>DESIGN UNITS</td><td>☒ SI METRIC</td><td>☐ US CUSTOMARY</td></tr><tr><td colspan="3">WEIGHT</td></tr></table>				DESIGN UNITS	☒ SI METRIC	☐ US CUSTOMARY	WEIGHT																					
		DESIGN UNITS	☒ SI METRIC	☐ US CUSTOMARY																												
WEIGHT																																



FIGURE 12


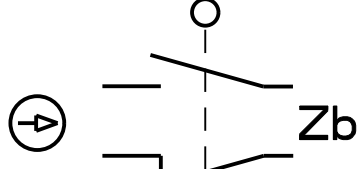
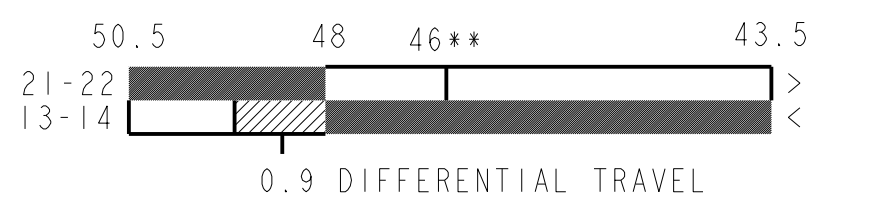
FIGURE 12, WOBBLE HEAD, ANGULAR ACTUATION								
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING TORQUE N-m LB/in	MAXIMUM DISCONNECT TORQUE N-m LB/in	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN	
GL**02E	Snap - ACTION CONTACTS SINGLE POLE 	21-22 13-14 18° 8° DIFFERENTIAL TRAVEL > <	0.2 1.8	N/A	360	8	100	

FIGURE 12. WOBBLE HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{MM}{S}$ $\frac{IN}{S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 26 > 13-14 < 12 DIFFERENTIAL TRAVEL	$\frac{2.5}{0.6}$	N/A	$\frac{.5}{19.7}$	$\frac{.11}{.43}$	100

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table><tr><td>DIM</td><td>TOL</td><td>DIM</td><td>TOL</td></tr><tr><td>mm</td><td>mm / in.</td><td>mm</td><td>mm / in.</td></tr><tr><td>1</td><td>1.64</td><td>1</td><td>0.81 / 0.031</td></tr><tr><td>2</td><td>0.41 / 0.016</td><td>2</td><td>0.76 / 0.030</td></tr><tr><td>3</td><td>0.15 / 0.006</td><td>3</td><td>0.13 / 0.005</td></tr><tr><td colspan="2">± 2</td><td colspan="2"></td></tr></table>		DIM	TOL	DIM	TOL	mm	mm / in.	mm	mm / in.	1	1.64	1	0.81 / 0.031	2	0.41 / 0.016	2	0.76 / 0.030	3	0.15 / 0.006	3	0.13 / 0.005	± 2			
DIM	TOL	DIM	TOL																								
mm	mm / in.	mm	mm / in.																								
1	1.64	1	0.81 / 0.031																								
2	0.41 / 0.016	2	0.76 / 0.030																								
3	0.15 / 0.006	3	0.13 / 0.005																								
± 2																											
FED. MFG. CODE 91929	CATALOG LISTING																										
MICRO SWITCH a Honeywell Division	GL SERIES CHART 2																										
	SWITCH, ENCLOSED																										
	<table><tr><td>SI METRIC</td><td>US CUSTOMARY</td></tr><tr><td>DESIGN UNITS ☒</td><td>☐</td></tr></table>		SI METRIC	US CUSTOMARY	DESIGN UNITS ☒	☐																					
SI METRIC	US CUSTOMARY																										
DESIGN UNITS ☒	☐																										

REVISIONS		
A	CO	78529
B	CS	81101
C	CO	93188
D	CO	93188
E	CO	93188
F	CO	93188
G	CO	93188
H	CO	93188
I	CO	93188
J	CO	93188
K	CO	93188
L	CO	93188
M	CO	93188
N	CO	93188
O	CO	93188
P	CO	93188
Q	CO	93188
R	CO	93188
S	CO	93188
T	CO	93188
U	CO	93188
V	CO	93188
W	CO	93188
X	CO	93188
Y	CO	93188
Z	CO	93188

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL M/S in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 0.9 DIFFERENTIAL TRAVEL	16 3.6	27 6.0	0.1 3.9	1.0 .04	250

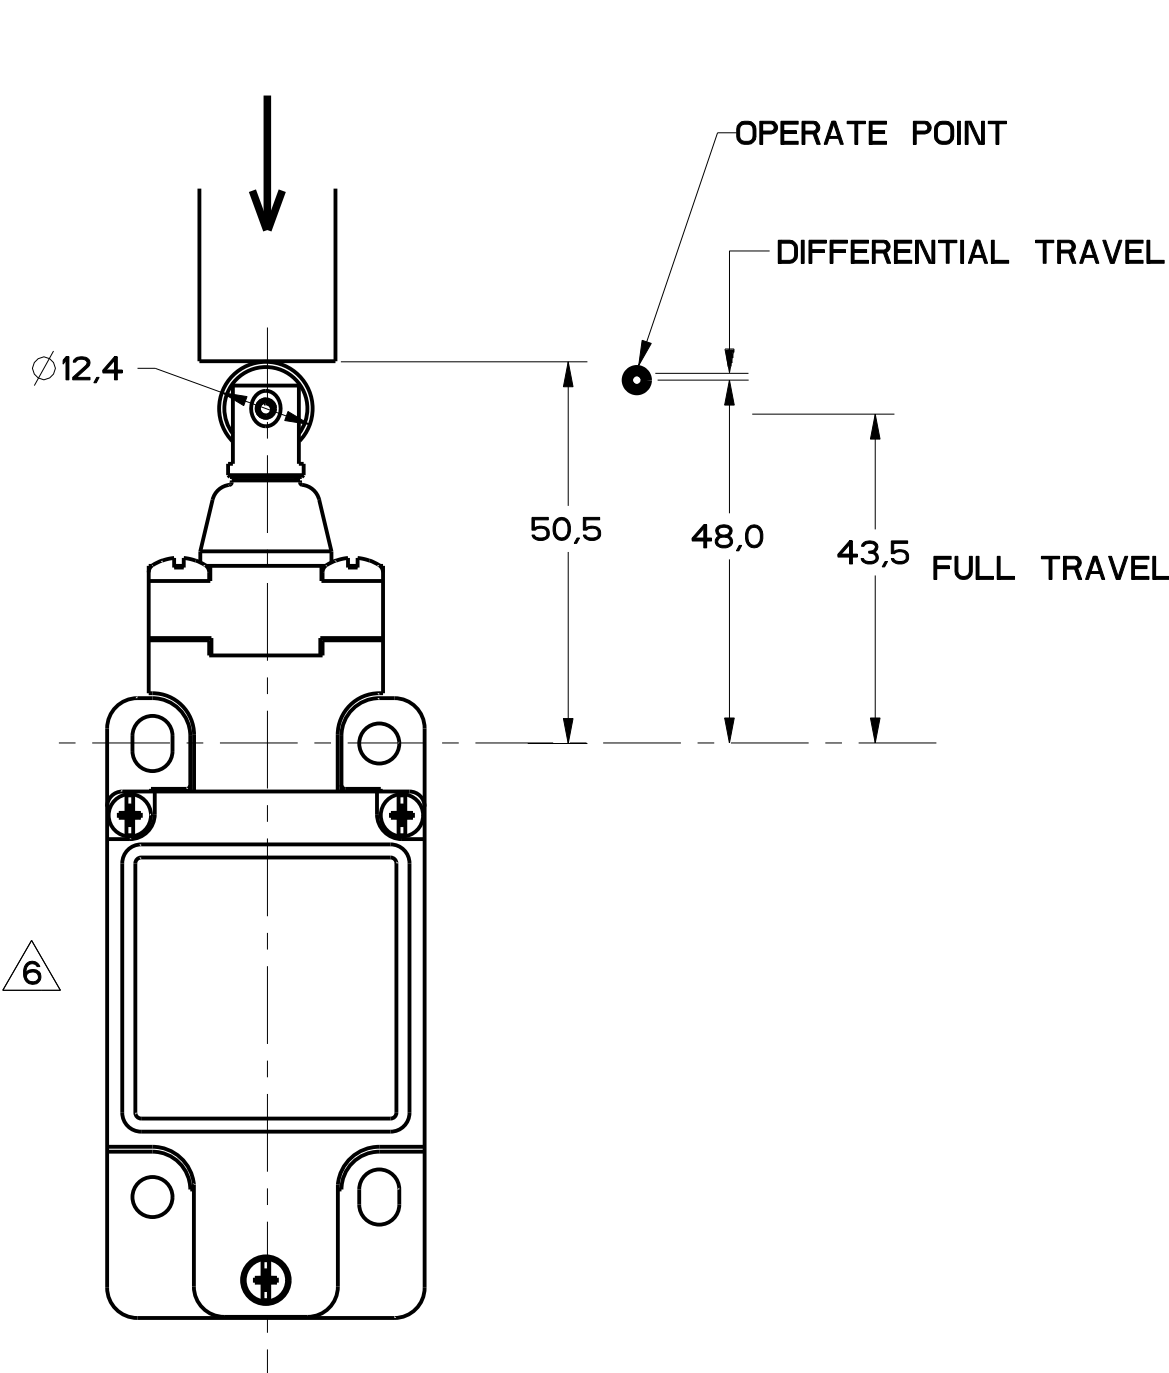


FIGURE 13A

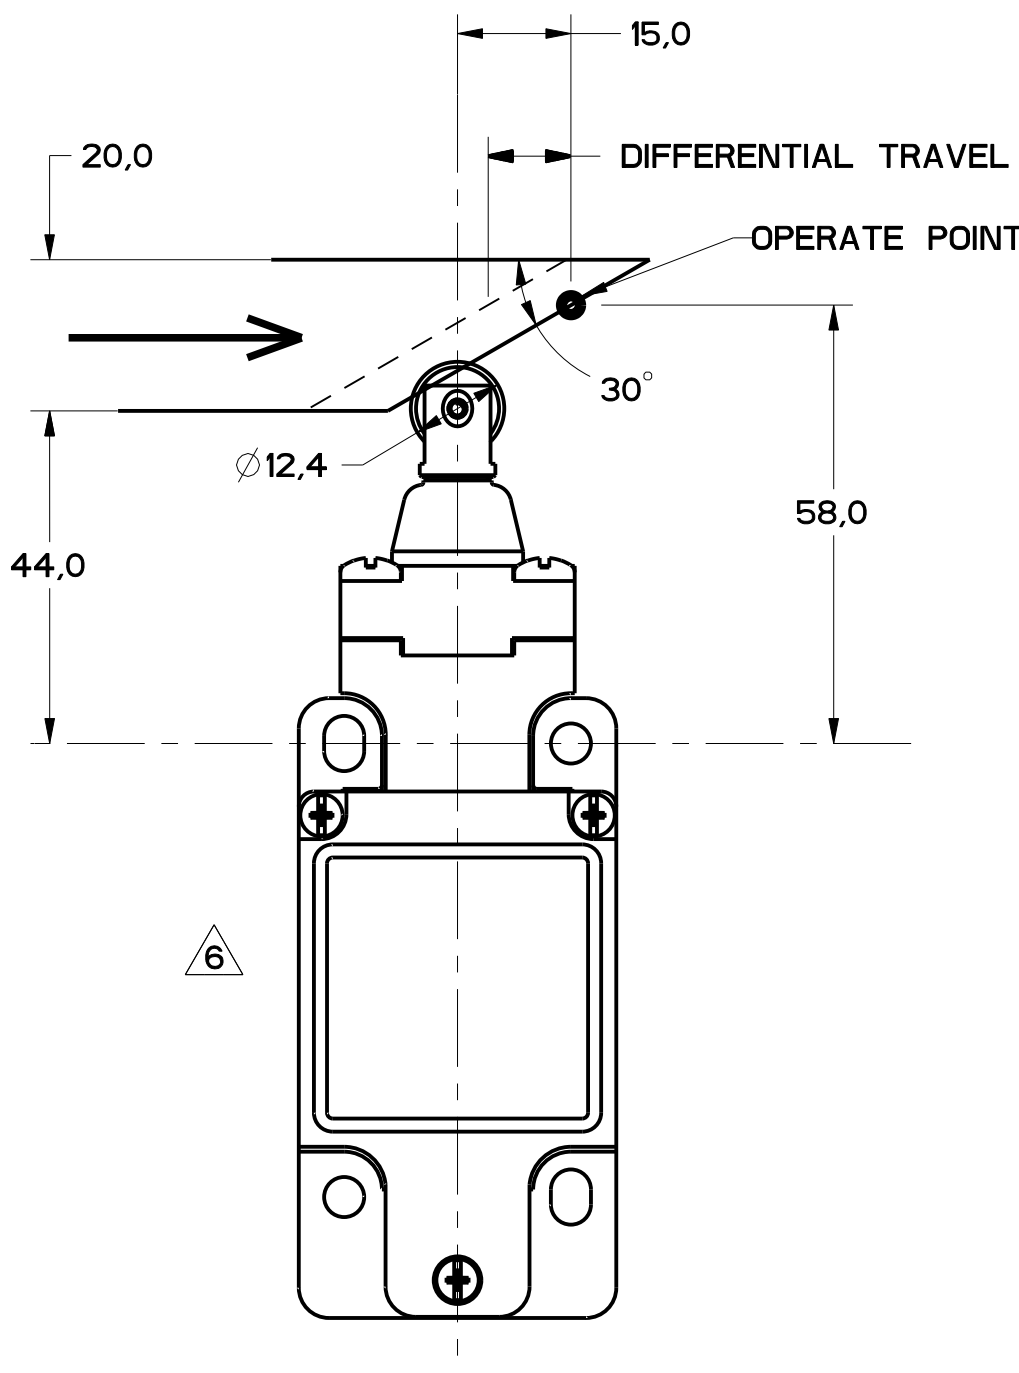
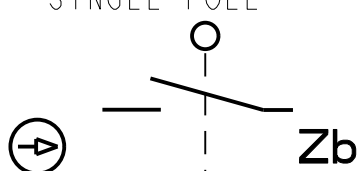
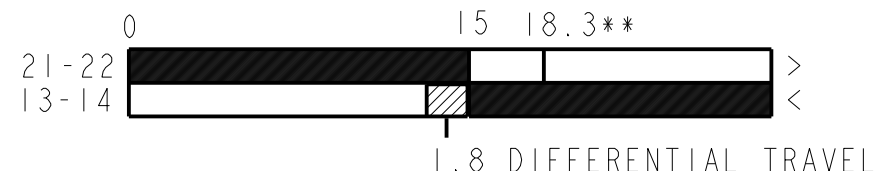



FIGURE 13B

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/s	MIN OPERATE VEL M/S in/s	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 1.8 DIFFERENTIAL TRAVEL	9.3 2.1	15.6 3.5	0.17 6.7	1.7 .067	250

THIRD ANGLE PROJECTION			
			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	1/16	1/32	1/64
ONE PLACE	1/16	1/32	1/64
TWO PLACES	1/16	1/32	1/64
THREE PLACES	1/16	1/32	1/64
ANGLES	1/16	1/32	1/64
DESIGN UNITS	SI METRIC	US CUSTOMARY	
WEIGHT			

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		GL SERIES CHART 2	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	

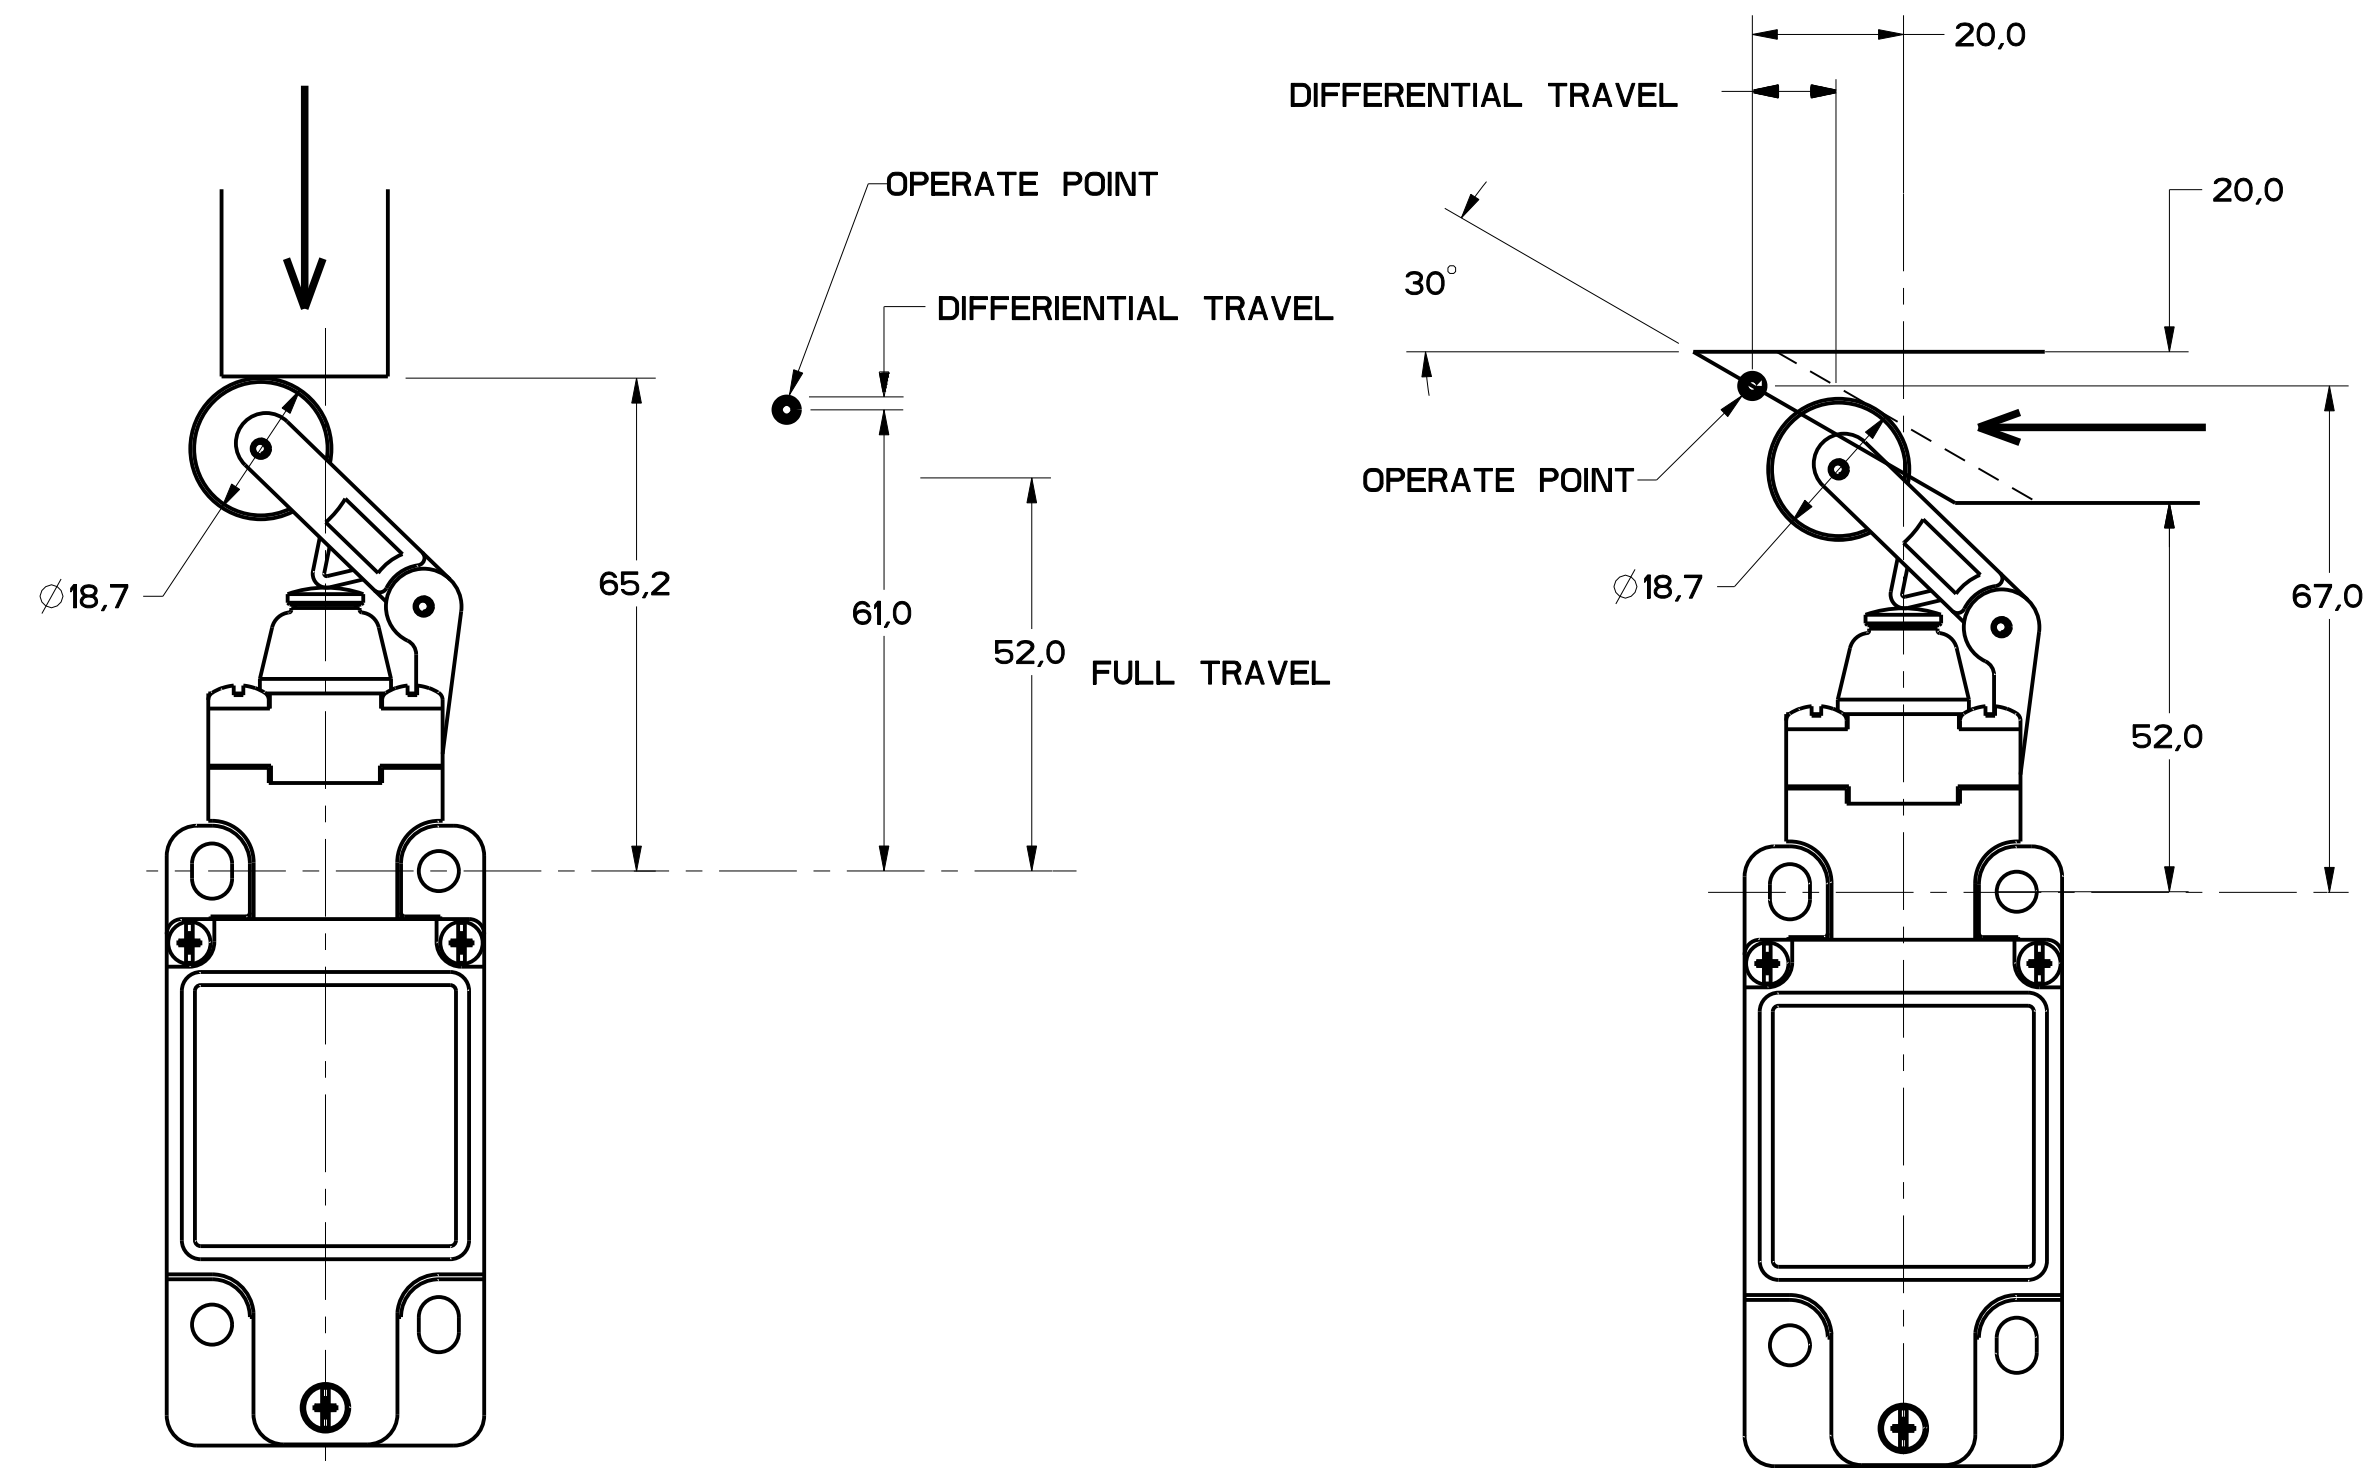


FIGURE 14A

FIGURE 14B

FIGURE 14A, TOP ROLLER LEVER HEAD WITH PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 21-22 13-14	9.5 2.1	12 2.7	0.17 6.7	0.067 1.7	250

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 21-22 13-14	5.5 1.2	7.0 1.6	0.29 11.4	0.11 2.9	250

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

	DIM	TOL	DIM	TOL
NO PLACES	X	0.04	2.X	0.04/0.05
ONE PLACE	X.X	0.01/0.015	2.XX	0.04/0.05
TWO PLACES	X.XX	0.001/0.006	2.XXX	0.001/0.005
THREE PLACES	X.XXX	0.0001/0.0005		

DESIGN UNITS SI METRIC X US CUSTOMARY

WEIGHT

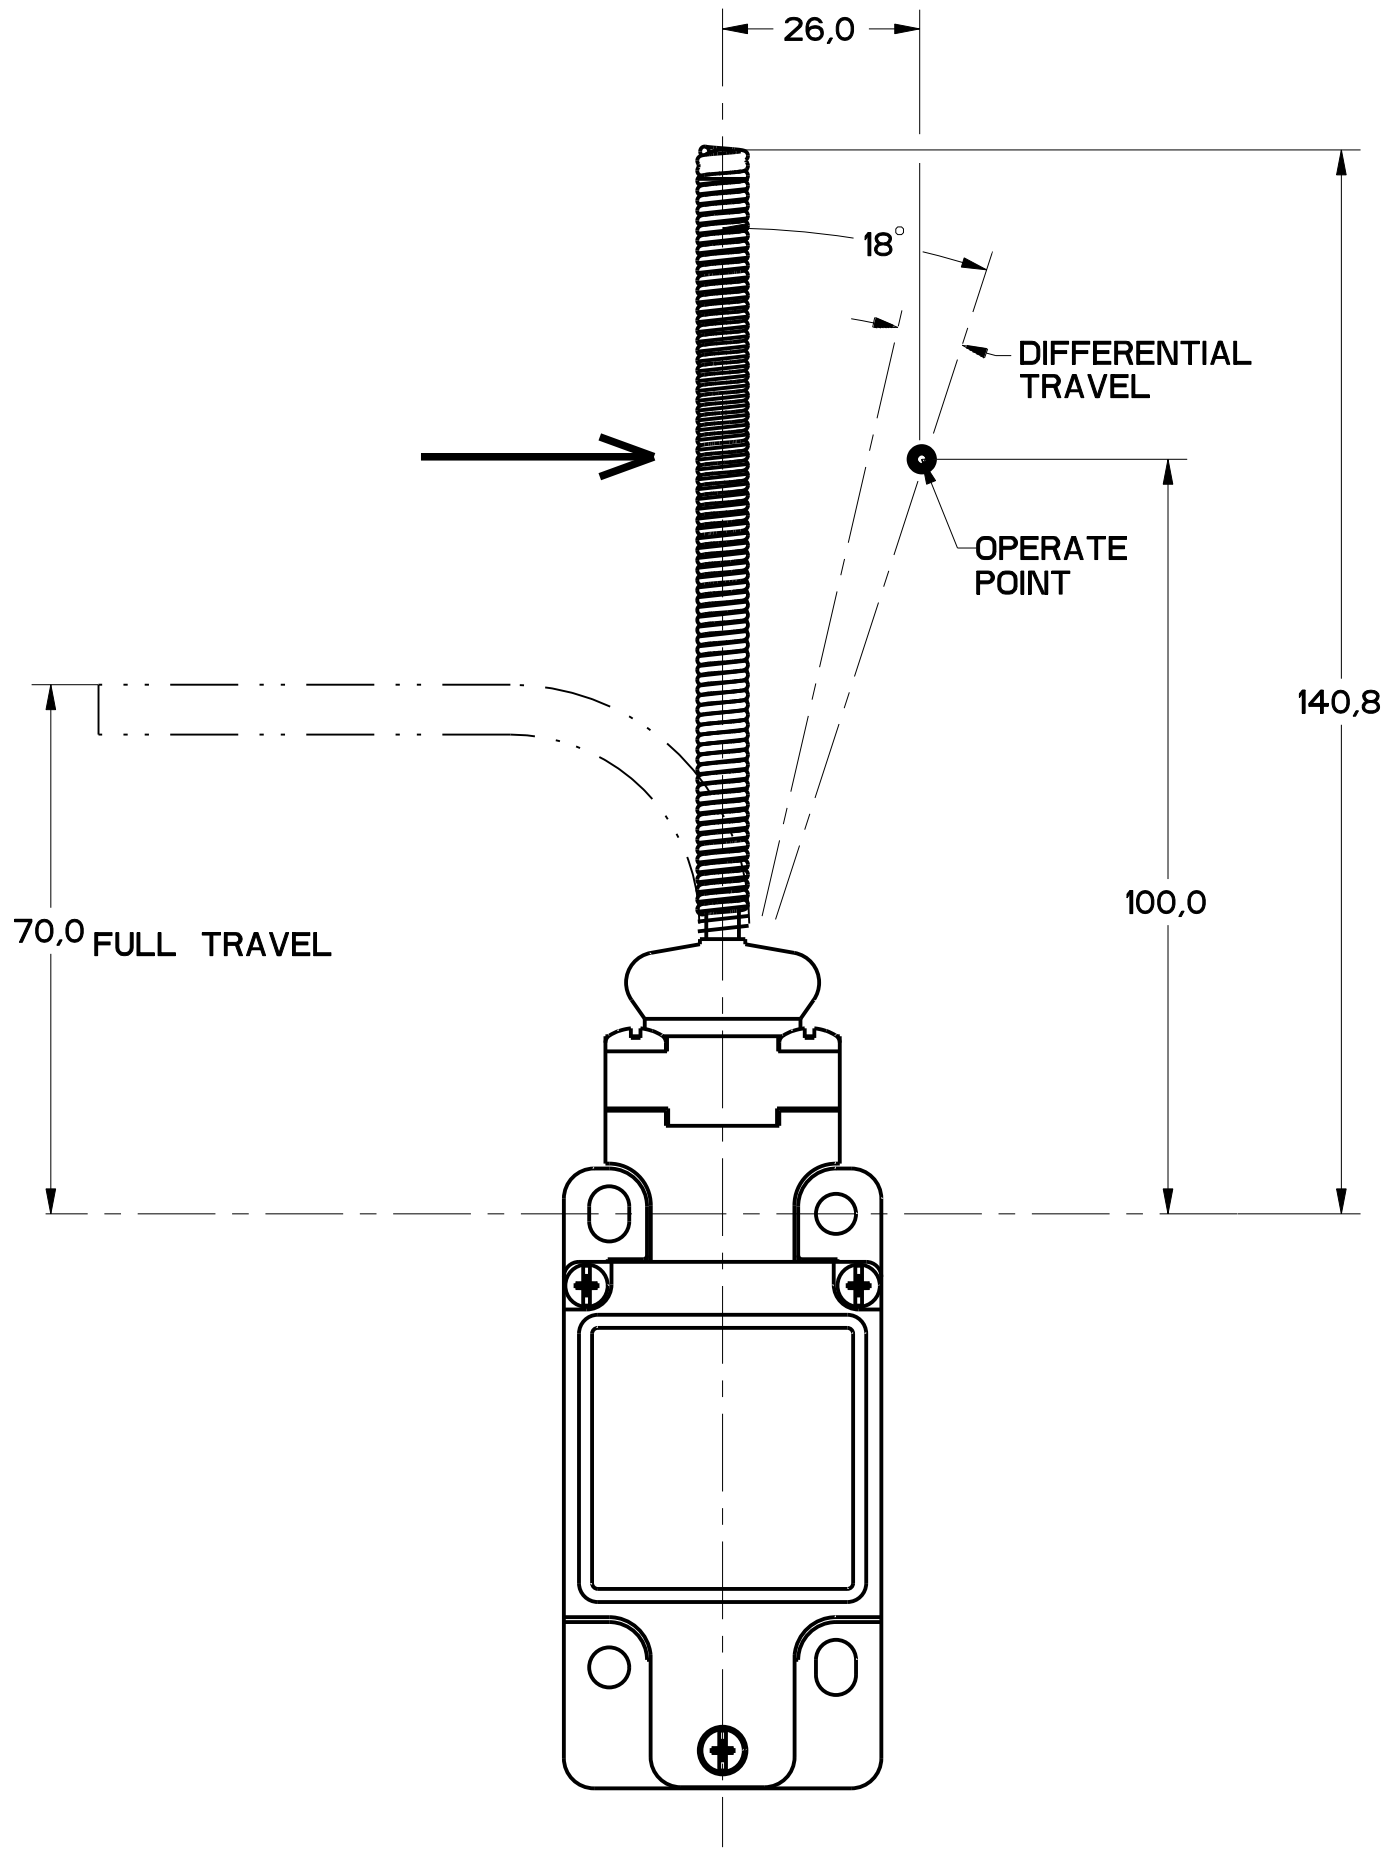



FIGURE 15

FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE LB-IN	MAXIMUM DISCONNECT TORQUE LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	 8° DIFFERENTIAL TRAVEL	$\frac{0.1}{.9}$	N/A	360	8

FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE LB	MAXIMUM DISCONNECT FORCE LB	MAX OPERATE VEL IN/S	MIN OPERATE VEL IN/S
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	 12 DIFFERENTIAL TRAVEL	$\frac{1.3}{.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$

THIRD ANGLE PROJECTION			
			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE: 1			
	DIM. inches X X.X X.XX X.XXX ±	TOL inches 1/64 0.0156 0.0031 0.0016 ±	DIM. mm X X.X X.XX X.XXX ±
NO PLACES		0.875	0.875
ONE PLACE		0.0156	0.391
TWO PLACES		0.0031	0.078
THREE PLACES		0.0016	0.039
ANGLES			
SI METRIC		US CUSTOMARY	
DESIGN UNITS ☒		DESIGN UNITS ☐	

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
FED. MFG. CODE 91929	CATALOG LISTING	GL SERIES CHART 2
SWITCH, ENCLOSED		



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331