

AMPROBE®

IRC-110 Infrared Camera

Point-and-shoot thermal imaging technology for the professional

The Amprobe IRC-110 thermal camera, designed for the professional, is rugged with point-and-shoot functionality to give you a visual heat map image for quick and accurate identification of temperature related issues. Troubleshoot electrical connections, motors, HVAC and electrical, and insulation leaks around buildings to identify potential energy savings.

Infrared heat map
image blending

Center-point
temperature
measurement

Hot and cold
markers

Adjustable
emissivity

IRC-110
Infrared Camera

CE K A

Features


- **Infrared heat map image blending** at 0%, 25%, 50%, 75%, and 100%
- **Three selectable color palettes** (grey scale, hot iron and rainbow)
- **Center-point temperature measurement** and focus free
- **IR measurement 20:1 Distance to Spot ratio**
- **Adjustable emissivity** from 0.10 to 1.00
- **Auto off function**
- **Selectable °F and °C**
- **Intuitive joystick navigation** to on-screen menu and settings
- **Hot and cold markers** instantly identifies hottest and coldest spots



Safety Certification

All Amprobe tools, including the Amprobe IRC-110, are rigorously tested for safety, accuracy, reliability, and ruggedness in our state-of-the-art test lab. In addition, Amprobe products that measure electricity are listed by a 3rd party safety lab, either UL or CSA. This system assures that Amprobe products meet or exceed safety regulations and will perform in a tough, professional environment for many years to come.

Infrared heat map image blending

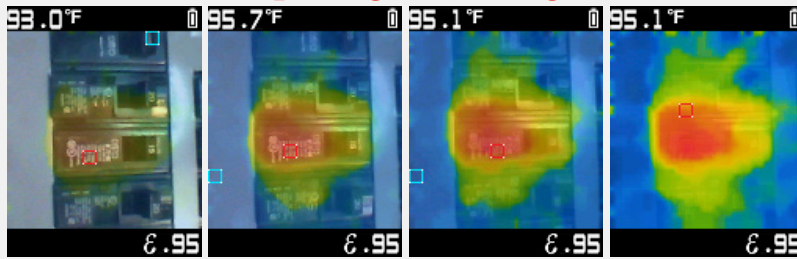

Blending Mode 25% Blending Mode 50% Blending Mode 75% Blending Mode 100%

Specifications

Features	IRC-110
Built-in digital camera	•
Infrared heat map overlay	Five blending modes: 0%, 25%, 50%, 75%, 100%
Color palettes	Grey Scale, Hot Iron, Rainbow
Field of view	33 ° x 33 °
Focus system	Focus free
IR temperature range	14 °F to 932 °F (-10 °C to 500 °C)
Distance to Spot ratio (D:S)	20:1
Emissivity	0.10 to 1.00
Display resolution	0.2 °F/0.1 °C
Hot and cold markers	•
Center point marker	•
Temperature units	Selectable °F/°C
Auto power off	•
Detailed Specifications	
Temperature measurement	Yes, center point
Temperature range	14 °F to 932 °F (-10 °C to 500 °C)
IR accuracy (calibration geometry with ambient temperature 23°C ± 2°C)	≥ 32 °F (≥ 0 °C): ± 4 °F (± 2 °C) or ± 2 % of the reading, whichever is greater < 32 °F (< 0 °C): ± 6 °F (± 3 °C)
Display resolution	0.2 °F / 0.1 °C
IR Repeatability	± 8 % of the reading or ± 2 °F (± 1 °C), whichever is greater
Temperature Coefficient	0.1 °C/°C or ± 0.1 %/°C of the reading, whichever is greater
Distance to spot	20:1
Minimum spot size	0.32 inches (8 mm)
Response time (95 %)	< 125 ms
Spectral response	8 μm to 14 μm
Emissivity	Digitally adjustable from 0.10 to 1.00 by 0.01
Visual image with infrared heat map overlay	Five blending modes (0%, 25%, 50%, 75% and 100%)
Visual to IR effective image alignment	≥ 10 inches
Visual image resolution	16,384 pixels (128 x 128 pixels)
Screen resolution	20,480 pixels (128 x 160)
Field of view	33 ° x 33 °
Thermal sensitivity	150 mK
Focus system	Focus free
Image palettes	Grey Scale (white hot), Hot Iron and Rainbow
Hot and cold marker	Yes
Display	1.77 in color TFT with 128 x 160 pixels
Operating temperature and humidity	32 °F to 122 °F (0 °C to 50 °C) 10 % to 90 % RH non-condensing at 86 °F (30 °C)
Storage temperature	-4 °F to 140 °F (-20 °C to 60 °C) without battery
Operating and storage altitude	< 6561 ft (< 2000 m)
Drop proof	4-feet (1.2 m)
Vibration and shock	IEC 60068-2-6, 2.5g, 10 to 200 Hz, IEC 60068-2-27, 50g 11ms
Power supply	Three (3) 1.5 V AA IEC LR6 alkaline batteries
Battery life	8 hours with display ON (Typical) Power consumption: 150 mA (Typical)
Auto power off	Selectable modes: OFF, 1 minute, 2 minutes, 5 minutes and 10 minutes
Certifications	CE KC A
Electromagnetic Compatibility	EN 61326-1 Korea (KCC): Class A Equipment (Industrial Broadcasting & Communication Equipment) [1] [1] This product meets requirements for industrial (Class A) electromagnetic wave equipment and the seller or user should take notice of it. This equipment is intended for use in business environments and is not to be used in homes.
Size (H x W x L)	Approx. 7.3 x 2.1 x 4.1 in (185 x 54 x 104 mm)
Weight	Approx. 0.57 lb (0.26 kg)

Included: 3 x 1.5 V AA Batteries (not installed), Wrist Strap and User Manual

Applications

- **Electrical, HVAC, mechanical, and automotive**
- **Identify temperature related issues** for electrical connections and motors
- **Quickly verify HVAC functionality** and performance
- **Locate heat loss spots** on the insulation around buildings to save energy costs

Industries

- **Industrial Maintenance**
- **Commercial Facility Maintenance**
- **Oil & Gas Maintenance**
- **Reliability Inspections**
- **Building Diagnostics**
- **Electrical, Water & Gas Utilities**
- **Research & Development**



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331